


A static ranking by recovered flow captures most of what an adaptive optimiser can find — and the optimiser's remaining edge is bought with scoring calls and library quality

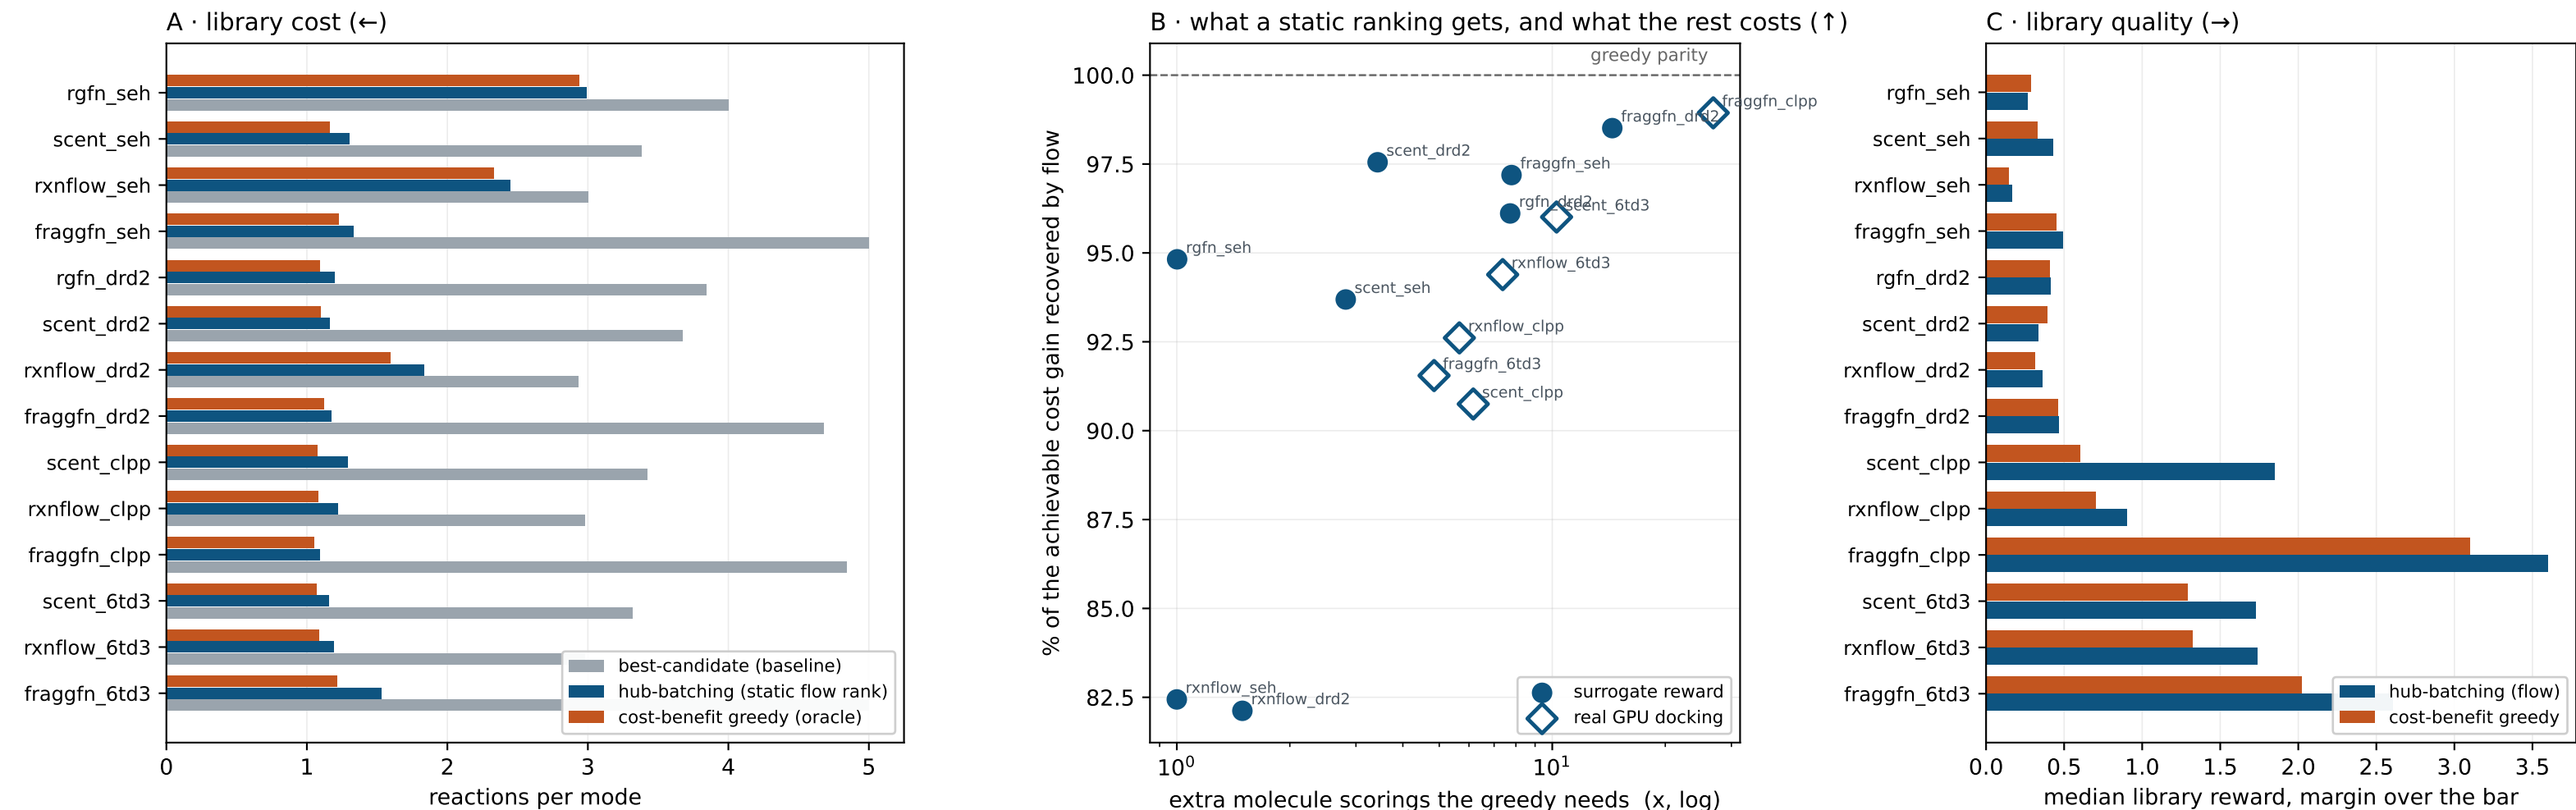

14 cells (4 generators x 4 targets; diamonds = real GPU docking). Budget 300 modes, Tanimoto cutoff 0.5, Morgan r=3. Both arms share the enumeration, cost model, child policy and mode definition; only the choice of which hub to walk next differs.