


Of the 300 molecules each library hands over, how many are distinct molecules?

SCENT sEH surrogate — each arm run to the same 300-molecule target, so the bars are directly comparable

greedy @0.7 (reward-ordered) greedy @0.5 (reward-ordered) qualified (reward + diversity re-imposed)
Butina @0.7 (reward-blind) Butina @0.5 (reward-blind)

Hub batching

Best candidate (previous)

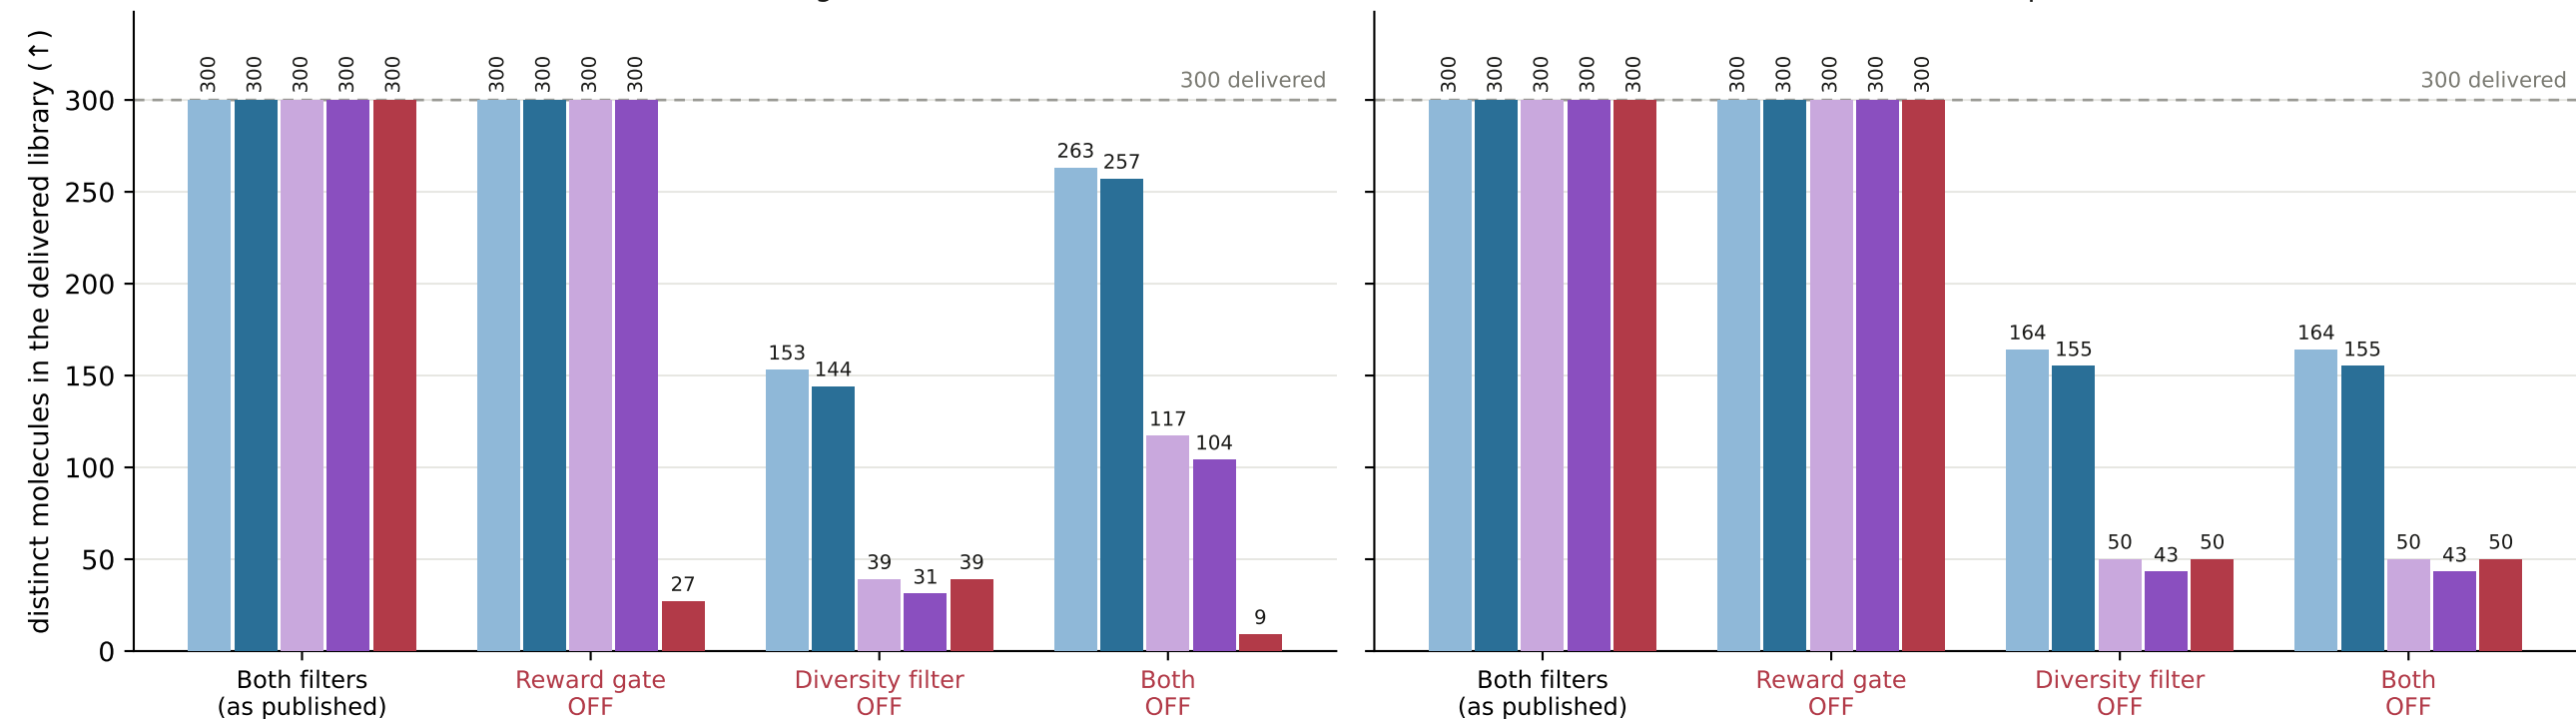

Greedy = the paper's sphere-exclusion count, fed best-reward-first. Butina = the same "how many families?" question with reward taken OUT of the procedure (centres by neighbourhood density), so a collapse cannot be an artifact of counting in reward order. Qualified = members surviving the canonical definition (reward ≥ 7 and Tanimoto ≤ 0.5) — for the unablated arm that is the whole library, by construction.