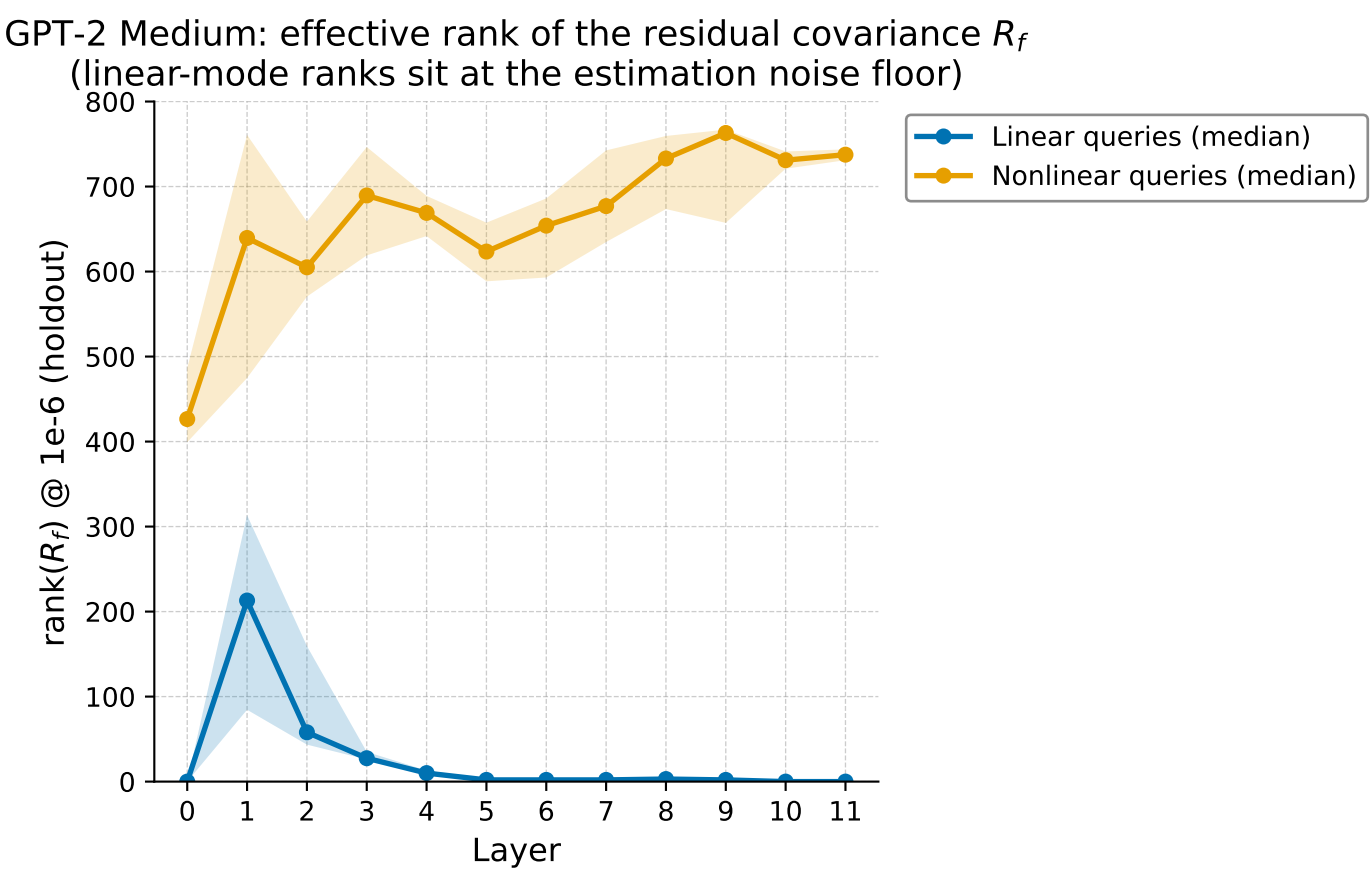
GPT-2 Medium: effective rank of the residual covariance R_f
(linear-mode ranks sit at the estimation noise floor)
rank(R_f) @ 1e-6 (holdout)
Layer
Linear queries (median)
Nonlinear queries (median)
0
100
200
300
400
500
600
700
800
0
1
2
3
4
5
6
7
8
9
10
11