

API Documentation

API Documentation

October 22, 2013

Contents

Contents	1
1 Package lotto	3
1.1 Modules	3
1.2 Variables	3
2 Module lotto.auswertung	4
2.1 Variables	4
2.2 Class ui_lotto_auswertung	4
2.2.1 Methods	5
2.2.2 Properties	7
2.2.3 Class Variables	7
3 Module lotto.datahandler	8
3.1 Variables	8
3.2 Class Datahandler	8
3.2.1 Methods	10
3.2.2 Properties	13
4 Package lotto.gui	14
4.1 Variables	14
5 Module lotto.kalender_datum	15
5.1 Variables	15
5.2 Class ui_kalender	16
5.2.1 Methods	16
5.2.2 Properties	18
5.2.3 Class Variables	18
6 Module lotto.lotto_gui_dateneing	20
6.1 Functions	20
6.2 Variables	20
6.3 Class MeinDialog	21
6.3.1 Methods	21
6.3.2 Properties	26
6.3.3 Class Variables	26
7 Module lotto.webzugriff	27

7.1	Functions	27
7.2	Variables	27
8	Module <code>lotto.zufallszahl</code>	28
8.1	Functions	29
8.2	Variables	29
9	Module <code>pylotto</code>	30
	Index	31

1 Package lotto

1.1 Modules

- **auswertung**: pyLottoverwaltung
(Section 2, p. 4)
- **datahandler**: the data handler for insert, get and delete data in the database
(Section 3, p. 8)
- **gui** (Section 4, p. 14)
- **kalender__datum**: pyLottoverwaltung
(Section 5, p. 15)
- **lotto__gui__dateneing**: pyLottoverwaltung
(Section 6, p. 20)
- **webzugriff**: pyLottoverwaltung
(Section 7, p. 27)
- **zufallszahl**: Erzeugen einer Zufallszahl, mit Modultest beim direkten Aufruf
(Section 8, p. 28)

1.2 Variables

Name	Description
__package__	Value: None

2 Module `lotto.auswertung`

`pyLottoverwaltung`

Copyright (C) <2012-2013> Markus Hackspacher

This file is part of `pyLottoverwaltung`.

`pyLottoverwaltung` is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.


`pyLottoverwaltung` is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU General Public License along with `pyLottoverwaltung`. If not, see <<http://www.gnu.org/licenses/>>.

2.1 Variables

Name	Description
<code>__package__</code>	Value: <code>'lotto'</code>
<code>__warningregistry__</code>	Value: <code>{('the sets module is deprecated', <type 'exceptions.Depr...</code>

2.2 Class `ui_lotto_auswertung`

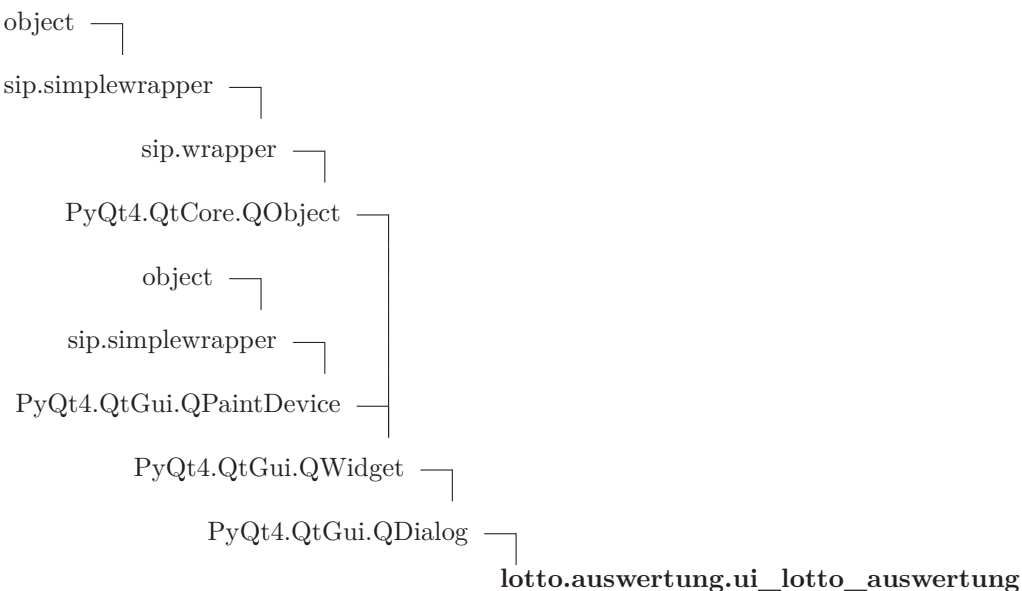

2.2.1 Methods

<code>__init__</code> (<i>self</i> , <i>rowid</i> , <i>data_handler</i>)
open analyze dialog Datenauswerte Dialog oeffnen
Parameters
<i>data_handler</i> : (<i>type=datahandler</i>)
<i>rowid</i> : (<i>type=int</i>)
Return Value
give <code>close(0)</code> back
Overrides: <code>object.__init__</code>

Inherited from `PyQt4.QtGui.QDialog`

`accept()`, `accepted()`, `closeEvent()`, `contextMenuEvent()`, `done()`, `eventFilter()`, `exec_()`, `extension()`, `finished()`, `isSizeGripEnabled()`, `keyPressEvent()`, `minimumSizeHint()`, `open()`, `orientation()`, `reject()`, `rejected()`, `resizeEvent()`, `result()`, `setExtension()`, `setModal()`, `setOrientation()`, `setResult()`, `setSizeGripEnabled()`, `setVisible()`, `showEvent()`, `showExtension()`, `sizeHint()`

Inherited from `PyQt4.QtGui.QWidget`

`acceptDrops()`, `accessibleDescription()`, `accessibleName()`, `actionEvent()`, `actions()`, `activateWindow()`, `addAction()`, `addActions()`, `adjustSize()`, `autoFillBackground()`, `backgroundRole()`, `baseSize()`, `changeEvent()`, `childAt()`, `childrenRect()`, `childrenRegion()`, `clearFocus()`, `clearMask()`, `close()`, `contentsMargins()`, `contentsRect()`, `contextMenuPolicy()`, `create()`, `cursor()`, `customContextMenuRequested()`, `destroy()`, `devType()`, `dragEnterEvent()`, `dragLeaveEvent()`, `dragMoveEvent()`, `dropEvent()`, `effectiveWinId()`, `enabledChange()`, `ensurePolished()`, `enterEvent()`, `event()`, `find()`, `focusInEvent()`, `focusNextChild()`, `focusNextPrevChild()`, `focusOutEvent()`, `focusPolicy()`, `focusPreviousChild()`, `focusProxy()`, `focusWidget()`, `font()`, `fontChange()`, `fontInfo()`, `fontMetrics()`, `foregroundRole()`, `frameGeometry()`, `frameSize()`, `geometry()`, `getContentsMargins()`, `grabGesture()`, `grabKeyboard()`, `grabMouse()`, `grabShortcut()`, `graphicsEffect()`, `graphicsProxyWidget()`, `handle()`, `hasFocus()`, `hasMouseTracking()`, `height()`, `heightForWidth()`, `hide()`, `hideEvent()`, `inputContext()`, `inputMethodEvent()`, `inputMethodHints()`, `inputMethodQuery()`, `insertAction()`, `insertActions()`, `isActiveWindow()`, `isAncestorOf()`, `isEnabled()`, `isEnabledTo()`, `isEnabledToTLW()`, `isFullScreen()`, `isHidden()`, `isLeftToRight()`, `isMaximized()`, `isMinimized()`, `isModal()`, `isRightToLeft()`, `isTopLevel()`, `isVisible()`, `isVisibleTo()`, `isWindow()`, `isWindowModified()`, `keyReleaseEvent()`, `keyboardGrabber()`, `languageChange()`, `layout()`, `layoutDirection()`, `leaveEvent()`, `locale()`, `lower()`, `mapFrom()`, `mapFromGlobal()`, `mapFromParent()`, `mapTo()`, `mapToGlobal()`, `mapToParent()`, `mask()`, `maximumHeight()`, `maximumSize()`, `maximumWidth()`, `metric()`, `minimumHeight()`, `minimumSize()`, `minimumWidth()`, `mouseDoubleClickEvent()`, `mouseGrabber()`, `mouseMoveEvent()`, `mousePressEvent()`, `mouseReleaseEvent()`, `move()`, `moveEvent()`, `nativeParentWidget()`, `nextInFocusChain()`, `normalGeometry()`, `overrideWindowFlags()`,

`overrideWindowState()`, `paintEngine()`, `paintEvent()`, `palette()`, `paletteChange()`,
`parentWidget()`, `pos()`, `previousInFocusChain()`, `raise_()`, `rect()`, `releaseKeyboard()`,
`releaseMouse()`, `releaseShortcut()`, `removeAction()`, `render()`, `repaint()`, `resetInput-`
`Context()`, `resize()`, `restoreGeometry()`, `saveGeometry()`, `scroll()`, `setAcceptDrops()`,
`setAccessibleDescription()`, `setAccessibleName()`, `setAttribute()`, `setAutoFillBack-`
`ground()`, `setBackgroundRole()`, `setBaseSize()`, `setContentsMargins()`, `setContextMenuPol-`
`icy()`, `setCursor()`, `setDisabled()`, `setEnabled()`, `setFixedHeight()`, `setFixedSize()`,
`setFixedWidth()`, `setFocus()`, `setFocusPolicy()`, `setFocusProxy()`, `setFont()`, `set-`
`ForegroundRole()`, `setGeometry()`, `setGraphicsEffect()`, `setHidden()`, `setInputCon-`
`text()`, `setInputMethodHints()`, `setLayout()`, `setLayoutDirection()`, `setLocale()`, `set-`
`Mask()`, `setMaximumHeight()`, `setMaximumSize()`, `setMaximumWidth()`, `setMin-`
`imumHeight()`, `setMinimumSize()`, `setMinimumWidth()`, `setMouseTracking()`, `set-`
`Palette()`, `setParent()`, `setShortcutAutoRepeat()`, `setShortcutEnabled()`, `setShown()`,
`setSizeIncrement()`, `setSizePolicy()`, `setStatusTip()`, `setStyle()`, `setStyleSheet()`, `set-`
`TabOrder()`, `setToolTip()`, `setUpdatesEnabled()`, `setWhatsThis()`, `setWindowFilePath()`,
`setWindowFlags()`, `setWindowIcon()`, `setWindowIconText()`, `setWindowModality()`,
`setWindowModified()`, `setWindowOpacity()`, `setWindowRole()`, `setWindowState()`,
`setWindowTitle()`, `show()`, `showFullScreen()`, `showMaximized()`, `showMinimized()`,
`showNormal()`, `size()`, `sizeIncrement()`, `sizePolicy()`, `stackUnder()`, `statusTip()`, `style()`,
`styleSheet()`, `tabletEvent()`, `testAttribute()`, `toolTip()`, `topLevelWidget()`, `under-`
`Mouse()`, `ungrabGesture()`, `unsetCursor()`, `unsetLayoutDirection()`, `unsetLocale()`,
`update()`, `updateGeometry()`, `updateMicroFocus()`, `updatesEnabled()`, `visibleRe-`
`gion()`, `whatsThis()`, `wheelEvent()`, `width()`, `winId()`, `window()`, `windowActivation-`
`Change()`, `windowFilePath()`, `windowFlags()`, `windowIcon()`, `windowIconText()`,
`windowModality()`, `windowOpacity()`, `windowRole()`, `windowState()`, `windowTi-`
`tle()`, `windowType()`, `x()`, `x11Info()`, `x11PictureHandle()`, `y()`

Inherited from `PyQt4.QtCore.QObject`

`__getattr__()`, `blockSignals()`, `childEvent()`, `children()`, `connect()`, `connectNo-`
`tify()`, `customEvent()`, `deleteLater()`, `destroyed()`, `disconnect()`, `disconnectNotify()`,
`dumpObjectInfo()`, `dumpObjectTree()`, `dynamicPropertyNames()`, `emit()`, `findChild()`,
`findChildren()`, `inherits()`, `installEventFilter()`, `isWidgetType()`, `killTimer()`, `metaOb-`
`ject()`, `moveToThread()`, `objectName()`, `parent()`, `property()`, `pyqtConfigure()`, `re-`
`ceivers()`, `removeEventFilter()`, `sender()`, `senderSignalIndex()`, `setObjectName()`,
`setProperty()`, `signalsBlocked()`, `startTimer()`, `thread()`, `timerEvent()`, `tr()`, `trUtf8()`

Inherited from `PyQt4.QtGui.QPaintDevice`

`colorCount()`, `depth()`, `heightMM()`, `logicalDpiX()`, `logicalDpiY()`, `numColors()`,
`paintingActive()`, `physicalDpiX()`, `physicalDpiY()`, `widthMM()`

Inherited from `sip.simplewrapper`

`__new__()`

Inherited from object

```
__delattr__(), __format__(), __getattr__(), __hash__(), __reduce__(),
__reduce_ex__(), __repr__(), __setattr__(), __sizeof__(), __str__(), __sub-
classhook__()
```

2.2.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

2.2.3 Class Variables

Name	Description
<i>Inherited from PyQt4.QtGui.QDialog</i>	
Accepted, Rejected	
<i>Inherited from PyQt4.QtGui.QWidget</i>	
DrawChildren, DrawWindowBackground, IgnoreMask	
<i>Inherited from PyQt4.QtCore.QObject</i>	
staticMetaObject	
<i>Inherited from PyQt4.QtGui.QPaintDevice</i>	
PdmDepth, PdmDpiX, PdmDpiY, PdmHeight, PdmHeightMM, PdmNumColors, PdmPhysicalDpiX, PdmPhysicalDpiY, PdmWidth, PdmWidthMM	

3 Module `lotto.datahandler`

the data handler for insert, get and delete data in the database

pyLottoverwaltung

Copyright (C) <2012-2013> Markus Hackspacher

This file is part of pyLottoverwaltung.

pyLottoverwaltung is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

pyLottoverwaltung is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU General Public License along with pyLottoverwaltung. If not, see <<http://www.gnu.org/licenses/>>.

3.1 Variables

Name	Description
<code>__package__</code>	Value: <code>'lotto'</code>

3.2 Class Datahandler

object —
 `lotto.datahandler.Datahandler`

3.2.1 Methods

```

__init__(self, path)
class init
Parameters
    path: (type=string)

>>> data_handler = Datahandler(':memory:')
>>> data_handler.insert_ziehung('2013-03-13', [11, 12, 13, 14, 15, 16, 17], 666)
>>> data_handler.get_ziehung()
[(1, u'2013-03-13', 666, 777, 888, u'11,12,13,14,15,16,17')]
>>> data_handler.insert_ziehung('2013-03-12', [21, 22, 23, 24, 25, 26, 27], 222)
>>> data_handler.get_ziehung(2)
[(2, u'2013-03-12', 222, 333, 444, u'21,22,23,24,25,26,27')]
>>> data_handler.get_ziehung()
[(2, u'2013-03-12', 222, 333, 444, u'21,22,23,24,25,26,27'), (1, u'2013-03-13', 666, 777, 888, u'11,12,13,14,15,16,17')]
>>> data_handler.insert_schein('2013-03-13', [11, 12, 13, 14, 15, 16, 17], 2)
>>> data_handler.get_schein()
[(1, u'2013-03-13', 2, 0, 888, u'11,12,13,14,15,16,17')]
>>> data_handler.insert_schein('2013-03-12', [21, 22, 23, 24, 25, 28], 1, 1, 444)
>>> data_handler.get_schein(2)
[(2, u'2013-03-12', 1, 1, 444, u'21,22,23,24,25,28')]
>>> data_handler.get_schein()
[(2, u'2013-03-12', 1, 1, 444, u'21,22,23,24,25,28'), (1, u'2013-03-13', 2, 0, 888, u'11,12,13,14,15,16,17')]
>>> data_handler.get_id_numbers_of_ziehung(2)
[2]
>>> data_handler.get_id_numbers_of_ziehung(2, 3)
'error'
>>> data_handler.get_id_numbers_of_ziehung()
'error'
>>> data_handler.get_id_numbers_of_ziehung(number_list=[12, 27])
[1, 2]
>>> data_handler.dump()
>>> data_handler.delete_ziehung(1)
>>> data_handler.delete_ziehung(2)
>>> data_handler.get_ziehung()
[]
>>> data_handler.delete_schein(1)
>>> data_handler.delete_schein(2)
>>> data_handler.get_schein()
[]
)
Overrides: object.__init__

```

create__tables(*self*)

Tabellen erstellen mit id

**insert__ziehung(*self*, *date*, *zahlen*, *zahl_super*, *zahl_spiel77*,
zahl_spielsuper6)**

Save the number of the draw in database Lottozahlen in der Datenbank speichern

Parameters

date: *(type=date)*
zahl_super: *(type=int)*
zahlen: *(type=list)*
zahl_spielsuper6: *(type=int)*
zahl_spiel77: *(type=int)*

insert__schein(*self*, *date*, *zahlen*, *laufzeit*, *laufzeit_tag*, *scheinnr*)

Save the number of the tip in database Daten des Lottoscheines in der Datenbank speichern

Parameters

date: *(type=date)*
laufzeit: *(type=int)*
scheinnr: *(type=int)*
zahlen: *(type=list of int)*
laufzeit_tag: *(type=int)*

get__ziehung(*self*, *rowid*=None, *date*=None)

Daten der Ziehung der Lottozahlen auslesen

Parameters

date: *(type=date)*
rowid: *(type=int)*

Return Value

data

get_id_numbers_of_ziehung(*self*, *id_lottoschein*=None, *number_list*=None)

Get id numbers of ziehung, with the id of lotteryticket Finde die ID Nummer der Ziehungsdaten, durch den Lottoschein

Parameters

id_lottoschein: (*type=int*)
number_list: (*type=list of int*)

Return Value

data all the draw with the number of lotteryticket

get_schein(*self*, *rowid*=None)

Get data from Lottoscheines Daten des Lottoscheines auslesen

Parameters

rowid: (*type=int*)

Return Value

data

delete_ziehung(*self*, *rowid*)

Daten der Ziehung der Lottozahlen löschen

Parameters

rowid: (*type=int*)

delete_schein(*self*, *rowid*)

Daten eines Lottoscheines löschen

Parameters

rowid: (*type=int*)

dump(*self*)

write dump file

__del__(*self*)

close connection of database

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`,
`__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`,
`__str__()`, `__subclasshook__()`

3.2.2 Properties

Name	Description
<i>Inherited from object</i> __class__	

4 Package lotto.gui

4.1 Variables

Name	Description
__package__	Value: None

5 Module `lotto.kalender__datum`

pyLottoverwaltung

Copyright (C) <2012-2013> Markus Hackspacher

This file is part of pyLottoverwaltung.

pyLottoverwaltung is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.


pyLottoverwaltung is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU General Public License along with pyLottoverwaltung. If not, see <<http://www.gnu.org/licenses/>>.

5.1 Variables

Name	Description
<code>__package__</code>	Value: <code>'lotto'</code>

5.2 Class `ui_kalender`

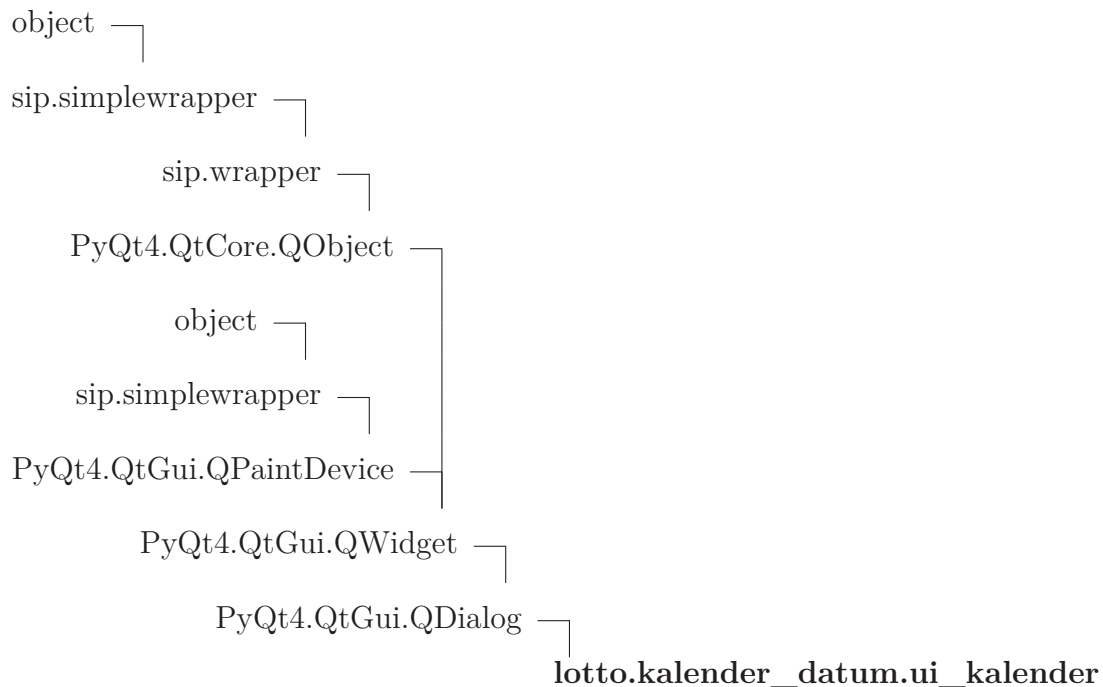

5.2.1 Methods

<code>__init__</code> (<i>self</i> , <i>year</i> , <i>month</i> , <i>day</i>)
open kalender dialog Kalender Dialog oeffnen
Parameters
<i>month</i> : (<i>type=int</i>)
<i>day</i> : (<i>type=int</i>)
<i>year</i> : (<i>type=int</i>)
Overrides: <code>object.__init__</code>

<code>kalender</code> (<i>self</i>)
Return the date of the kalender
Return Value
datum

Inherited from `PyQt4.QtGui.QDialog`

`accept()`, `accepted()`, `closeEvent()`, `contextMenuEvent()`, `done()`, `eventFilter()`, `exec_()`, `extension()`, `finished()`, `isSizeGripEnabled()`, `keyPressEvent()`, `minimumSizeHint()`,

`open()`, `orientation()`, `reject()`, `rejected()`, `resizeEvent()`, `result()`, `setExtension()`, `setModal()`, `setOrientation()`, `setResult()`, `setSizeGripEnabled()`, `setVisible()`, `showEvent()`, `showExtension()`, `sizeHint()`

Inherited from `PyQt4.QtGui.QWidget`

`acceptDrops()`, `accessibleDescription()`, `accessibleName()`, `actionEvent()`, `actions()`, `activateWindow()`, `addAction()`, `addActions()`, `adjustSize()`, `autoFillBackground()`, `backgroundRole()`, `baseSize()`, `changeEvent()`, `childAt()`, `childrenRect()`, `childrenRegion()`, `clearFocus()`, `clearMask()`, `close()`, `contentsMargins()`, `contentsRect()`, `contextMenuPolicy()`, `create()`, `cursor()`, `customContextMenuRequested()`, `destroy()`, `devType()`, `dragEnterEvent()`, `dragLeaveEvent()`, `dragMoveEvent()`, `dropEvent()`, `effectiveWinId()`, `enabledChange()`, `ensurePolished()`, `enterEvent()`, `event()`, `find()`, `focusInEvent()`, `focusNextChild()`, `focusNextPrevChild()`, `focusOutEvent()`, `focusPolicy()`, `focusPreviousChild()`, `focusProxy()`, `focusWidget()`, `font()`, `fontChange()`, `fontInfo()`, `fontMetrics()`, `foregroundRole()`, `frameGeometry()`, `frameSize()`, `geometry()`, `getContentsMargins()`, `grabGesture()`, `grabKeyboard()`, `grabMouse()`, `grabShortcut()`, `graphicsEffect()`, `graphicsProxyWidget()`, `handle()`, `hasFocus()`, `hasMouseTracking()`, `height()`, `heightForWidth()`, `hide()`, `hideEvent()`, `inputContext()`, `inputMethodEvent()`, `inputMethodHints()`, `inputMethodQuery()`, `insertAction()`, `insertActions()`, `isActiveWindow()`, `isAncestorOf()`, `isEnabled()`, `isEnabledTo()`, `isEnabledToTLW()`, `isFullScreen()`, `isHidden()`, `isLeftToRight()`, `isMaximized()`, `isMinimized()`, `isModal()`, `isRightToLeft()`, `isTopLevel()`, `isVisible()`, `isVisibleTo()`, `isWindow()`, `isWindowModified()`, `keyPressEvent()`, `keyboardGrabber()`, `languageChange()`, `layout()`, `layoutDirection()`, `leaveEvent()`, `locale()`, `lower()`, `mapFrom()`, `mapFromGlobal()`, `mapFromParent()`, `mapTo()`, `mapToGlobal()`, `mapToParent()`, `mask()`, `maximumHeight()`, `maximumSize()`, `maximumWidth()`, `metric()`, `minimumHeight()`, `minimumSize()`, `minimumWidth()`, `mouseDoubleClickEvent()`, `mouseGrabber()`, `mouseMoveEvent()`, `mousePressEvent()`, `mouseReleaseEvent()`, `move()`, `moveEvent()`, `nativeParentWidget()`, `nextInFocusChain()`, `normalGeometry()`, `overrideWindowFlags()`, `overrideWindowState()`, `paintEngine()`, `paintEvent()`, `palette()`, `paletteChange()`, `parentWidget()`, `pos()`, `previousInFocusChain()`, `raise_()`, `rect()`, `releaseKeyboard()`, `releaseMouse()`, `releaseShortcut()`, `removeAction()`, `render()`, `repaint()`, `resetInputContext()`, `resize()`, `restoreGeometry()`, `saveGeometry()`, `scroll()`, `setAcceptDrops()`, `setAccessibleDescription()`, `setAccessibleName()`, `setAttribute()`, `setAutoFillBackground()`, `setBackgroundRole()`, `setBaseSize()`, `setContentsMargins()`, `setContextMenuPolicy()`, `setCursor()`, `setDisabled()`, `setEnabled()`, `setFixedHeight()`, `setFixedSize()`, `setFixedWidth()`, `setFocus()`, `setFocusPolicy()`, `setFocusProxy()`, `setFont()`, `setForegroundRole()`, `setGeometry()`, `setGraphicsEffect()`, `setHidden()`, `setInputContext()`, `setInputMethodHints()`, `setLayout()`, `setLayoutDirection()`, `setLocale()`, `setMask()`, `setMaximumHeight()`, `setMaximumSize()`, `setMaximumWidth()`, `setMinimumHeight()`, `setMinimumSize()`, `setMinimumWidth()`, `setMouseTracking()`, `setPalette()`, `setParent()`, `setShortcutAutoRepeat()`, `setShortcutEnabled()`, `setShown()`, `setSizeIncrement()`, `setSizePolicy()`, `setStatusTip()`, `setStyle()`, `setStyleSheet()`, `setTabOrder()`, `setToolTip()`, `setUpdatesEnabled()`, `setWhatsThis()`, `setWindowFilePath()`,

`setWindowFlags()`, `setWindowIcon()`, `setWindowIconText()`, `setWindowModality()`,
`setWindowModified()`, `setWindowOpacity()`, `setWindowRole()`, `setWindowState()`,
`setWindowTitle()`, `show()`, `showFullScreen()`, `showMaximized()`, `showMinimized()`,
`showNormal()`, `size()`, `sizeIncrement()`, `sizePolicy()`, `stackUnder()`, `statusTip()`, `style()`,
`stylesheet()`, `tabletEvent()`, `testAttribute()`, `toolTip()`, `topLevelWidget()`, `under-`
`Mouse()`, `ungrabGesture()`, `unsetCursor()`, `unsetLayoutDirection()`, `unsetLocale()`,
`update()`, `updateGeometry()`, `updateMicroFocus()`, `updatesEnabled()`, `visibleRe-`
`gion()`, `whatsThis()`, `wheelEvent()`, `width()`, `winId()`, `window()`, `windowActivation-`
`Change()`, `windowFilePath()`, `windowFlags()`, `windowIcon()`, `windowIconText()`,
`windowModality()`, `windowOpacity()`, `windowRole()`, `windowState()`, `windowTi-`
`tle()`, `windowType()`, `x()`, `x11Info()`, `x11PictureHandle()`, `y()`

Inherited from `PyQt4.QtCore.QObject`

`__getattr__()`, `blockSignals()`, `childEvent()`, `children()`, `connect()`, `connectNo-`
`tify()`, `customEvent()`, `deleteLater()`, `destroyed()`, `disconnect()`, `disconnectNotify()`,
`dumpObjectInfo()`, `dumpObjectTree()`, `dynamicPropertyNames()`, `emit()`, `findChild()`,
`findChildren()`, `inherits()`, `installEventFilter()`, `isWidgetType()`, `killTimer()`, `metaOb-`
`ject()`, `moveToThread()`, `objectName()`, `parent()`, `property()`, `pyqtConfigure()`, `re-`
`ceivers()`, `removeEventFilter()`, `sender()`, `senderSignalIndex()`, `setObjectName()`,
`setProperty()`, `signalsBlocked()`, `startTimer()`, `thread()`, `timerEvent()`, `tr()`, `trUtf8()`

Inherited from `PyQt4.QtGui.QPaintDevice`

`colorCount()`, `depth()`, `heightMM()`, `logicalDpiX()`, `logicalDpiY()`, `numColors()`,
`paintingActive()`, `physicalDpiX()`, `physicalDpiY()`, `widthMM()`

Inherited from `sip.simplewrapper`

`__new__()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__reduce__()`,
`__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__sub-`
`classhook__()`

5.2.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

5.2.3 Class Variables

Name	Description
<i>Inherited from <code>PyQt4.QtGui.QDialog</code></i> Accepted, Rejected	
<i>Inherited from <code>PyQt4.QtGui.QWidget</code></i> DrawChildren, DrawWindowBackground, IgnoreMask	
<i>Inherited from <code>PyQt4.QtCore.QObject</code></i> staticMetaObject	
<i>Inherited from <code>PyQt4.QtGui.QPaintDevice</code></i> PdmDepth, PdmDpiX, PdmDpiY, PdmHeight, PdmHeightMM, PdmNumColors, PdmPhysicalDpiX, PdmPhysicalDpiY, PdmWidth, PdmWidthMM	

6 Module `lotto.lotto_gui_dateneing`

`pyLottoverwaltung`

Copyright (C) <2012-2013> Markus Hackspacher

This file is part of `pyLottoverwaltung`.

`pyLottoverwaltung` is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

`pyLottoverwaltung` is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU General Public License along with `pyLottoverwaltung`. If not, see <<http://www.gnu.org/licenses/>>.


6.1 Functions

<code>gui</code> (<i>arguments</i>)
open the GUI
Parameters
arguments: language (en, de) (<i>type=string</i>)
Return Value
none

6.2 Variables

Name	Description
<code>__package__</code>	Value: 'lotto'

6.3 Class *MeinDialog*

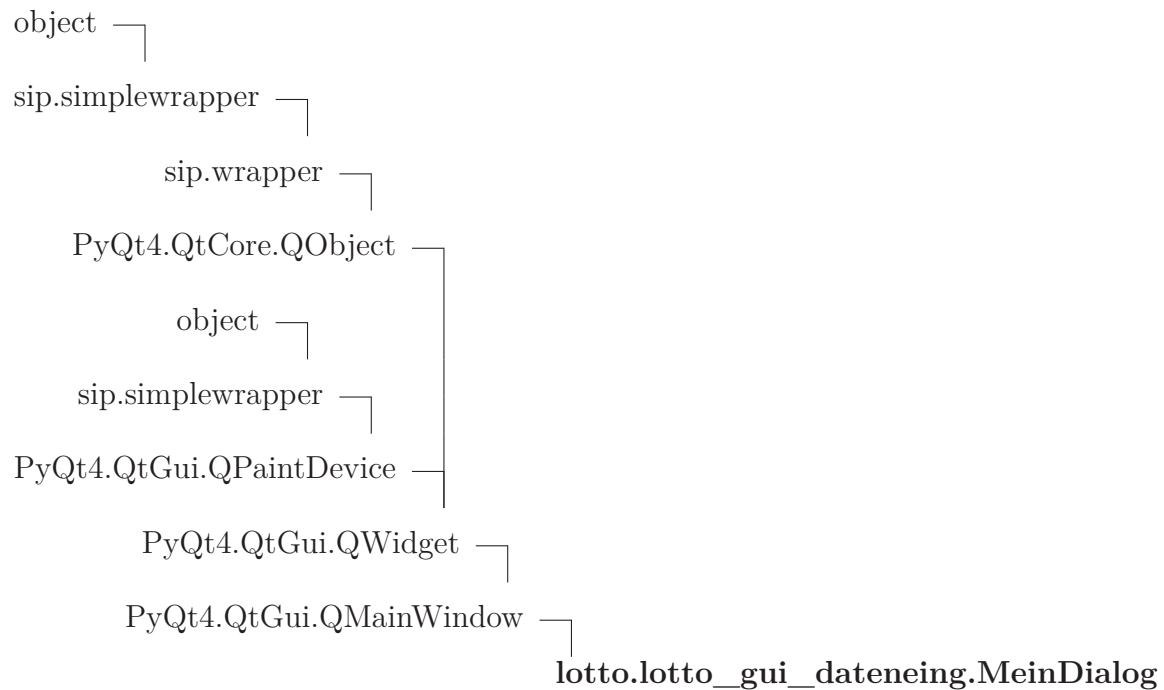

6.3.1 Methods

<code>__init__(self)</code>
initial the main window 1 to 49 button, 7 spinbox, calender, datafield Overrides: <i>object.__init__</i>
<code>init(self)</code>
init variable
<code>onbtn_kalender(self)</code>
open calender dialog
<code>ondaten_gewinnz(self)</code>
Anzeigen der Gewinnzahlen an den Auswahlfeld Auslesen der Zeilennummer Den Text der Zeile in der Beschriftung ausgeben

ondaten__lottoschein(*self*)

Anzeigen der Daten des Lottoscheins an den Auswahlfeld Auslesen der Zeilennummer Den Text der Zeile in der Beschriftung ausgeben

onInfo(*self*)

Programm Info

closeEvent(*self*, *event*)

the program exit

Overrides: PyQt4.QtGui.QWidget.closeEvent

onData__lottode(*self*)

Load the actual draw from lotto.de

onData__lottozahlenonlinede(*self*, *first_year*, *last_year*)

Load the draw from lottozahlenonline.de

spinBox__1to7__clear(*self*, *number*=None, *numbers*=None)

Die SpinBoxen 1 bis 6 und Zusatzzahl löschen

onEingabefeld__1to49(*self*, *zahl*)

Ein Zahlenfelder 1 bis 49 wurde angeklickt

focusSpinBox__1to7(*self*, *number*)

Ein Auswahlfelder der 7 Gewinnzahlen oder Lottoscheins hat sich geändert

onbtn__hinzu(*self*)

drawing numbers move in database

onBtn__ls__auswerten(*self*)

den Lottoschein auswerten

onBtn__gz__anzeigen(*self*)

show drawing numbers Gewinnzahlen im großen Feld anzeigen

onBtn_ls_anzeigen(*self*)

show tip numbers Lottoschein im großen Feld anzeigen,

onBtn_gz_loeschen(*self*)

delete drawing numbers from the database Gewinnzahlen einer Ziehung aus der Datenbank loeschen

onBtn_ls_loeschen(*self*)

delete tip numbers from the database Lottoschein aus der Datenbank loeschen

onBtn_ls_laden(*self*)

Read the Lottoschein from the Database loading into the QPlainTextEdit

onBtn_gz_laden(*self*)

Read the Gewinnzahlen from the Database loading into the QPlainTextEdit

onCBox_gz_kompl_ausgeben(*self*)

CheckBox: Show the complete database in TextEdit

onbtn_zufall(*self*)

Die Zufallszahlen generieren

onbtn_set_calender_today(*self*)

set calender today

onmodus(*self*)

Wenn der Eingabe-Modus wechselt werden Schaltflächen an oder ab geschaltet

geaendert(*self*)

Botton colour in dependence of the value of the Spinbox

geaendert_btn(*self*)

in den SpinBoxen die Nummern der Zahlen 1 bis 49 anzeigen wenn die Zahl abgewählt wird, wird auch der Wert der entsprechende Spinbox gelöscht

draw__numbers(<i>self</i>)

numbers are in the draw

onwebsite(<i>self</i>)

open website

onClose(<i>self</i>)

Inherited from PyQt4.QtGui.QMainWindow

addDockWidget(), addToolBar(), addToolBarBreak(), centralWidget(), contextMenuEvent(), corner(), createPopupMenu(), dockOptions(), dockWidgetArea(), documentMode(), event(), iconSize(), iconSizeChanged(), insertToolBar(), insertToolBarBreak(), isAnimated(), isDockNestingEnabled(), isSeparator(), menuBar(), menuWidget(), removeDockWidget(), removeToolBar(), removeToolBarBreak(), restoreDockWidget(), restoreState(), saveState(), setAnimated(), setCentralWidget(), setCorner(), setDockNestingEnabled(), setDockOptions(), setDocumentMode(), setIconSize(), setMenuBar(), setMenuWidget(), setStatusBar(), setTabPosition(), setTabShape(), setToolButtonStyle(), setUnifiedTitleAndToolBarOnMac(), splitDockWidget(), statusBar(), tabPosition(), tabShape(), tabifiedDockWidgets(), tabifyDockWidget(), toolBarArea(), toolBarBreak(), toolButtonStyle(), toolButtonStyleChanged(), unifiedTitleAndToolBarOnMac()

Inherited from PyQt4.QtGui.QWidget

acceptDrops(), accessibleDescription(), accessibleName(), actionEvent(), actions(), activateWindow(), addAction(), addActions(), adjustSize(), autoFillBackground(), backgroundRole(), baseSize(), changeEvent(), childAt(), childrenRect(), childrenRegion(), clearFocus(), clearMask(), close(), contentsMargins(), contentsRect(), contextMenuPolicy(), create(), cursor(), customContextMenuRequested(), destroy(), devType(), dragEnterEvent(), dragLeaveEvent(), dragMoveEvent(), dropEvent(), effectiveWinId(), enabledChange(), ensurePolished(), enterEvent(), find(), focusInEvent(), focusNextChild(), focusNextPrevChild(), focusOutEvent(), focusPolicy(), focusPreviousChild(), focusProxy(), focusWidget(), font(), fontChange(), fontInfo(), fontMetrics(), foregroundRole(), frameGeometry(), frameSize(), geometry(), getContentsMargins(), grabGesture(), grabKeyboard(), grabMouse(), grabShortcut(), graphicsEffect(), graphicsProxyWidget(), handle(), hasFocus(), hasMouseTracking(), height(), heightForWidth(), hide(), hideEvent(), inputContext(), inputMethodEvent(), inputMethodHints(), inputMethodQuery(), insertAction(), insertActions(), isActiveWindow(), isAncestorOf(), isEnabled(), isEnabledTo(), isEnabledToTLW(), isFullScreen(), isHidden(), isLeftToRight(), isMaximized(), isMinimized(), isModal(), isRightToLeft(), isTopLevel(), isVisible(), isVisibleTo(), isWindow(), isWindowModified(), keyPressEvent(), keyReleaseEvent(), keyboardGrabber(), languageChange(), layout(), layoutDirection(), leaveEvent(), locale(), lower(), mapFrom(),

mapFromGlobal(), mapFromParent(), mapTo(), mapToGlobal(), mapToParent(), mask(), maxHeight(), maxSize(), maxWidth(), metric(), minHeight(), minimumSize(), minimumSizeHint(), minimumWidth(), mouseDoubleClickEvent(), mouseGrabber(), mouseMoveEvent(), mousePressEvent(), mouseReleaseEvent(), move(), moveEvent(), nativeParentWidget(), nextInFocusChain(), normalGeometry(), overrideWindowFlags(), overrideWindowState(), paintEngine(), paintEvent(), palette(), paletteChange(), parentWidget(), pos(), previousInFocusChain(), raise_(), rect(), releaseKeyboard(), releaseMouse(), releaseShortcut(), removeAction(), render(), repaint(), resetInputContext(), resize(), resizeEvent(), restoreGeometry(), saveGeometry(), scroll(), setAcceptDrops(), setAccessibleDescription(), setAccessibleName(), setAttribute(), setAutoFillBackground(), setBackgroundRole(), setBaseSize(), setContentsMargins(), setContextMenuPolicy(), setCursor(), setDisabled(), setEnabled(), setFixedHeight(), setFixedSize(), setFixedWidth(), setFocus(), setFocusPolicy(), setFocusProxy(), setFont(), setForegroundRole(), setGeometry(), setGraphicsEffect(), setHidden(), setInputContext(), setInputMethodHints(), setLayout(), setLayoutDirection(), setLocale(), setMask(), setMaximumHeight(), setMaximumSize(), setMaximumWidth(), setMinimumHeight(), setMinimumSize(), setMinimumWidth(), setMouseTracking(), setPalette(), setParent(), setShortcutAutoRepeat(), setShortcutEnabled(), setShown(), setSizeIncrement(), setSizePolicy(), setStatusTip(), setStyle(), setStyleSheet(), setTabOrder(), setToolTip(), setUpdatesEnabled(), setVisible(), setWhatsThis(), setWindowFilePath(), setWindowFlags(), setWindowIcon(), setWindowIconText(), setWindowModality(), setWindowModified(), setWindowOpacity(), setWindowRole(), setWindowState(), setWindowTitle(), show(), showEvent(), showFullScreen(), showMaximized(), showMinimized(), showNormal(), size(), sizeHint(), sizeIncrement(), sizePolicy(), stackUnder(), statusTip(), style(), styleSheet(), tabletEvent(), testAttribute(), tooltip(), topLevelWidget(), underMouse(), ungrabGesture(), unsetCursor(), unsetLayoutDirection(), unsetLocale(), update(), updateGeometry(), updateMicroFocus(), updatesEnabled(), visibleRegion(), whatsThis(), wheelEvent(), width(), winId(), window(), windowActivationChange(), windowFilePath(), windowFlags(), windowIcon(), windowIconText(), windowModality(), windowOpacity(), windowRole(), windowState(), windowTitle(), windowType(), x(), x11Info(), x11PictureHandle(), y()

Inherited from PyQt4.QtCore.QObject

__getattr__(), blockSignals(), childEvent(), children(), connect(), connectNotify(), customEvent(), deleteLater(), destroyed(), disconnect(), disconnectNotify(), dumpObjectInfo(), dumpObjectTree(), dynamicPropertyNames(), emit(), eventFilter(), findChild(), findChildren(), inherits(), installEventFilter(), isWidgetType(), killTimer(), metaObject(), moveToThread(), objectName(), parent(), property(), pyqtConfigure(), receivers(), removeEventFilter(), sender(), senderSignalIndex(), setObjectName(), setProperty(), signalsBlocked(), startTimer(), thread(), timerEvent(), tr(), trUtf8()

Inherited from PyQt4.QtGui.QPaintDevice

colorCount(), depth(), heightMM(), logicalDpiX(), logicalDpiY(), numColors(),
paintingActive(), physicalDpiX(), physicalDpiY(), widthMM()

Inherited from sip.simplewrapper

__new__()

Inherited from object

__delattr__(), __format__(), __getattr__(), __hash__(), __reduce__(),
__reduce_ex__(), __repr__(), __setattr__(), __sizeof__(), __str__(), __sub-
classhook__()

6.3.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

6.3.3 Class Variables

Name	Description
<i>Inherited from PyQt4.QtGui.QMainWindow</i>	
AllowNestedDocks, AllowTabbedDocks, AnimatedDocks, ForceTabbedDocks, VerticalTabs	
<i>Inherited from PyQt4.QtGui.QWidget</i>	
DrawChildren, DrawWindowBackground, IgnoreMask	
<i>Inherited from PyQt4.QtCore.QObject</i>	
staticMetaObject	
<i>Inherited from PyQt4.QtGui.QPaintDevice</i>	
PdmDepth, PdmDpiX, PdmDpiY, PdmHeight, PdmHeightMM, PdmNumColors, PdmPhysicalDpiX, PdmPhysicalDpiY, PdmWidth, PdmWidthMM	

7 Module `lotto.webzugriff`

`pyLottoverwaltung`

Copyright (C) <2012-2013> Markus Hackspacher

This file is part of `pyLottoverwaltung`.

`pyLottoverwaltung` is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

`pyLottoverwaltung` is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU General Public License along with `pyLottoverwaltung`. If not, see <<http://www.gnu.org/licenses/>>.

7.1 Functions

<code>data_from_webpage()</code>

Data from <code>lotto.de</code>

Return Value

datum, list of numbers (draw 1-6, Zusatzzahl, Superzahl, Spiel77, Super6)

<code>data_from_achiv(<i>data_handler</i>, <i>quote_url</i>=None)</code>

Data from <code>www.lottozahlenonline.de</code>

<code>test_data_from_webpage()</code>
--

7.2 Variables

Name	Description
<code>__package__</code>	Value: <code>'lotto'</code>

8 Module **lotto.zufallszahl**

Erzeugen einer Zufallszahl, mit Modultest beim direkten Aufruf

pyLottoverwaltung

Copyright (C) <2012-2013> Markus Hackspacher

This file is part of pyLottoverwaltung.

pyLottoverwaltung is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

pyLottoverwaltung is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU General Public License along with pyLottoverwaltung. If not, see <<http://www.gnu.org/licenses/>>.

8.1 Functions

zufallszahlen(*anzahl*, *maxwert*)

Zufallszahl ermitteln und als Wurfelergebnis nehmen return random value

Parameters

anzahl: Gibt die Anzahl der Ausgabewerte an

(*type=int*)

maxwert: Gibt den höchsten Zahlenwert an

(*type=int*)

Return Value

Gibt Zufallszahlen zurueck.

```
>>> zufallszahlen(16, 15)
```

```
Traceback (most recent call last):
```

```
ValueError: sample larger than population
```

```
>>> zufallszahlen(16, -15)
```

```
Traceback (most recent call last):
```

```
ValueError: sample larger than population
```

```
>>> zufallszahlen(-16, 15)
```

```
Traceback (most recent call last):
```

```
ValueError: sample larger than population
```

```
>>> zufallszahlen(1, 1)
```

```
[1]
```

```
>>> zufallszahlen(1, 1.7)
```

```
Traceback (most recent call last):
```

```
TypeError: integer argument expected, got float
```

```
>>> sorted(zufallszahlen(3, 3))
```

```
[1, 2, 3]
```

8.2 Variables

Name	Description
<code>__package__</code>	Value: 'lotto'

9 Module pylotto

pyLottoverwaltung

Copyright (C) <2012> Markus Hackspacher

This file is part of pyLottoverwaltung.

pyLottoverwaltung is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

pyLottoverwaltung is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU General Public License along with pyLottoverwaltung. If not, see <<http://www.gnu.org/licenses/>>.

Index

lotto (*package*), 3

- lotto.auswertung (*module*), 4–7
 - lotto.auswertung.ui_lotto_auswertung (*class*), 4–7
- lotto.datahandler (*module*), 8–13
 - lotto.datahandler.Datahandler (*class*), 8–13
- lotto.gui (*package*), 14
- lotto.kalender_datum (*module*), 15–19
 - lotto.kalender_datum.ui_kalender (*class*), 15–19
- lotto.lotto_gui_dateneing (*module*), 20–26
 - lotto.lotto_gui_dateneing.gui (*function*), 20
 - lotto.lotto_gui_dateneing.MeinDialog (*class*), 20–26
- lotto.webzugriff (*module*), 27
 - lotto.webzugriff.data_from_achiv (*function*), 27
 - lotto.webzugriff.data_from_webpage (*function*), 27
 - lotto.webzugriff.test_data_from_webpage (*function*), 27
- lotto.zufallszahl (*module*), 28–29
 - lotto.zufallszahl.zufallszahlen (*function*), 29

pylotto (*module*), 30