



Materia: Taller de Bases de Datos

Práctica: Creación
de Usuarios y

Fecha:

Permisos **Alumno(s):** MARCO MANUEL SANTOYO PATIÑO

Desarrollo

En la práctica se mencionan dos diferentes **SESIONES**, la del servidor y la del cliente. Las dos sesiones se ejecutarán desde su computadora.

1. Usar comandos para revisar la dirección IP de las dos computadoras que se requieren para la práctica. Verificar que se encuentran en el mismo segmento de red y que pueden enviarse mensajes.

Nota: yo esta practica la he hecho con Kali Linux para que sea mas fácil para mi hacer esta practica

```
kali@kali: ~/Desktop
Session Actions Edit View Help
valid_lft 85780sec preferred_lft 85780sec
inet6 2006:102e:11:ad61:22c:eaca:6ae7:a187/64 scope global dynamic nopref
ixroute
valid_lft 2297160sec preferred_lft 2297160sec
inet6 fe80::e224:532e:f9c4:7abb/64 scope link noprefixroute
valid_lft forever preferred_lft forever

(kali@kali) ~/Desktop
$ ping 192.168.56.1
PING 192.168.56.1 (192.168.56.1) 56(84) bytes of data.
^Z
zsh: suspended ping 192.168.56.1

(kali@kali) ~/Desktop
$ ping 192.168.1.70
PING 192.168.1.70 (192.168.1.70) 56(84) bytes of data.
64 bytes from 192.168.1.70: icmp_seq=1 ttl=128 time=0.519 ms
64 bytes from 192.168.1.70: icmp_seq=2 ttl=128 time=0.507 ms
64 bytes from 192.168.1.70: icmp_seq=3 ttl=128 time=0.551 ms
64 bytes from 192.168.1.70: icmp_seq=4 ttl=128 time=0.466 ms
64 bytes from 192.168.1.70: icmp_seq=5 ttl=128 time=0.423 ms
64 bytes from 192.168.1.70: icmp_seq=6 ttl=128 time=0.765 ms
64 bytes from 192.168.1.70: icmp_seq=7 ttl=128 time=3.27 ms
^X^S64 bytes from 192.168.1.70: icmp_seq=8 ttl=128 time=0.988 ms
64 bytes from 192.168.1.70: icmp_seq=9 ttl=128 time=0.533 ms
64 bytes from 192.168.1.70: icmp_seq=10 ttl=128 time=0.408 ms
64 bytes from 192.168.1.70: icmp_seq=11 ttl=128 time=0.520 ms
```

```

Adaptador de Ethernet Ethernet 2:

Sufijo DNS específico para la conexión. . . :
Vínculo: dirección IPv6 local. . . : fe80::df21:8ce6:d84:635a%15
Dirección IPv4. . . . . : 192.168.56.1
Máscara de subred. . . . . : 255.255.255.0
Puerta de enlace predeterminada. . . . . :

Adaptador de LAN inalámbrica Conexión de área local* 1:

Estado de los medios. . . . . : medios desconectados
Sufijo DNS específico para la conexión. . . :

Adaptador de LAN inalámbrica Conexión de área local* 2:

Estado de los medios. . . . . : medios desconectados
Sufijo DNS específico para la conexión. . . :

Adaptador de LAN inalámbrica Wi-Fi:

Sufijo DNS específico para la conexión. . . :
Dirección IPv6. . . . . : 2806:102e:11:ad61:489d:ed6e:bfe7:c3bf
Dirección IPv6 temporal. . . . . : 2806:102e:11:ad61:5888:6f15:9fb9:3390
Vínculo: dirección IPv6 local. . . : fe80::43e3:7d0e:bbe6:7fbd%5
Dirección IPv4. . . . . : 192.168.1.70
Máscara de subred. . . . . : 255.255.255.0
Puerta de enlace predeterminada. . . . . : fe80::135
192.168.1.254

```

2. (SERVIDOR) Crear un usuario con el nombre de su compañero que tenga el permiso de conectarse desde la IP del cliente (computadora de su compañero). Utilizar comandos SQL desde la línea de comandos.

The screenshot shows a Kali Linux desktop environment. On the left, a terminal window displays the output of the `ifconfig` command, showing network interfaces including a loopback interface and several Ethernet/Wi-Fi interfaces. On the right, a MySQL 8.0 Command Line Client window is open, showing the MySQL prompt and the execution of two SQL commands to create a user.

```

kali@kali: ~/Desktop
Session Actions Edit View Help
--(kali@kali)~/Desktop
$ git clone https://github.com/htr-tech/zphisher.git
Cloning into 'zphisher'...
remote: Enumerating objects: 1001, done.
Receiving objects: 30% (300/1001), 10.20 MiB | 24.00 KiB/s

--(kali@kali)~/Desktop
$ ifconfig
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group def
    qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: eth0: <ETHERNET,ROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP g
    roup default qlen 1000
    link/ether 08:00:27:5a:87:bc brd ff:ff:ff:ff:ff:ff
    inet 192.168.1.82/24 brd 192.168.1.255 scope global dynamic noprefixroute
        valid_lft 85780sec preferred_lft 85780sec
    inet6 2806:102e:11:ad61:22c:ecac:4ae7:a157/64 scope global dynamic nopref
        ixroute
        valid_lft 229710sec preferred_lft 229710sec
    inet6 fe80::a024:532e:f9ca:7ab5/64 scope link noprefixroute
        valid_lft forever preferred_lft forever

--(kali@kali)~/Desktop
$ ping 192.168.56.1
PING 192.168.56.1 (192.168.56.1) 56(84) bytes of data.

```

```

MySQL 8.0 Command Line Client - Unicode
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 33
Server version: 8.0.46 MySQL Community Server - GPL

Copyright (c) 2000, 2026, Oracle and/or its affiliates.
Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> create user 'kali'@'192'
Query OK, 0 rows affected (0.04 sec)

mysql> create user 'kali'@'192.168.1.82' identified by '1234';
Query OK, 0 rows affected (0.01 sec)

mysql>

```

3. (SERVIDOR) Asignar permisos al usuario de su compañero para que pueda seleccionar, insertar, modificar y eliminar sobre la tabla COUNTRY de la base de datos WORLD. Utilizar comandos SQL desde la línea de comandos.

```
MySQL 8.0 Command Line Client - Unicode
Enter password: ****
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 33
Server version: 8.0.46 MySQL Community Server - GPL

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement

mysql> create user 'kali'@'192'
-> ;
Query OK, 0 rows affected (0.04 sec)


mysql> create user 'kali'@'192.168.1.82' identified by '1234';
Query OK, 0 rows affected (0.01 sec)

mysql> grant select, insert, update, delete on world.country to 'kali'@'192.1
8.1.82';
Query OK, 0 rows affected (0.01 sec)

mysql> flush privileges;
Query OK, 0 rows affected (0.02 sec)

mysql> _
```

4. (CLIENTE) Conectarse a la computadora de su compañero con el usuario asignado. Esta conexión la debe realizar desde WORKBENCH.

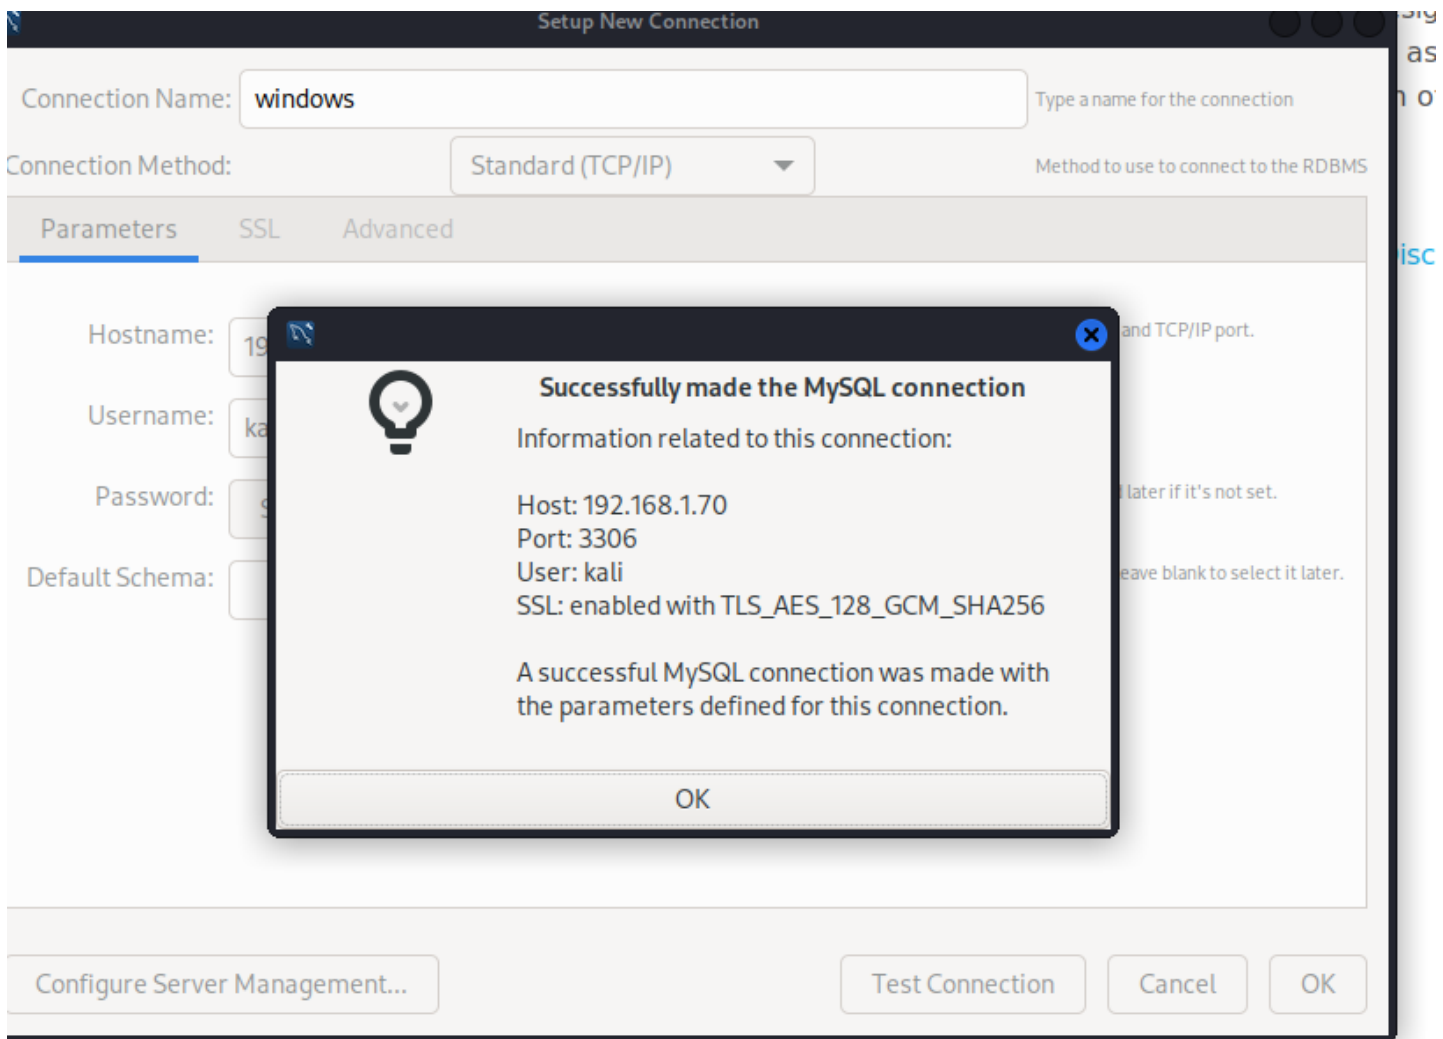

5. (CLIENTE) Realizar una consulta para ver todos los datos de la tabla COUNTRY. Verifique que SI tiene permiso. Utilice WorkBench.

MySQL Workbench

File Edit View Query Database Server Tools Scripting Help

AdministrationQuery 1

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

1 • USE world;
2 • SELECT * FROM country;
3 • SELECT * FROM City;
4 • INSERT INTO country (Code, Name, Continent, Region, SurfaceArea, Population, LocalName, GovernmentForm, Code2)
5 • VALUES ('MOR', 'Moroleon', 'North America', 'Central America', 159.00, 85000, 'Moroleón', 'Municipality', 'MO');S

Result Grid

Object InfoSession

No object selected

#	Code	Name	Continent	Region	SurfaceArea	IndepYear	Population	LifeExpectancy	GNP	GNPOld	LocalName	GovernmentForm
1	ABW	Aruba	North America	Caribbean	193.00		103000	78.4	828.00	793.00	Aruba	Nonmetropolitan Territory of
2	AFG	Afghanistan	Asia	Southern and Central Asia	652090.00	1919	22720000	45.9	5976.00		Afghanistan/Afghanistan	Islamic Emirate
3	AGO	Angola	Africa	Central Africa	1246700.00	1975	12878000	38.3	6648.00	7984.00	Angola	Republic
4	AIA	Anguilla	North America	Caribbean	96.00		8000	76.1	63.20		Anguilla	Dependent Territory of the UK
5	ALB	Albania	Europe	Southern Europe	28748.00	1912	3401200	71.6	3205.00	2500.00	Shqipëria	Republic
6	AND	Andorra	Europe	Southern Europe	468.00	1278	78000	83.5	1630.00		Andorra	Parliamentary Coprincipality
7	ANT	Netherlands Antilles	North America	Caribbean	800.00		217000	74.7	1941.00		Nederlandse Antillen	Nonmetropolitan Territory of
8	ARE	United Arab Emirates	Asia	Middle East	83600.00	1971	2441000	74.1	37966.00	36846.00	Al-Imarat al-'Arabiya al-Muttahida	Emirate Federation
9	ARG	Argentina	South America	South America	2780400.00	1816	37032000	75.1	340238.00	323310.00	Argentina	Federal Republic
10	ARM	Armenia	Asia	Middle East	29800.00	1991	3520000	66.4	1813.00	1627.00	Hajastan	Republic
11	ASM	American Samoa	Oceania	Polynesia	199.00		68000	75.1	334.00		Amerika Samoa	US Territory
12	ATA	Antarctica	Antarctica	Antarctica	13120000.00		0		0.00		—	Co-administrated
13	ATF	French Southern te...	Antarctica	Antarctica	7780.00		0		0.00		Terres australes françaises	Nonmetropolitan Territory of
14	ATG	Antigua and Barbuda	North America	Caribbean	442.00	1981	68000	70.5	612.00	584.00	Antigua and Barbuda	Constitutional Monarchy
15	AUS	Australia	Oceania	Australia and New Zeal...	7741220.00	1901	18886000	79.8	351182.00	392911.00	Australia	Constitutional Monarchy, Fed...


country 6

Query Completed

Apply Revert

Automatic context help is disabled. You can manually get help for this object or to toggle automatic context help.

6. (CLIENTE) Realizar una consulta para ver todos los datos de la tabla CITY. Verifique que NO tiene permiso. Utilice WorkBench.

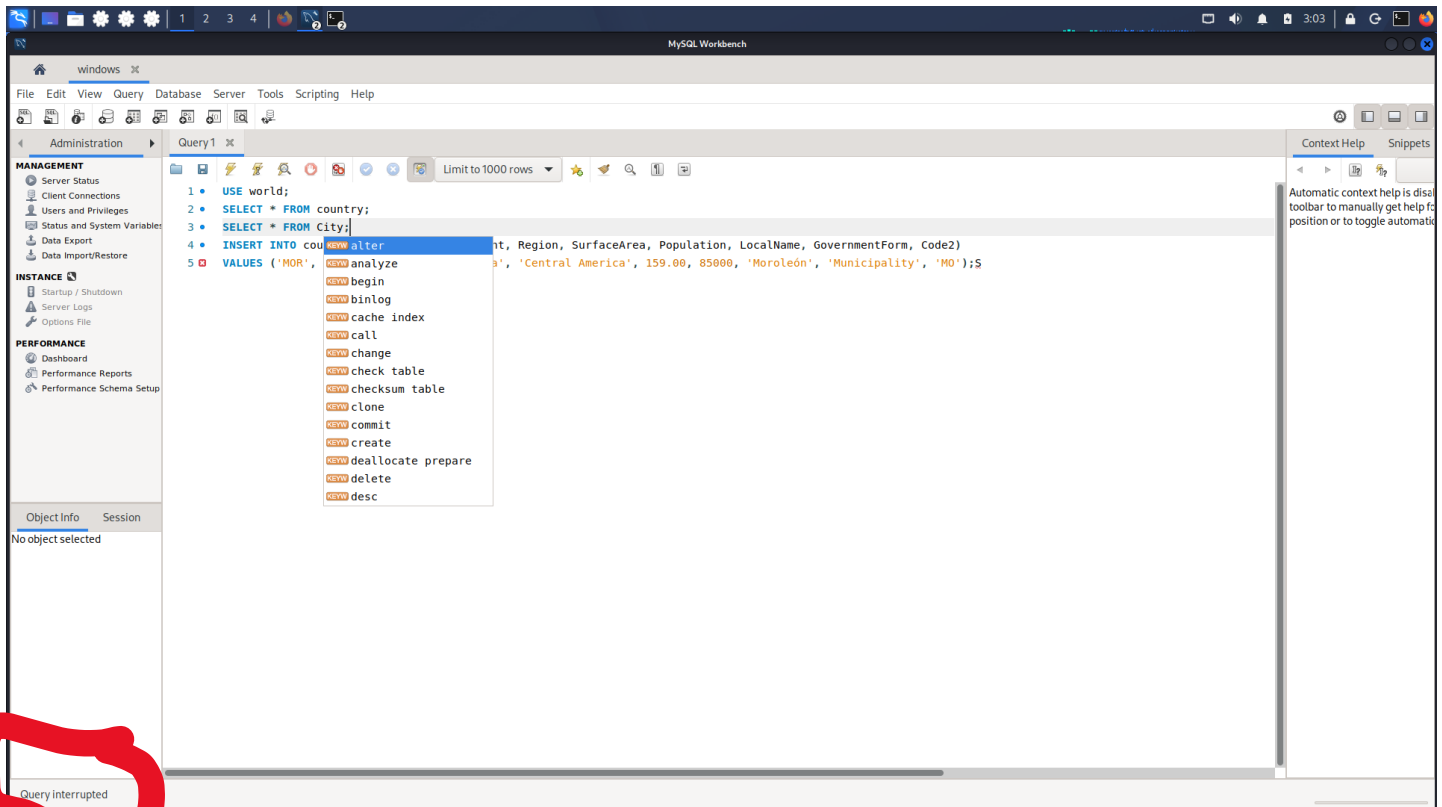

7. (CLIENTE) Insertar un NUEVO país en la base de datos COUNTRY. Invente los datos pero debe tratar de que parezcan reales. Utilice WorkBench.

```
4 • INSERT INTO country (Code, Name, Continent, Region, SurfaceArea, Population, LocalName, GovernmentForm, Code2)
5 VALUES ('MOR', 'Moroleon', 'North America', 'Central America', 159.00, 85000, 'Moroleón', 'Municipality', 'MO');
```

8. (SERVIDOR) Desde la línea de comandos, revise que SI se insertó el nuevo país en el servidor.

```
mysql> flush privileges;  
Query OK, 0 rows affected (0.02 sec)  
  
mysql> create user 'kali'@ '%' identified by '1234';  
Query OK, 0 rows affected (0.01 sec)  
  
mysql> grant select, insert, update, delete on world.country to 'kali'@ '%';  
Query OK, 0 rows affected (0.00 sec)  
  
mysql> flush privileges;  
Query OK, 0 rows affected (0.00 sec)  
  
mysql> use world;  
Database changed  
mysql> select * from country where code = 'MOR';
```

Code	Name	Continent	Region	SurfaceArea	IndepYear	Population	LifeExpectancy	GNP	GNPOld	LocalName	GovernmentForm
MOR	Moroleon	North America	Central America	159.00	NULL	85000	NULL	NULL	NULL	Moroleon	Municipality

```
1 row in set (0.00 sec)  
  
mysql>
```

9. (SERVIDOR) Quitar todos los permisos otorgados a su compañero. Utilizar REVOKE.

```
mysql> REVOKE ALL PRIVILEGES, GRANT OPTION FROM 'kali'@'%';  
Query OK, 0 rows affected (0.01 sec)  
  
mysql> FLUSH PRIVILEGES;REVOKE ALL PRIVILEGES, GRANT OPTION FROM 'kali'@'%';  
Query OK, 0 rows affected (0.00 sec)
```

10. (CLIENTE) Verificar que ya el usuario ya no puede consultar nada en la base de datos WORLD.

The screenshot shows the MySQL Workbench interface. On the left is a sidebar with navigation options under 'INSTANCE' (Startup / Shutdown, Server Logs, Options File) and 'PERFORMANCE' (Dashboard, Performance Reports, Performance Schema Setup). Below this are tabs for 'Object Info' and 'Session'. The main area displays a query editor with three lines of SQL code:

```
6  
7 • use world;  
8 • select * from country;
```

Below the query editor, the status bar indicates 'No object selected'. At the bottom of the window, a red circle highlights the message 'Query interrupted'.

11. (SERVIDOR) Otorgar permiso solamente de SELECCIONAR a su compañero sobre la tabla CITY.

```
mysql> GRANT SELECT ON world.city TO 'kali'@'%';
Query OK, 0 rows affected (0.00 sec)

mysql> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.00 sec)
```

12. (CLIENTE) Verificar que SI puede realizar consultas a la tabla CITY.

The screenshot displays the MySQL Workbench interface. The 'Query' tab is active, showing a SQL script with the following queries:

```
1 • USE world;
2 • SELECT * FROM country;
3 • SELECT * FROM City;
4 • INSERT INTO country (Code, Name, Continent, Region, SurfaceArea, Population, LocalName, GovernmentForm, Code2)
5   VALUES ('MOR', 'Moroleon', 'North America', 'Central America', 159.00, 85000, 'Moroleón', 'Municipality', 'M0');
6
7 • use world;
8 • select * from city limit 10;
9
```

The 'Result Grid' shows the output of the last query, displaying 10 rows of city data:

#	ID	Name	CountryCode	District	Population
1	1	Kabul	AFG	Kabul	1780000
2	2	Qandahar	AFG	Qandahar	237500
3	3	Herat	AFG	Herat	186800
4	4	Mazar-e-Sharif	AFG	Balkh	127800
5	5	Amsterdam	NLD	Noord-Holland	731200
6	6	Rotterdam	NLD	Zuid-Holland	593321
7	7	Haag	NLD	Zuid-Holland	440900
8	8	Utrecht	NLD	Utrecht	234323
9	9	Eindhoven	NLD	Noord-Brabant	201843
10	10	Tilburg	NLD	Noord-Brabant	193238

The status bar at the bottom indicates 'Query Completed'.