

Hospicart App

<<class>> MainMenu

```
+ main(args: String[]): void
+ setApplication(): void
+ register(): void
+ registerDoctor(): void
+ registerNurse(): void
+ registerSupplier(): void
+ login(): void
+ resetPassword(): void
```

<<class>> DoctorMenu

```
+ DoctorMenu(cm: ConnectionManagerJDBC, doc: Client)
+ displayDoctorMenu(): void
+ productShoppingMenu(chosenProduct: Product): void
+ viewCart(): void
+ addToCart(product: Product, amount: int): void
+ browseProductsByCategory(category: Category): void
+ pay(): void
+ accountSettings(): void
+ client2Xml(): void
```

<<class>> NurseMenu

```
+ NurseMenu(cm: ConnectionManagerJDBC, nurse: Client)
+ displayNurseMenu(): void
+ productShoppingMenu(chosenProduct: Product): void
+ viewCart(): void
+ addToCart(product: Product, amount: int): void
+ browseProductsByCategory(category: Category): void
+ pay(): void
+ accountSettings(): void
+ client2Xml(): void
```


<<class>> SupplierMenu

```
+ SupplierMenu(cm: ConnectionManagerJDBC, supplierUser: User)
+ displaySupplierMenu(): void
+ displaySupplierMenuOptions(): void
+ approveOrder(order: Order): boolean
```

Exceptions


```
ClientException
OrderException
```

Hospicart POS

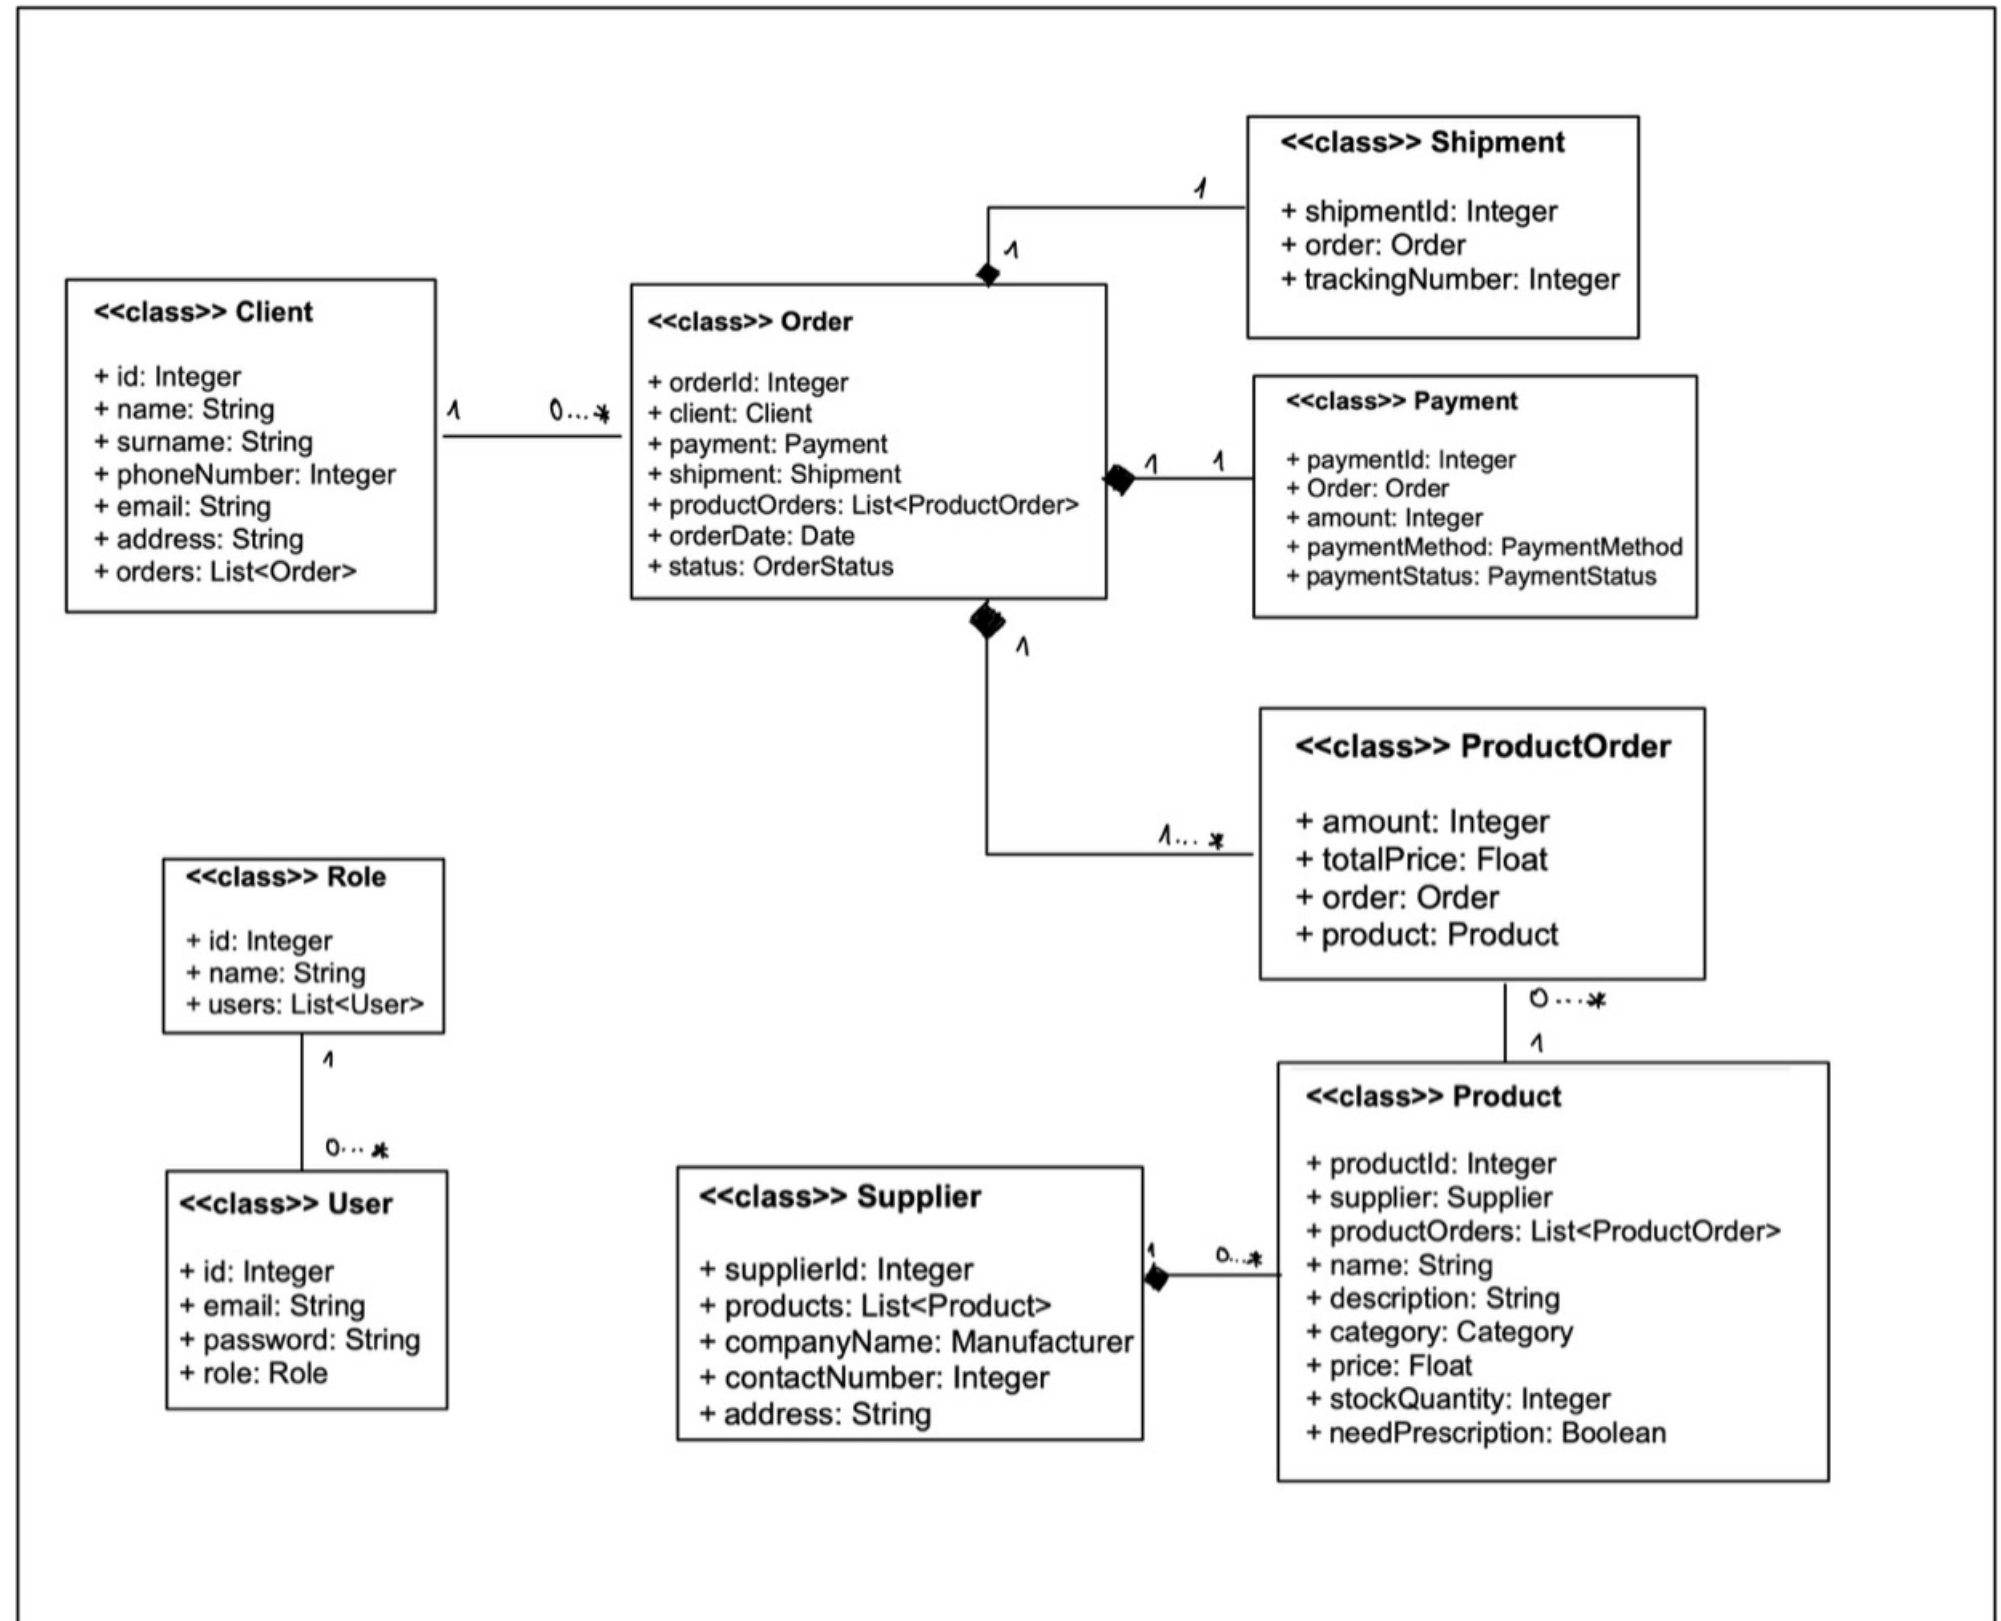

Hospi Cart Interfaces

HospiCart JDBC

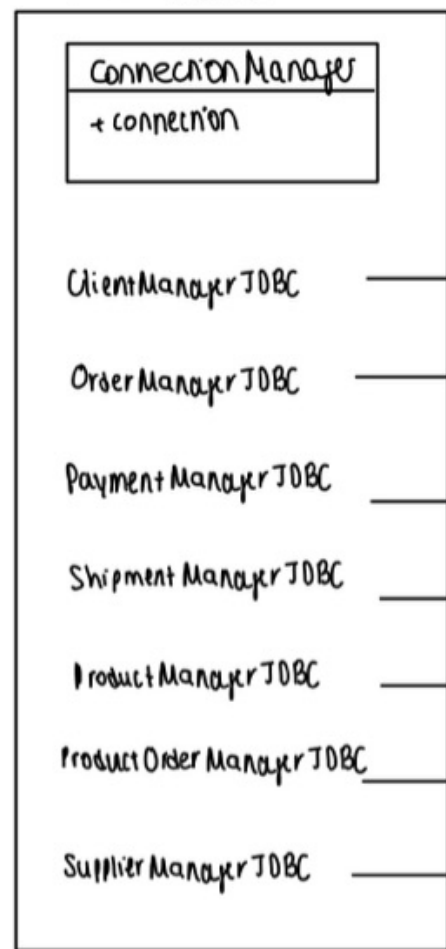

<<interface>> IClientManager

```
+ insertClient(Client c)
+ deleteClientById(Integer id)
+ getListOfClients()
+ getClientById(Integer c_id)
+ getClientByEmail(String c_email)
```

<<interface>> IShipmentManager

```
+ insertShipment(shipment: Shipment): void
+ deleteShipmentById(shipment_id: int): void
+ deleteShipmentByTrackingNumber(tracking_number: int): void
+ deleteShipmentByOrderId(order_id: int): void
+ getShipmentById(shipment_id: int): Shipment
+ getShipmentByTrackingNumber(tracking_number: int): Shipment
+ getShipmentByOrderId(order_id: int): Shipment
+ getAllShipments(): List<Shipment>
```

<<interface>> IOrderManager

```
+ insertOrder(order: Order)
+ deleteOrder(order_id: int)
+ getOrderById(order_id: int): Order
+ getOrdersByUser(user_id: int): List<Order>
+ getOrdersByOrderDate(order_date: Date): List<Order>
+ getOrdersWithinDateRange(startDate: Date, endDate: Date): List<Order>
+ getAllOrders(): List<Order>
+ getOrdersByStatus(status: OrderStatus): List<Order>
+ updateOrderStatus(order_id: int, newStatus: OrderStatus)
```

<<interface>> ISupplierManager

```
+ insertSuppliersFromCSV(filePath: String): void
+ insertSupplier(supplier: Supplier): void
+ showCompanyNames(): void
+ getSupplierById(supplier_id: int): Supplier
+ getSupplierByCompanyName(companyName: String): Supplier
+ getCompanyNames(): List<String>
+ updateSupplierAddress(supplier_id: int, newAddress: String): void
+ updateSupplierContactNumber(supplier_id: int, contactNumber: int): void
```

<<interface>> IProductManager

```
+ insertProduct(product: Product): boolean
+ deleteProduct(id: int): boolean
+ getProductById(id: int): Product
+ getAllProducts(): List<Product>
+ getProductsByName(name: String): List<Product>
+ getProductsByCategory(type: Category): List<Product>
+ getProductsByManufacturer(manufacturer: Manufacturer): List<Product>
+ getLowStockProductsByCategory(category: Category): List<Product>
+ updateProduct(product: Product): boolean
+ updateProductStock(product: Product, amount: int, increasing: boolean): void
```

<<interface>> IPaymentManager

```
+ insertPayment(p: Payment)
+ deletePaymentById(paymentId: Integer)
+ getListOfPayments(): List<Payment>
+ getPaymentById(p_id: Integer): Payment
+ updateAmount(paymentId: Integer, amount: Integer)
+ updatePaymentMethod(paymentId: Integer, method: PaymentMethod)
+ updatePaymentStatus(paymentId: Integer, status: PaymentStatus)
+ getPaymentByOrderId(order_id: int): Payment
```

<<interface>> IProductOrderManager

```
+ insertProductOrder(productOrder: ProductOrder): void
+ deleteProductOrdersByOrderId(order_id: int): void
+ deleteProductOrderByIds(product_id: int, order_id: int): void
+ getProductOrderByIds(product_id: int, order_id: int): ProductOrder
+ getProductOrdersByOrderId(order_id: int): List<ProductOrder>
+ getTotalPriceOfAnOrder(order_id: int): double
+ getOrdersWithAProduct(product_id: int): List<Order>
+ updateProductAmountInAnOrder(product_id: int, order_id: int, amount: int): void
```


<<interface>> IUserManager

```
+ register(user: User, roleOption: int): void
+ createRole(role: Role): void
+ getRole(name: String): Role
+ getRoles(): List<Role>
+ assignRole(user: User, role: Role): void
+ getUser(name: String, password: String): User
+ getUserByEmail(name: String): User
+ close(): void
+ updatePassword(email: String, password: String, closeEM: boolean): void
```

<<interface>> IXMLManager

```
+ client2Xml(c: Client): void
+ xml2Client(xml: File): Client
+ product2Xml(p: Product): void
+ xml2Product(xml: File): Product
```

HospiCart JPA



Hospi Cart + XML

