Instituto Superior de Engenharia do Porto
(ISEP)

Licenciatura em Engenharia de Telecomunicações e Informática (LETI)

Desenvolvimento de Software e Sistemas Móveis (DSSMV)




DSSMV: PL: Week 3

Views and Event Listeners

Paulo Baltarejo Sousa and Carlos Filipe Freitas
{pbs,caf}@isep.ipp.pt
2026/27

1 EditText

Consider the following figures. The first one presents an interface composed by a `EditText` and a `Button`. In the second one, the user fills in the `EditText`. In the last, the user clicks on `Button` and shows a Toast with the `EditText` text and clear it.

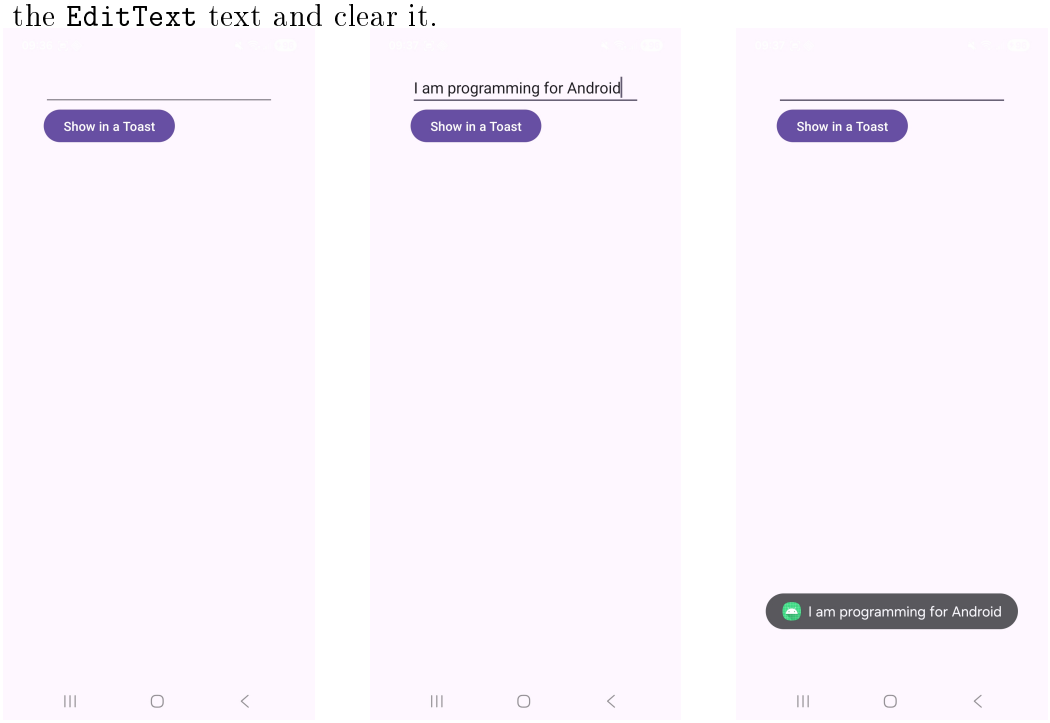

Create a project for that.

1.1 Solution

- `activity_main.xml`

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
android:orientation="vertical"
android:padding="50dp"
android:layout_width="match_parent"
android:layout_height="match_parent">

  <EditText android:id="@+id/edittext"
  android:layout_width="match_parent"
  android:layout_height="wrap_content"/>

  <Button android:id="@+id/button"
  android:layout_width="wrap_content"
  android:layout_height="wrap_content"
  android:text="Show in a Toast"/>

</LinearLayout>
```

- MainActivity.java

```
  import android.view.View;
  import android.widget.Button;
  import android.widget.EditText;
  import android.widget.Toast;
  import androidx.appcompat.app.AppCompatActivity;
  import android.os.Bundle;


  public class MainActivity extends AppCompatActivity {


    private EditText et;
    private Button bt;
    @Override
    protected void onCreate(Bundle savedInstanceState) {
      super.onCreate(savedInstanceState);
      setContentView(R.layout.activity_main);
      et = (EditText) findViewById(R.id.edittext);
      bt = (Button) findViewById(R.id.button);
      bt. setOnClickListener(new View.OnClickListener() {
        @Override
        public void onClick(View v) {
          String text = et.getText().toString();
          Toast.makeText(MainActivity.this, text, Toast.LENGTH_LONG).show();
          et.setText("");

        }
      });
    }
  }
```

2 DatePicker

Consider the following figures. The first one presents an interface composed by a `DatePicker` and a `TextView`. In the second one, the user clicks on `Datepicker` selecting one date and the selected date appears into the `TextView`

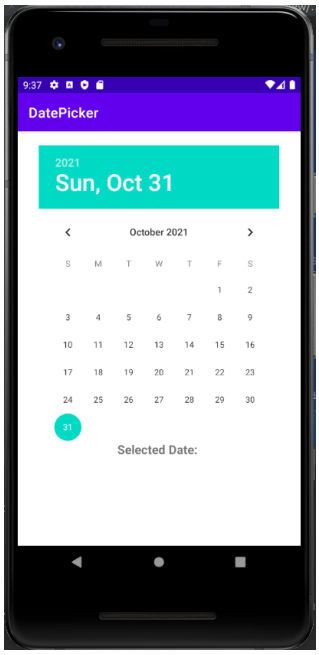


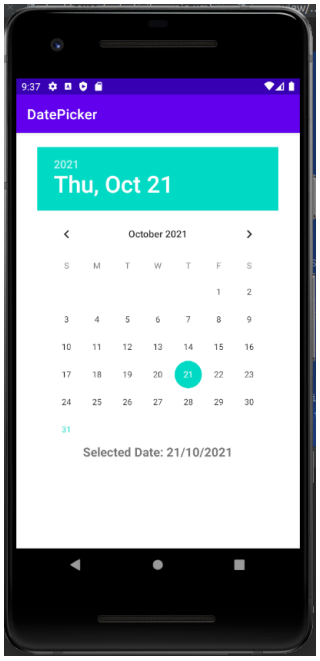

Create a project for that (search in the Internet).

3 DatePicker 1


Consider the following figures. The first one presents an interface composed by a `DatePicker` in the spinner mode, a `Button`, and a `TextView`. In the second one, the user scrolls the `Datepicker` to select one date. In the last one, the user clicks on `Button` and the selected date appears into the `TextView`

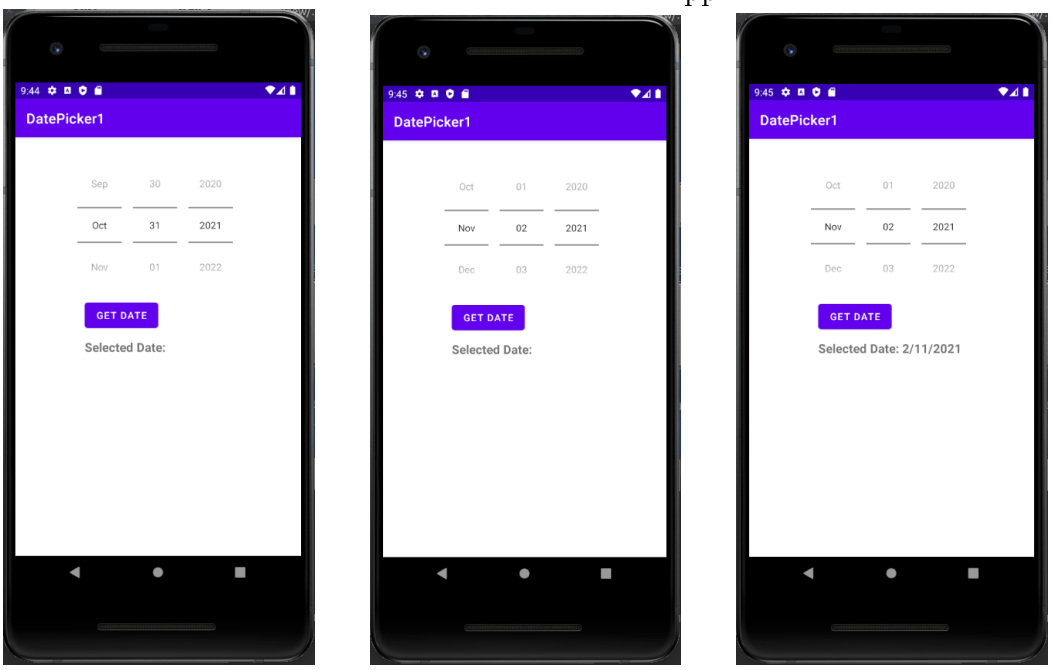

Create a project for that (search in the Internet).

4 ImageView


Consider the following figures. The first one presents an interface composed by a `Button`, and a `ImageView`. In the last one, the user clicks on `Button` and a new image appears into the `ImageView`

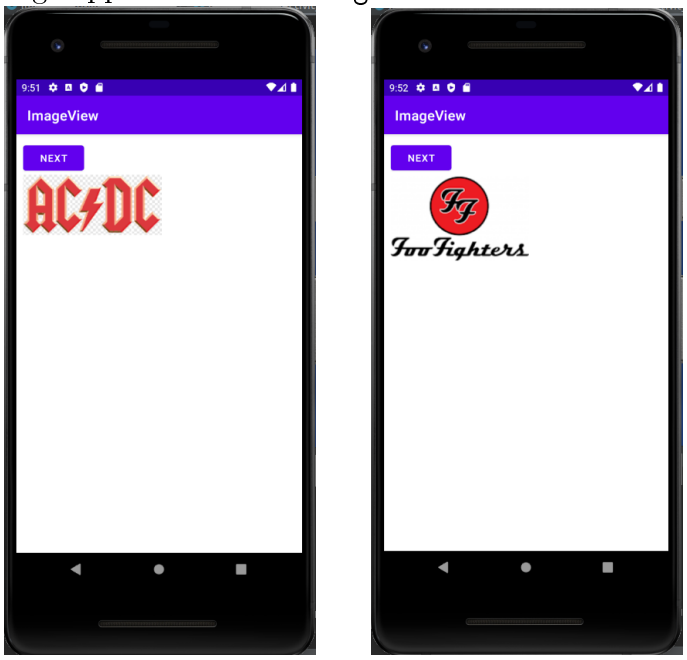

Create a project for that (search in the Internet).

5 RadioButton


Consider the following figures. The first one presents an interface composed by a `TextView`, and a `RadioGroup` composed by three `RadioButtons`. The others two figures shows that when the user select a radio button the correspondent text appears into the `TextView`

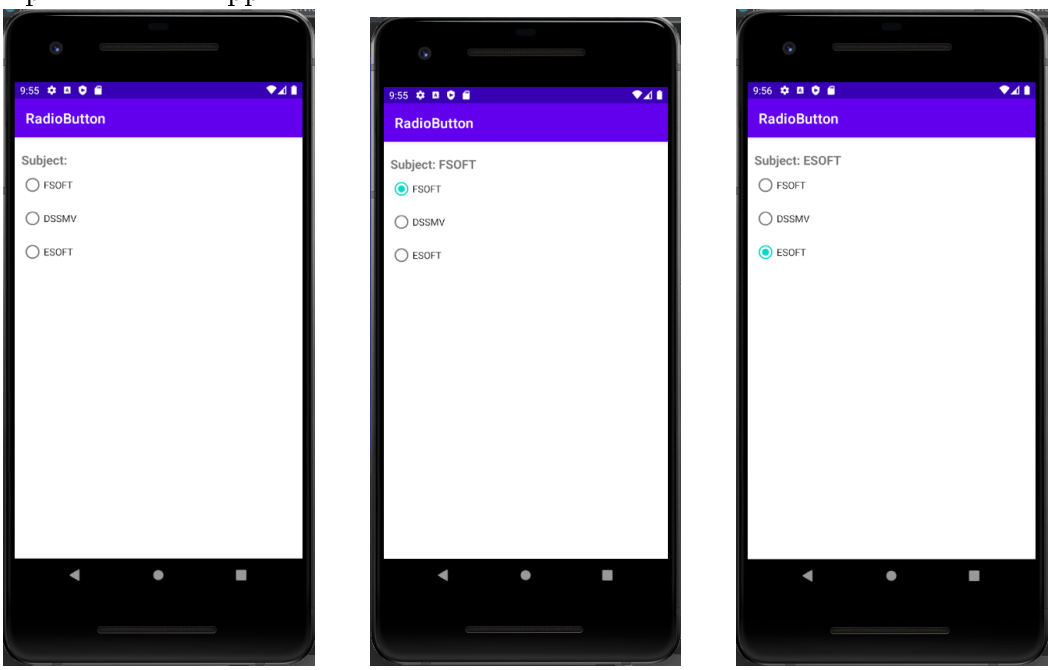

Create a project for that (search in the Internet).

6 CheckBox


Consider the following figures. The first one presents an interface composed by a `TextView`, and three `CheckBox`es, and a `Button`. In the second one, the user checks the first and last `CheckBox`es. In the last one, the user clicks on `Button` and the checked `CheckBox`es text appears into the `TextView`

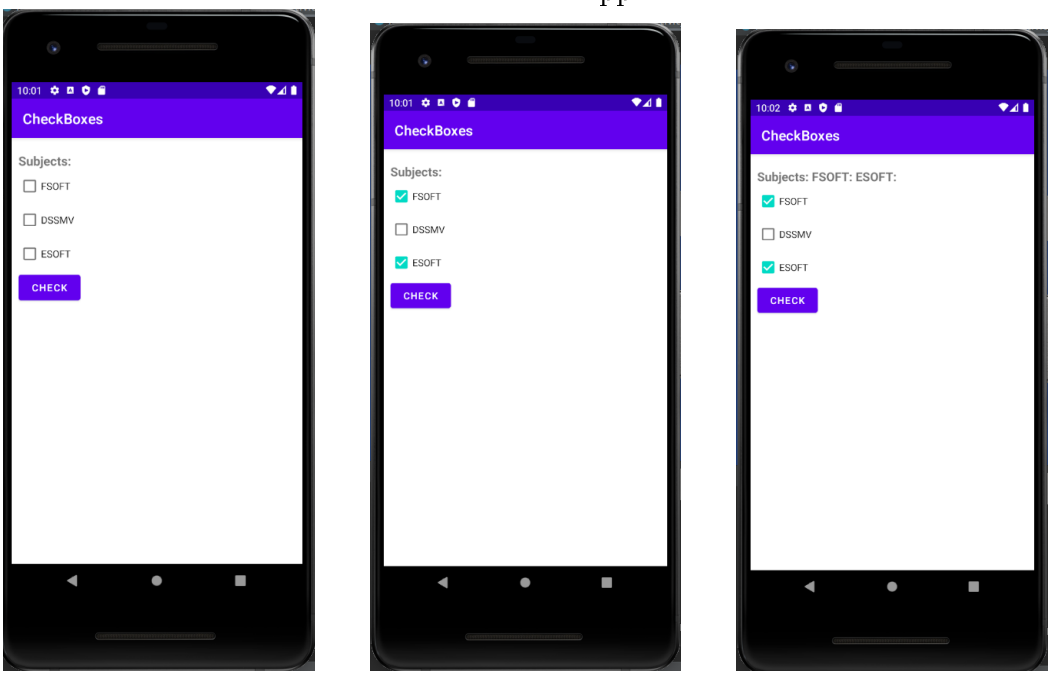

Create a project for that (search in the Internet).

7 Spinner


Consider the following figures. The first one presents an interface composed by a `TextView`, and a `Spinner`. In the second one, the user drops down the `Spinner` by click on it.. In the last one, the user selects one `Spinner` entry ant it appears into the `TextView`

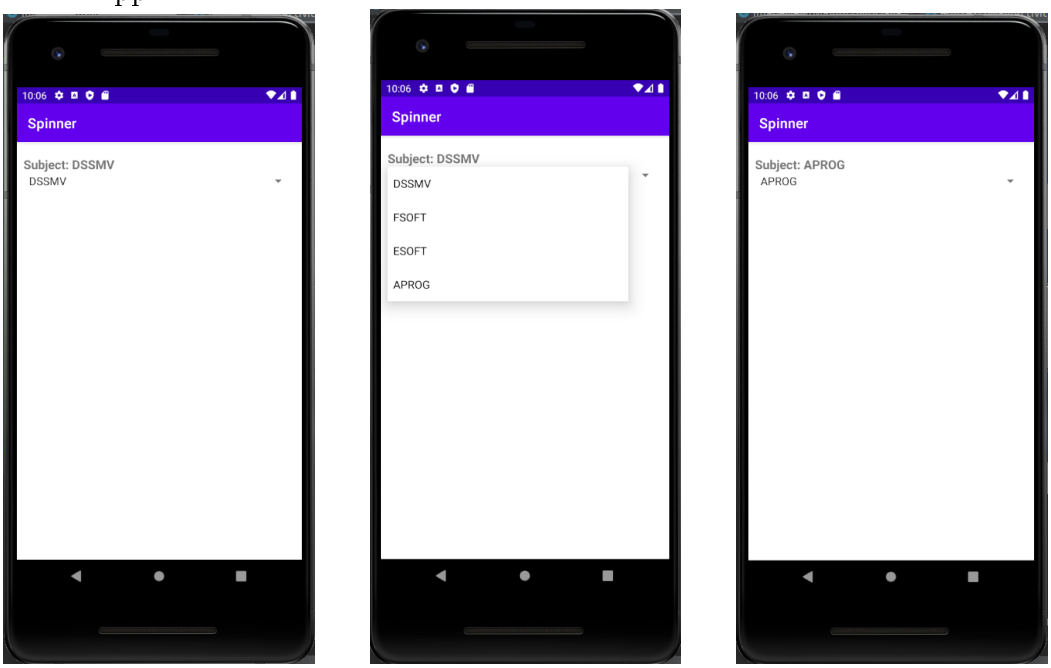

Create a project for that (search in the Internet).

8 TextWatcher

Consider the following figures. The first one presents an interface composed by a `EditText`, and a `ListView` (actually isno visible, because it has no data). In the second one, the user enters a letter into the `EditText` and automatically, in the `ListView` appears a list of names that contains the letter. In the last one, the user enters a new letter, forming a pattern, and, again, in the `ListView` appears a list of names that contains such a pattern. Note, the application contains a list of names.

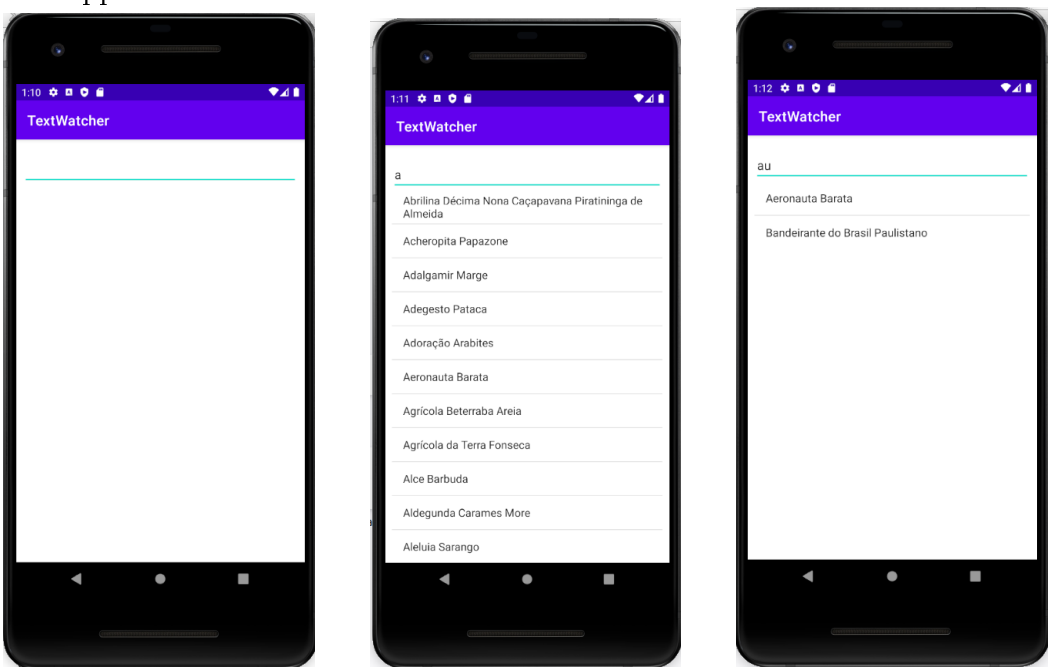

Create a project for that (search in the Internet).