



ISAAK

## Classifying vessel shapes

using automated shape extraction and unsupervised classification

---

Martin Hinz<sup>1</sup>, Caroline Heitz<sup>2</sup>

March 2018

1. Institute of Pre- and Protohistoric Archaeology, Kiel University; 2. Institut für Archäologische Wissenschaften, Bern University

motivation

previous approaches

Shape Extraction

Shape Analysis 1: PCA & hclust

Shape Analysis 2: t-sne & hdbscan

Case studies

## **motivation**

---

## shape vs. decoration for typology

## levels of pottery design

criteria	shape	decoration
functional dependency	strong	weak
dependency on local ressources	stronger	weak
moment of determination	from the beginning	finished product
ad hoc changes	difficult	easy
more reflecting	habitus	personal signature
design decision	more collective	more individual
homogeneity	more convergent	more divergent
degrees of freedom	lesser	more
category of style	more isochrestic	more emblemic
unit of analysis	ideal type	singularity

# Phases of ceramic production

## Design

- imagined and intended
- concept of a shape
- ideal type
- **social bounded options for creativity**

## 'style of action'

- learned, habitual movements, manipulations, routines
- at all stages of the *chaîne opératoire*
- instantiation
- **limited options for creativity**

## 'material style'

- physical traces and effects in the material
- Characteristics of the vessel
- finished object
- **material induced alterations of the original design possible**

**using vessel shapes to identify underlying large scaled ‘communities of practice’**

- more related to covert communication structures, habitus and similar (economic) practises
- ‘better measurable’ from a practical quantitative perspective

## **previous approaches**

---

## using specific locations

- Koch 1998

## 'Holistic' approaches



- Mom 2005
- Chapman et al., 2006
- Keogh et al., 2009

## **Shape Extraction**

---


‘by hand’

## Workflow

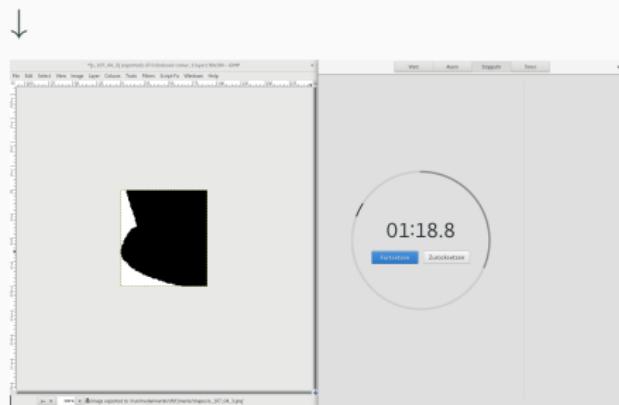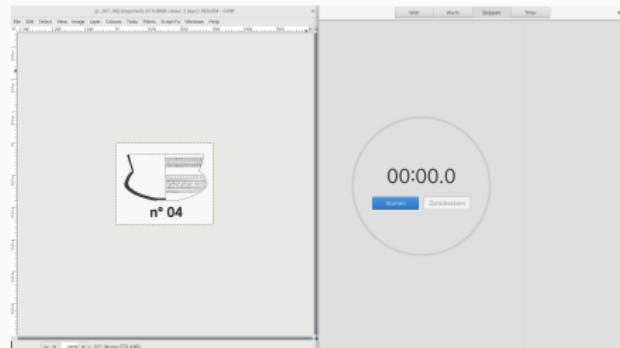

# Adaptive Contour Motivation

- Scanned vessel drawings might have holes (dashed lines)
- No simple image segmentation with background color and floodfill possible

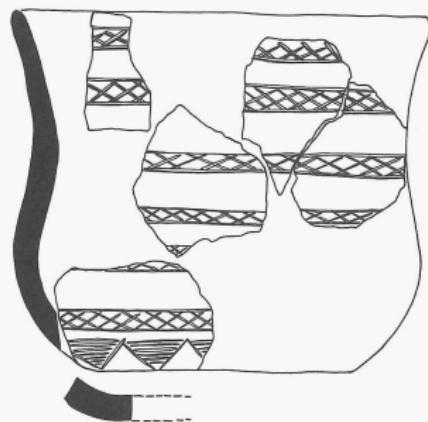

1727

Figure 1: Bell Beaker (Harrison 1977)

## Adaptive Contour: what is it

***Active contour model***, also called ***snakes***, is a framework in computer vision for delineating an object outline from a possibly noisy 2D image. The snakes model is popular in computer vision, and snakes are greatly used in applications like object tracking, ***shape recognition***, segmentation, edge detection and stereo matching. Wikipedia

source: <https://github.com/pmneila/morphsnakes>

# Active contour with Bell Beakers

See shapAAR vignette

<https://github.com/ISAAKiel/shapAAR/blob/master/vignettes/object-extraction.md>

---

	Image preparation	bw, blur
	Image segmentation	active_contour
	Selecting the biggest object	EBImage
	Rectify and crop	get Bounding box, rotate upright, crop
	half and side mean	split in middle, mean left-right


---

## Shape Analysis 1: PCA & hclust

---

## approach/workflow

- using profile distances + additional nominal variables as input
- conduct PCA
- using hclust (euclidean/Ward) to cluster
- package FactoMinR: HCPC with automatical cut (number of clusters according to higher relative loss of inertia)
- for individual clusters, repeat with cluster members as new dataset (usually 3 levels)

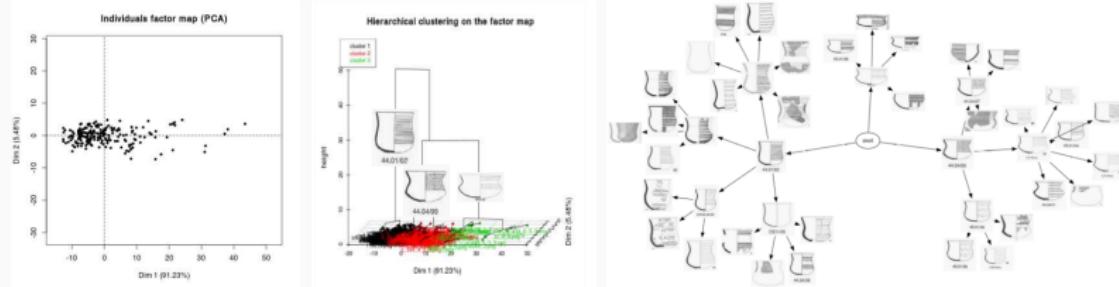


## problems

- non-metric (non-euclidean) variables not considered correctly
- all vessels had to belong to one cluster (hand made ceramics)
- global dissimilarity resulted in suboptimal separation

## Shape Analysis 2: t-sne & hdbscan

---

## t-Distributed Stochastic Neighbor Embedding

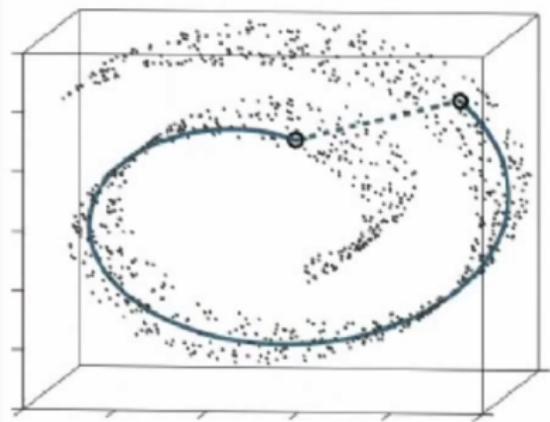


### Challenge

- high dimensional non-linear data distribution
- consider not the global, but the local neighbourhood (contrasting PCA)




Figure 2: van der Maaten 2008; 2009; 2012; 2014;  
<https://lvdmaaten.github.io/tsne/>  
<https://www.youtube.com/watch?v=RJVL80Gg3IA>

## Hierarchical Density-Based Spatial Clustering of Applications with Noise

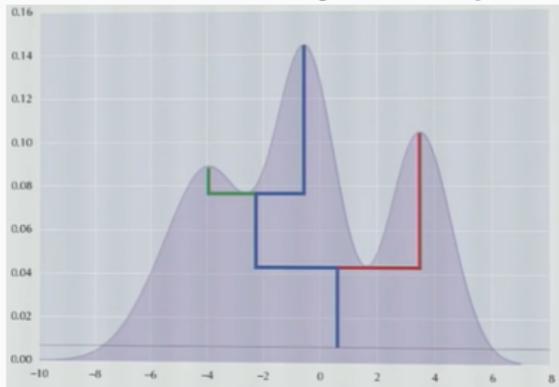



### Benefits:

- separating non-circular clusters
- 'identification' and exclusion of noise (hand made ceramics!)

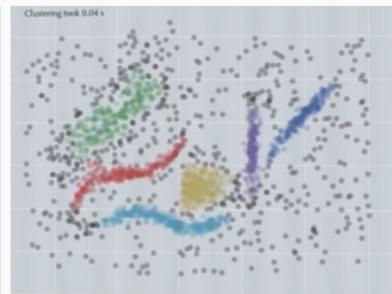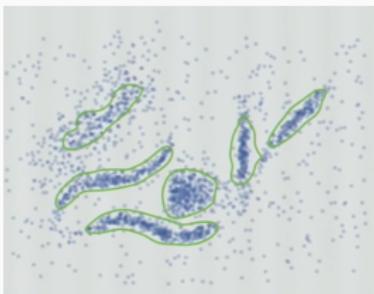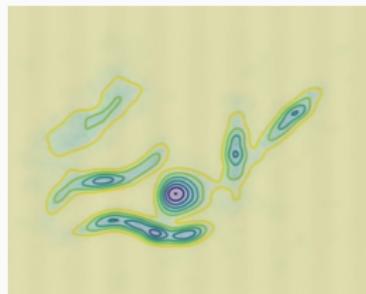

## approach/workflow

- using profile distances + additional nominal variables as input
- conduct t-sne
- using hdbscan to cluster
- package Rtsne: conduct t-sne
  - `Rtsne(as.matrix(shapes), perplexity=30, dims=2, theta = 0)`
- package dbscan: conduct hdbscan on t-sne result
  - `hdbscan(this_res_sne, minPts = 5)`
- for individual clusters, repeat with cluster members as new dataset (usually only 2 levels)

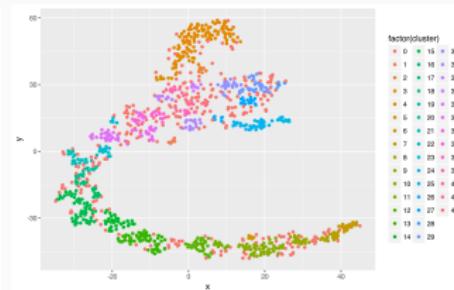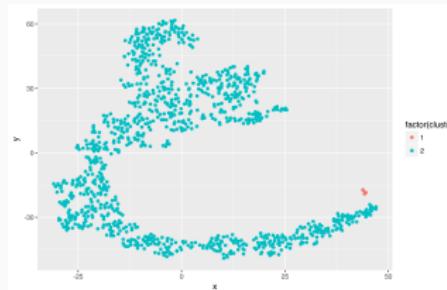

## **Case studies**

---

# Bell Beakers of the Iberian Peninsula

# Neolithic Swiss Ceramic

# Thank you



**Martin Hinz**

[martin.hinz@ufg.uni-kiel.de](mailto:martin.hinz@ufg.uni-kiel.de)



**Caroline Heitz**

[caroline.heitz@iaw.unibe.ch](mailto:caroline.heitz@iaw.unibe.ch)