


C# DataExecutor class again

Cite as: Martin Paul Eve, "C# DataExecutor class again", *eve.gd: Martin Paul Eve*, July 31, 2008, <https://doi.org/10.59348/ker7b-4sd65>.

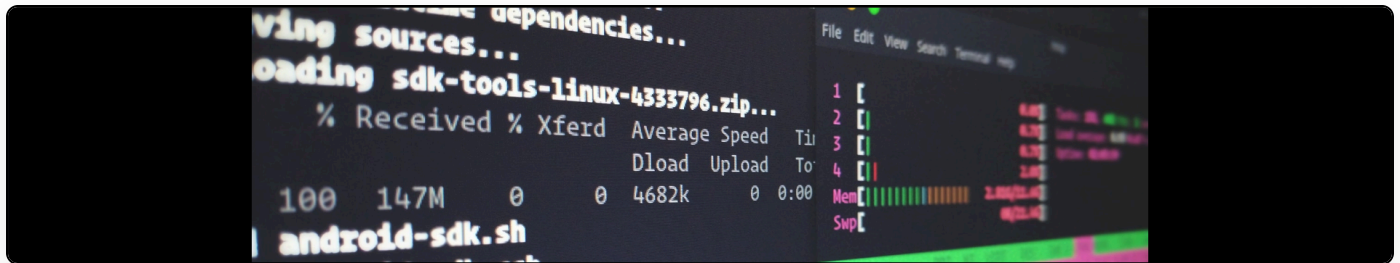

Just been asked some further questions about the [DataExecutor](#) class on FreeNode and thought I'd give some usage instructions/clarification here.

Howto: Fill a strongly typed dataset

Set your base class (of your TableAdapter) to Tools.genericTableAdapter.

Fill your strongly typed DataSet thus:

```

DataExecutor de = null;

try{
    de = new DataExecutor();

    const string TABLEPREFIX = "blog";

    MySqlCommand cmd = new MySqlCommand(string.Format("SELECT * FROM {0}
WHERE id=@id", TABLEPREFIX));
    cmd.Parameters.AddWithValue("@id", id);

    de.NextCommand(cmd, false);

    DataSchema.blog_postsDataTable postsDT = new
DataSchema.blog_postsDataTable();

    DataTable dtRef = (DataTable)postsDT;

    de.DataSetSchema(ref dtRef);
} finally {
    if(de != null) de.Close();
}

```

Why do it like this?

Answer: because it lets you hook into the return results for testing purposes.

```

de = new Tools.DataExecutor(true);
de.OnTestModeFill += new Tools.DataExecutor.TestModeFillInterceptor(taskFillHandler);

```

Then in taskFillHandler you will receive a reference to a DataTable that you can populate in whatever way you like to ensure that your application behaves correctly - aka. offline database unit testing!