


Automated CPanel Backups with SCP

Cite as: Martin Paul Eve, "Automated CPanel Backups with SCP", *eve.gd: Martin Paul Eve*, January 08, 2011, <https://doi.org/10.59348/d16y8-w8w12>.

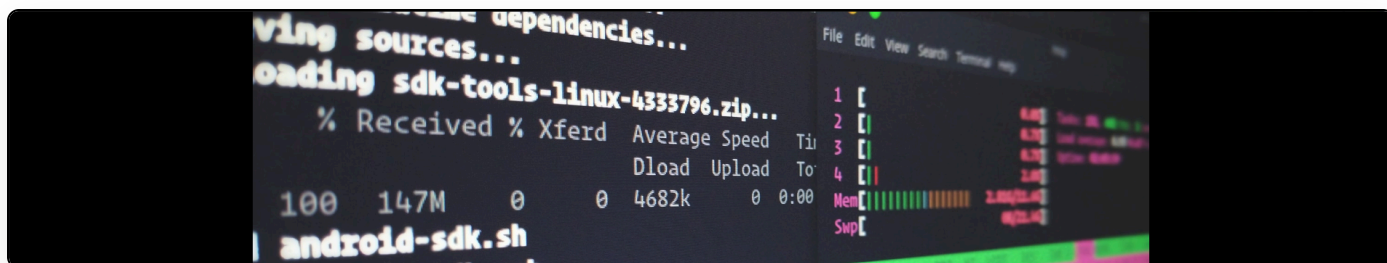

Originally from [V-Nessa's site](#), I thought I would share the PHP script that I have now modified to include Secure Copy (SCP) support.

```
<?php
```

```
// PHP script to allow periodic cPanel backups automatically.
```

```
// Permissions on this file should be 600
```

```
// Place outside your public_html
```

```
// Crontab: 30 3 * * * /usr/local/bin/php /home/username/cpanel_backup.php
```

```
// ***** Configuration *****
```

```
// Info required for cPanel access
```

```
$cpuser = "username"; // Username used to login to CPanel
```

```
$cppass = "password"; // Password used to login to CPanel
```

```
$domain = "domain.com"; // Domain name where CPanel is run
```

```
$skin = "x3"; // Set to cPanel skin you use (script won't work if it doesn't match)
```

```
// Info required for SCP host
```

```
$ftpuser = "scpuser"; // Username for SCP account
```

```
$ftppass = "scppass"; // Password for SCP account
```

```
$ftphost = "scp.host.com"; // Full hostname or IP address for SCP host
```

```
$port = "22";
```

```
$ftpmode = "scp"; // FTP mode ("ftp" for active, "passiveftp" for passive, "scp" for scp)
```

```
$rdir = "/home/yourusername/Backup/";
```

```
// make sure this folder exists on the destination host
```

```
// Notification information
```

```
$notifyemail = "you@youremail.com"; // Email address to send results

// Secure or non-secure mode

$secure = 0; // Set to 1 for SSL (requires SSL support), otherwise will use standard
HTTP

// Set to 1 to have web page result appear in your cron log

$debug = 1;

// ***** Don't Touch!! *****

if ($secure) {

    $url = "ssl://".$domain;

    $port = 2083;

} else {

    $url = $domain;

    $port = 2082;

}

$socket = fsockopen($url,$port);

if (!$socket) { echo "Failed to open socket connection... Bailing out!\n"; exit; }

// Encode authentication string

$authstr = $cpuser.":". $cppass;
```

```

$pass = base64_encode($authstr);

$params =
"dest=$ftpmode&rdir=$rdir&email=$notifyemail&server=$ftphost&port=$port&user=$ftpuser&p
ass=$ftppass&submit=Generate Backup";

// Make POST to cPanel

fputs($socket, "POST /frontend/" . $skin . "/backup/dofullbackup.html?" . $params . "
HTTP/1.0\r\n");

fputs($socket, "Host: $domain\r\n");

fputs($socket, "Authorization: Basic $pass\r\n");

fputs($socket, "Connection: Close\r\n");

fputs($socket, "\r\n");

// Grab response even if we don't do anything with it.

while (!feof($socket)) {

    $response = fgets($socket, 4096);

    if ($debug) echo $response;

}

fclose($socket);

?>

```

If you need help with usage, it's exactly the same as in V_Nessa's original post, so read there, but now supports copying to a remote host over SSH.