


Displaying EE mobile data usage in Conky

Cite as: Martin Paul Eve, "Displaying EE mobile data usage in Conky", *eve.gd: Martin Paul Eve*, July 14, 2013, <https://doi.org/10.59348/xecrq-8qk94>.

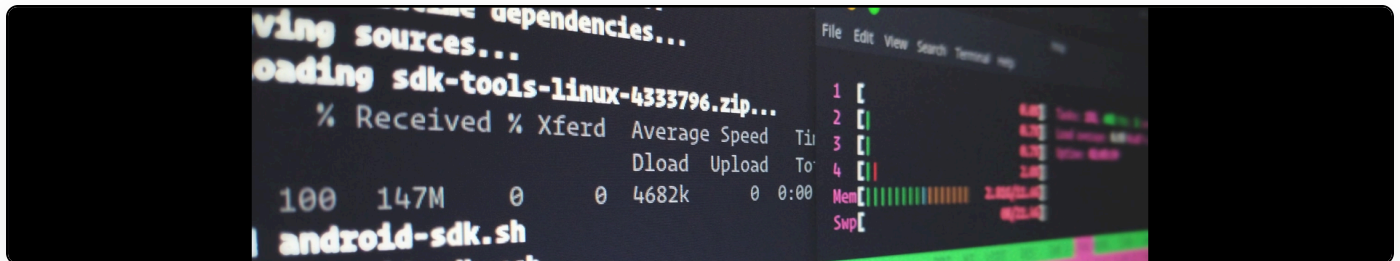

OK, this is probably one of the most specific posts I've ever written, but...

I wrote a bash script to automatically fetch and parse the currently used data on the 4G EE mobile network in the UK that can then be used with Conky. It's a compact one liner that looks like this:

```
#!/bin/bash
wget -qO- http://add-on.ee.co.uk/status | awk -v OFS=' / ' -v ORS=' ' '/<span
class="data-used">/{sub(/^^[^0-9]*/, ""); dused=$0; match(dused, /^[0-9].?[0-9]?)+([0-
9][^G]?[0-9]?)/, arr);} END {print arr[1], arr[2];}'
```

You can then call this from a conkyrc file with something like this:

```
${color #F09000}Mobile Usage${color #707070}:${color white} ${execi 900
~/scripts/getusage.sh}GB
```