


Bitmask values for w:tblLook w:val attribute in OOXML

Cite as: Martin Paul Eve, "Bitmask values for w:tblLook w:val attribute in OOXML", *eve.gd*: Martin Paul Eve, April 17, 2014, <https://doi.org/10.59348/ymej-q-efd49>.

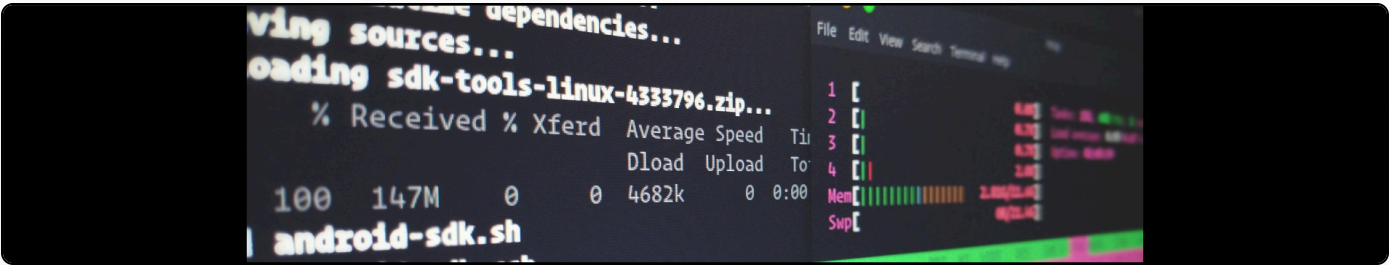

For my own reference:

0x0020	Apply first row conditional formatting
0x0040	Apply last row conditional formatting
0x0080	Apply first column conditional formatting
0x0100	Apply last column conditional formatting
0x0200	Do not apply row banding conditional formatting
0x0400	Do not apply column banding conditional formatting

If no bitmask on the row, it is inherited from table-level properties.

Seems to be set to 04A0 when heading is on, as opposed to 0480 when off.

Given that 0x0400 and 0x0080 seem to be irrelevant, it looks as though headings are controlled by: 0x0020 Apply first row conditional formatting