


Semantically marking up JATS bibliographies using meTypeset and Zotero

Cite as: Martin Paul Eve, "Semantically marking up JATS bibliographies using meTypeset and Zotero", *eve.gd: Martin Paul Eve*, July 05, 2014, <https://doi.org/10.59348/g0dg8-3ck26>.

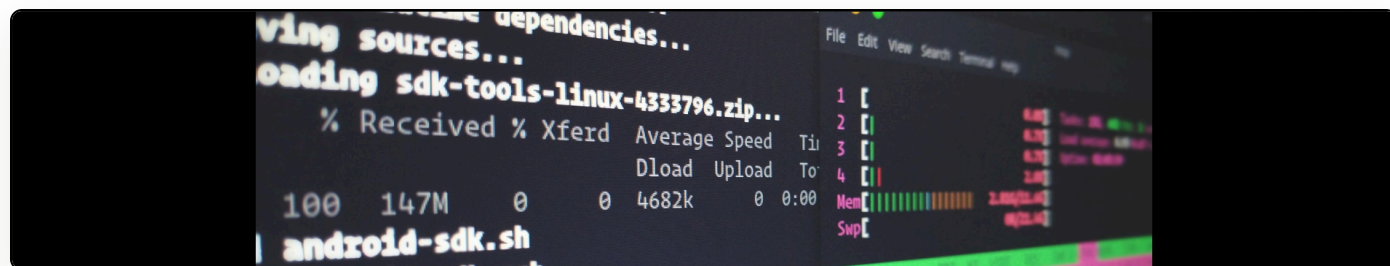

A couple of weeks ago I wrote about the [potential for producing semantically rich JATS element-citations by using Zotero's built-in CSL engine](#). A short while after writing that post, I wondered whether it might, instead, be possible and better to directly link [my typesetter](#) to a Zotero database. I quickly [mocked up a prototype](#) using an improved version of the [libzotero library in Qnotero](#) for the Zotero interaction.

A full initial implementation of this, which replaces the original meTypeset internal bibliographic database, is now [available in the zotero branch of meTypeset](#).

The process for Zotero typesetting in meTypeset is now, as follows:

- meTypeset classifies bibliography entries and places them inside mixed-citation elements
- If the Zotero flag is passed to meTypeset ('--zotero' or '-z') then the bibliographic database kicks in
- The Zotero handler sanitizes input through a series of regex replaces (special characters, digits etc.)
- The Zotero handler searches the local database iteratively reducing the search string by one word from right to left until it finds a unique hit

- If a unique hit is found, the original mixed-citation string is transcribed into a comment and a semantically rich JATS element-citation is inserted