


Pangolin, Newt, Gerbil and custom ports

Cite as: Martin Paul Eve, "Pangolin, Newt, Gerbil and custom ports", *eve.gd: Martin Paul Eve*, October 04, 2025, <https://doi.org/10.59348/az6ev-rvh24>.

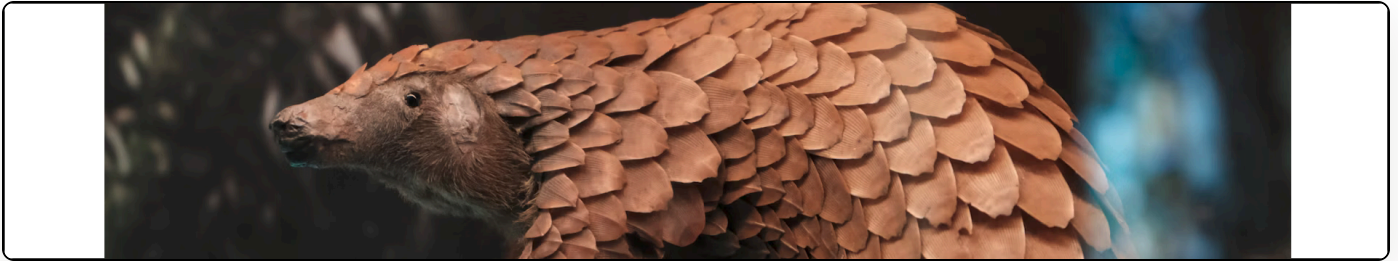

I have been playing around with [Pangolin](#), a really nice management system for exposing internal services over HTTPS.

However, I found that its internal wireguard networking does not play nicely if you already have another wireguard system, like tailscale, on the box. The solution was actually simple, but has a potential tripwire.

In your docker-compose.yml, set something like this under Gerbil's ports:

```
- 51821:51821/udp
```

However, importantly: these ports must MATCH. You cannot have “- 51821:51820/udp” or similar. This will cause the Newt tunnels to fail.

Then, in pangolin/config/config.yml, make sure that the Gerbil port is set to 51821 or whatever your selected port is. Tada.