Prueba de hipótesis para una proporción

Ejercicio 1: Prueba de Proporciones (2 Resultados)

Prueba Binomial

	Nivel	Frecuencia	Total	Proporción	p
Mejora_deteccion_phishing	**Si**	64	80	0.800	0.184
	No	16	80	0.200	1.000

Nota. H_a es proporción > 0.75


Binomial Distribution

Input values

Parameters	'Compute probability'	'Compute quantile(s)'
Size = 80	x1 = 64	p = 0.95
Prob. = 0.75	Mode: P(X ≥ x1)	cumulative mode

Results

	Quantile
Probability	**x1**
0.184	66

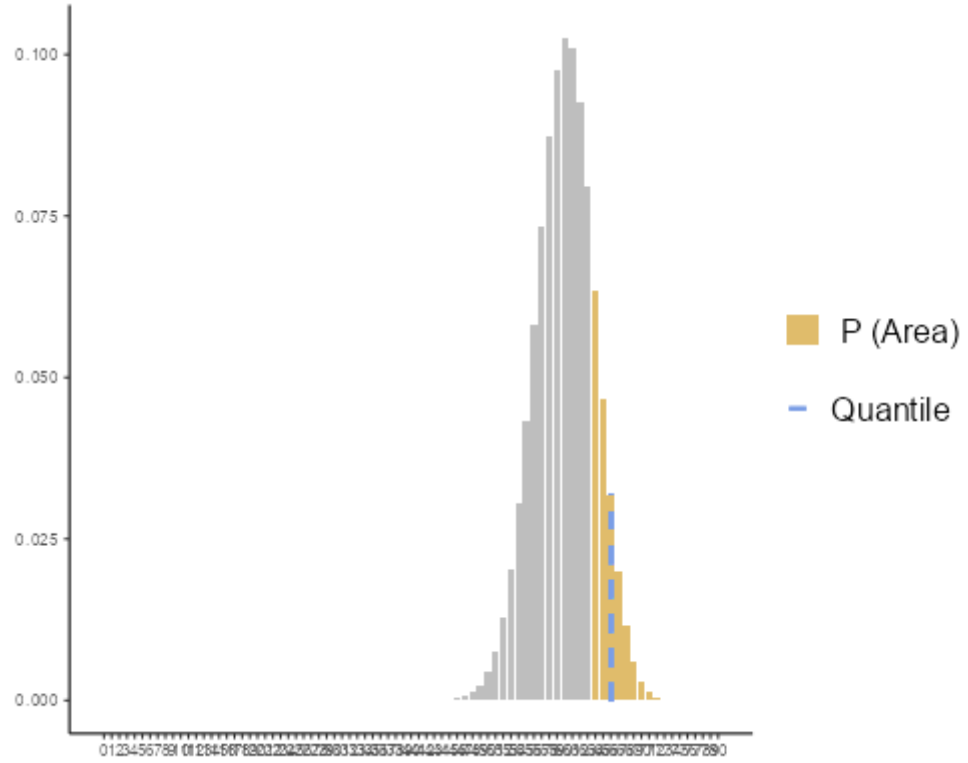


Normal Distribution

Input values

Parameters	'Compute probability'	'Compute quantile(s)'
Mean = 0	x1 = 1.118	p = 0.95
SD = 1	Mode: P(X ≥ x1)	cumulative mode

Results

	Quantile
Probability	**x1**
0.132	1.64

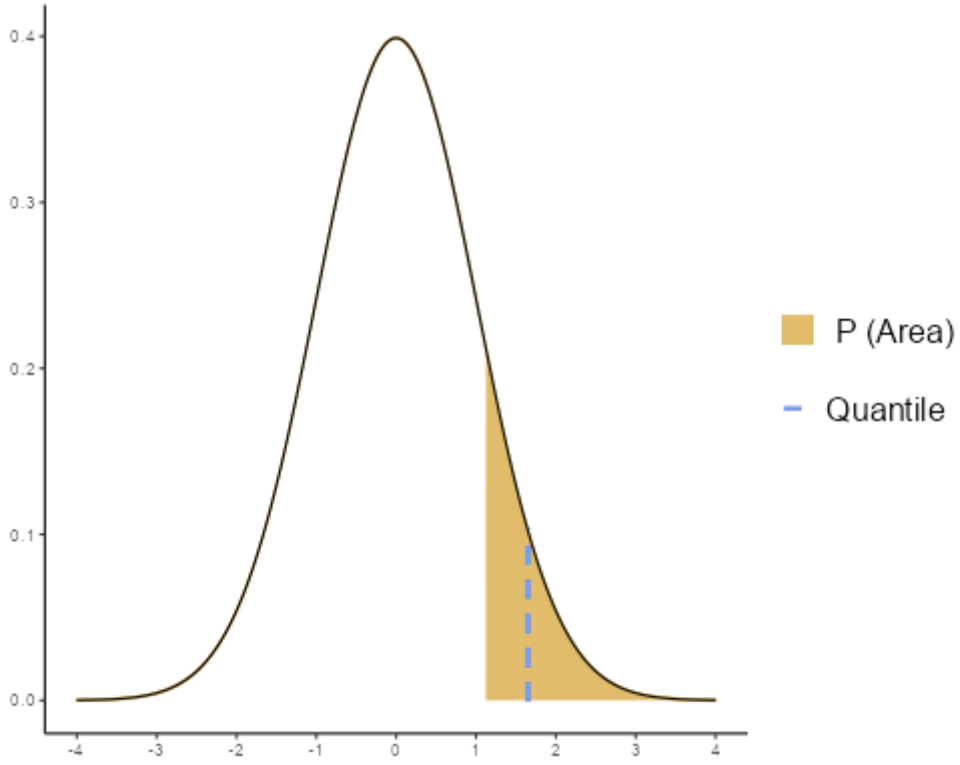

Ejercicio 2: Prueba de Proporciones (2 Resultados)

Prueba Binomial

	Nivel	Frecuencia	Total	Proporción	p
Aplica_protocolo_verificacion	**Si**	68	80	0.850	0.164
	No	12	80	0.150	1.000

Nota. H_a es proporción > 0.8


Binomial Distribution

Input values

Parameters	'Compute probability'	'Compute quantile(s)'
Size = 80	x1 = 68	p = 0.95
Prob. = 0.8	Mode: P(X ≥ x1)	cumulative mode

Results

	Quantile
Probability	**x1**
0.164	70

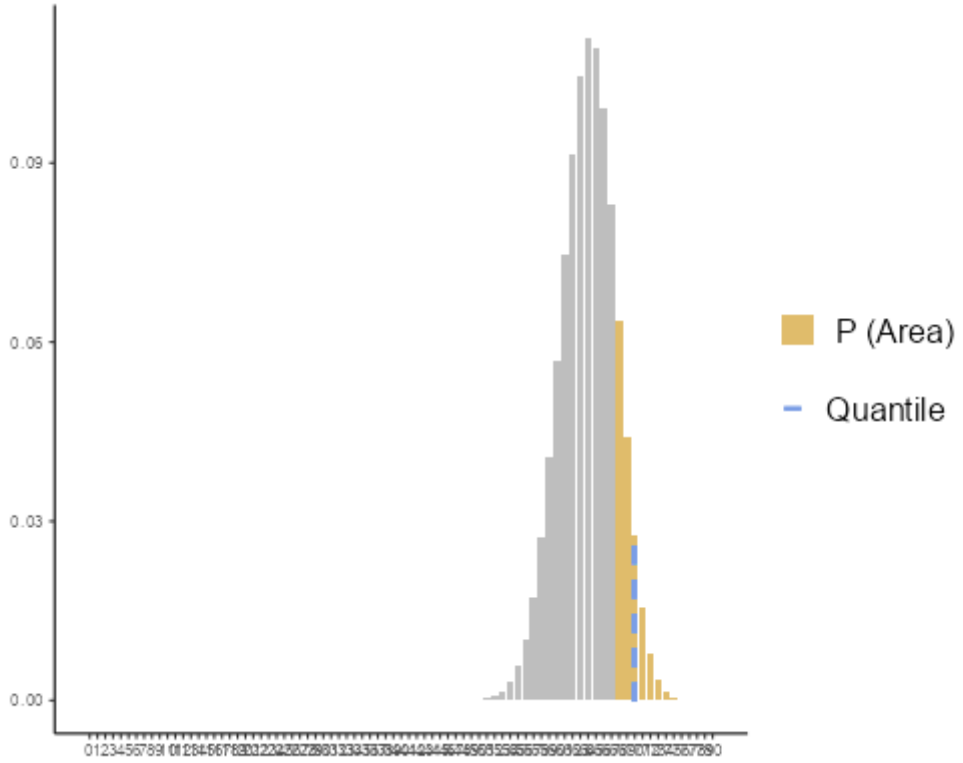


Normal Distribution

Input values

Parameters	'Compute probability'	'Compute quantile(s)'
Mean = 0	x1 = 1.118	p = 0.95
SD = 1	Mode: P(X ≥ x1)	cumulative mode

Results

	Quantile
Probability	**x1**
0.132	1.64

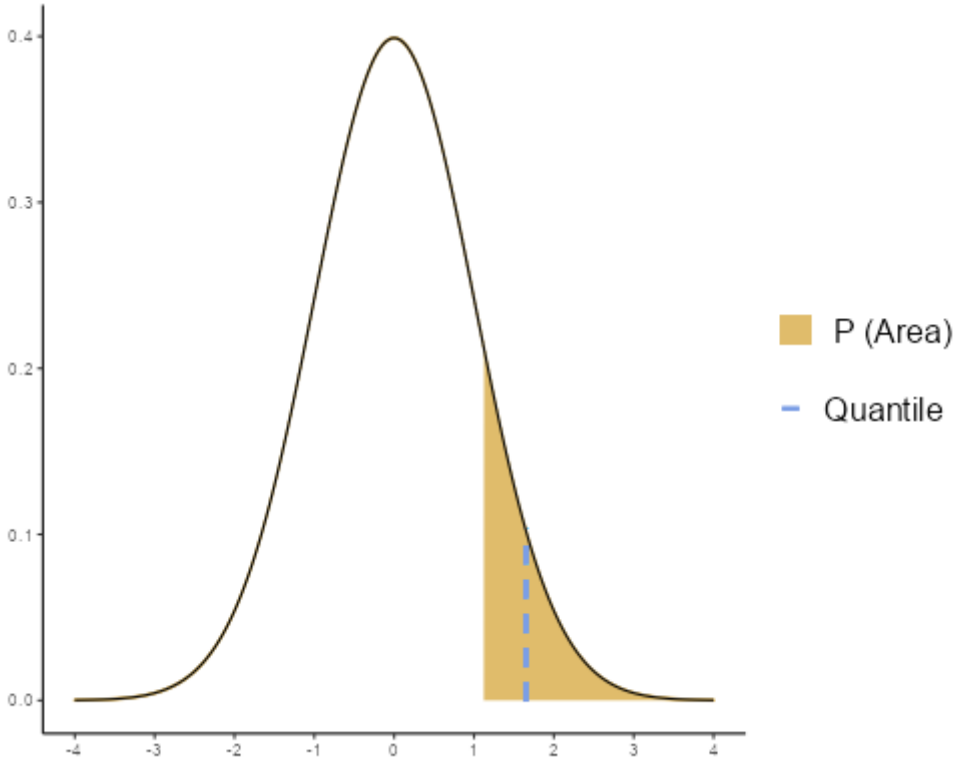

Referencias

[1] The jamovi project (2024). *jamovi*. (Version 2.6) [Computer Software]. Retrieved from https://www.jamovi.org.

[2] R Core Team (2024). *R: A Language and environment for statistical computing*. (Version 4.4) [Computer software]. Retrieved from https://cran.r-project.org. (R packages retrieved from CRAN snapshot 2024-08-07).