Univariate time series

Instructions

---

1. Do NOT move the variable into **Time box** to run ARIMA analysis.

2. In order to perform a prophet analysis, the variables must be named **'ds' and 'y'** respectively.

3. Prophet analysis requires the date column to be in a specific format (%Y-%m-%d). Otherwise, an error occurs


4. ARIMA options are classified by two factors; **Frequency**= the number of observations per unit of time. **Prediction**= number of periods for forecasting.

5. The results of ARIMA were implemented with **auto.arima() and forecast() function** in R.

6. The rationale of **forecast** R package is described in the documentation.


7. Feature requests and bug reports can be made on the GitHub.

Decomposition

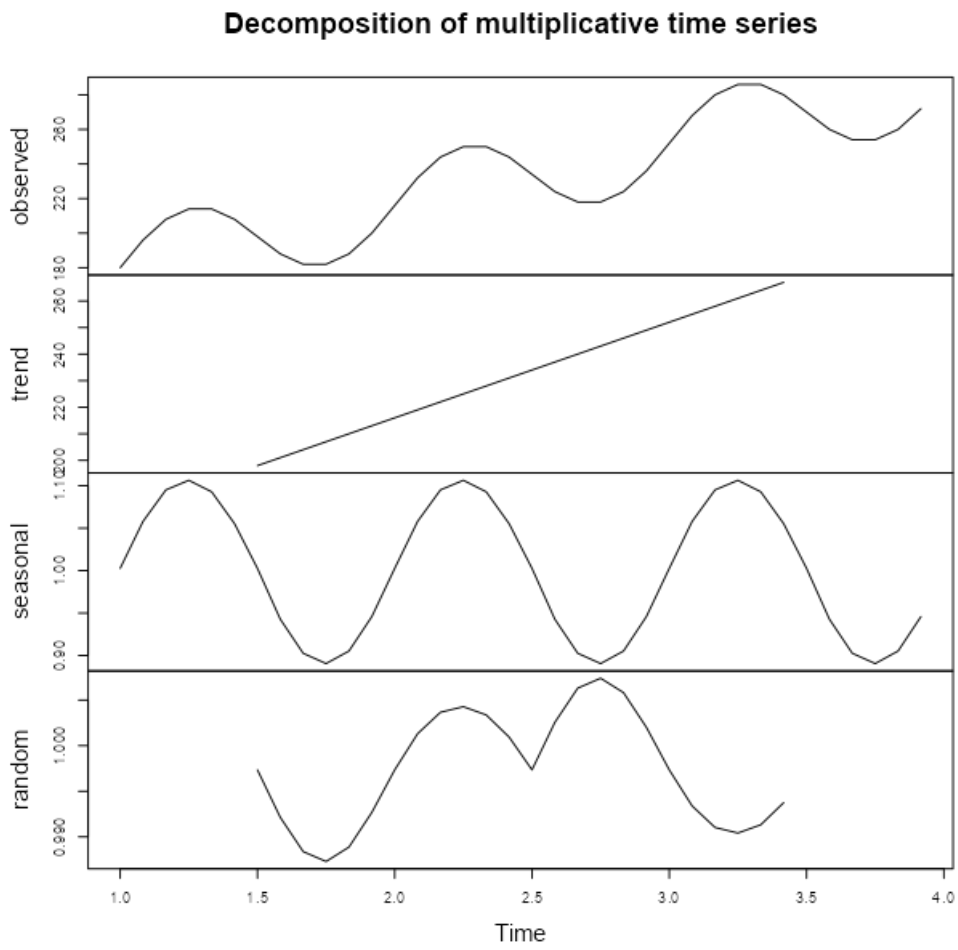

Concluimos que la serie de "incidentes" presenta una tendencia creciente y una estacionalidad anual bien definida, mientras que la variación aleatoria tiene una influencia reducida sobre el comportamiento general de la serie.

Box plot

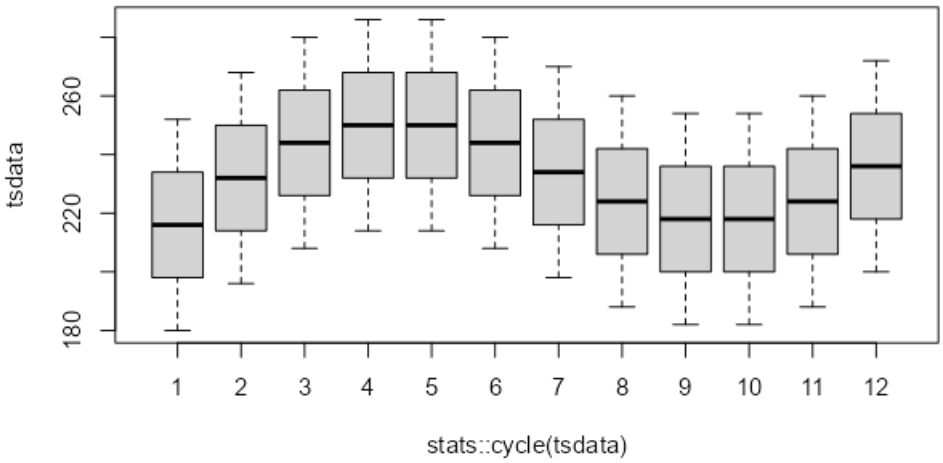
tsdata
180
220
260
1
2
3
4
5
6
7
8
9
10
11
12
stats::cycle(tsdata)