GROND Workflow Figures

Global Regularization Of Non-kinematical Diffraction

Figure Set

These figures describe how GROND takes a reintegrated XDS directory plus a solved structure and turns row-level observations into Bloch/Born predictions, corrected reflection files, endpoint statistics, forensic audits, and maps. The diagrams are written as source figures for papers, talks, and lab documentation. For a non-expert reader, a *row* means one measured spot observation from the integration table. A *merged reflection* means several rows have already been combined. GROND keeps rows alive for as long as possible because row-level geometry, thickness, polarity, and weak-reflection behavior are where many useful diagnostics live.

Overall GROND Operating Map

The overview is intentionally compact: solve once, reintegrate for row-level observations, then let GROND make staged decisions before final outputs.

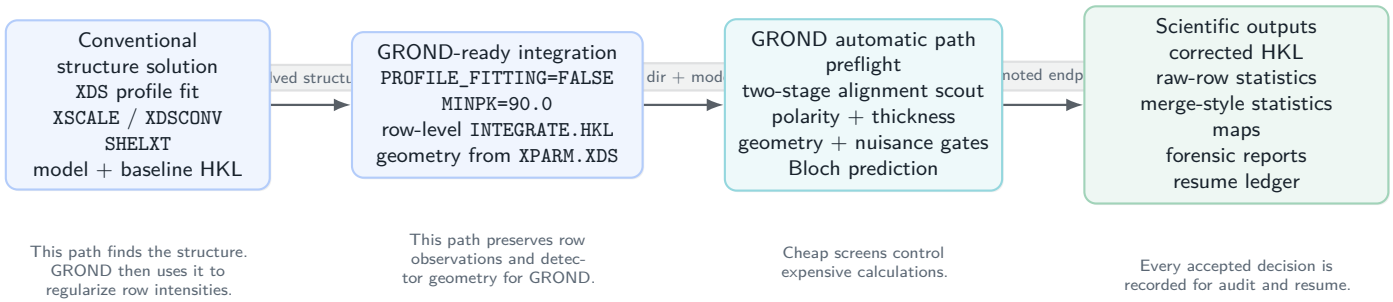


Figure 1: High-level GROND flow. The conventional path supplies a chemically sensible starting model; the GROND path starts from row-level integration data and regularizes observed intensities using non-kinematical Bloch/Born predictions.

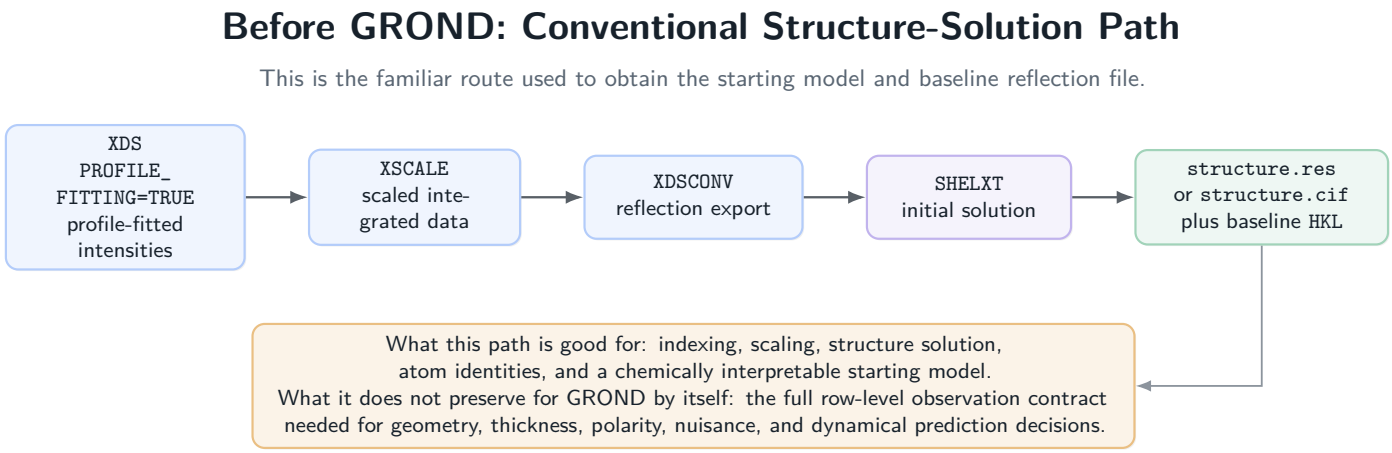


Figure 2: The pre-GROND path produces the starting model and baseline HKL. GROND keeps this path as provenance but does not treat it as the final physical model.

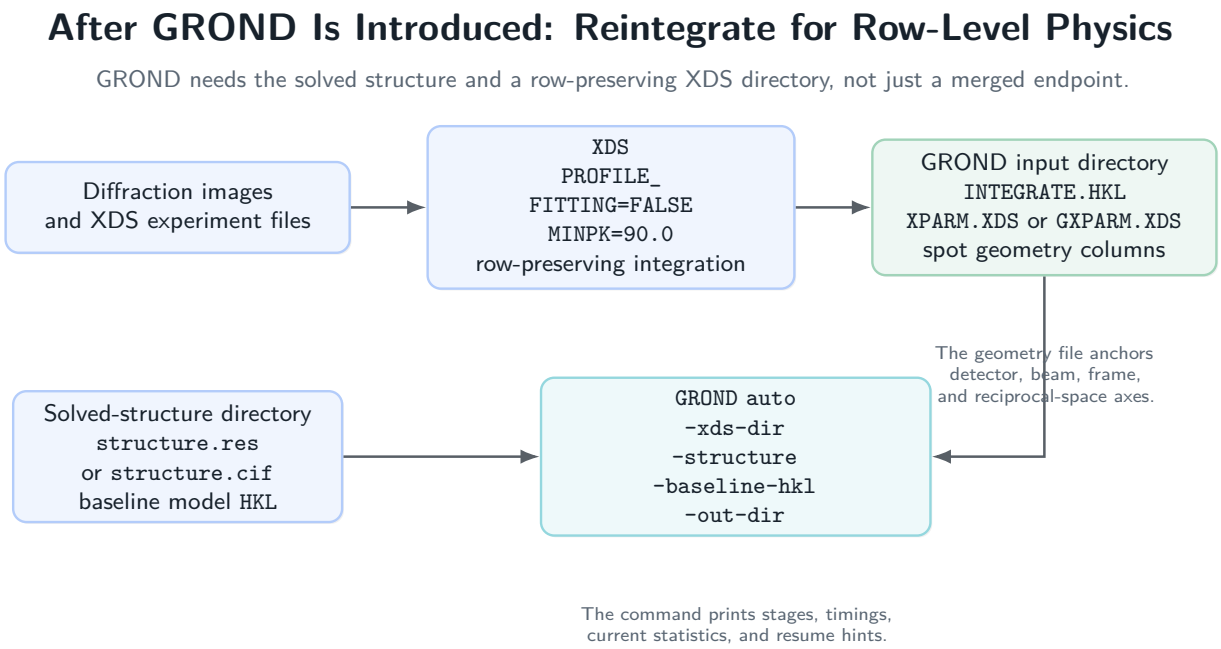


Figure 3: Recommended GROND intake. The row-preserving XDS run provides the observation contract; the solved structure provides the atomic model and baseline reflection alignment.

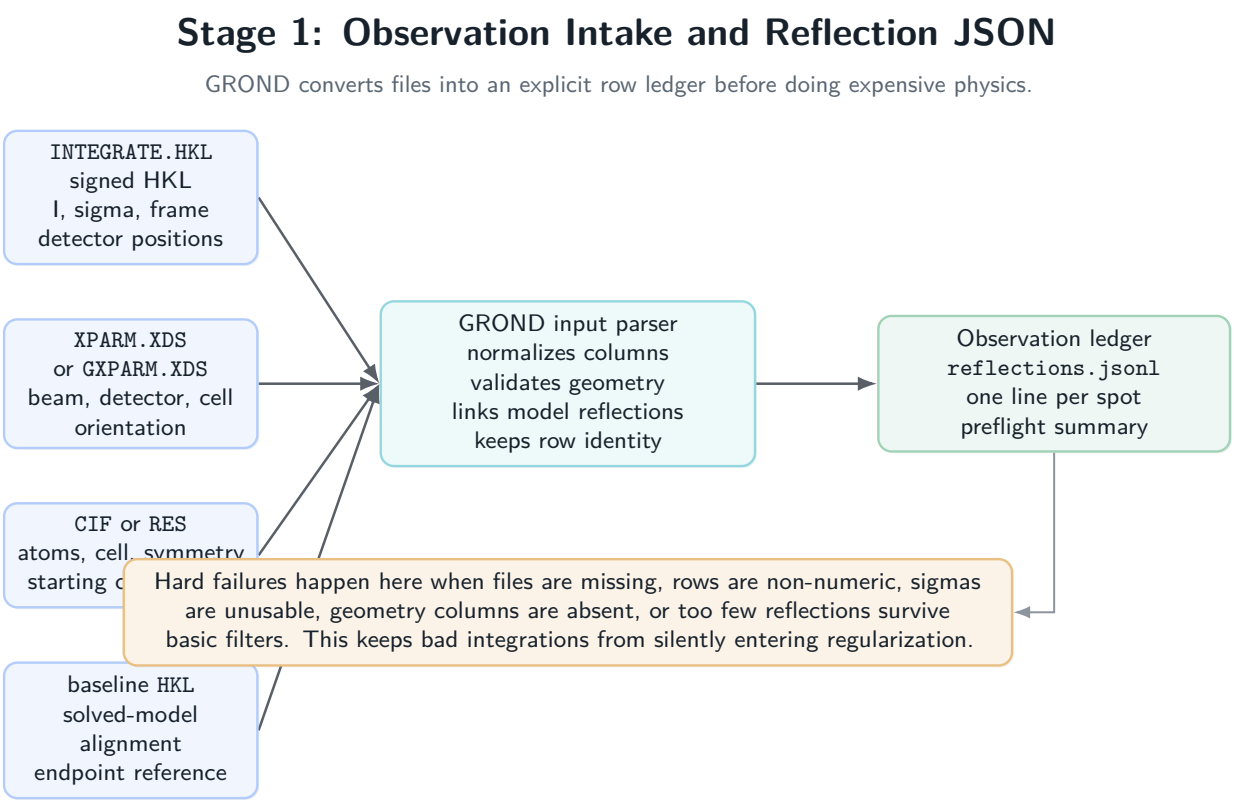


Figure 4: Reflection JSON creation. GROND first builds a machine-readable observation ledger so later stages can be audited, resumed, and compared row by row.

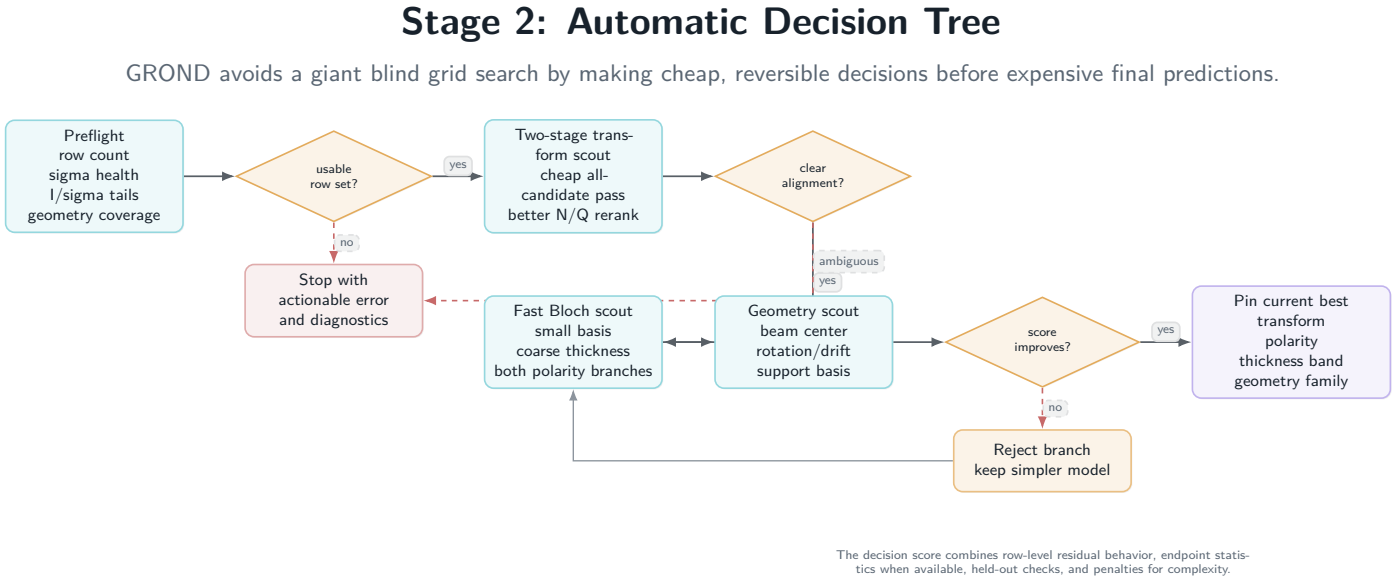


Figure 5: Automatic decision tree. GROND promotes a branch only when it improves the chosen score without creating obvious weak-row, high-resolution, or held-out damage.

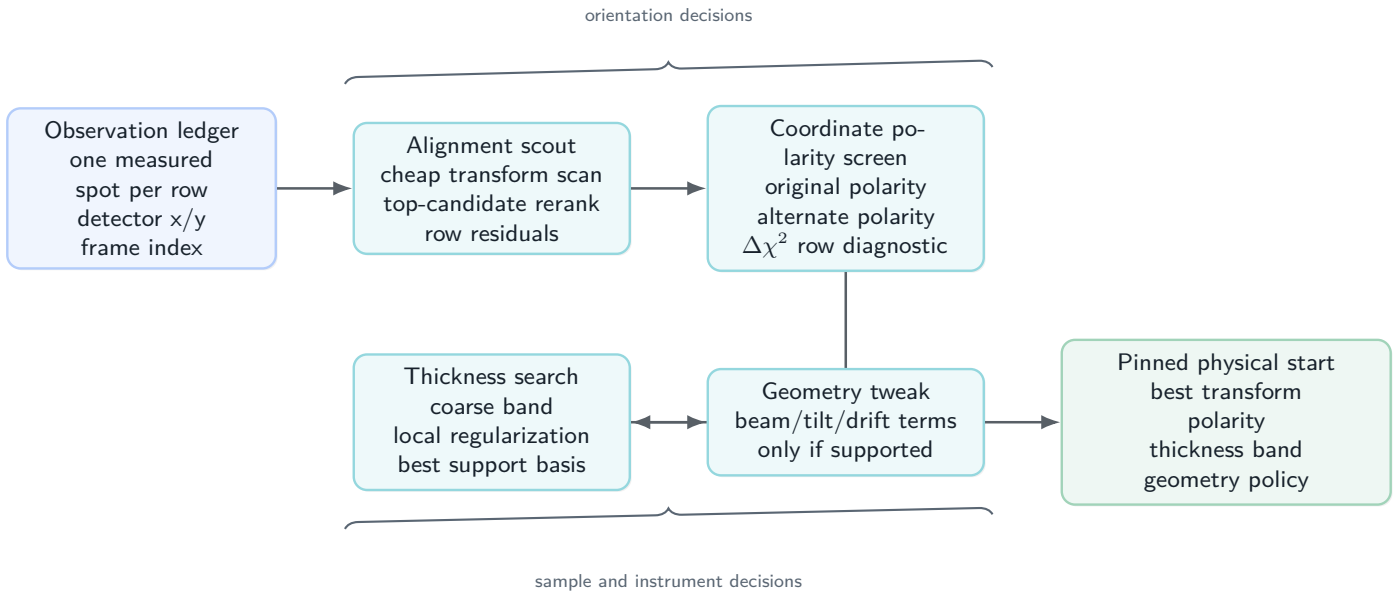


Figure 6: Early physical decisions. The goal is not to test every possible setting, but to find a stable transform, polarity, thickness band, and geometry family quickly enough to make the final regularization tractable.

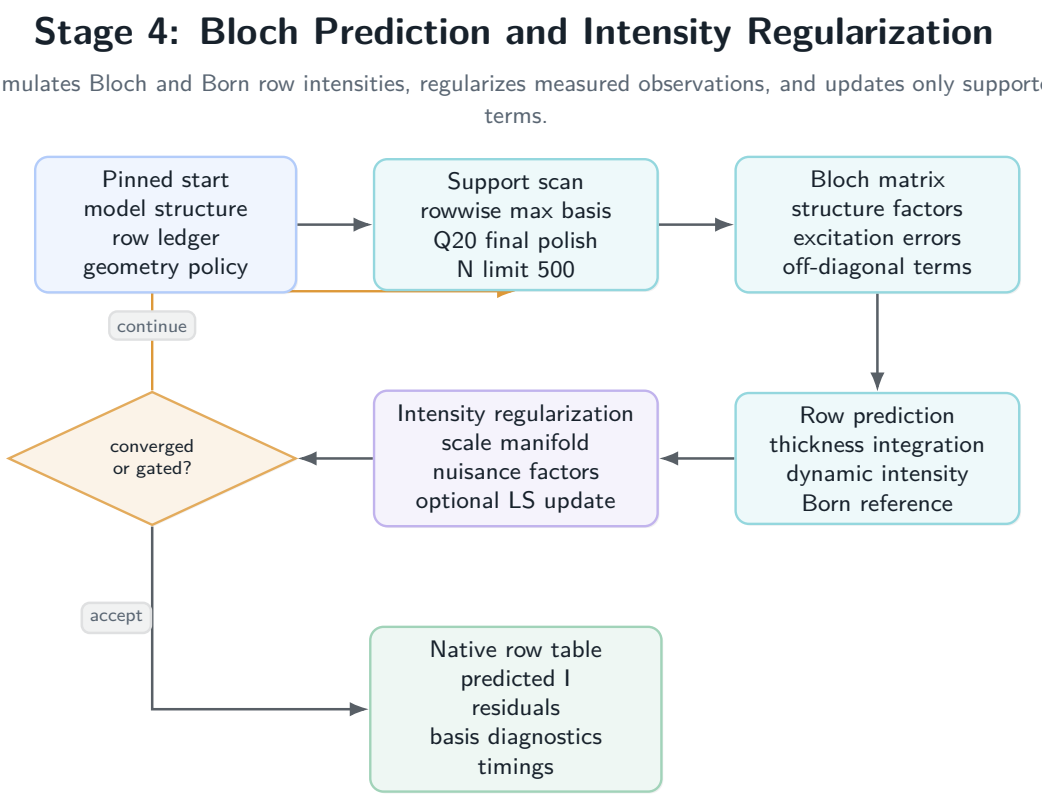


Figure 7: Bloch/regularization core. GROND separates cheap scouting from the final high-fidelity prediction so runtime is spent on branches that have already earned promotion.

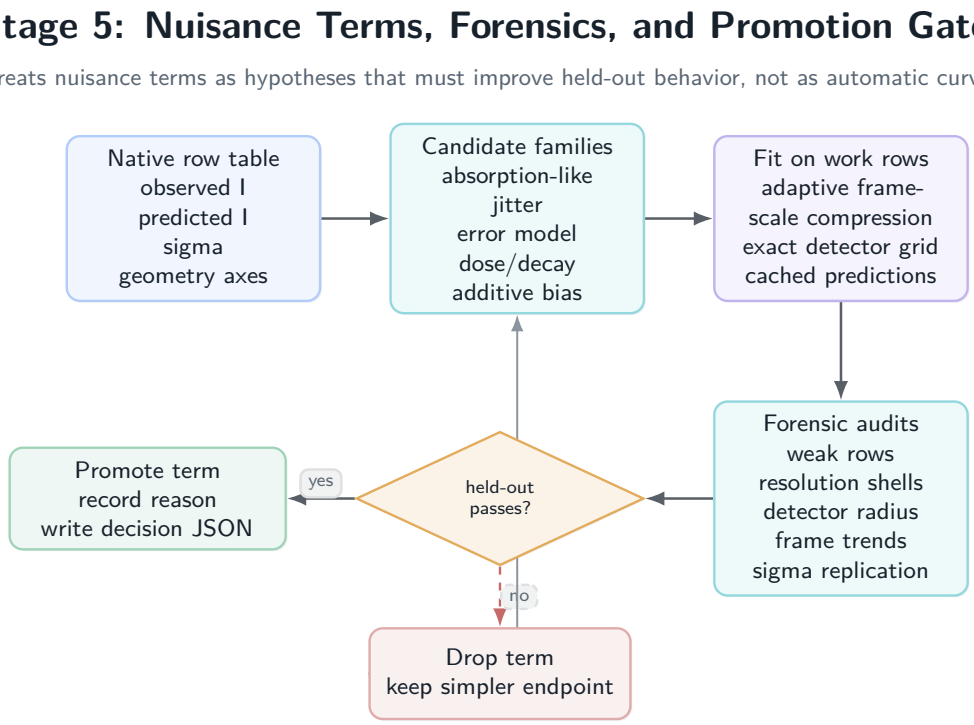


Figure 8: Nuisance and forensic gatekeeping. The package promotes only terms that improve the physical model without hiding failures in scale factors or weak reflections.

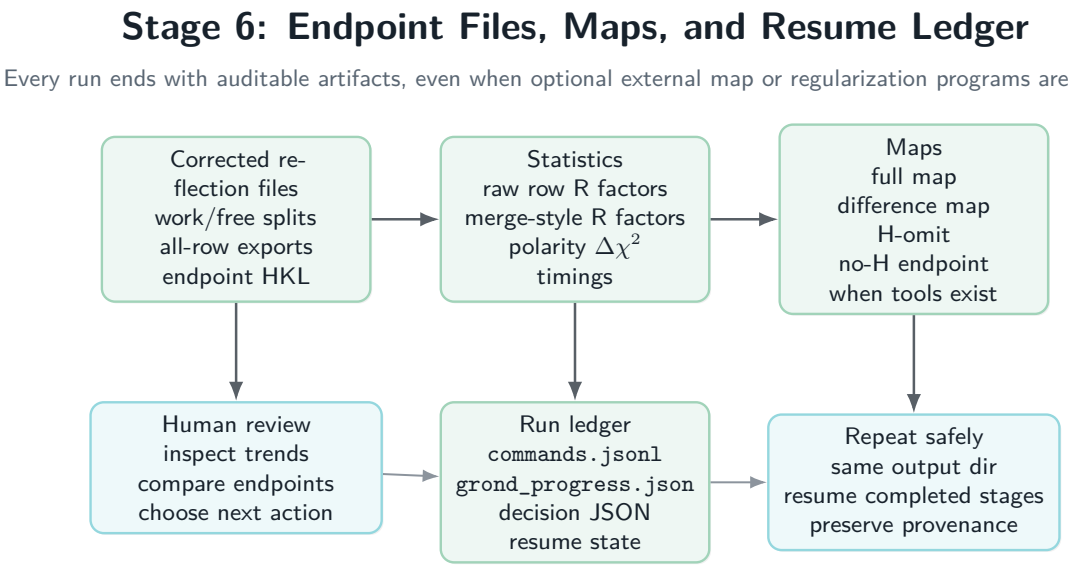


Figure 9: Endpoint and artifact production. GROND produces corrected reflection files, statistics, maps when possible, and a resume ledger so interrupted runs can continue without losing provenance.

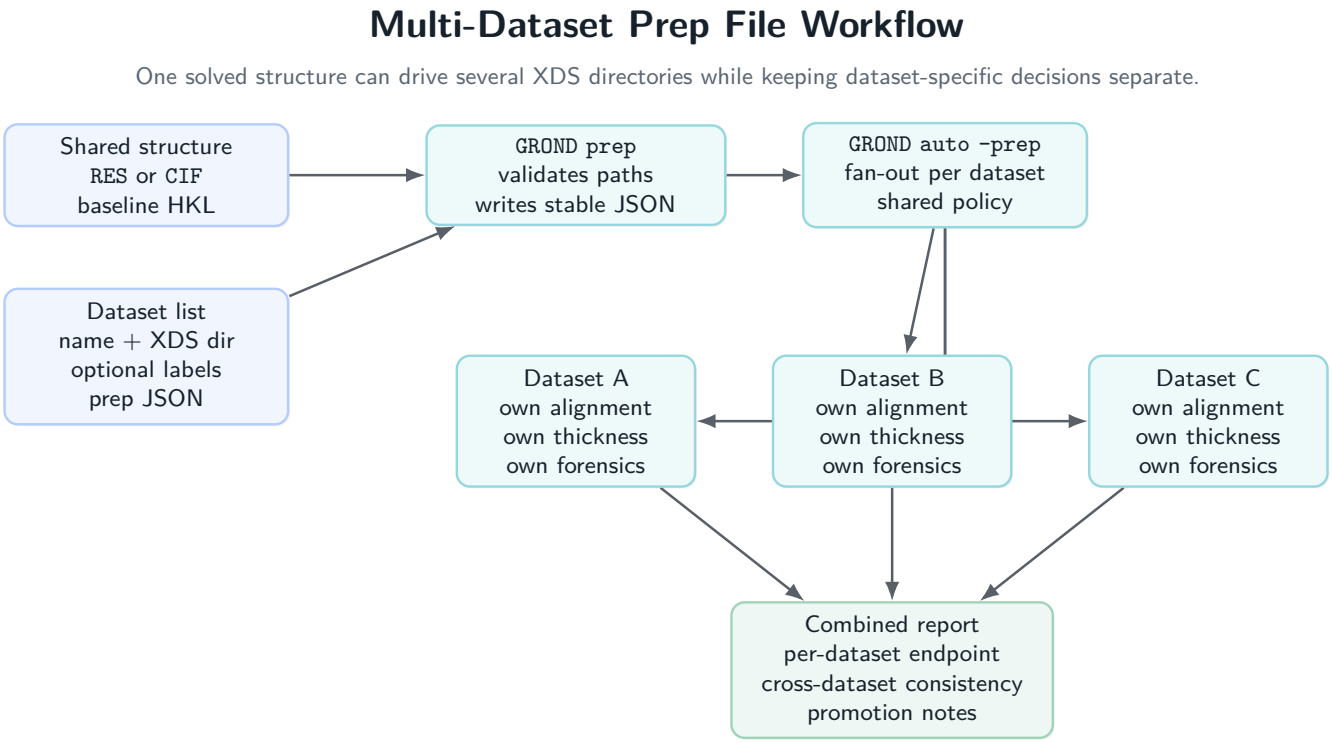


Figure 10: Multi-dataset execution. The prep file is a compact manifest: shared structure and baseline model information plus multiple row-preserving XDS directories.



Figure 11: Mode chart. Fast mode is for immediate sanity checks; auto mode is the default walk-away path; raw-polish remains an optional final test layer when raw images and calibration are available.