HSU Enterprise Application Stack(HSU EAS)

MANUAL

Marvin HSU FORUM VERSION 1.0.5

目錄

- Ii	ntroduction	2
C	CRUD sequence machanism	5
3.1	Query	5
3.2	Create	6
3.3	Update & Delete	7
F	unction	8
1.1	Function item	8
1.2	Function	10
1.3	Group	11
1.4	User	13
1.5	Module	14
C	Others	16
5.1	default-faces-config.xml	16
	3.1 3.2 3.3 F 4.1 4.3 4.4 4.5	Introduction Using steps CRUD sequence machanism 3.1 Query 3.2 Create 3.3 Update & Delete Function 4.1 Function item 4.2 Function 4.3 Group 4.4 User 4.5 Module Others Others Others Others Others 5.1 default-faces-config.xml

1. Introduction

HSU Enterprise Application Stack(HSU EAS), It is made by Marvin. You can download from Git Hub. EAS was made by using main stream Java technology, include Prime Faces(JSF), Spring, Hibernate(JPA) and Spring Security. The goal of EAS is increase productivity, compare with using Java script to develop, it can increase 20%~30% productivity. HSU Common is common library, HSU EAS is main application. Default account and password is admin and abcd1234

- Support language is Traditional Chinese, Simple Chinese and English
- Support DB is Oracle, SQL Server and MySQL
- Support AP Server is Tomcat, Jetty, JBoss WildFly, Jboss EAP and WebLogic •
- HSU Common Git Hub download address is https://github.com/MarvinHsu/HSUCommon
- HSU EAS Git Hub download address is https://github.com/MarvinHsu/EAS
- Demo war file download address (Google Drive) is https://drive.google.com/drive/folders/0B2s05eiH2k6CYXJ0LThmNVBUVXM
 P.S. Tomcat please setup jndi datasource name jndi/EASDS. Jboss please setup jndi datasource name java:/EASXADS. Weblogic please setup jndi datasource name jndi/EASXADS

Support Java AP Server


Java AP Server	Version
Tomcat	7+
Jetty	9.4.12+
JBoss EAP	7+
JBoss WildFly	10+
WebLogic	12.2.1.3+
WebSphere Liberty	17.0.0.2+
Payara(GlassFish)	4.1.1.164+

Support Data Base


Data Base	Version
MySQL	5.5+
Oracle	10g+
SQL Server	2008+
DB2	9.7+
PostgreSQL	9.6+

2. Using steps


1. Import Git Maven Prject in Eclipse

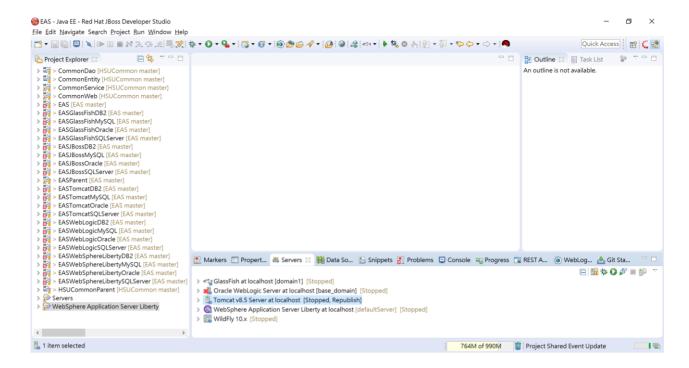

2. Depend your DB environment to execute DB Schema SQL and DB Init Data SQL



3. Start AP Server and brows default page. Default account and password is admin and abcd1234

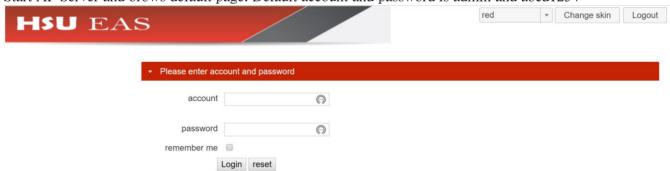

4. After login you can use the manage function



red Thange skin Logout

Management Module Welcome To HSU Enterprise Application Stack

Function item Config

<u>Function Config</u>


Group Config

User Config


Module Config

3. CRUD sequence machanism


3.1 Query

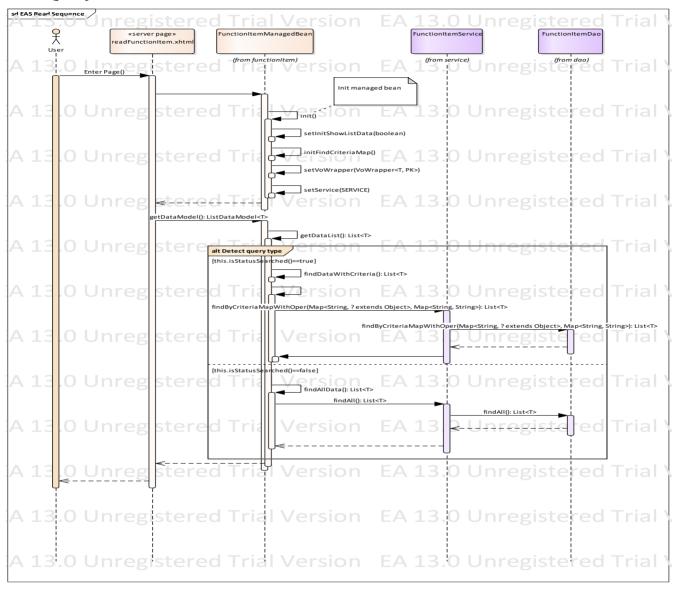

3.2 Create

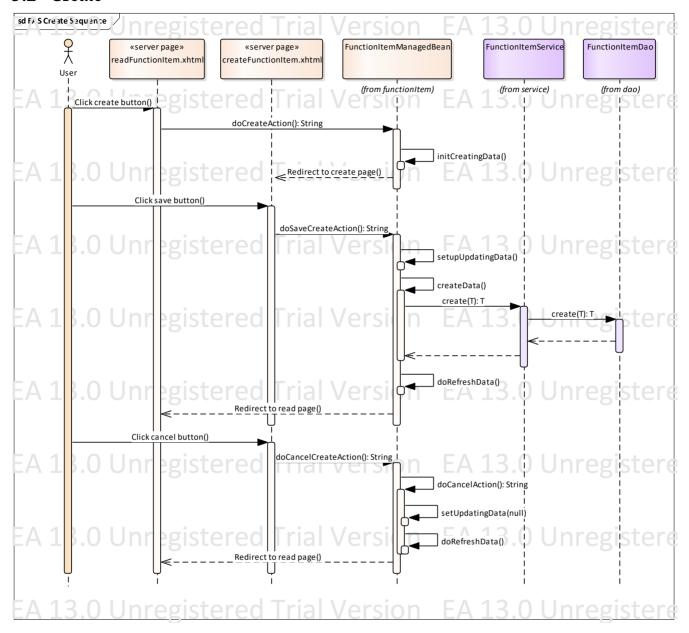


3.3 Update & Delete

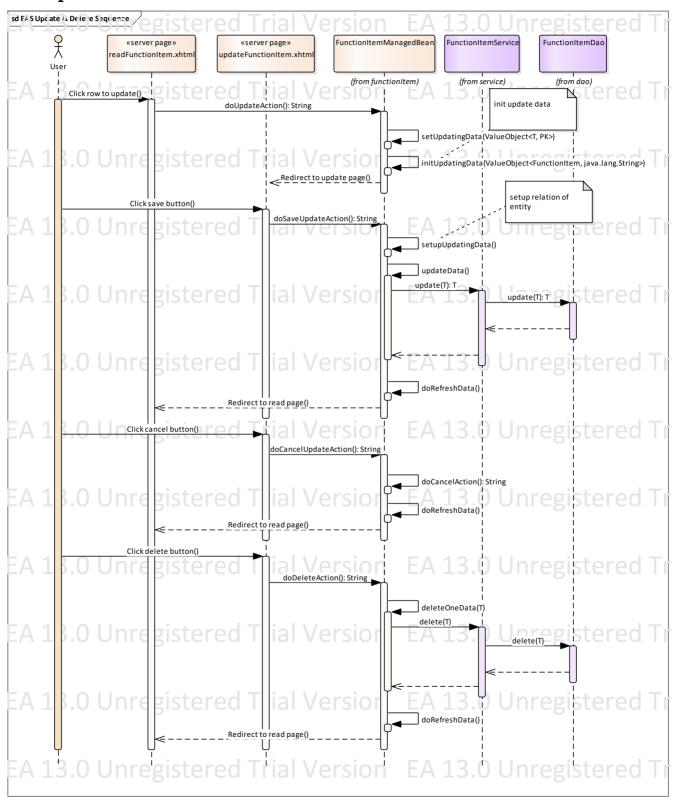


4. Function

4.1 Function item


Function item

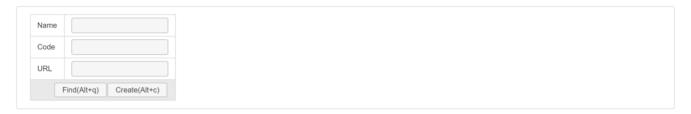

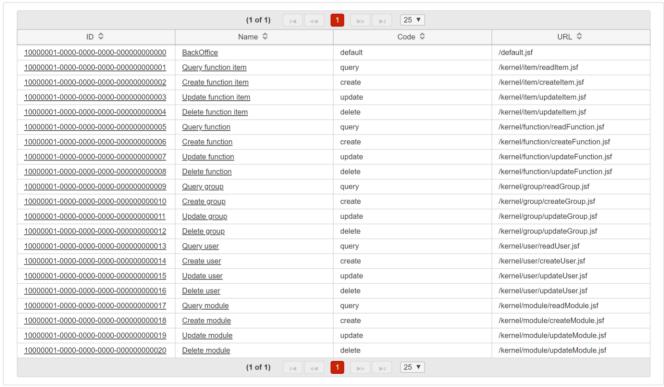


- Input find condition, click find button can find data.
- Click create button can create a function item data.
- Click Name can enter update page.

Function item-Create

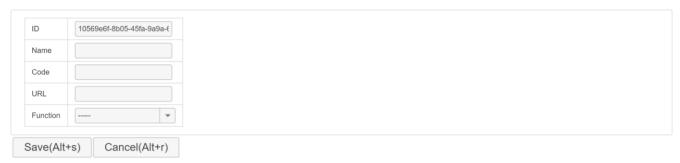

- Input data and click save button can create a function item data.
- Click cancel button will go to query page.

Function item-Update

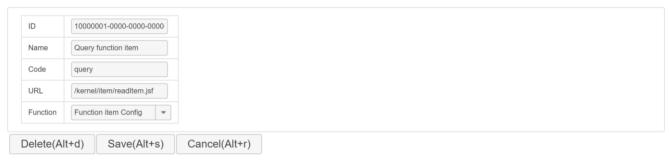


- Click delete button can delete the function data.
- Input data and click save button can modify the function item date.
- Click cancel button will go to query page.

4.2 Function


Function



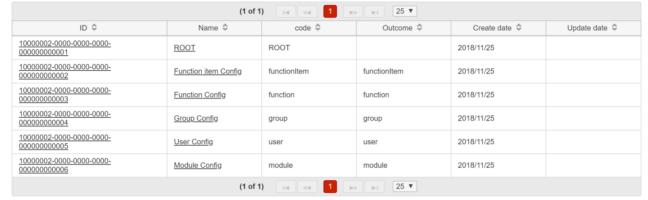


- Input find condition, click find button can find data.
- Click create button can create a function data.
- Click Name can enter update page.

Function-Create

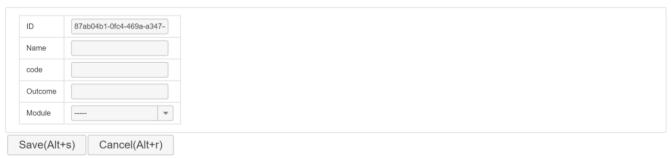

- Input data and click save button can create a function data.
- Click cancel button will go to query page.

Function-Update

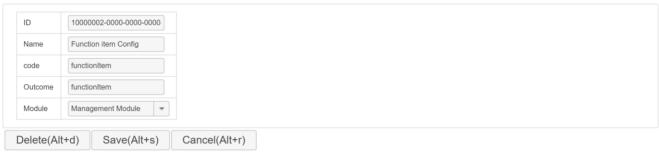

- Click delete button can delete the function data.
- Input data and click save button can modify the function date.
- Click cancel button will go to query page.


4.3 Group


Group



- Input find condition, click find button can find data.
- Click create button can create a group data.
- Click Name can enter update page.


Group-Create




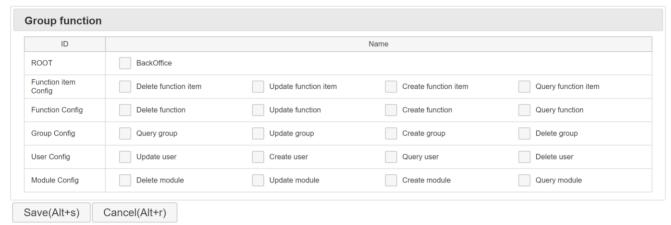

- Input data and click save button can create a group data.
- Click cancel button will go to query page.

Group-Update



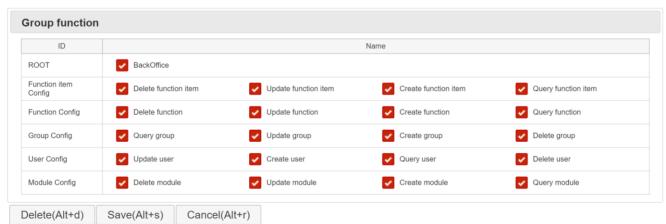

- Click delete button can delete the function data.
- Input data and click save button can modify the group date.
- Click cancel button will go to query page.


4.4 User

User




- Input find condition, click find button can find data.
- Click create button can create a user data.
- Click Name can enter update page.

User-Create

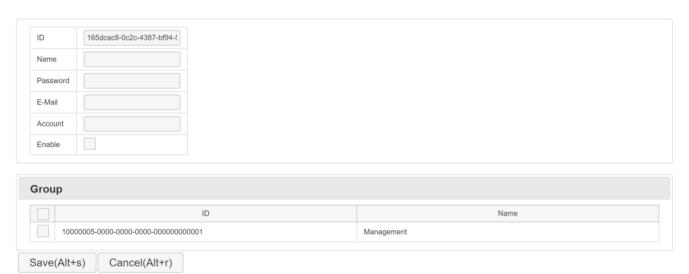

- Input data and click save button can create a user data.
- Click cancel button will go to query page.

User-Update

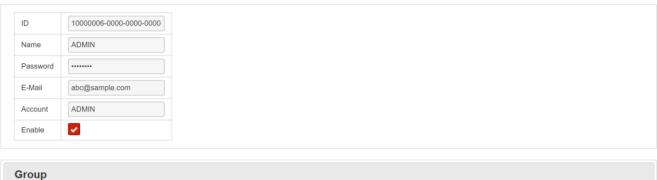



- Click delete button can delete the function data
- Input data and click save button can modify the user date
- Click cancel button will go to query page


4.5 Module

Module



- Input find condition, click find button can find data.
- Click create button can create a module data.
- Click Name can enter update page.


Module-Create




ID	Name
10000002-0000-0000-0000-000000000001	ROOT
10000002-0000-0000-0000-0000000000002	Function item Config
10000002-0000-0000-0000-000000000003	Function Config
10000002-0000-0000-0000-000000000004	Group Config
10000002-0000-0000-0000-000000000005	User Config
10000002-0000-0000-0000-000000000006	Module Config

- Save(Alt+s) Cancel(Alt+r)
 - Input data and click save button can create a module data.
 - Click cancel button will go to query page.

Module-Update



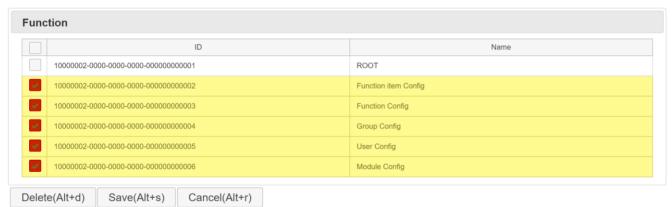

- Click delete button can delete the function data.
- Input data and click save button can modify the module date.
- Click cancel button will go to query page.

5. Others

5.1 default-faces-config.xml

There are some options of whole system in default-faces-config.xml.

- systemCode default value is EAS, this is identifier of system.
- devMode default value is true, this can control ID column show or not show in query page.
- rowsOfPerPage default value is 25, this can control how many rows show in one page.
- timeZone default value is Asia/Taipei, this can control system show time zone.