Bash-Debugger sketched documentation

cieplypolar

Note: Sketches have not been updated continuously, keep that in mind ;)

DEBUG- env. var. responsible for only one woot execution

sets as first thing to do

1.

ROOT

Then he creates pipes to listen

CHID

PROOT

ROOT

ROO

3. 4 voot executes vootProcess

We after finish the unsets & DEBUG

Les velours exit code

La fork child executes child Process

La returns exit code


 5. root Process

destream map

4 to know where

to write pucket

to generally voot is moster of miting be wester all the files and links

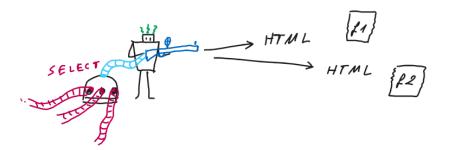

6. pockets flows

PACKET

PREV PACKET