

Time Series Classification Utility v1.0

User Manual

Hüseyin Kaya

March 1, 2013

Contents

1	Introduction	1
2	Installation	1
3	Running	2
4	Options	3
4.1	'alignment'	3
4.2	'DTWbandwidth'	4
5	Examples	4
6	Final Words	4

1 Introduction

Time Series Classification Utility (TSCU) is a simple MATLAB program that you can use it to classify time series by choosing a couple of alignment methods including Dynamic Time Warping (DTW), Constrained DTW (CDTW) and Signal Alignment via Genetic Algorithm (SAGA).

I decided to prepare TSCU during my Ph.D which is about a new time series alignment algorithm and its application to various real-world problems. There were (and there are still) a bunch of useful tools for time series alignment, but none of them seemed general enough. I also wanted to create a useful website so that people searching for a time series classification task will find all crucial information quickly.

2 Installation

TSCU is freely available from GitHub. Majority of the code lies in just one MATLAB script: `tscu.m`. However it is recommended to fetch the whole repository (which is about 1Mb) in order to obtain a few dependent files. You can use the following command to download the repository:

```
git clone https://github.com/hkayabilisim/TSCU.git
```

This will checkout the repository into a new directory named TSCU. After downloading the source code, you should follow the following steps.

- In order to use the alignment methods DTW and constrained DTW, you should compile the mex file `dtw.c` by issuing the following command on MATLAB:

mex dtw.c

- If everything goes well, you will have a new executable file with extension name begins with mex. In my Macbook Pro, its name is dtw.mexmaci64. If you have problems in compiling the mex file (you are very likely to face such problems, by the way), then you can look for compiled binaries on TSCU repository.
- If you want to test the utility with the University of California, Riverside (UCR) time series repository, then you should request the dataset from Eamonn Keogh personally because I don't have permission to provide the dataset. I strongly suggest you to have a copy of this large and diverse dataset if you want to do detailed analysis on alignment techniques.
- If you want to test the alignment algorithm Signal Alignment via Genetic Algorithm (SAGA), you should have Genetic Algorithm Toolbox of MATLAB. SAGA is optional, so if you don't have this toolbox, don't bother. You can still use DTW or constrained DTW for alignment.

3 Running

A straightforward way to test the installation is to run a few tasks. Let's start with the Synthetic Control dataset from University of California-Riverside (UCR) time series repository. This dataset is freely available on UCR time repository web page¹. There are 6 different classes of time series each has length 60. There are totally 600 time series half of it is reversed for training. Some examples of the dataset are displayed in Figure 1.

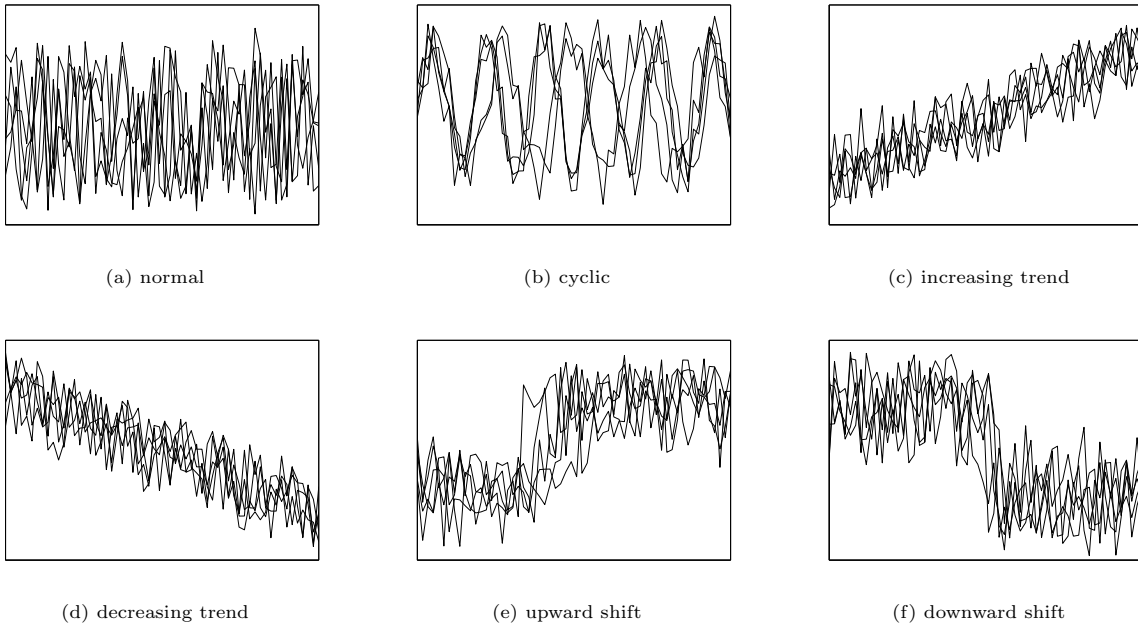


Figure 1: Some examples from 6 different control charts used in the synthetic control dataset.

After downloading training and testing set, you can classify the time series in the testing set by using the following command:

¹http://www.cs.ucr.edu/~eamonn/time_series.data/.

```
>> trn=load('synthetic_control_TRAIN');
>> tst=load('synthetic_control_TEST');
>> tscu(trn,tst)
```

Size of training set.....: 300
Size of testing set.....: 300
Time series length.....: 60
Classification method.....: 1-NN
Alignment method.....: None
Overall Accuracy.....: 0.880
Overall Error.....: 0.120
Producer Accuracy.....: 0.440 1.000 0.980 1.000 0.940 0.920
User Accuracy.....: 1.000 0.833 0.891 0.862 0.887 0.885
Kappa.....: 0.856
Z-value.....: 5.439

Confusion matrix

	1	2	3	4	5	6	UA	T0
1	22	0	0	0	0	0	1.000	22
2	10	50	0	0	0	0	0.833	60
3	3	0	49	0	3	0	0.891	55
4	4	0	0	50	0	4	0.862	58
5	5	0	1	0	47	0	0.887	53
6	6	0	0	0	0	46	0.885	52
PA	0.440	1.000	0.980	1.000	0.940	0.920		
T0	50	50	50	50	50	50		300

Time elapsed (sec).....: 1.08

Output of TSCU is pretty self-explanatory. As you see from the output, TSCU does not use an alignment algorithm in its default form. Overall error in this case is 0.12 which is the same as the published error on UCR web site. TSCU also outputs confusion matrix which can sometimes be useful for further analysis.

If you want to use Dynamic Time Warping (DTW) as the alignment method for the same dataset, then you can append the following options:

```
>> trn=load('synthetic_control_TRAIN');
>> tst=load('synthetic_control_TEST');
>> tscu(trn,tst,'alignment','DTW')
```

Size of training set.....: 300
Size of testing set.....: 300
Time series length.....: 60
Classification method.....: 1-NN
Alignment method.....: DTW
Overall Accuracy.....: 0.993
Overall Error.....: 0.007
Producer Accuracy.....: 0.960 1.000 1.000 1.000 1.000 1.000
User Accuracy.....: 1.000 0.980 1.000 1.000 0.980 1.000
Kappa.....: 0.992
Z-value.....: 24.884

Confusion matrix

	1	2	3	4	5	6	UA	T0
1	48	0	0	0	0	0	1.000	48
2	1	50	0	0	0	0	0.980	51
3	0	0	50	0	0	0	1.000	50
4	0	0	0	50	0	0	1.000	50
5	1	0	0	0	50	0	0.980	51
6	0	0	0	0	0	50	1.000	50
PA	0.960	1.000	1.000	1.000	1.000	1.000		
T0	50	50	50	50	50	50		300

Time elapsed (sec).....: 5.77

4 Options

4.1 'alignment'

This option specifies the alignment algorithm used in distance calculation between any two time series. The following option are available.

'None' (*default*) In this case no alignment takes place and usual Euclidean distance between two time series is taken as the distance.

'DTW' Standard Dynamic Time Warping is used in its original simple form without any lower bounding or bands. The implementation is based on The UCR Suite². The code is written as a MATLAB MEX file to gain some speed. However one should compile the mex file *dtw.c* to be able to use it in TSCU.

'CDTW' Constrained Dynamic Time Warping in which the path is constrained in Sakoe-Chiba band. It is implemented again in the same mex file *dtw.c* however one should use the additional option 'DTWbandwidth' to set the width of the band.

4.2 'DTWbandwidth'

6 *default* This parameter is used when one choose 'CDTW' as the alignment method. It is the width of the Sakoe-Chiba band defined in percentage. Setting it to 100 is the same effect as running DTW.

5 Examples

In order to classify synthetic control dataset with default options you can use the following commands provided that you first downloaded the dataset:

```
trn=load('synthetic_control_TRAIN');  
tst=load('synthetic_control_TEST');
```

```
tscu(trn,tst)
```

You can specify the alignment algorithm by using the option 'alignment'. For instance:

```
tscu(trn,tst,'alignment','DTW')
```

choose good old Dynamic Time Warping method. In order use constrained DTW, you can use 'CDTW' together with 'DTWbandwidth'.

```
tscu(trn,tst,'alignment','CDTW','DTWbandwidth',6)
```

²<http://www.cs.ucr.edu/%7Eeamonn/UCRsuite.html>