


Programming Assignment

Startup code is provided for you.

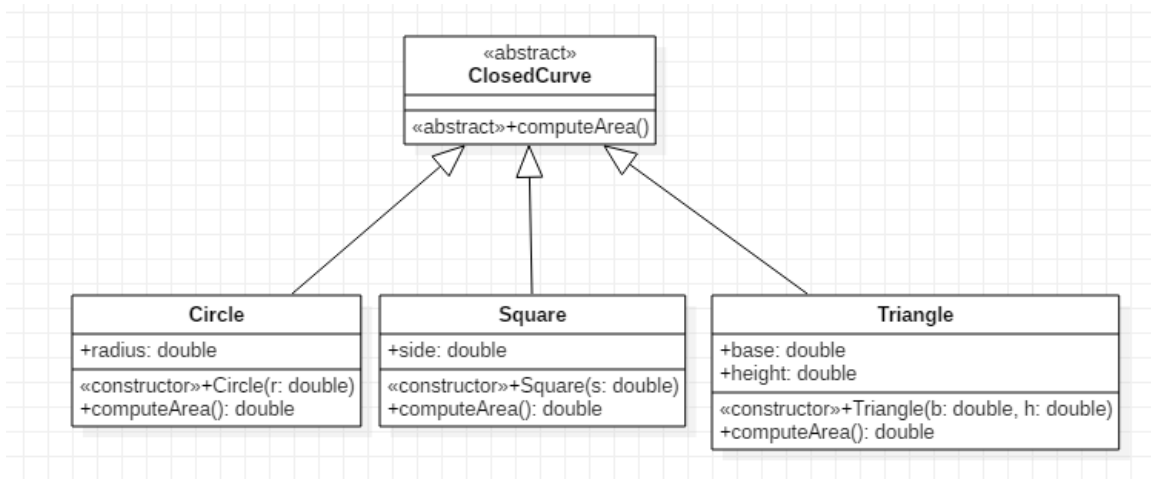

Test class

The problem:

- Instead, if we use an array `Object []`, we have to repeatedly test the type of the `Object` in the array in order to execute the correct `computeArea()` method (using the `instanceof` operator).
- This approach needs improvement!

Solution:

- Read `computeArea()` method polymorphically.