


Section 10 — Oracle Scheduler Jobs

One-Time Job

```
BEGIN
  DBMS_SCHEDULER.CREATE_JOB (
    job_name    => 'JOB_GREET_EMPLOYEES',
    job_type    => 'PLSQL_BLOCK',
    job_action  => q'[
      BEGIN
        DBMS_OUTPUT.PUT_LINE('Payroll System Initialized');
        INSERT INTO EMPLOYEE_LOG
          (log_id, emp_id, action, log_timestamp)
        VALUES
          (EMP_LOG_SEQ.NEXTVAL, NULL,
           'PAYROLL SYSTEM INITIALIZED', SYSDATE);
      END;
    ]',
    start_date  => SYSTIMESTAMP + INTERVAL '2' MINUTE,
    enabled     => TRUE,
    auto_drop   => FALSE
  );
END;
/
```

Check Job Status

```
SELECT job_name, operation, status, log_date
FROM USER_SCHEDULER_JOB_LOG
WHERE job_name = 'JOB_GREET_EMPLOYEES'
ORDER BY log_date DESC;
```

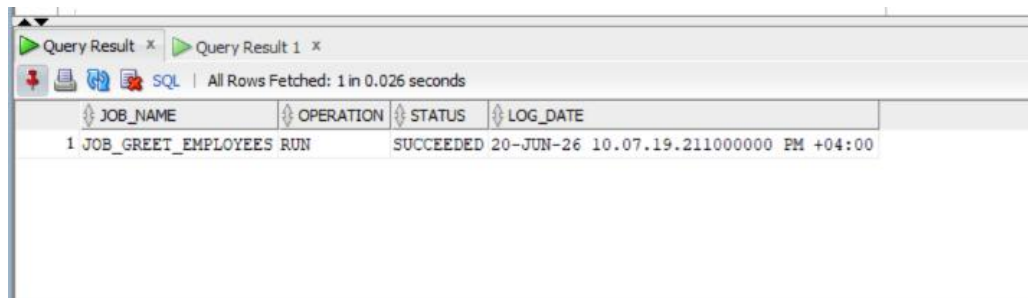


The screenshot shows a SQL Developer window with a query result table. The table has four columns: JOB_NAME, OPERATION, STATUS, and LOG_DATE. There is one row of data showing the job 'JOB_GREET_EMPLOYEES' with operation 'RUN', status 'SUCCEEDED', and a log date of '20-JUN-26 10.07.19.211000000 PM +04:00'. The window title is 'Query Result 1' and it shows 'All Rows Fetched: 1 in 0.026 seconds'.

JOB_NAME	OPERATION	STATUS	LOG_DATE
1 JOB_GREET_EMPLOYEES	RUN	SUCCEEDED	20-JUN-26 10.07.19.211000000 PM +04:00

Verify Log Entry

```
SELECT log_id, action, log_timestamp
FROM EMPLOYEE_LOG
WHERE action = 'PAYROLL SYSTEM INITIALIZED'
ORDER BY log_id DESC;
```

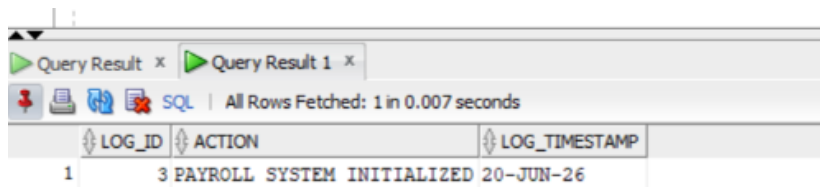


The screenshot shows a SQL query result window with two tabs: 'Query Result' and 'Query Result 1'. The window displays a table with three columns: LOG_ID, ACTION, and LOG_TIMESTAMP. The table contains one row with the following values: LOG_ID is 1, ACTION is 3 PAYROLL SYSTEM INITIALIZED, and LOG_TIMESTAMP is 20-JUN-26. The status bar at the bottom indicates 'All Rows Fetched: 1 in 0.007 seconds'.

LOG_ID	ACTION	LOG_TIMESTAMP
1	3 PAYROLL SYSTEM INITIALIZED	20-JUN-26

Daily Recurring Job


```
BEGIN
  DBMS_SCHEDULER.CREATE_JOB (
    job_name      => 'JOB_DAILY_LEAVE_REPORT',
    job_type      => 'PLSQL_BLOCK',
    job_action    => q'[
      DECLARE
        v_leave_count NUMBER;
      BEGIN
        SELECT COUNT(*) INTO v_leave_count
        FROM LEAVE
        WHERE TRUNC(leave_date) = TRUNC(SYSDATE);
        INSERT INTO EMPLOYEE_LOG
        (log_id, emp_id, action, log_timestamp)
        VALUES
        (EMP_LOG_SEQ.NEXTVAL, NULL,
        'DAILY LEAVE REPORT: ' || v_leave_count || ' leave record(s)',
        SYSDATE);
      END;
    ]',
    start_date    => SYSTIMESTAMP,
    repeat_interval => 'FREQ=DAILY;BYHOUR=7;BYMINUTE=0;BYSECOND=0',
    enabled       => TRUE,
    auto_drop     => FALSE
  );
END;
/
```

```
BEGIN
  DBMS_SCHEDULER.RUN_JOB (
    job_name      => 'JOB_DAILY_LEAVE_REPORT',
    use_current_session => TRUE
  );
END;
/
```

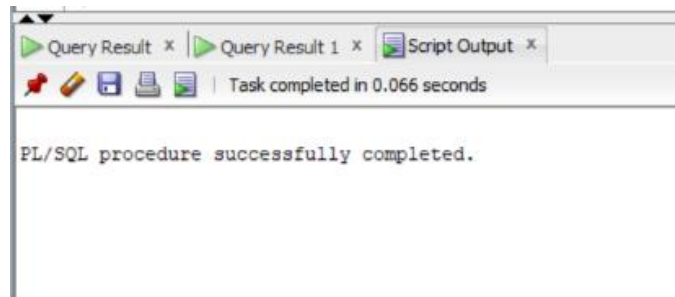

Check Job Schedule

```
SELECT job_name, enabled, state, repeat_interval
FROM USER_SCHEDULER_JOBS
WHERE job_name = 'JOB_DAILY_LEAVE_REPORT';
```

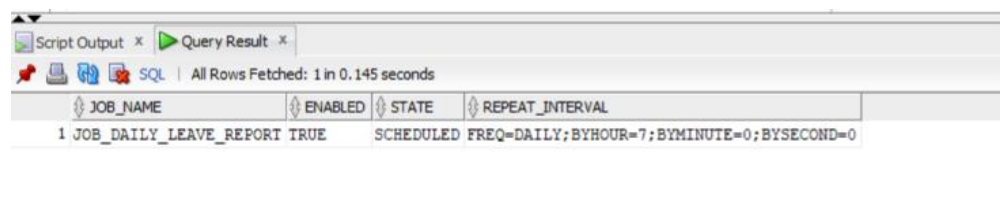A screenshot of a SQL*Plus window showing the query result. The title bar shows 'Script Output *' and 'Query Result *'. Below the title bar, there are icons for a pin, a folder, a play button, a printer, and a SQL icon. The text 'All Rows Fetched: 1 in 0.145 seconds' is displayed. The main area shows a table with the following data:

JOB_NAME	ENABLED	STATE	REPEAT_INTERVAL
1 JOB_DAILY_LEAVE_REPORT	TRUE	SCHEDULED	FREQ=DAILY;BYHOUR=7;BYMINUTE=0;BYSECOND=0

Verify Log Entries

```
SELECT log_id, action, log_timestamp
FROM EMPLOYEE_LOG
WHERE action LIKE 'DAILY LEAVE REPORT:%'
ORDER BY log_id DESC;
```

A screenshot of a SQL*Plus window showing the query result. The title bar shows 'Script Output *' and 'Query Result *'. Below the title bar, there are icons for a pin, a folder, a play button, a printer, and a SQL icon. The text 'All Rows Fetched: 2 in 0.007 seconds' is displayed. The main area shows a table with the following data:

LOG_ID	ACTION	LOG_TIMESTAMP
1	5 DAILY LEAVE REPORT: 0 leave record(s)	20-JUN-26
2	4 DAILY LEAVE REPORT: 0 leave record(s)	20-JUN-26