

Manual for mVMC
ver. 0.3.3

October 19, 2016

Contents

1	What is mVMC?	1
1.1	Overview of mVMC	1
1.2	License	1
1.3	Copyright	1
1.4	Contributors	2
1.5	Operating environment	2
2	How to use mVMC?	3
2.1	Prerequisite	3
2.2	Installation	3
2.2.1	Using <code>config.sh</code>	4
2.2.2	Using <code>cmake</code>	5
2.3	Directory structure	6
2.4	Basic usage	8
2.5	Printing version ID	9
3	Tutorial	10
3.1	List of sample files	10
3.2	Heisenberg model	10
4	File specification	17
4.1	Input files for <code>vmcdry.out</code>	17
4.1.1	Parameters about the kind of a calculation . . .	18
4.1.2	Parameters for the lattice	18
4.1.3	Sublattice	22
4.1.4	Parameters for the Hamiltonian	22
4.1.5	Parameters for the numerical condition	26
4.2	Detailed input files	30

4.2.1	List file for Input files (namelist.def)	33
4.2.2	ModPara file (modpara.def)	35
4.2.3	LocSpin file (locspn.def)	40
4.2.4	Trans file (trans.def)	42
4.2.5	InterAll file	44
4.2.6	CoulombIntra file (coulombintra.def)	46
4.2.7	CoulombInter file (coulombinter.def)	48
4.2.8	Hund file (hund.def)	50
4.2.9	PairHop file	52
4.2.10	Exchange file (exchange.def)	54
4.2.11	Gutzwiller file (gutzwiller.def)	56
4.2.12	Jastrow file (jastrow.def)	58
4.2.13	DH2 file	60
4.2.14	DH4 file	62
4.2.15	Orbital file (orbitalidx.def)	64
4.2.16	TransSym file (qptransidx.def)	67
4.2.17	Files to set initial values of variational parameters	69
4.2.18	OneBodyG file (greenone.def)	71
4.2.19	TwoBodyG file (greentwo.def)	73
4.3	Output files	75
4.3.1	Output file for variational parameters (***_opt.dat)	75
4.3.2	Output files for variational parameters at each steps (xxx_var_yyy.dat)	75
4.3.3	Output file for gutzwiller factors (***_gutzwiller_opt.dat)	76
4.3.4	Output file for jastrow factors (***_jastrow_opt.dat)	76
4.3.5	Output file for doublonHolon 2-site factors (***_doublonHolon2site_opt.dat)	76
4.3.6	Output file for doublonHolon 4-site factors (***_doublonHolon4site_opt.dat)	76
4.3.7	Output file for pair orbitals (***_orbital_opt.dat)	76
4.3.8	xxx_out_yyy.dat	76
4.3.9	xxx_CalcTimer.dat	77
4.3.10	xxx_time_zzz.dat	78

4.3.11	xxx_cisajs_yyy.dat	78
4.3.12	xxx_cisajscktalt_yyy.dat	78
5	Algorithm	79
5.1	Variational MonteCalro Method	79
5.1.1	Importance sampling	79
5.2	Bogoliubov representation	79
5.3	Relation between Pfaffian Slater determinant and single Slater determinant	80
5.3.1	Relation between f_{ij} and $\Phi_{in\sigma}$	80
5.3.2	Singular value decomposition of f_{ij}	81
6	Acknowledgement	82
A Program for the unrestricted Hartree-Fock approximation		83
A.1	Overview	83
A.1.1	ソースコード	83
A.1.2	コンパイル方法	83
A.1.3	Input files	84
A.2	Usage	85

1

What is mVMC?

1.1 Overview of mVMC

By using mVMC, the following calculation can be done:

- The variational wave function which gives the minimum value of the expected value of energy in the range of the degree of freedoms of variational parameters is numerically generated. The calculation limited to the partial space divided by quantum numbers is also possible.
- The expected values of the physical quantities such as correlation functions can be calculated by using the generated variational wave functions.

The calculation flow in mVMC is shown as follows:

1. Read input files (*.def)
2. Optimize variational parameters α to minimize $\langle \mathcal{H} \rangle$
3. Calculate one body and two body Green functions
4. Output variational parameters and expected values

In calculation, the simple parallelization for the generation of the real space arrangement $|x\rangle$ and the collecting samples and the calculation result of expected energies is implemented. Following the procedure for each cluster computers, the parallelized calculation using MPI is automatically done by indicating the parallel number. However, mVMC cannot execute under the environment where the MPI job is forbidden such as the front-end of system B at ISSP. In mVMC, we use PFAPACK [1] to compute the Pfaffian matrix.

1.2 License

The distribution of the program package and the source codes for mVMC follows GNU General Public License version 3 (GPL v3).

1.3 Copyright

©2016- The University of Tokyo All rights reserved.

This software is developed under the support of “*Project for advancement of software usability in materials science*” by The Institute for Solid State Physics, The University of Tokyo.

1.4 Contributors

This software is developed by following contributors.

- ver.1.0 (released at 2016/xx/xx)
 - Developers
 - * Takahiro Misawa
(The Institute for Solid State Physics, The University of Tokyo)
 - * Satoshi Morita
(The Institute for Solid State Physics, The University of Tokyo)
 - * Takahiro Ogoe
(Department of Applied Physics, The University of Tokyo)
 - * Kota Ido
(Department of Applied Physics, The University of Tokyo)
 - * Masatoshi Imada
(Department of Applied Physics, The University of Tokyo)
 - * Mitsuaki Kawamura
(The Institute for Solid State Physics, The University of Tokyo)
 - * Kazusyohi Yoshimi
(The Institute for Solid State Physics, The University of Tokyo)
 - Project coordinator
 - * Takeo Kato
(The Institute for Solid State Physics, The University of Tokyo)

1.5 Operating environment

mVMC is tested in the following platform:

- The supercomputer system-B “sekirei” and system-C “maki” in ISSP
- K computer
- OpenMPI + Intel Compiler + MKL
- MPICH + Intel Compiler + MKL
- MPICH + GNU Compiler + MKL

2

How to use mVMC?

2.1 Prerequisite

mVMC requires the following packages:

- C compiler (intel, Fujitsu, GNU, etc.)
- ScaLAPACK library (intel MKL, Fujitsu, ATLAS, etc.)
- MPI library

Tips

E. g. / Settings of intel compiler

When you use the intel compiler, you can use easily scripts attached to the compiler. In the case of the bash in 64 bit OS, write the following in your `~/.bashrc`:

```
source /opt/intel/bin/compilervars.sh intel64
```

or

```
source /opt/intel/bin/iccvars.sh intel64
source /opt/intel/mkl/bin/mklvars.sh
```

Please read manuals of your compiler/library for more information.

2.2 Installation

You can download mVMC in the following place.

You can obtain the mVMC directory by typing

```
$ tar xzvf mVMC-xxx.tar.gz
```

There are two kind of procedures to install mVMC.

2.2.1 Using config.sh

Please run `config.sh` script in the mVMC directory as follow (for ISSP system-B "sekirei"):

```
$ bash config.sh sekirei
```

Then environmental configuration file `make.sys` is generated in `src/` directory. The command-line argument of `config.sh` is as follows:

- `sekirei` : ISSP system-B "sekirei"
- `kei` : K computer and ISSP system-C "maki"
- `openmpi-intel` : OpenMPI + intel compiler
- `mpich-intel` : MPICH + intel compiler
- `mpich-gnu-mkl` : MPICH + GNU Compiler + MKL
- `gnu` : GCC

`make.sys` is as follows (for ISSP-system-B "sekirei"):

```
CC = mpicc
LIB = -L$(MKLR00T)/lib/intel64 -lmkl_scalapack_lp64 -lmkl_intel_lp64 \
      -lmkl_intel_thread -lmkl_core -lmkl_blacs_sgimpt_lp64 -lpthread -lm
CFLAGS = -O3 -no-prec-div -xHost -qopenmp -Wno-unknown-pragmas
REPORT = -qopt-report-phase=openmp -qopt-report-phase=par
OPTION = -D_mpi_use
CP = cp -f -v
AR = ar rv
FORT = ifort
FFLAGS = -O3 -implicitnone -xHost
SMFTFLAGS = -O3 -no-ansi-alias -xHost -DMEXP=19937 -DHAVE_SSE2
```

We explain macros of this file as:

- `CC` : The C Compilation command (`mpicc`, `mpifccpx`)
- `Lib` : Compilation options for ScaLAPACK.
- `CFLAGS` : Other compilation options.
- `FORT` : Fortran compilation command (`ifort`, `frtpx`)

Then you are ready to compile mVMC. Please type

```
$ make mvmc
```


and obtain `vmc.out` and `vmcdry.out` in `src/` directory; you should add this directory to the `$PATH`.

Tips

You can make a `PATH` to mVMC as follows:

```
$ export PATH=${PATH}:mVMC_top_directory/src/
```

If you keep this `PATH`, you should write above in `~/.bashrc` (for `bash` as a login shell)

2.2.2 Using cmake

Tips

Before using `cmake` for `sekirei`, you must type

```
source /home/issp/materiapps/tool/env.sh
```

while for `maki`, you must type

```
source /global/app/materiapps/tool/env.sh
```

We can compile mVMC as

```
cd $HOME/build/mvmc
cmake -DCONFIG=gcc $PathTomVMC
make
```

Here, we set a path to mVMC as `$PathTomVMC` and to a build directory as `$HOME/build/mvmc`. After compiling, a `src` folder is constructed below a `$HOME/build/mvmc` folder and obtain executables `vmc.out` and `vmcdry.out` in `src/` directory.

In the above example, we compile mVMC by using a `gcc` compiler. We can select a compiler by using following options

- `sekirei` : ISSP system-B "sekirei"
- `fujitsu` : Fujitsu compiler (ISSP system-C "maki")
- `intel` : intel compiler + Linux PC
- `gcc` : GCC compiler + Linux PC.


An example for compiling mVMC by an intel compiler is shown as follows,

```
mkdir ./build
cd ./build
cmake -DCONFIG=intel ../
make
```

After compiling, a `src` folder is made below the `build` folder and executes `vmc.out` and `vmcdry.out` are made in the `src` folder. It is noted that we must delete the `build` folder and do the above works again when we change the compilers.

2.3 Directory structure

When mVMC-xxx.tar.gz is unzipped, the following directory structure is composed.

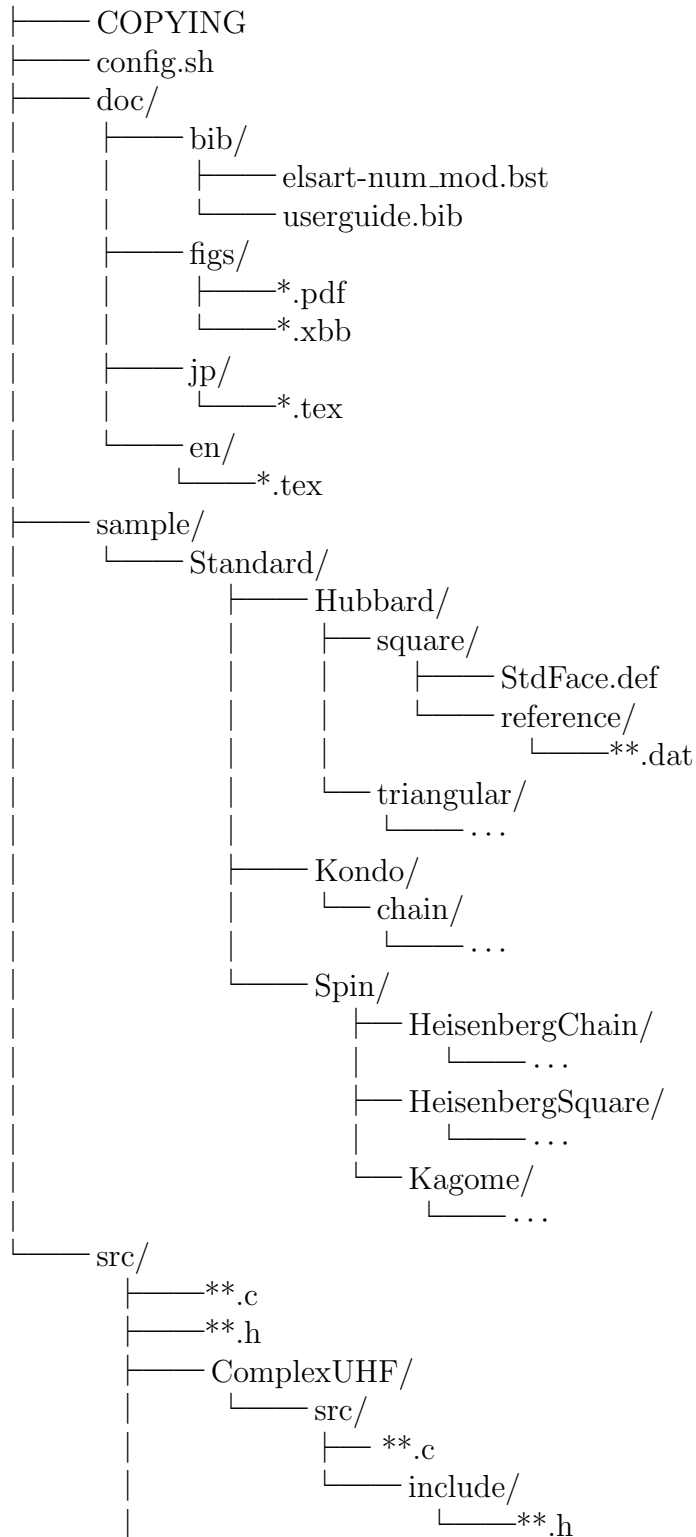

```
|—— makefile_src
|—— include/
|   |—— **.h
|—— StdFace/
|   |—— **.c
|   |—— **.h
|—— pfapack/
|   |—— makefile_pfapack
|   |—— **.f
|—— sfmt/
|   |—— makefile_sfmt
|   |—— **.c
|   |—— **.h
```

2.4 Basic usage

mVMC has two executables; one generates detailed input files and the other perform the main calculation with these files. Here, the basic flows of calculations by using these programs.

1. Prepare a minimal input file

You can choose a model (the Heisenberg model, the Hubbard model, etc.) and a lattice (the square lattice, the triangular lattice, etc.) from ones provided; you can specify some parameters (such as the first/second nearest neighbor hopping integrals, the on-site Coulomb integral, etc.) for them. The input file format is described in the Sec. 4.1.

2. Run

Run a executable `vmcdry.out` in terminal by specifying the name of input file written in previous step. MPI is not used in this step.

```
$ Path/vmcdry.out Input_file_name
```

Then, run a executable `vmc.out` with the *namelist* file generated in the previous step.

```
$ mpiexec -np number_of_processes Path/vmcdry.out namelist.def
```

When you use a queuing system in workstations or super computers, sometimes the number of processes is specified as an argument for the job-submitting command. If you need more information, please refer manuals for your system.

3. Watch calculation logs

Log files are outputted in the current directry which is automatically made in the directory for a calculation scenario. The details of output files are shown in Sec. 4.3.

4. Results

If the calculation is finished normally, the result files are outputted in the current directry. The details of output files are shown in Sec. 4.3.

Tips

The number of threads for OpenMP

If you specify the number of OpenMP threads for mVMC, you should set it as follows (in case of 16 threads) before the running:

```
export OMP_NUM_THREADS=16
```

2.5 Printing version ID

By using `-v` option as follows, you can check which version of mVMC you are using.

```
$ PATH/vmcdry.out -v  
$ PATH/vmc.out -v
```

3

Tutorial

3.1 List of sample files

There are following tutorials in `samples/Standard/`.

- The Hubbard model on the two dimensional square lattice
(`samples/Standard/Hubbard/square/`)
- The Hubbard model on the two dimensional triangular lattice
(`samples/Standard/Hubbard/triangular/`)
- The one dimensional Kondo chain
(`samples/Standard/Kondo/chain/`)
- The one dimensional antiferromagnetic Heisenberg chain
(`samples/Standard/Spin/HeisenbergChain/HeisenbergChain/`)
- The antiferromagnetic Heisenberg model on the two dimensional square lattice
(`samples/Standard/Spin/HeisenbergSquare/`)
- The antiferromagnetic Heisenberg model on the two dimensional Kagome lattice
(`samples/Standard/Spin/Kagome/`)

We can perform these tutorials in the same way. In the following, the tutorial of the one dimensional antiferromagnetic Heisenberg chain is shown.

3.2 Heisenberg model

This tutorial should be performed in

`sample/Standard/Spin/HeisenbergChain/`.

This directory contains the following things:

The input file: `StdFace.def`

reference outputs: `reference/`

In this case, we treat the one dimensional antiferromagnetic Heisenberg chain which has a nearest neighbor spin coupling.

$$\hat{H} = J \sum_{i=1}^L \hat{\mathbf{S}}_i \cdot \hat{\mathbf{S}}_{i+1} \quad (3.1)$$

The input file is as follows:

```
L = 16
Lsub=4
model = "Spin"
lattice = "chain lattice"
J = 1.0
2Sz = 0
NMPtrans=1
```

In this tutorial, J and the number of sites are set to 1 (arbitrary unit) and 16 respectively.

Making detailed input files

In mVMC, the detailed input files should be made as a first step. We first execute the following command.

```
$ Path/vmcdry.out StdFace.def
```

Then, we can see the following standard outputs in the terminal.

```
##### Standard Interface Mode STARTS #####

Open Standard-Mode Inputfile StdFace.def

KEYWORD : l           | VALUE : 16
KEYWORD : lsub        | VALUE : 4
KEYWORD : model       | VALUE : spin
KEYWORD : lattice     | VALUE : chain
KEYWORD : j           | VALUE : 1.0
KEYWORD : nmptrans    | VALUE : 1

##### Parameter Summary #####

@ Lattice Size & Shape

      L = 16
Lsub = 4
      L = 16
      W = 1
```

```

        phase0 = 0.00000      ##### DEFAULT VALUE IS USED #####

@ Hamiltonian

        2S = 1                ##### DEFAULT VALUE IS USED #####
        h = 0.00000          ##### DEFAULT VALUE IS USED #####
        Gamma = 0.00000      ##### DEFAULT VALUE IS USED #####
        D = 0.00000          ##### DEFAULT VALUE IS USED #####
        J0x = 1.00000
        J0y = 1.00000
        J0z = 1.00000

@ Numerical conditions

        Lsub = 4
        Wsub = 1
        ioutputmode = 1      ##### DEFAULT VALUE IS USED #####

##### Print Expert input files #####

qptransidx.def is written.
        filehead = zvo      ##### DEFAULT VALUE IS USED #####
        filehead = zqp      ##### DEFAULT VALUE IS USED #####
        NVMCCalMode = 0      ##### DEFAULT VALUE IS USED #####
        NLanczosMode = 0     ##### DEFAULT VALUE IS USED #####
        NDataIdxStart = 1    ##### DEFAULT VALUE IS USED #####
        NDataQtySmp = 1      ##### DEFAULT VALUE IS USED #####
        NSPGaussLeg = 8      ##### DEFAULT VALUE IS USED #####
        NMPTrans = 1
        NSROptItrStep = 1000 ##### DEFAULT VALUE IS USED #####
        NSROptItrSmp = 100   ##### DEFAULT VALUE IS USED #####
        NVMCWarmUp = 10      ##### DEFAULT VALUE IS USED #####
        NVMCInterval = 1     ##### DEFAULT VALUE IS USED #####
        NVMCSSample = 1000   ##### DEFAULT VALUE IS USED #####
        NExUpdatePath = 2
        RndSeed = 123456789  ##### DEFAULT VALUE IS USED #####
        NSplitSize = 1       ##### DEFAULT VALUE IS USED #####
        NStore = 0           ##### DEFAULT VALUE IS USED #####
        DSOptRedCut = 0.00100 ##### DEFAULT VALUE IS USED #####
        DSOptStaDel = 0.02000 ##### DEFAULT VALUE IS USED #####
        DSOptStepDt = 0.02000 ##### DEFAULT VALUE IS USED #####
        NSPStot = 0          ##### DEFAULT VALUE IS USED #####
        ComplexType = 0      ##### DEFAULT VALUE IS USED #####
locspn.def is written.
trans.def is written.
interall.def is written.
jastrowidx.def is written.
coulombintra.def is written.

```



```

coulombinter.def is written.
hund.def is written.
exchange.def is written.
orbitalidx.def is written.
gutzwilleridx.def is written.
namelist.def is written.
modpara.def is written.
greenone.def is written.
greentwo.def is written.

```

```
##### Input files are generated. #####
```

In the beginning of this run, files describing the detail of considered Hamiltonian

- locspin.def
- trans.def
- coulombinter.def
- coulombintra.def
- exchange.def
- hund.def
- namelist.def
- modpara.def

and files for setting variational parameters

- gutzwilleridx.def
- jastrowidx.def
- orbitalidx.def
- qptransidx.def

and files specifying elements of correlation functions that will be calculated

- greenone.def
- greentwo.def

are generated. The details of these files are shown in Sec. 4.2.

Running

By reading the detailed input files, mVMC executes the calculation of optimizing the variational parameters.

We execute the following command.

```
$ mpiexec -np number_of_processes Path/vmcdry.out namelist.def
```

The MPI command depends on your system (such as `mpiexec`, `mpirun`, `mpijob`, `poe`, etc.). Then, the calculation starts and the following standard message is outputted in the terminal.

```
-----
Start: Read *def files.
  Read File namelist.def .
  Read File 'modpara.def' for ModPara.
  Read File 'locspn.def' for LocSpin.
  Read File 'trans.def' for Trans.
  Read File 'coulombintra.def' for CoulombIntra.
  Read File 'coulombinter.def' for CoulombInter.
  Read File 'hund.def' for Hund.
  Read File 'exchange.def' for Exchange.
  Read File 'gutzwilleridx.def' for Gutzwiller.
  Read File 'jastrowidx.def' for Jastrow.
  Read File 'orbitalidx.def' for Orbital.
  Read File 'qptransidx.def' for TransSym.
  Read File 'greenone.def' for OneBodyG.
  Read File 'greentwo.def' for TwoBodyG.
End   : Read *def files.
Start: Read parameters from *def files.
End   : Read parameters from *def files.
Start: Set memories.
End   : Set memories.
Start: Initialize parameters.
End   : Initialize parameters.
Start: Initialize variables for quantum projection.
End   : Initialize variables for quantum projection.
Start: Optimize VMC parameters.
End   : Optimize VMC parameters.
-----
```

Under the calculation, the following file is outputted:

```
zvo_SRinfo.dat
zvo_out_001.dat
zvo_time_001.dat
zvo_var_001.dat
zvo_CalcTimer.dat
```

In `zvo_out_001.dat`, the following quantities are outputted at each bins

$$\langle H \rangle, \langle H^2 \rangle, \frac{\langle H^2 \rangle - \langle H \rangle^2}{\langle H \rangle^2}.$$

By seeing these informations, the conversion of the calculation can be judged. By using gnuplot, we can check the evolution of $\langle H \rangle$ as follows:

```
plot "zvo_out_001.dat" u 1
```

The details of these outputted files are shown in Sec. 4.3.

Output results

After finishing calculation normally, the files for the energy, the deviation, the optimized variational parameters and the time of execution for each calculation steps are outputted. In the following, the outputted files are shown

```
gutzwiller_opt.dat
jastrow_opt.dat
orbital_opt.dat
zqp_opt.dat
ClacTimer.dat
```

The details of these outputted files are shown in Sec. 4.3.

Calculation of Green functions

After changing the value of `NVMCCalMode` from 0 to 1 in `modpara.def` file, we execute the following command. When we add `"zqp_opt.dat"` after `"namelist.dat"` as a commandline argument as follows, the calculation of Green functions is done by using the optimized variational parameters.

```
$ Path/vmc.out namelist.def zqp_opt.dat
```

After finishing the calculation, the following files are outputted.

```
zvo_cisajs_001.dat
zvo_cisajsckalt_001.dat
```

The details of these outputted files are shown in Sec. 4.3.

In mVMC, the calculation is done by reading input files categorized by the following six parts.

- (1) **List:** Specify the kinds and names of input files.
- (2) **Basic parameters:** Specify the basic parameters.

- (3) **Set Hamiltonian:** Specify the Hamiltonian.
- (4) **Set condition of variational parameters :** Specify the variational parameters to be optimized.
- (5) **Initial variational parameters:** Specify the initial values of the variational parameters.
- (6) **Output:** Specify the components of one-body and two-body Green's functions to be outputted.

The calculation for complex models can be done by directly making above input files. The details for each files are shown in Sec. 4.2.

4

File specification

4.1 Input files for `vmcdry.out`

An example of input file for the standard mode is shown below:

```
W = 2
L = 4
model = "spin"

lattice = "triangular lattice"
//mu = 1.0
// t = -1.0
// t' = -0.5
// U = 8.0
//V = 4.0
//V'=2.0
J = -1.0
J'=-0.5
// nelec = 8
```

Basic rules for input files

- In each line, there is a set of a keyword (before an “=”) and a parameter(after an “=”); they are separated by “=”.
- You can describe keywords in a random order.
- Empty lines and lines beginning in a “//”(comment outs) are skipped.
- Upper- and lowercase are not distinguished. Double quotes and blanks are ignored.
- There are three kinds of parameters.
 1. Parameters that must be specified (if not, `vmcdry.out` will stop with error messages),
 2. Parameters that is not necessary be specified (if not, default values are used),
 3. Parameters that must not be specified (if specified, `vmcdry.out` will stop with error messages).An example of 3 is transfer t for the Heisenberg spin system. If you choose “model=spin”, you should not specify “ t ”.

We explain each keywords as follows:

4.1.1 Parameters about the kind of a calculation

- **model**

Type : String (Choose from "Fermion Hubbard", "Spin", "Kondo Lattice")

Description : The target model is specified with this parameter; "Fermion Hubbard" denotes the canonical ensemble of the Fermion in the Hubbard model

$$H = -\mu \sum_{i\sigma} c_{i\sigma}^\dagger c_{i\sigma} - \sum_{i \neq j\sigma} t_{ij} c_{i\sigma}^\dagger c_{j\sigma} + \sum_i U n_{i\uparrow} n_{i\downarrow} + \sum_{i \neq j} V_{ij} n_i n_j, \quad (4.1)$$

"Spin" denotes canonical ensemble in the Spin model ($\{\sigma_1, \sigma_2\} = x, y, z$)

$$H = -h \sum_i S_{iz} - \Gamma \sum_i S_{ix} + D \sum_i S_{iz} S_{iz} + \sum_{ij, \sigma_1} J_{ij\sigma_1} S_{i\sigma_1} S_{j\sigma_1} + \sum_{ij, \sigma_1 \neq \sigma_2} J_{ij\sigma_1\sigma_2} S_{i\sigma_1} S_{j\sigma_2}, \quad (4.2)$$

"Kondo Lattice" denotes canonical ensemble in the Kondo lattice model

$$H = -\mu \sum_{i\sigma} c_{i\sigma}^\dagger c_{i\sigma} - t \sum_{\langle ij \rangle \sigma} c_{i\sigma}^\dagger c_{j\sigma} + \frac{J}{2} \sum_i \left\{ S_i^+ c_{i\downarrow}^\dagger c_{i\uparrow} + S_i^- c_{i\uparrow}^\dagger c_{i\downarrow} + S_{iz} (n_{i\uparrow} - n_{i\downarrow}) \right\}. \quad (4.3)$$

- **lattice**

Type : String (Choose from "Chain Lattice", "Square Lattice", "Triangular Lattice", "Honeycomb Lattice", "Kagome", "Ladder")

Description : The lattice shape is specified with this parameter; above words denote the one dimensional chain lattice (Fig. 4.1(a)), the two dimensional square lattice (Fig. 4.1(b)), the two dimensional triangular lattice (Fig. 4.1(c)), the two dimensional anisotropic honeycomb lattice (Fig. 4.2), the Kagome Lattice (Fig. 4.3), and the ladder lattice (Fig. 4.4), respectively.

4.1.2 Parameters for the lattice

Chain [Fig. 4.1(a)]

- **L**

Type : Integer

Description : The length of the chain is specified with this parameter.

Ladder (Fig. 4.4)

- **L**

Type : Integer

Description : The length of the ladder is specified with this parameter.

- **W**

Type : Integer

Description : The number of the ladder is specified with this parameter.

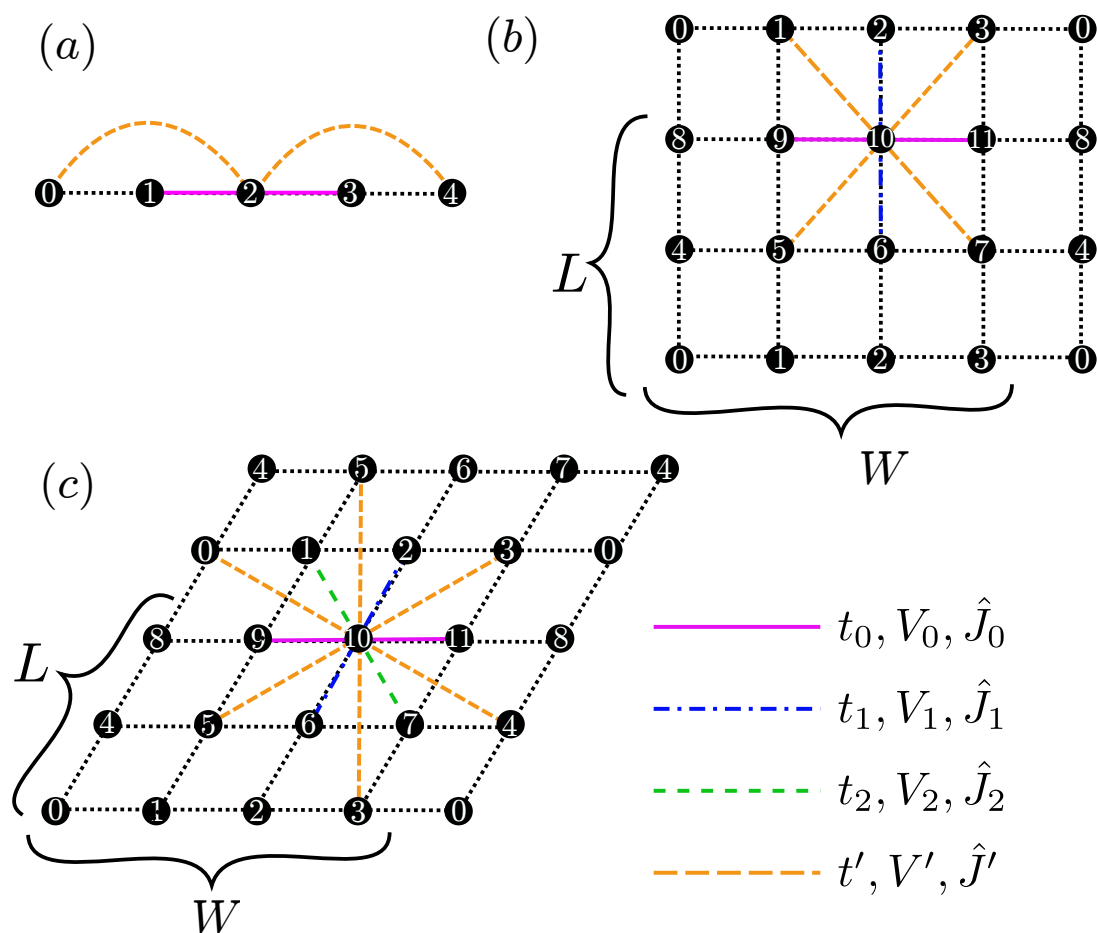


Figure 4.1: Schematic illustration of (a) one dimensional chain lattice, (b) two dimensional square lattice, and (c) two dimensional triangular lattice. They have t , V , and J as a nearest neighbor hopping, an onsite Coulomb integral, and a spin-coupling constant, respectively (magenta solid lines); They also have t' , V' , and J' as a next nearest neighbor hopping, onsite Coulomb integral, and spin-coupling constant, respectively (green dashed line).

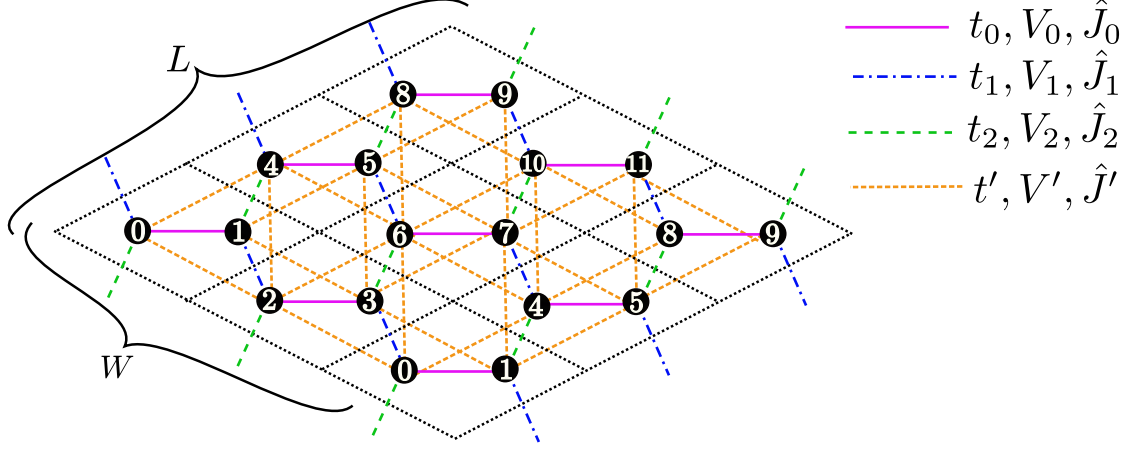


Figure 4.2: Schematic illustration of the anisotropic honeycomb lattice. The nearest neighbor hopping integral, spin coupling, offsite Coulomb integral depend on the bond direction. Those between second nearest neighbor sites are not supported.

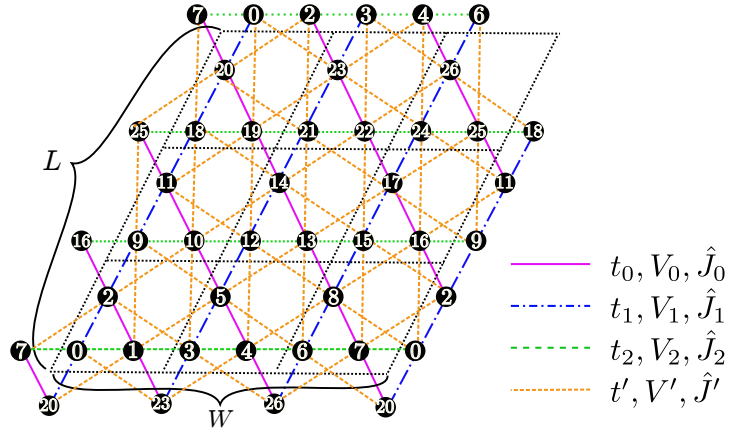


Figure 4.3: Schematic illustration of the Kagome lattice.

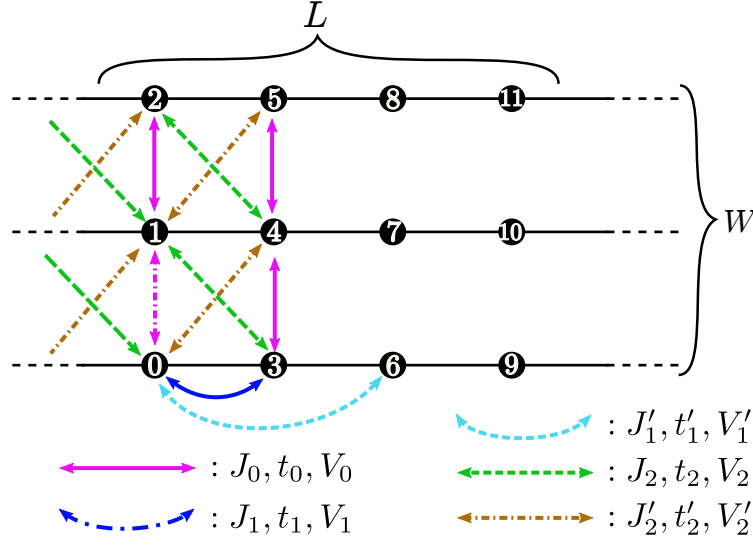
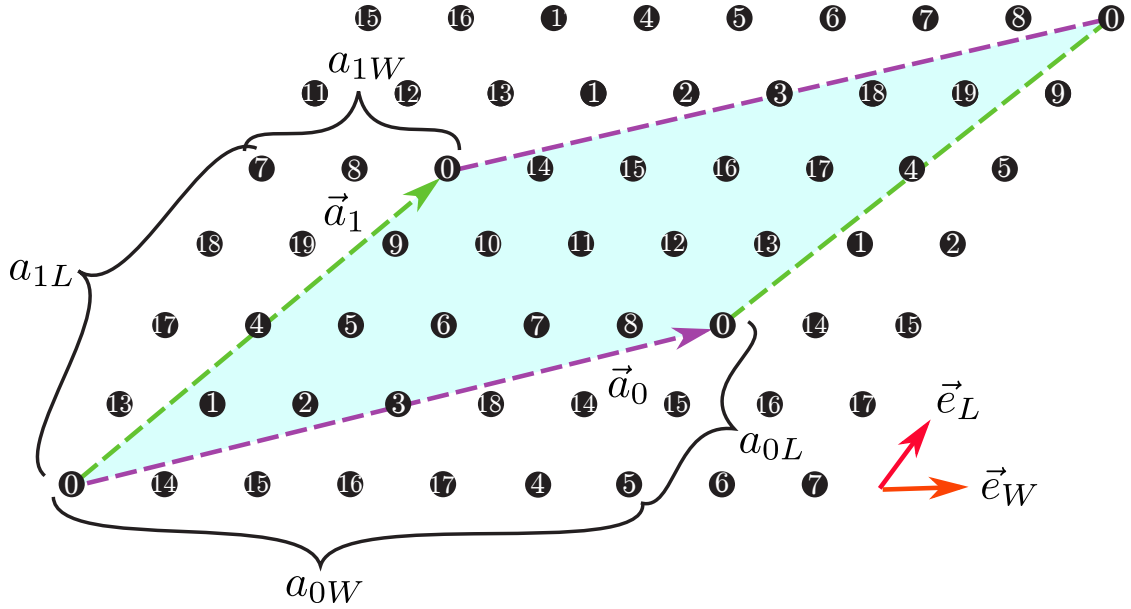


Figure 4.4: Schematic illustration of the ladder lattice.

Figure 4.5: The shape of the numerical cell when $\mathbf{a}_0 = (6, 2)$, $\mathbf{a}_1 = (2, 4)$ in the triangular lattice. The region surrounded by \mathbf{a}_0 (Magenta dashed arrow) and \mathbf{a}_1 (Green dashed arrow) becomes the cell to be calculated (20 sites).

Square lattice [Fig. 4.1(b)], Triangular lattice[Fig. 4.1(c)], Honeycomb lattice(Fig. 4.2), Kagome lattice(Fig. 4.3)

In these lattices, we can specify the shape of the numerical cell by using the following two methods.

- W, L

Type : Integer

Description : The alignment of original unit cells (dashed black lines in Figs. 4.1 - 4.3) is specified with these parameter.

- a0W, a0L, a1W, a1L

Type : Integer

Description : We can specify two vectors ($\mathbf{a}_0, \mathbf{a}_1$) that surrounds the numerical cell (Fig. 4.5). These vectors should be specified in the Fractional coordinate.

If we use both of these method, `vmcdry.out` stops.

We can check the shape of the numerical cell by using a file `lattice.gp`(only for square, triangular, honeycomb, and kagome lattice) which is written in the Standard mode. This file can be read by `gnuplot` as follows:

```
$ gnuplot lattice.gp
```

4.1.3 Sublattice

By using the following parameters, we can force the pair-orbital symmetrical to the translation of the sublattice.

- a0Wsub, a0Lsub, a1Wsub, a1Lsub, Wsub, Lsub

Type : Positive integer. In the default setting, `a0Wsub=a0W`, `a0Lsub=a0L`, `a1Wsub=a1W`, `a1Lsub=a1L`, `Wsub=W`, and `Lsub=L`. Namely, there is no sublattice.

Description : We can specify these parameter as we specify `a0W`, `a0L`, `a1W`, `a1L`, `W`, `L`. If the sublattice is incommensurate with the original lattice, `vmcdry.out` stops.

4.1.4 Parameters for the Hamiltonian

A default value is set as 0 unless a specific value is not defined in a description. Table 4.1 shows the parameters for each models. In the case of a complex type, a file format is “*a real part, an imaginary part*” while in the case of a real type, only “*a real part*”.

Local terms

- μ

Type : Real

Description : (Hubbard and Kondo lattice model) The chemical potential μ (including the site potential) is specified with this parameter.

- U

Type : Real

Description : (Hubbard and Kondo lattice model) The onsite Coulomb integral U is specified with this parameter.

- Jx, Jy, Jz, Jxy, Jyx, Jxz, Jzx, Jyz, Jzy

Type : Real

Description : (Kondo lattice model) The spin-coupling constant between the valence and the local electrons is specified with this parameter. If the exchange coupling J is specified in the input file, instead of Jx, Jy, Jz, the diagonal exchange couplings, Jx, Jy, Jz, are set as $Jx = Jy = Jz = J$. When both the set of exchange couplings (Jx, Jy, Jz) and the exchange coupling J are specified in the input file, vmcdry.out will stop.

- h, Gamma, D

Type : Real

Description : (Spin model) The longitudinal magnetic field, transverse magnetic field, and the single-site anisotropy parameter are specified with these parameters. The single-site anisotropy parameter is not available for `model=SpinGBoost`.

The non-local terms described below should be specified in different ways depending on the lattice structure: For `lattice=Ladder`, the non-local terms are specified in the different way from `lattice=Chain Lattice`, `Square Lattice`, `Triangular Lattice`, `Honeycomb Lattice`, `Kagome`. Below, the available parameters for each lattice are shown in Table 4.1.

Interactions	1D chain	2D square	2D triangular	Honeycomb	Kagome	Ladder
J, t, V (simplified)	○	○	○	○	○	-
J', t', V'	○	○	○	○	○	-
J0, t0, V0	○	○	○	○	○	○
J1, t1, V1	-	○	○	○	○	○
J2, t2, V2	-	-	○	○	○	○
J1', t1', V1'	-	-	-	-	-	○
J2', t2', V2'	-	-	-	-	-	○

Table 4.1: Interactions for each models defined in an input file. We can define spin couplings as matrix format.

Non-local terms[for Ladder (Fig. 4.4)]

- t0, t1, t1', t2, t2'

Type : Complex

Description : (Hubbard and Kondo lattice model) Hopping integrals in the ladder lattice (See Fig. 4.4) is specified with this parameter.

- $V_0, V_1, V_1', V_2, V_2'$

Type : Real

Description : (Hubbard and Kondo lattice model) Offsite Coulomb integrals on the ladder lattice (Fig. 4.2) are specified with these parameters.

- $J_{0x}, J_{0y}, J_{0z}, J_{0xy}, J_{0yx}, J_{0xz}, J_{0zx}, J_{0yz}, J_{0zy}$
- $J_{1x}, J_{1y}, J_{1z}, J_{1xy}, J_{1yx}, J_{1xz}, J_{1zx}, J_{1yz}, J_{1zy}$
- $J_{1'x}, J_{1'y}, J_{1'z}, J_{1'xy}, J_{1'yx}, J_{1'xz}, J_{1'zx}, J_{1'yz}, J_{1'zy}$
- $J_{2x}, J_{2y}, J_{2z}, J_{2xy}, J_{2yx}, J_{2xz}, J_{2zx}, J_{2yz}, J_{2zy}$
- $J_{2'x}, J_{2'y}, J_{2'z}, J_{2'xy}, J_{2'yx}, J_{2'xz}, J_{2'zx}, J_{2'yz}, J_{2'zy}$

Type : Real

Description : (Spin model) Spin-coupling constants in the ladder lattice (See Fig. 4.4) are specified with these parameter. If the simplified parameter J_0 is specified in the input file instead of the diagonal couplings, J_{0x}, J_{0y}, J_{0z} , these diagonal couplings are set as $J_{0x} = J_{0y} = J_{0z} = J_0$. If both J_0 and the set of the couplings (J_{0x}, J_{0y}, J_{0z}) are specified, `vmcdry.out` will stop. The above rules are also valid for the simplified parameters, J_1, J_1', J_2 , and J_2' .

Non-local terms [other than Ladder (Figs. 4.1, 4.2, 4.3)]

- t_0, t_1, t_2

Type : Complex

Description : (Hubbard and Kondo lattice model) Nearest neighbor hoppings for each direction (See Figs. 4.1-4.3. These bonds are depicted with different line styles.) are specified with these parameter. If there is no bond dependence of the nearest-neighbor hoppings, the simplified parameter t is available to specify t_0, t_1 , and t_2 as $t_0 = t_1 = t_2 = t$. If both t and the set of the hoppings (t_0, t_1, t_2) are specified, `vmcdry.out` will stop.

- V_0, V_1, V_2

Type : Real

Description : (Hubbard and Kondo lattice model) Nearest-neighbor offsite Coulomb integrals V for each direction (See Figs. 4.1-4.3. These bonds are depicted with different line styles.) are specified with these parameters. If there is no bond dependence of the nearest-neighbor offsite Coulomb integrals, the simplified parameter V is available to specify V_0, V_1 , and V_2 as $V_0 = V_1 = V_2 = V$. If both V and the set of the Coulomb integrals (V_0, V_1, V_2) are specified, `vmcdry.out` will stop.

- $J_{0x}, J_{0y}, J_{0z}, J_{0xy}, J_{0yx}, J_{0xz}, J_{0zx}, J_{0yz}, J_{0zy}$
- $J_{1x}, J_{1y}, J_{1z}, J_{1xy}, J_{1yx}, J_{1xz}, J_{1zx}, J_{1yz}, J_{1zy}$
- $J_{2x}, J_{2y}, J_{2z}, J_{2xy}, J_{2yx}, J_{2xz}, J_{2zx}, J_{2yz}, J_{2zy}$

Type : Real

Description : (Spin model) Nearest-neighbor exchange couplings for each direction are specified with the parameters. If the simplified parameter J_0 is specified, instead of J_{0x} , J_{0y} , J_{0z} , the exchange couplings, J_{0x} , J_{0y} , J_{0z} , are set as $J_{0x} = J_{0y} = J_{0z} = J_0$. If both J_0 and the set of the exchange couplings (J_{0x} , J_{0y} , J_{0z}) are specified, vmcdry.out will stop. The above rules are valid for J_1 and J_2 .

If there is no bond dependence of the nearest-neighbor exchange couplings, the simplified parameters, J_x , J_y , J_z , J_{xy} , J_{yx} , J_{xz} , J_{zx} , J_{yz} , J_{zy} , are available to specify the exchange couplings for every bond as $J_{0x} = J_{1x} = J_{2x} = J_x$. If any simplified parameter ($J_x \sim J_{zy}$) is specified in addition to its counter parts ($J_{0x} \sim J_{2zy}$), vmcdry.out will stop. Below, examples of parameter sets for nearest-neighbor exchange couplings are shown.

- If there are no bond-dependent, no anisotropic and offdiagonal exchange couplings (such as J_{xy}), please specify J in the input file.
- If there are no bond-dependent and offdiagonal exchange couplings but are anisotropic couplings, please specify the non-zero couplings in the diagonal parameters, J_x , J_y , J_z .
- If there are no bond-dependent exchange couplings but are anisotropic and offdiagonal exchange couplings, please specify the non-zero couplings in the nine parameters, J_x , J_y , J_z , J_{xy} , J_{yz} , J_{xz} , J_{yx} , J_{zy} , J_{zx} .
- If there are no anisotropic and offdiagonal exchange couplings, but are bond-dependent couplings, please specify the non-zero couplings in the three parameters, J_0 , J_1 , J_2 .
- If there are no anisotropic exchange couplings, but are bond-dependent and offdiagonal couplings, please specify the non-zero couplings in the nine parameters, J_{0x} , J_{0y} , J_{0z} , J_{1x} , J_{1y} , J_{1z} , J_{2x} , J_{2y} , J_{2z} .
- If there are bond-dependent, anisotropic and offdiagonal exchange couplings, please specify the non-zero couplings in the twenty-seven parameters from J_{0x} to J_{2zy} .

- t'

Type : Complex

Description : (Hubbard and Kondo lattice model) Nearest neighbor hoppings for each direction (See Figs. 4.1-4.3) are specified with these parameter.

- V'

Type : Real

Description : (Hubbard and Kondo lattice model) Nearest neighbor-offsite Coulomb integrals V for each direction (See Figs. 4.1-4.3) are specified with these parameters.

- $J'x$, $J'y$, $J'z$, $J'xy$, $J'yx$, $J'xz$, $J'zx$, $J'yz$, $J'zy$

Type : Real

Description : (Spin model) Second nearest-neighbor exchange couplings are specified. However, for `lattice = Honeycomb Lattice` and `lattice = Kagome` with

`model=SpinGBoost`, the second nearest-neighbor exchange couplings are not available in the *Standard* mode. If the simplified parameter `J'` is specified, instead of `J'x`, `J'y`, `J'z`, the exchange couplings are set as `J'x = J'y = J'z = J'`. If both `J'` and the set of the couplings (`J'x`, `J'y`, `J'z`), `vmcdry.out` will stop.

- `phase0`, `phase1`

Type : Double complex (1.0 as defaults)

Description : We can specify the phase for the prefactor for the hopping through the cell boundary with these parameter. These factor for the \mathbf{a}_0 direction and the \mathbf{a}_1 direction can be specified independently. For the one-dimensional system, only `phase0` can be used. For example, a hopping from i -th site to $i + 1$ -th site through the cell boundary with the positive direction becomes as

$$\exp(i \times \text{phase0}) \times t \hat{c}_{i+1\sigma}^\dagger \hat{c}_{i\sigma} + \exp(-i \times \text{phase0}) \times t^* \hat{c}_{i\sigma}^\dagger \hat{c}_{i+1\sigma} \quad (4.4)$$

4.1.5 Parameters for the numerical condition

- `nelec`

Type : int-type (must be specified)

Description : The number of itinerant electrons. It is the sum of the \uparrow and \downarrow electrons.

- `NVMCCalMode`

Type : int-type (default value: 0)

Description : [0] Optimization of variational parameters, [1] Calculation of one body and two body Green's functions.

- `NDataIdxStart`

Type : int-type (default value: 1)

Description : An integer for numbering of output files. For `NVMCCalMode = 0`, `NDataIdxStart` is added at the end of the output files. For `NVMCCalMode = 1`, the files are outputted with the number from `NDataIdxStart` to `NDataIdxStart + NDataQtySmp - 1`.

- `NDataQtySmp`

Type : int-type (default value: 1)

Description : The set number for outputted files (only used for `NVMCCalMode = 1`).

- `NSPGaussLeg`

Type : int-type (Positive integer, default value: 1)

Description : The mesh number for the Gauss-legendre quadrature about β integration (S_y rotation) for the spin quantum-number projection in actual numerical calculation.

- **NSPStot**
Type : int-type (greater than 0, default value: 0)
Description : The spin quantum-number.
- **NMPTrans**
Type : int-type (Positive integer. As a default, The number of translational vectors in the sublattice)
Description : The number of the momentum and lattice translational quantum-number projection. In the case of not to apply the projection, this value must be set as 1.
- **NSROptItrStep**
Type : int-type (Positive integer, default value: 1000)
Description : The whole step number to optimize variational parameters by SR method. Only used for NVMCCalMode=0.
- **NSROptItrSmp**
Type : int-type (Positive integer, default value: NSROptItrStep/10)
Description : In the NSROptItrStep step, the average values of the each variational parameters at the NSROptItrStep step are adopted as the optimized values. Only used for NVMCCalMode=0.
- **DSROptRedCut**
Type : double-type (default value: 0.001)
Description : The stabilized factor for the SR method by truncation of redundant directions corresponding to ε_{wf} in the ref. [2].
- **DSROptStaDel**
Type : double-type (default value: 0.02)
Description : The stabilized factor for the SR method by modifying diagonal elements in the overwrap matrix corresponding to ε in the ref. [2].
- **DSROptStepDt**
Type : double-type (default value: 0.02)
Description : The time step using in the SR method.
- **NVMCWarmUp**
Type : int-type (Positive integer, default value: 10)
Description : Idling number for the Malkov chain Montecarlo Methods.
- **NVMCInterval**
Type : int-type (Positive integer, default value: 1)
Description : The interval step between samples. The local update will be performed $N_{\text{site}} \times \text{NVMCInterval}$ times.

- **NVMCSample**

Type : int-type (Positive integer, default value: 1000)

Description : The sample numbers to calculate the expected values.

- **NExUpdatePath**

Type : int-type (Positive integer)

Description : The option for local update about exchange terms. 0: not update, 1: update. The default value is set as 1 when the local spin exists, otherwise 0.

- **RndSeed**

Type : int-type (default value: 123456789)

Description : The initial seed of generating random number. For MPI parallelization, the initial seeds are given by **RndSeed**+my rank+1 at each ranks.

- **NSplitSize**

Type : int-type (Positive integer, default value: 1)

Description : The number of processes of MPI parallelization.

- **NStore**

Type : int-type (Positive integer, default value: 0)

Description : The option of applying matrix-matrix product to calculate expected values $\langle O_k O_l \rangle$ (0: off, 1: on).

- **ComplexType**

Type : int-type (0 or 1. 0 as a default)

Description : If it is 0, only the real part of the variational parameters are optimized. And the real and the imaginary part of them are optimized if this parameter is 1.

- **OutputMode**

Type : Choose from "none", "correlation", and "full" (correlation as a default)

Description : Indices of correlation functions are specified with this keyword.

"none" indicates correlation functions will not calculated. When **outputmode="correlation"**, $\langle c_{i\sigma}^\dagger c_{i\sigma} \rangle$ is computed at all i, σ , and $\langle c_{i\sigma}^\dagger c_{i\sigma} c_{j\sigma'}^\dagger c_{j\sigma'} \rangle$ is computed at all i, j, σ, σ' . If "full" is selected, $\langle c_{i\sigma}^\dagger c_{j\sigma'} \rangle$ is computed at all i, j, σ, σ' , and $\langle c_{i_1\sigma}^\dagger c_{i_2\sigma} c_{i_3\sigma'}^\dagger c_{i_4\sigma'} \rangle$ is computed at all $i_1, i_2, i_3, i_4, \sigma, \sigma'$.

In spin system, indices are specified as those on the Bogoliubov representation (See 5.2).

- **CDataFileHead**

Type : string-type (default : "zvo")

Description : A header for output files. For example, the output filename for one body Green's function becomes "xxx_cisajs_yyy.dat" (xxx are characters set by **CDataFileHead** and yyy are numbers given by numbers from **NDataIdxStart** to **NDataIdxStart + NDataQtySmp**).

- CParaFileHead

Type : string-type (default : "zqp")

Description : A header for output files of the optimized variational parameters. For example, the optimized variational parameters are outputted as **zzz_opt_yyy.dat** (zzz are characters set by CParaFileHead and yyy are numbers given by numbers from NDataIdxStart to NDataIdxStart + NDataQtySmp-1).

4.2 Detailed input files

In this section, detailed input files (*.def) are explained. Input files are categorized by the following six parts. The files that are listed in parentheses correspond to the file made by vmcdry.out.

(1) List:

No keyword (namelist.def): This file is a list of input file names with keywords. Each keywords is fixed, but file names are free to be determined.

(2) Basic parameters:

ModPara (modpara.def): Set the parameters for basic parameters such as site number, electron number, Lanczos step *etc.*

LocSpin (locspn.def): Set the location of local spin.

(3) Hamiltonian:

Hamiltonian for mVMC is denoted by

$$\mathcal{H} = \mathcal{H}_T + \mathcal{H}_U + \mathcal{H}_V + \mathcal{H}_H + \mathcal{H}_E + \mathcal{H}_P + \mathcal{H}_I, \quad (4.5)$$

$$\mathcal{H}_T = - \sum_{i,j} \sum_{\sigma_1, \sigma_2} t_{ij\sigma_1\sigma_2} c_{i\sigma_1}^\dagger c_{j\sigma_2}, \quad (4.6)$$

$$\mathcal{H}_U = \sum_i U_i n_{i\uparrow} n_{i\downarrow}, \quad (4.7)$$

$$\mathcal{H}_V = \sum_{i,j} V_{ij} n_i n_j, \quad (4.8)$$

$$\mathcal{H}_H = - \sum_{i,j} J_{ij}^{\text{Hund}} (n_{i\uparrow} n_{j\uparrow} + n_{i\downarrow} n_{j\downarrow}), \quad (4.9)$$

$$\mathcal{H}_E = \sum_{i,j} J_{ij}^{\text{Ex}} (c_{i\uparrow}^\dagger c_{j\uparrow}^\dagger c_{j\downarrow}^\dagger c_{i\downarrow} + c_{i\downarrow}^\dagger c_{j\downarrow}^\dagger c_{j\uparrow}^\dagger c_{i\uparrow}), \quad (4.10)$$

$$\mathcal{H}_P = \sum_{i,j} J_{ij}^{\text{Pair}} c_{i\uparrow}^\dagger c_{j\uparrow}^\dagger c_{i\downarrow}^\dagger c_{j\downarrow}, \quad (4.11)$$

$$\mathcal{H}_I = \sum_{i,j,k,l} \sum_{\sigma_1, \sigma_2, \sigma_3, \sigma_4} I_{ijkl\sigma_1\sigma_2\sigma_3\sigma_4} c_{i\sigma_1}^\dagger c_{j\sigma_2} c_{k\sigma_3}^\dagger c_{l\sigma_4}, \quad (4.12)$$

as the format of interactions for electron system. Here, we define the charge density operator with spin σ at site i as $n_{i\sigma} = c_{i\sigma}^\dagger c_{i\sigma}$ and the total charge density operator at site i as $n_i = n_{i\uparrow} + n_{i\downarrow}$. Each parameters are specified by the following files, respectively;

Trans (trans.def): $t_{ij\sigma_1\sigma_2}$ in \mathcal{H}_T ,

CoulombIntra (coulombintra.def): U_i in \mathcal{H}_U ,

CoulombInter (coulombinter.def): V_{ij} in \mathcal{H}_V ,

Hund (hund.def): J_{ij}^{Hund} in \mathcal{H}_H ,

Exchange (exchange.def): J_{ij}^{Ex} in \mathcal{H}_E ,

PairHop: J_{ij}^{Pair} in \mathcal{H}_P ,

InterAll: $I_{ijkl\sigma_1\sigma_2\sigma_3\sigma_4}$ in \mathcal{H}_I .

(4) Variational parameters to be optimized:

The variational parameters to be optimized are specified by using this categorized

files. In mVMC, the variational wave function is given as

$$|\psi\rangle = \mathcal{P}_G \mathcal{P}_J \mathcal{P}_{d-h}^{(2)} \mathcal{P}_{d-h}^{(4)} \mathcal{L}^S \mathcal{L}^K \mathcal{L}^P |\phi_{\text{pair}}\rangle, \quad (4.13)$$

$$\mathcal{P}_G = \exp \left[\sum_i g_i n_{i\uparrow} n_{i\downarrow} \right], \quad (4.14)$$

$$\mathcal{P}_J = \exp \left[\frac{1}{2} \sum_{i \neq j} v_{ij} (n_i - 1)(n_j - 1) \right], \quad (4.15)$$

$$\mathcal{P}_{d-h}^{(2)} = \exp \left[\sum_t \sum_{n=0}^2 (\alpha_{2nt}^d \sum_i \xi_{i2nt}^d + \alpha_{2nt}^h \sum_i \xi_{i2nt}^h) \right], \quad (4.16)$$

$$\mathcal{P}_{d-h}^{(4)} = \exp \left[\sum_t \sum_{n=0}^4 (\alpha_{4nt}^d \sum_i \xi_{i4nt}^d + \alpha_{4nt}^h \sum_i \xi_{i4nt}^h) \right], \quad (4.17)$$

$$\mathcal{L}_S = \frac{2S+1}{8\pi^2} \int d\Omega P_S(\cos \beta) \hat{R}(\Omega), \quad (4.18)$$

$$\mathcal{L}_K = \frac{1}{N_s} \sum_{\mathbf{R}} e^{i\mathbf{K} \cdot \mathbf{R}} \hat{T}_{\mathbf{R}}, \quad (4.19)$$

$$\mathcal{L}_P = \sum_{\alpha} p_{\alpha} \hat{G}_{\alpha}, \quad (4.20)$$

where $\Omega = (\alpha, \beta, \gamma)$ is the Euler angle, $\hat{R}(\Omega)$ is the rotational operator, $P_S(x)$ is the S -th polynomial, \mathbf{K} is the momentum operator of the whole system and $\hat{T}_{\mathbf{R}}$ is the translational operators corresponding to the translational vector \mathbf{R} , \hat{G}_{α} is the point group operator, and p_{α} is the parity operator, respectively. The details of $\mathcal{P}_{d-h}^{(2)}$ and $\mathcal{P}_{d-h}^{(4)}$ are shown in [2]. The one body part of the wavefunction is represented as the pair function of the real space:

$$|\phi_{\text{pair}}\rangle = \left[\sum_{i,j=1}^{N_s} f_{ij} c_{i\uparrow}^{\dagger} c_{j\downarrow}^{\dagger} \right]^{N/2} |0\rangle, \quad (4.21)$$

where N is the number of electrons and N_s is the number of sites. The setting for optimizing variational parameters or not is given by the following files (the parameters for \mathcal{L}_S are specified in the **ModPara** file).

Gutzwiller (gutzwilleridx.def): Set the target parameters g_i in \mathcal{P}_G to be optimized.

Jastrow (jastrowidx.def): Set the target parameters v_{ij} in \mathcal{P}_J to be optimized.

DH2: Set the target 2-site doublon-holon correlation factor $\alpha_{2nt}^{d(h)}$ in $\mathcal{P}_{d-h}^{(2)}$ to be optimized.

DH4: Set the target 4-site doublon-holon correlation factor $\alpha_{4nt}^{d(h)}$ in $\mathcal{P}_{d-h}^{(4)}$ to be optimized.

Orbital (orbitalidx.def): Set the pair orbital f_{ij} in $|\phi_{\text{pair}}\rangle$ to be optimized.

TransSym (qptransidx.def): Set the the momentum projection operators \mathcal{L}_K and the lattice translational projection operators \mathcal{L}_P .

(5) Initial variational parameters:

Set the initial values of the variational parameters. When the keyword is not setting,

the corresponding parameters are given by random values as default values.

InGutzwiller: Set the initial values of g_i in \mathcal{P}_G .

InJastrow: Set the initial values of v_{ij} in \mathcal{P}_J .

InDH2: Set the initial values of $\alpha_{2nt}^{d(h)}$ in $\mathcal{P}_{d-h}^{(2)}$.

InDH4: Set the initial values of $\alpha_{4nt}^{d(h)}$ in $\mathcal{P}_{d-h}^{(4)}$.

InOrbital: Set the initial values of f_{ij} in $|\phi_{\text{pair}}\rangle$.

(6) **Output:**

OneBodyG (greenone.def): Set the components of one-body green functions to output.

TwoBodyG (greentwo.def): Set the components of two-body green functions to output.

4.2.1 List file for Input files (namelist.def)

This file determines input filenames correlated with keywords. An example of the file format is shown as follows.

```
ModPara  modpara.def
LocSpin  zlocspn.def
Trans    ztransfer.def
InterAll zinterall.def
Orbital  orbitalidx.def
OneBodyG zcisajs.def
TwoBodyG zcisajscktaltdc.def
```

File format

[string01] [string02]

Parameters

- [string01]
Type : string-type
Description : Select a word from keywords.
- [string02]
Type : string-type
Description : An input filename which is correlated with keywords.

User rules

- After setting keywords at [string 01], half-width state is needed for writing a filename. You can set the filename freely.
- Keywords for input files are shown in Table 4.2.
- Essential keywords are “CalcMod”, “ModPara”, “LocSpin”, “Orbital” and “TransSym”.
- Keywords can be set in random order.
- If keywords or filenames are incorrect, the program is terminated.
- When the head of line is “#”, the line is skipped.

Keywords	Details for corresponding files
ModPara*	Parameters for calculation.
LocSpin*	Configurations of the local spins for Hamiltonian.
Trans	Transfer and chemical potential for Hamiltonian.
InterAll	Two-body interactions for Hamiltonian.
CoulombIntra	CoulombIntra interactions.
CoulombInter	CoulombInter interactions.
Hund	Hund couplings.
PairHop	Pair hopping couplings.
Exchange	Exchange couplings.
Gutzwiller	Gutzwiller factors.
Jastrow	Charge Jastrow factors.
DH2	2-site doublon-holon correlation factors.
DH4	4-site doublon-holon correlation factors.
Orbital*	Pair orbital factors.
TransSym*	Translational and lattice symmetry operation.
InGutzwiller	Initial values of Gutzwiller factors.
InJastrow	Initial values of charge Jastrow factors.
InDH2	Initial values of 2-site doublon-holon correlation factors.
InDH4	Initial values of 4-site doublon-holon correlation factors.
InOrbital	Initial values of pair orbital factors.
OneBodyG	Output components for Green functions $\langle c_{i\sigma}^\dagger c_{j\sigma} \rangle$
TwoBodyG	Output components for Correlation functions $\langle c_{i\sigma}^\dagger c_{j\sigma} c_{k\tau}^\dagger c_{l\tau} \rangle$

Table 4.2: List of the definition files. The files marked * are essential for executing.

4.2.2 ModPara file (modpara.def)

This file determines parameters for calculation. An example of the file format is shown as follows.

```

-----
Model_Parameters      0
-----
VMC_Cal_Parameters
-----
CDataFileHead  zvo
CParaFileHead  zqp
-----
NVMCCalMode      0
NLanczosMode      0
-----
NDataIdxStart     1
NDataQtySmp       1
-----
Nsite             16
Nelectron          8
NSPGaussLeg       1
NSPStot           0
NMPTrans          1
NSROptItrStep     1200
NSROptItrSmp      100
DSROptRedCut      0.001
DSROptStaDel      0.02
DSROptStepDt      0.02
NVMCWarmUp        10
NVMCInterval      1
NVMCSample        1000
NExUpdatePath     0
RndSeed           11272
NSplitSize        1
NStore            1

```

File format

- Lines 1 - 5: Header
- Line 6: [string01] [string02]
- Line 7: [string03] [string04]
- Line 8: Header
- Lines 9 - : [string05] [int01] (or [double01])

Parameters

- [string01]
Type : string-type (blank parameter not allowed)
Description : Set a keyword for header of output files.
- [string02]
Type : string-type (blank parameter not allowed)
Description : Set a header of output files. For example, the output file of one-body green's functions are named as **xxx_cisajs.dat**, where **xxx** is [string02].
- [string03]
Type : string-type (blank parameter not allowed)
Description : Set a keyword for header of output files for variational parameters.
- [string04]
Type : string-type (blank parameter not allowed)
Description : Set a header of output files for variational parameters. For example, the output file of optimized variational parameters are named as **xxx_opt.dat**, where **xxx** is [string04].
- [string05]
Type : string-type
Description : Select a word from keywords.
- [int01] ([double01])
Type : int (double)-type (blank parameter not allowed)
Description : A parameter which is correlated with a keyword.

User rules

- From Line 9: After setting keywords at [string 01], a half-width blank is needed for setting a parameter.
- From Line 9: When the first character of the line is “-”, the line is not read and skipped.

Keywords and parameters

- NVMCCalMode
Type : int-type (default value: 0)
Description : [0] Optimization of variational parameters, [1] Calculation of one body and two body Green's functions.

- **NDataIdxStart**

Type : int-type (default value: 0)

Description : An integer for numbering of output files. For `NVMCCalMode= 0` , `NDataIdxStart` is added at the end of the output files. For `NVMCCalMode = 1`, the files are outputted with the number from `NDataIdxStart` to `NDataIdxStart+NDataQtySmp-1`.

- **NDataQtySmp**

Type : int-type (default value: 1)

Description : The set number for outputted files (only used for `NVMCCalMode = 1`).

- **Nsite**

Type : int-type (Positive integer)

Description : The number of sites.

- **Nelectron**

Type : int-type (Positive integer)

Description : The electron number with \uparrow spin. Since the calculation is done at the partial space $S_z = 0$, the electron number with \uparrow spin is equal to that with \downarrow spin.

- **NSPGaussLeg**

Type : int-type (Positive integer, default value: 8)

Description : The mesh number for the Gauss-legendre quadrature about β integration (S_y rotation) for the spin quantum-number projection in actual numerical calculation.

- **NSPStot**

Type : int-type (greater than 0, default value: 0)

Description : The spin quantum-number.

- **NMPTrans**

Type : int-type (default value: 1)

Description : The absolute value gives the number of the momentum and lattice translational quantum-number projection. When the value is negative, the mode of anti-periodic condition turns on. The quantum-number projection is used from the top to `NMPTrans` with the specified weight indicated in `TransSym` file. In the case of not applying the projection, this value must be equal to 1.

- **NSROptItrStep**

Type : int-type (Positive integer, default value: 1000)

Description : The whole step number to optimize variational parameters by SR method. Only used for `NVMCCalMode=0`.

- **NSROptItrSmp**
Type : int-type (Positive integer, default value: `NSROptItrStep/10`)
Description : In the `NSROptItrStep` step, the average values of the each variational parameters at the `NSROptItrStep` step are adopted as the optimized values. Only used for `NVMCCalMode=0`.
- **DSROptRedCut**
Type : double-type (default value: 0.001)
Description : The stabilized factor for the SR method by truncation of redundant directions corresponding to ε_{wf} in the ref. [2].
- **DSROptStaDel**
Type : double-type (default value: 0.02)
Description : The stabilized factor for the SR method by modifying diagonal elements in the overwrap matrix corresponding to ε in the ref. [2].
- **DSROptStepDt**
Type : double-type
Description : The time step using in the SR method.
- **NVMCWarmUp**
Type : int-type (Positive integer, default value: 10)
Description : Idling number for the Malkov chain Montecarlo Methods.
- **NVMCInterval**
Type : int-type (Positive integer, default value: 1)
Description : The interval step between samples. The local update will be performed `Nsite × NVMCInterval` times.
- **NVMCSample**
Type : int-type (Positive integer, default value: 1000)
Description : The sample numbers to calculate the expected values.
- **NExUpdatePath**
Type : int-type (Positive integer)
Description : The option for local update about exchange terms. 0: not update, 1: update for electron system. For Spin system, the value must be 2.
- **RndSeed**
Type : int-type
Description : The initial seed of generating random number. For MPI parallelization, the initial seeds are given by `RndSeed+my rank+1` at each ranks.
- **NSplitSize**
Type : int-type (Positive integer, default value: 1)
Description : The number of processes of MPI parallelization.

- **NStore**

Type : int-type (Positive integer, default value: 0)

Description : The option of applying matrix-matrix product to calculate expected values $\langle O_k O_l \rangle$ (0: off, 1: on).

4.2.3 LocSpin file (locspn.def)

This file determines sites with localized spins. An example of the file format is shown as follows.

```
=====
NlocalSpin      6
=====
=====i_0LocSpn_1IteElc =====
=====
    0      1
    1      0
    2      1
    3      0
    4      1
    5      0
    6      1
    7      0
    8      1
    9      0
   10      1
   11      0
```

File format

- Line 1: Header
- Line 2: [string01] [int01]
- Lines 3 - 5: Header
- Lines 6 -: [int02] [int03]

Parameters

Parameters

- [string01]
Type : string-type (blank parameter not allowed)
Description : A keyword for total number of localized spins. You can freely give a name of the keyword.
- [int01]
Type : int-type (blank parameter not allowed)
Description : An integer giving total number of localized spins.
- [int02]
Type : int-type (blank parameter not allowed)
Description : An integer giving a site index ($0 \leq [\text{int02}] < \text{Nsite}$).

- [int03]

Type : int-type (blank parameter not allowed)

Description : An integer for selecting an electron state whether localized spin or itinerant electron states (0: Itinerant electron state, 1: localized spin state with $S = 1/2$).

Use rules

- Headers cannot be omitted.
- A program is terminated, when [int01] is different from the total number of localized spins indicated by [int03].
- A program is terminated, when [int02] is different from the total number of sites.
- A program is terminated under the condition $[int02] < 0$ or $N_{site} \leq [int02]$.

4.2.4 Trans file (trans.def)

The Hamiltonian for general one-body interactions

$$\mathcal{H}_T = - \sum_{ij\sigma_1\sigma_2} t_{ij\sigma_1\sigma_2} c_{i\sigma_1}^\dagger c_{j\sigma_2}, \quad (4.22)$$

is added to the whole Hamiltonian by setting the parameters $t_{ij\sigma_1\sigma_2}$. In ver.1.0, σ_1 must be equal to σ_2 , since the calculation is only allowed at $S_z = 0$. An example of the file format is shown as follows.

```
=====
NTransfer      24
=====
=====i_j_s_tijs=====
=====
  0      0      2      0  1.000000  0.000000
  2      0      0      0  1.000000  0.000000
  0      1      2      1  1.000000  0.000000
  2      1      0      1  1.000000  0.000000
  2      0      4      0  1.000000  0.000000
  4      0      2      0  1.000000  0.000000
  2      1      4      1  1.000000  0.000000
  4      1      2      1  1.000000  0.000000
  4      0      6      0  1.000000  0.000000
  6      0      4      0  1.000000  0.000000
  4      1      6      1  1.000000  0.000000
  6      1      4      1  1.000000  0.000000
  6      0      8      0  1.000000  0.000000
  8      0      6      0  1.000000  0.000000
...
```

File format

- Line 1: Header
- Line 2: [string01] [int01]
- Lines 3-5: Header
- Lines 6-: [int02] [int03] [int04] [int05] [double01] [double02]

Parameters

- [string01]

Type : string-type (blank parameter not allowed)

Description : A keyword for total number of transfer integrals. You can freely give a name of the keyword.

- [int01]
Type : int-type (blank parameter not allowed)
Description : An integer giving total number of transfer integrals.
- [int02], [int04]
Type : int-type (blank parameter not allowed)
Description : An integer giving a site index ($0 \leq [\text{int02}], [\text{int04}] < \text{Nsite}$).
- [int03], [int05]
Type : int-type (blank parameter not allowed)
Description : An integer giving a spin index,
0: up-spin,
1: down-spin.
- [double01]
Type : double-type (blank parameter not allowed)
Description : A value for a real part of $t_{ij\sigma_1\sigma_2}$.
- [double02]
Type : double-type (blank parameter not allowed)
Description : A value for an imaginary part of $t_{ij\sigma_1\sigma_2}$.

Use rules

- Headers cannot be omitted.
- Blank line is not allowed.
- A program is terminated, when [int01] is different from the total number of transfer integrals defined in this file.
- A program is terminated, when [int02]-[int05] are out of range from the defined values.
- Since Hamiltonian must be Hermitian, the following relation must be satisfied,

$$t_{ij\sigma_1\sigma_2} = t_{ji\sigma_2\sigma_1}^\dagger.$$

4.2.5 InterAll file

The Hamiltonian for general two-body interactions

$$\mathcal{H}_I = \sum_{i,j,k,l} \sum_{\sigma_1, \sigma_2, \sigma_3, \sigma_4} I_{ijkl\sigma_1\sigma_2\sigma_3\sigma_4} c_{i\sigma_1}^\dagger c_{j\sigma_2} c_{k\sigma_3}^\dagger c_{l\sigma_4}. \quad (4.23)$$

is added to the whole Hamiltonian by setting the parameters $I_{ijkl\sigma_1\sigma_2\sigma_3\sigma_4}$. In ver.1.0, this file cannot be used for the spin system. Furthermore, σ_1 and σ_3 must be equal to σ_2 , σ_4 , respectively, since the calculation is only allowed at $S_z = 0$. An example of file format is shown as follows.

```
=====
NInterAll      36
=====
=====zInterAll=====
=====
0   0   0   1   1   1   1   0   0.50  0.0
0   1   0   0   1   0   1   1   0.50  0.0
0   0   0   0   1   0   1   0   0.25  0.0
0   0   0   0   1   1   1   1  -0.25  0.0
0   1   0   1   1   0   1   0  -0.25  0.0
0   1   0   1   1   1   1   1   0.25  0.0
2   0   2   1   3   1   3   0   0.50  0.0
2   1   2   0   3   0   3   1   0.50  0.0
2   0   2   0   3   0   3   0   0.25  0.0
2   0   2   0   3   1   3   1  -0.25  0.0
2   1   2   1   3   0   3   0  -0.25  0.0
2   1   2   1   3   1   3   1   0.25  0.0
4   0   4   1   5   1   5   0   0.50  0.0
4   1   4   0   5   0   5   1   0.50  0.0
4   0   4   0   5   0   5   0   0.25  0.0
4   0   4   0   5   1   5   1  -0.25  0.0
4   1   4   1   5   0   5   0  -0.25  0.0
4   1   4   1   5   1   5   1   0.25  0.0
...

```

File format

- Line 1: Header
- Line 2: [string01] [int01]
- Lines 3 - 5: Header
- Lines 6 -: [int02] [int03] [int04] [int05] [int06] [int07] [int08] [int09] [double01] [double02]

Parameters

- [string01]

Type : string-type (blank parameter not allowed)

Description : A keyword for total number of generalized two body interactions. You can freely give a name of the keyword.

- [int01]

Type : int-type (blank parameter not allowed)

Description : An integer giving total number of generalized two body interactions.

- [int02], [int04], [int06], [int08]

Type : int-type (blank parameter not allowed)

Description : An integer giving a site index ($0 \leq [\text{int02}], [\text{int04}], [\text{int06}], [\text{int08}] < N_{\text{site}}$).

- [int03], [int05], [int07], [int09]

Type : int-type (blank parameter not allowed)

Description : An integer giving a spin index,
0: up-spin,
1: down-spin.

- [double01]

Type : double-type (blank parameter not allowed)

Description : A value for a real part of $I_{ijkl\sigma_1\sigma_2\sigma_3\sigma_4}$.

- [double02]

Type : double-type (blank parameter not allowed)

Description : A value for an imaginary part of $I_{ijkl\sigma_1\sigma_2\sigma_3\sigma_4}$.

Use rules

- Headers cannot be omitted.
- Since Hamiltonian must be Hermitian, the following relation must be satisfied,

$$I_{ijkl\sigma_1\sigma_2\sigma_3\sigma_4} = I_{lkji\sigma_4\sigma_3\sigma_2\sigma_1}^\dagger.$$
- A program is terminated, when [int01] is different from the total number of generalized two body interactions defined in this file.
- A program is terminated, when [int02]-[int09] are out of range from the defined values.

4.2.6 CoulombIntra file (coulombintra.def)

The Hamiltonian for the coulombintra interactions

$$\mathcal{H}_U = \sum_i U_i n_{i\uparrow} n_{i\downarrow} \quad (4.24)$$

is added to the whole Hamiltonian by setting U_i . An example of the file format is shown as follows.

```
=====
NCoulombIntra 6
=====
=====i_0LocSpn_1IteElc =====
=====
0  4.000000
1  4.000000
2  4.000000
3  4.000000
4  4.000000
5  4.000000
```

File format

- Line 1: Header
- Line 2: [string01] [int01]
- Lines 3 - 5: Header
- Lines 6 -: [int02] [double01]

Parameters

- [string01]
Type : string-type (blank parameter not allowed)
Description : A keyword for total number of on-site interactions. You can freely give a name of the keyword.
- [int01]
Type : int-type (blank parameter not allowed)
Description : An integer giving total number of on-site interactions.
- [int02]
Type : int-type (blank parameter not allowed)
Description : An integer giving a site index ($0 \leq [\text{int02}] < \text{Nsite}$).
- [double01]
Type : double-type (blank parameter not allowed)
Description : A value for U_i .

Use rules

- Headers cannot be omitted.
- A program is terminated, when [int01] is different from the total number of on-site interactions defined in this file.
- A program is terminated, when [int02] is out of range from the defined values.

4.2.7 CoulombInter file (coulombinter.def)

The Hamiltonian for the coulombinter interactions

$$\mathcal{H}_V = \sum_{i,j} V_{ij} n_i n_j \quad (4.25)$$

is added to the whole Hamiltonian by setting V_{ij} . An example of the file format is shown as follows.

```
=====
NCoulombInter 6
=====
=====CoulombInter =====
=====
  0      1  1.0000
  1      2  1.0000
  2      3  1.0000
  3      4  1.0000
  4      5  1.0000
  5      0  1.0000
```

File format

- Line 1: Header
- Line 2: [string01] [int01]
- Lines 3 - 5: Header
- Lines 6 -: [int02] [int03] [double01]

Parameters

- [string01]
Type : string-type (blank parameter not allowed)
Description : A keyword for total number of off-site interactions. You can freely give a name of the keyword.
- [int01]
Type : int-type (blank parameter not allowed)
Description : An integer giving total number of off-site interactions.
- [int02], [int03]
Type : int-type (blank parameter not allowed)
Description : An integer giving a site index ($0 \leq [\text{int02}], [\text{int03}] < \text{Nsite}$).
- [double01]
Type : double-type (blank parameter not allowed)
Description : A value for V_{ij} .

Use rules

- Headers cannot be omitted.
- A program is terminated, when [int01] is different from the total number of off-site interactions defined in this file.
- A program is terminated, when either [int02] or [int03] are out of range from the defined values.

4.2.8 Hund file (hund.def)

The Hamiltonian for Hund couplings

$$\mathcal{H}_H = - \sum_{i,j} J_{ij}^{\text{Hund}} (n_{i\uparrow} n_{j\uparrow} + n_{i\downarrow} n_{j\downarrow}) \quad (4.26)$$

is added to the whole Hamiltonian by setting the parameters J_{ij}^{Hund} . An example of the file format is shown as follows.

```
=====
NHund 6
=====
=====Hund =====
=====
    0      1 -0.250000
    1      2 -0.250000
    2      3 -0.250000
    3      4 -0.250000
    4      5 -0.250000
    5      0 -0.250000
```

File format

- Line 1: Header
- Line 2: [string01] [int01]
- Lines 3 - 5: Header
- Lines 6 -: [int02] [int03] [double01]

Parameters

- [string01]
Type : string-type (blank parameter not allowed)
Description : A keyword for total number of Hund couplings. You can freely give a name of the keyword.
- [int01]
Type : int-type (blank parameter not allowed)
Description : An integer giving total number of Hund couplings.
- [int02], [int03]
Type : int-type (blank parameter not allowed)
Description : An integer giving a site index ($0 \leq [\text{int02}], [\text{int03}] < \text{Nsite}$).
- [double01]
Type : double-type (blank parameter not allowed)
Description : A value for J_{ij}^{Hund} .

Use rules

- Headers cannot be omitted.
- A program is terminated, when [int01] is different from the total number of Hund couplings defined in this file.
- A program is terminated, when either [int02] or [int03] are out of range from the defined values.

4.2.9 PairHop file

The Hamiltonian for PairHop couplings

$$\mathcal{H}_P = \sum_{i,j} J_{ij}^{\text{Pair}} c_{i\uparrow}^\dagger c_{j\uparrow}^\dagger c_{i\downarrow}^\dagger c_{j\downarrow} \quad (4.27)$$

is added to the whole Hamiltonian by setting the parameters J_{ij}^{Pair} . An example of the file format is shown as follows.

```
=====
NPairhop 12
=====
-----Pairhop -----
=====
  0      1  0.50000
  1      0  0.50000
  1      2  0.50000
  2      1  0.50000
  2      3  0.50000
  3      2  0.50000
  3      4  0.50000
  4      3  0.50000
  4      5  0.50000
  5      4  0.50000
  5      0  0.50000
  0      5  0.50000
```

File format

- Line 1: Header
- Line 2: [string01] [int01]
- Lines 3 - 5: Header
- Lines 6 -: [int02] [int03] [double01]

Parameters

- [string01]

Type : string-type (blank parameter not allowed)

Description : A keyword for total number of PairHop couplings. You can freely give a name of the keyword.

- [int01]

Type : int-type (blank parameter not allowed)

Description : An integer giving total number of PairHop couplings.

- [int02], [int03]
Type : int-type (blank parameter not allowed)
Description : An integer giving a site index ($0 \leq [\text{int02}], [\text{int03}] < \text{Nsite}$).
- [double01]
Type : double-type (blank parameter not allowed)
Description : A value for J_{ij}^{Pair} .

Use rules

- Headers cannot be omitted.
- A program is terminated, when [int01] is different from the total number of PairHop couplings defined in this file.
- A program is terminated, when either [int02] or [int03] are out of range from the defined values.

4.2.10 Exchange file (exchange.def)

The Hamiltonian for exchange couplings

$$\mathcal{H}_E = \sum_{i,j} J_{ij}^{\text{Ex}} (c_{i\uparrow}^\dagger c_{j\uparrow} c_{j\downarrow}^\dagger c_{i\downarrow} + c_{i\downarrow}^\dagger c_{j\downarrow} c_{j\uparrow}^\dagger c_{i\uparrow}) \quad (4.28)$$

is added to the whole Hamiltonian by setting J_{ij}^{Ex} . An example of the file format is shown as follows.

```
=====
NExchange 6
=====
=====Exchange =====
=====
  0      1  0.50000
  1      2  0.50000
  2      3  0.50000
  3      4  0.50000
  4      5  0.50000
  5      0  0.50000
```

File format

- Line 1: Header
- Line 2: [string01] [int01]
- Lines 3-5: Header
- Lines 6-: [int02] [int03] [double01]

Parameters

- [string01]
Type : string-type (blank parameter not allowed)
Description : A keyword for total number of Exchange couplings. You can freely give a name of the keyword.
- [int01]
Type : int-type (blank parameter not allowed)
Description : An integer giving total number of Exchange couplings.
- [int02], [int03]
Type : int-type (blank parameter not allowed)
Description : An integer giving a site index ($0 \leq [\text{int02}], [\text{int03}] < \text{Nsite}$).
- [double01]
Type : double-type (blank parameter not allowed)
Description : A value for J_{ij}^{Ex} .

Use rules

- Headers cannot be omitted.
- A program is terminated, when [int01] is different from the total number of Exchange couplings defined in this file.
- A program is terminated, when either [int02] or [int03] are out of range from the defined values.

4.2.11 Gutzwiller file (gutzwiller.def)

This file sets the calculation conditions of Gutzwiller factors

$$\mathcal{P}_G = \exp \left[\sum_i g_i n_{i\uparrow} n_{i\downarrow} \right]. \quad (4.29)$$

A site number i and the variational parameters g_i are specified. An example of the file format is shown as follows.

```
=====
NGutzwillerIdx 2
ComplexType 0
=====
=====
  0      0
  1      0
  2      0
  3      1
(continue...)
 12      1
 13      0
 14      0
 15      0
  0      1
  1      0
```

File format

In the following, we define the whole number of sites as N_s and variational parameters as N_g , respectively.

- Line 1: Header
- Line 2: [string01] [int01]
- Line 3: [string02] [int02]
- Lines 4 - 5: Header
- Lines 6 - (5+ N_s): [int03] [int04]
- Lines (6+ N_s) - (5+ N_s + N_g): [int05] [int06]

Parameters

- [string01]

Type : string-type (blank parameter not allowed)

Description : A keyword for total number of variational parameters g_i . You can freely give a name of the keyword.

- [int01]
Type : int-type (blank parameter not allowed)
Description : An integer giving total number of variational parameters g_i .
- [string02]
Type : string-type (blank parameter not allowed)
Description : A keyword for indicating the double or complex type of variational parameters g_i . You can freely give a name of the keyword.
- [int02]
Type : int-type (blank parameter not allowed)
Description : An integer indicates the double or complex type of variational parameters g_i (0: double, 1: complex).
- [int03]
Type : int-type (blank parameter not allowed)
Description : An integer giving a site index ($0 \leq [\text{int03}] < \text{Nsite}$).
- [int04]
Type : int-type (blank parameter not allowed)
Description : An integer setting kinds of variational parameters g_i ($0 \leq [\text{int04}] < [\text{int01}]$).
- [int05]
Type : int-type (blank parameter not allowed)
Description : An integer giving kinds of variational parameters ($0 \leq [\text{int05}] < [\text{int01}]$).
- [int06]
Type : int-type (blank parameter not allowed)
Description : An integer to select the target of variational parameters indicated at [int05] to be optimized or not (0: not optimize, 1: optimize).

User rules

- Headers cannot be omitted.
- A program is terminated, when components of variational parameters are double counted.
- A program is terminated, when [int01] is different from the total number of variational parameters defined in this file.
- A program is terminated, when [int02] - [int06] are out of range from the defined values.

4.2.12 Jastrow file (jastrow.def)

This file sets the calculation conditions of Jastrow factors

$$\mathcal{P}_J = \exp \left[\frac{1}{2} \sum_{i \neq j} v_{ij} (n_i - 1)(n_j - 1) \right] \quad (4.30)$$

Site numbers i, j , and the variational parameters v_{ij} are specified. An example of the file format is shown as follows.

```
=====
NJastrowIdx 5
ComplexType 0
=====
=====
    0      1      0
    0      2      1
    0      3      0
  (continue...)
    0      1
    1      1
    2      1
    3      1
    4      1
```

File format

In the following, we define the total number of sites as N_s and variational parameters as N_j , respectively.

- Line 1: Header
- Line 2: [string01] [int01]
- Line 3: [string02] [int02]
- Lines 4 - 5: Header
- Lines 6 - $(5 + N_s \times (N_s - 1))$: [int03] [int04] [int05]
- Lines $(6 + N_s \times (N_s - 1)) - (5 + N_s \times (N_s - 1) + N_j)$: [int06] [int07]

Parameters

- [string01]

Type : string-type (blank parameter not allowed)

Description : A keyword for total number of variational parameters v_{ij} . You can freely give a name of the keyword.

- [int01]
Type : int-type (blank parameter not allowed)
Description : An integer giving total number of variational parameters v_{ij} .
- [string02]
Type : string-type (blank parameter not allowed)
Description : A keyword for indicating the double or complex type of variational parameters v_{ij} . You can freely give a name of the keyword.
- [int02]
Type : int-type (blank parameter not allowed)
Description : An integer indicates the double or complex type of variational parameters v_{ij} (0: double, 1: complex).
- [int03], [int04]
Type : int-type (blank parameter not allowed)
Description : An integer giving a site index ($0 \leq [\text{int03}], [\text{int04}] < \text{Nsite}$).
- [int05]
Type : int-type (blank parameter not allowed)
Description : An integer setting kinds of variational parameters v_{ij} ($0 \leq [\text{int05}] < [\text{int01}]$).
- [int06]
Type : int-type (blank parameter not allowed)
Description : An integer giving kinds of variational parameters ($0 \leq [\text{int06}] < [\text{int01}]$).
- [int07]
Type : int-type (blank parameter not allowed)
Description : An integer to select the target of variational parameters indicated at [int06] to be optimized or not (0: not optimize, 1: optimize).

User rules

- Headers cannot be omitted.
- A program is terminated, when [int01] is different from the total number of variational parameters defined in this file.
- A program is terminated, when [int02] - [int07] are out of range from the defined values.

4.2.13 DH2 file

This file sets the calculation conditions of 2-site doublon-holon correlation factors

$$\mathcal{P}_{d-h}^{(2)} = \exp \left[\sum_t \sum_{n=0}^2 (\alpha_{2nt}^d \sum_i \xi_{i2nt}^d + \alpha_{2nt}^h \sum_i \xi_{i2nt}^h) \right]. \quad (4.31)$$

A site number i , the two sites around i site and the variational parameters $\alpha_{2nt}^{d(h)}$ which have t kinds at each sites are specified. The details of the parameters $\alpha_{2nt}^{d(h)}$ and the operator $\xi_{i2nt}^{d(h)}$ are shown in ref. [2]. An example of the file format is shown as follows.

```
=====
NDoublonHolon2siteIdx 2
ComplexType 0
=====
=====
    0      5    15     0
    0     13     7     1
  (continue...)
   15      8     2     1
    0      1
  (continue...)
   11      1
```

File format

In the following, we define the total number of sites as N_s and variational parameters as N_{dh2} , respectively.

- Line 1: Header
- Line 2: [string01] [int01]
- Line 3: [string02] [int02]
- Lines 4 - 5: Header
- Lines 6 - $(5+N_s \times N_{dh2})$: [int03] [int04] [int05] [int06]
- Lines $(6+N_s \times N_{dh2})$ - $(5+(N_s + 6) \times N_{dh2})$: [int07] [int08]

Parameters

- [string01]

Type : string-type (blank parameter not allowed)

Description : A keyword for total number of variational parameters. You can freely give a name of the keyword.
- [int01]

Type : int-type (blank parameter not allowed)

Description : An integer giving total number of variational parameters.

- [string02]
Type : string-type (blank parameter not allowed)
Description : A keyword for indicating the double or complex type of variational parameters. You can freely give a name of the keyword.
- [int02]
Type : int-type (blank parameter not allowed)
Description : An integer indicates the double or complex type of variational parameters (0: double, 1: complex).
- [int03], [int04], [int05]
Type : int-type (blank parameter not allowed)
Description : An integer giving a site index ($0 \leq [\text{int03}], [\text{int04}], [\text{int05}] < \text{Nsite}$).
- [int06]
Type : int-type (blank parameter not allowed)
Description : An integer setting kinds of variational parameters ($0 \leq [\text{int06}] < [\text{int01}]$).
- [int07]
Type : int-type (blank parameter not allowed)
Description : An integer giving kinds of variational parameters. The value is $(2n + s) \times [\text{int01}] + t$, where n , s and t are given by the following relation:
 - n : The number of doublon (holon) around the center site (0, 1, 2),
 - s : When the center is doublon (holon), $s=0$ (1),
 - t : The kind of variational parameters (0, \dots $[\text{int01}]-1$).
- [int08]
Type : int-type (blank parameter not allowed)
Description : An integer to select the target of variational parameters indicated at [int07] to be optimized or not (0: not optimize, 1: optimize).

User rules

- Headers cannot be omitted.
- A program is terminated, when [int01] is different from the total number of variational parameters defined in this file.
- A program is terminated, when [int02] - [int08] are out of range from the defined values.

4.2.14 DH4 file

This file sets the calculation conditions of 4-site doublon-holon correlation factors

$$\mathcal{P}_{d-h}^{(4)} = \exp \left[\sum_t \sum_{n=0}^4 (\alpha_{4nt}^d \sum_i \xi_{i4nt}^d + \alpha_{4nt}^h \sum_i \xi_{i4nt}^h) \right] \quad (4.32)$$

A site number i , the four sites around i site and the variational parameters $\alpha_{4nt}^{d(h)}$ which have t kinds at each sites are specified. The details of the parameters $\alpha_{4nt}^{d(h)}$ and the operator $\xi_{i4nt}^{d(h)}$ are shown in ref. [2]. An example of the file format is shown as follows.

```
=====
NDoublonHolon4siteIdx 1
ComplexType 0
=====
=====
  0    1    3    4   12    0
  1    2    0    5   13    0
(continue...)
 15   12   14    3   11    0
  0    1
(continue...)
  9    1
```

File format

In the following, we define the total number of sites as N_s and variational parameters as N_{dh4} , respectively.

- Line 1: Header
- Line 2: [string01] [int01]
- Line 3: [string02] [int02]
- Lines 4 - 5: Header
- Lines 6 - $(5 + N_s \times N_{dh4})$: [int03] [int04] [int05] [int06] [int07] [int08]
- Lines $(6 + N_s \times N_{dh4})$ - $(5 + (N_s + 10) \times N_{dh4})$: [int09] [int10]

Parameters

- [string01]
Type : string-type (blank parameter not allowed)
Description : A keyword for total number of variational parameters. You can freely give a name of the keyword.
- [int01]
Type : int-type (blank parameter not allowed)
Description : An integer giving total number of variational parameters.

- [string02]
Type : string-type (blank parameter not allowed)
Description : A keyword for indicating the double or complex type of variational parameters. You can freely give a name of the keyword.
- [int02]
Type : int-type (blank parameter not allowed)
Description : An integer indicates the double or complex type of variational parameters (0: double, 1: complex).
- [int03], [int04], [int05], [int06], [int07]
Type : int-type (blank parameter not allowed)
Description : An integer giving a site index ($0 \leq [\text{int03}], \dots, [\text{int07}] < \text{Nsite}$).
- [int08]
Type : int-type (blank parameter not allowed)
Description : An integer setting kinds of variational parameters ($0 \leq [\text{int08}] < [\text{int01}]$).
- [int09]
Type : int-type (blank parameter not allowed)
Description : An integer giving kinds of variational parameters. The value is $(2n + s) \times [\text{int01}] + t$, where n , s and t are given by the following relation:
 - n : The number of doublon (holon) around the center site (0, 1, 2, 3, 4),
 - s : When the center is doublon (holon), $s=0$ (1),
 - t : The kind of variational parameters (0, \dots $[\text{int01}]-1$).
- [int10]
Type : int-type (blank parameter not allowed)
Description : An integer to select the target of variational parameters indicated at [int09] to be optimized or not (0: not optimize, 1: optimize).

User rules

- Headers cannot be omitted.
- A program is terminated, when components of variational parameters are double counted.
- A program is terminated, when [int01] is different from the total number of variational parameters defined in this file.
- A program is terminated, when [int02] - [int10] are out of range from the defined values.

4.2.15 Orbital file (orbitalidx.def)

This file sets the calculation conditions of pair orbitals

$$|\phi_{\text{pair}}\rangle = \left[\sum_{i,j=1}^{N_s} f_{ij} c_{i\uparrow}^\dagger c_{j\downarrow}^\dagger \right]^{N/2} |0\rangle. \quad (4.33)$$

Site numbers i, j and the variational parameters f_{ij} are indicated. An example of the file format is shown as follows.

```
=====
NOrbitalIdx 64
ComplexType 0
=====
=====
    0      0      0
    0      1      1
    0      2      2
    0      3      3
  (continue...)
   15      9     62
   15     10     63
    0      1
    1      1
  (continue...)
   62      1
   63      1
```

File format

In the following, we define the total number of sites as N_s and variational parameters as N_o , respectively.

- Line 1: Header
- Line 2: [string01] [int01]
- Line 3: [string02] [int02]
- Lines 4 - 5: Header
- Lines 6 - $(5+N_s^2)$: [int03] [int04] [int05] [int06]
- Lines $(6+N_s^2)$ - $(5+N_s^2 + N_o)$: [int06] [int07]

Parameters

- [string01]
Type : string-type (blank parameter not allowed)
Description : A keyword for total number of variational parameters. You can freely give a name of the keyword.

- [int01]
Type : int-type (blank parameter not allowed)
Description : An integer giving total number of variational parameters.
- [string02]
Type : string-type (blank parameter not allowed)
Description : A keyword for indicating the double or complex type of variational parameters. You can freely give a name of the keyword.
- [int02]
Type : int-type (blank parameter not allowed)
Description : An integer indicates the double or complex type of variational parameters (0: double, 1: complex).
- [int03], [int04]
Type : int-type (blank parameter not allowed)
Description : An integer giving a site index ($0 \leq [\text{int03}], [\text{int04}] < \text{Nsite}$).
- [int05]
Type : int-type (blank parameter not allowed)
Description : An integer setting kinds of variational parameters ($0 \leq [\text{int05}] < [\text{int01}]$).
- [int06]
Type : int-type
Description : When the mode of the anti-periodic condition turns on (the mode turns on when the value of `NMPTrans` in `ModPara` file is negative), the sign of f_{ij} is specified by setting $[\text{int06}] = \pm 1$. This term can be omitted when the mode of the anti-periodic condition is off.
- [int07]
Type : int-type (blank parameter not allowed)
Description : An integer giving kinds of variational parameters ($0 \leq [\text{int06}] < [\text{int01}]$).
- [int08]
Type : int-type (blank parameter not allowed)
Description : An integer to select the target of variational parameters indicated at [int06] to be optimized or not (0: not optimize, 1: optimize).

User rules

- Headers cannot be omitted.
- A program is terminated, when [int01] is different from the total number of variational parameters defined in this file.

- A program is terminated, when [int02] - [int09] are out of range from the defined values.

4.2.16 TransSym file (qptransidx.def)

This file sets the weight and corresponding site numbers of momentum projection $\mathcal{L}_K = \frac{1}{N_s} \sum_{\mathbf{R}} e^{i\mathbf{K} \cdot \mathbf{R}} \hat{T}_{\mathbf{R}}$ and lattice translational projection $\mathcal{L}_P = \sum_{\alpha} p_{\alpha} \hat{G}_{\alpha}$. The patterns of projection are indicated by (α, \mathbf{R}) . We note that the weight must be equal to 1.0 when the projection is not done. An example of the file format is shown as follows.

```
=====
NQPTrans 4
=====
== TrIdx_TrWeight_and_TrIdx_i_xi ==
=====
  0  1.000000
  1  1.000000
  2  1.000000
  3  1.000000
  0    0    0
(continue...)
  3   12    1
  3   13    2
```

File format

In the following, we define the total number of sites as N_s and projection patterns as N_{TS} , respectively.

- Line 1: Header
- Line 2: [string01] [int01]
- Lines 3 - 5: Header
- Lines 6 - (5+ N_{TS}): [int02] [double01]
- Lines (6+ N_{TS}) - (5+($N_s + 1$) \times N_{TS}): [int03] [int04] [int05] [int06]

Parameters

- [string01]
Type : string-type (blank parameter not allowed)
Description : A keyword for total number of projection patterns. You can freely give a name of the keyword.
- [int01]
Type : int-type (blank parameter not allowed)
Description : An integer giving total number of projection patterns.
- [int02]
Type : int-type (blank parameter not allowed)
Description : An integer giving the projection pattern (α, \mathbf{R}) ($0 \leq [\text{int02}] < [\text{int01}]$).

- [double01]
Type : double-type (blank parameter not allowed)
Description : The weight $p_\alpha \cos(\mathbf{K} \cdot \mathbf{R})$ of the projection pattern (α, \mathbf{R}) .
- [int03]
Type : int-type (blank parameter not allowed)
Description : An integer giving kinds of the projection pattern (α, \mathbf{R}) ($0 \leq [\text{int03}] < [\text{int01}]$).
- [int04], [int05]
Type : int-type (blank parameter not allowed)
Description : An integer giving a site index ($0 \leq [\text{int04}], [\text{int05}] < \text{Nsite}$). The site number [int05] is given by applying the translation and point group transformation indicated by [int03] to the site [int04].
- [int06]
Type : int-type
Description : When the mode of the anti-periodic condition turns on (the mode turns on when the value of `NMPTrans` in `ModPara` file is negative), the sign of the translational operator is specified by setting $[\text{int06}] = \pm 1$. This term can be omitted when the mode of the anti-periodic condition is off.

User rules

- Headers cannot be omitted.
- A program is terminated, when [int01] is different from the total number of projection patterns defined in this file.
- A program is terminated, when [int02] - [int06] are out of range from the defined values.

4.2.17 Files to set initial values of variational parameters

This file sets the initial values of variational parameters. The kinds of variational parameters are specified by setting the following keywords in `List` file (`namelist.def`): `InGutzwiller`, `InJastrow`, `InDH2`, `InDH4`, `InOrbital`.

The file format is common and an example of the `InJastrow` file is shown as follows.

```
=====
NJastrowIdx  28
=====
== i_j_JastrowIdx  ==
=====
0 -8.909963465082626488e-02  0.000000000000000000e+00
1  5.521681211878626955e-02  0.000000000000000000e+00
(continue...)
27 -9.017586139930480749e-02  0.000000000000000000e+00
```

File format

In the following, we define the total number of variational parameters as N_v .

- Line 1: Header
- Line 2: [string01] [int01]
- Lines 3 - 5: Header
- Lines 6 - (5+ N_v): [int03] [double01] [double02]

Parameters

- [string01]
Type : string-type (blank parameter not allowed)
Description : A keyword for total number of variational parameters. You can freely give a name of the keyword.
- [int01]
Type : int-type (blank parameter not allowed)
Description : An integer giving total number of variational parameters.
- [int02]
Type : int-type (blank parameter not allowed)
Description : An integer setting kinds of variational parameters ($0 \leq [\text{int02}] < [\text{int01}]$).
- [double01]
Type : double-type (blank parameter not allowed)
Description : The real part of the variational parameter indicated by [int01].

- [double02]

Type : double-type

Description : The imaginary part of the variational parameter indicated by [int01].

User rules

- Headers cannot be omitted.
- A program is terminated, when [int01] is different from the total number of variational parameters defined in this file.

4.2.18 OneBodyG file (greenone.def)

This file determines the target components to calculate and output one-body Green's function $\langle c_{i\sigma_1}^\dagger c_{j\sigma_2} \rangle$. An example of file format is shown as follows.

```
=====
NCisAjs      24
=====
===== Green functions =====
=====
  0      0      0      0
  0      1      0      1
  1      0      1      0
  1      1      1      1
  2      0      2      0
  2      1      2      1
  3      0      3      0
  3      1      3      1
  4      0      4      0
  4      1      4      1
  5      0      5      0
  5      1      5      1
  6      0      6      0
  6      1      6      1
  7      0      7      0
  7      1      7      1
  8      0      8      0
  8      1      8      1
  9      0      9      0
  9      1      9      1
 10      0     10      0
 10      1     10      1
 11      0     11      0
 11      1     11      1
```

File format

- Line 1: Header
- Line 2: [string01] [int01]
- Lines 3 - 5: Header
- Lines 6 -: [int02] [int03] [int04] [int05]

Parameters

- [string01]
Type : string-type (blank parameter not allowed)

Description : A keyword for total number of one-body Green's functions. You can freely give a name of the keyword.

- [int01]

Type : int-type (blank parameter not allowed)

Description : An integer giving total number of one-body Green's functions.

- [int02], [int04]

Type : int-type (blank parameter not allowed)

Description : An integer giving a site index ($0 \leq [\text{int02}], [\text{int04}] < \text{Nsite}$).

- [int03], [int05]

Type : int-type (blank parameter not allowed)

Description : An integer giving a spin index,
 0: up-spin,
 1: down-spin.

Use rules

- Headers cannot be omitted.
- A program is terminated, when [int01] is different from the total number of one-body Green's functions defined in this file.
- A program is terminated, when [int02]-[int05] are out of range from the defined values.

4.2.19 TwoBodyG file (greentwo.def)

This file determines the target components to calculate and output two-body Green's function $\langle c_{i\sigma_1}^\dagger c_{j\sigma_2} c_{k\sigma_3}^\dagger c_{l\sigma_4} \rangle$. For Spin, the condition $i = j$ and $k = l$ must be satisfied. An example of file format is shown as follows.

```
=====
NCisAjsCktAltDC          576
=====
===== Green functions for Sq AND Nq =====
=====
  0    0    0    0    0    0    0    0
  0    0    0    0    0    1    0    1
  0    0    0    0    1    0    1    0
  0    0    0    0    1    1    1    1
  0    0    0    0    2    0    2    0
  0    0    0    0    2    1    2    1
  0    0    0    0    3    0    3    0
  0    0    0    0    3    1    3    1
  0    0    0    0    4    0    4    0
  0    0    0    0    4    1    4    1
  0    0    0    0    5    0    5    0
  0    0    0    0    5    1    5    1
  0    0    0    0    6    0    6    0
  0    0    0    0    6    1    6    1
  0    0    0    0    7    0    7    0
  0    0    0    0    7    1    7    1
  0    0    0    0    8    0    8    0
  0    0    0    0    8    1    8    1
  0    0    0    0    9    0    9    0
  0    0    0    0    9    1    9    1
  0    0    0    0   10    0   10    0
  0    0    0    0   10    1   10    1
  0    0    0    0   11    0   11    0
  0    0    0    0   11    1   11    1
  0    1    0    1    0    0    0    0
  ...
```

File format

- Line 1: Header
- Line 2: [string01] [int01]
- Lines 3 - 5: Header
- Lines 6 -: [int02] [int03] [int04] [int05] [int06] [int07] [int08] [int09]

Parameters

- [string01]
Type : string-type (blank parameter not allowed)
Description : A keyword for total number of two-body Green's functions. You can freely give a name of the keyword.
- [int01]
Type : int-type (blank parameter not allowed)
Description : An integer giving total number of two-body Green's functions.
- [int02], [int04],[int06], [int08]
Type : int-type (blank parameter not allowed)
Description : An integer giving a site index ($0 \leq [int02], [int04], [int06], [int08] < N_{site}$).
- [int03], [int05],[int07], [int09]
Type : int-type (blank parameter not allowed)
Description : An integer giving a spin index,
0: up-spin,
1: down-spin.

Use rules

- Headers cannot be omitted.
- A program is terminated, when [int01] is different from the total number of two-body Green's functions defined in this file.
- A program is terminated, when [int02]-[int09] are out of range from the defined values.

4.3 Output files

The list of output files are shown in Table 4.3, where *** and xxx are the header indicated by CParaFileHead, CDataFileHead in ModPara file, respectively. yyy is a number given by $\text{NDataIdxStart} \cdots \text{NDataIdxStart} + \text{NDataQtySmp}$, where both NDataIdxStart and NDataQtySmp are defined in ModPara file and zzz is a number given by NDataIdxStart in ModPara.

Name	Details for corresponding files
***_opt.dat	All optimized parameters.
***_gutzwiller_opt.dat	Optimized gutzwiller factors.
***_jastrow_opt.dat	Optimized jastrow factors.
***_doublonHolon2site_opt.dat	Optimized 2-site doublon-holon correlation factors.
***_doublonHolon4site_opt.dat	Optimized 4-site doublon-holon correlation factors.
***_orbital_opt.dat	Optimized pair orbital factors.
xxx_out_yyy.dat	Energy and deviation.
xxx_var_yyy.dat	Progress information for optimizing variational parameters.
xxx_CalcTimer.dat	Computation time for each processes.
xxx_time_zzz.dat	Progress information for MonteCalro samplings.
xxx_cisajs_yyy.dat	One body Green's functions.
xxx_cisajsktalt_yyy.dat	Correlation functions.

Table 4.3: List of the output files.

4.3.1 Output file for variational parameters (***_opt.dat)

The average and deviation values of variational parameters and the energy optimized by the SR method are outputted in the following order:

$$\langle H \rangle, \langle H^2 \rangle, g_i, v_{ij}, \alpha_{2nt}^{d(h)}, \alpha_{4nt}^{d(h)}, f_{ij}.$$

The type of average values is a complex number, while that of the deviation is a real number. Since the initial values of all variational parameters are specified at the beginning of the calculation, the calculation of physical quantities is done by using this file file. Here, *** is the header indicated by CParaFileHead in ModPara file.

4.3.2 Output files for variational parameters at each steps (xxx_var_yyy.dat)

The average and deviation values of variational parameters and the energy optimized by the SR method are postscripted by the order same as \$\$\$_opt.dat file (the deviation is always outputted as 0). Here, xxx is the header indicated by CDataFileHead in ModPara file and yyy is a number given by $\text{NDataIdxStart} \cdots \text{NDataIdxStart} + \text{NDataQtySmp}$, where both NDataIdxStart and NDataQtySmp are defined in ModPara file.

4.3.3 Output file for gutzwiller factors (*****_gutzwiller_opt.dat**)

The optimized Gutzwiller factors by SR method are outputted. The file format is same as the `InGutzwiller` file defined in Sec. 4.2.17.

4.3.4 Output file for jastrow factors (*****_jastrow_opt.dat**)

The optimized Jastrow factors by SR method are outputted. The file format is same as the `InJastrow` file defined in Sec. 4.2.17.

4.3.5 Output file for doublonHolon 2-site factors (*****_doublonHolon2site_opt.dat**)

The optimized 2-site doublon-holon correlation factors by SR method are outputted. The file format is same as the `InDH2` file defined in Sec. 4.2.17.

4.3.6 Output file for doublonHolon 4-site factors (*****_doublonHolon4site_opt.dat**)

The optimized 4-site doublon-holon correlation factors by SR method are outputted. The file format is same as the `InDH4` file defined in Sec. 4.2.17.

4.3.7 Output file for pair orbitals (*****_orbital_opt.dat**)

The optimized pair orbitals by SR method are outputted. The file format is same as the `InOrbital` file defined in Sec. 4.2.17.

4.3.8 **xxx_out_yyy.dat**

The calculation information at each bins are outputted in the order:

$$\langle H \rangle, \langle H^2 \rangle, \frac{\langle H^2 \rangle - \langle H \rangle^2}{\langle H \rangle^2}.$$

The type of $\langle H \rangle$ is a complex number, and that of the others is a real number. Here, xxx is the header indicated by `CDataFileHead` in `ModPara` file and yyy is a number given by `NDataIdxStart...NDataIdxStart+NDataQtySmp`, where both `NDataIdxStart` and `NDataQtySmp` are defined in `ModPara` file. An example of outputted file is shown as follows.


```

1.151983765704212992e+01  8.124622418360909482e-01  \
1.619082955438887268e+02  2.019905203939084959e-01
1.288482613817423150e+01  5.006903733262847433e-01  \
1.972000325276957824e+02  1.824505193695792893e-01
1.308897206011880421e+01  5.701244886956570168e-01  \
2.072610167083121837e+02  2.029162857569105916e-01
...

```

4.3.9 xxx_CalcTimer.dat

After finishing calculation, the processing time is outputted in the order of the name, the number assigned by the process and the seconds at each processes. An example of outputted file is shown as follows.

```

All                [0]      15.90724
Initialization     [1]      0.04357
  read options     [10]     0.00012
  ReadDefFile      [11]     0.00082
  SetMemory        [12]     0.00002
  InitParameter    [13]     0.03026
VMCParaOpt         [2]     15.86367
  VMCMakeSample    [3]     12.85650
...

```

4.3.10 xxx_time_zzz.dat

The calculation information at each bins are outputted in the order of the sampling number, the acceptance ratio for hopping and exchange term (acc_hopp, acc_ex), trial numbers to update for hopping and exchange term (n_hopp, n_ex) and the time stamp. Here, xxx is the header indicated by CDataFileHead in ModPara file and zzz is a number given by NDataIdxStart in ModPara. An example of outputted file is shown as follows.

```
00000  acc_hop acc_ex  n_hop    n_ex      : Mon Jul 25 14:03:29 2016
00001  0.59688 0.00000 320      0         : Mon Jul 25 14:03:30 2016
00002  0.47727 0.00000 176      0         : Mon Jul 25 14:03:30 2016
00003  0.50000 0.00000 176      0         : Mon Jul 25 14:03:30 2016
00004  0.49432 0.00000 176      0         : Mon Jul 25 14:03:30 2016
00005  0.57386 0.00000 176      0         : Mon Jul 25 14:03:30 2016
00006  0.55114 0.00000 176      0         : Mon Jul 25 14:03:30 2016
...
```

4.3.11 xxx_cisajs_yyy.dat

The values of one body Green's functions are outputted in the order indicated by OneBodyG file. Here, xxx is the header indicated by CDataFileHead in ModPara file and yyy is a number given by NDataIdxStart...NDataIdxStart+NDataQtySmp, where both NDataIdxStart and NDataQtySmp are defined in ModPara file.

4.3.12 xxx_cisajsktalt_yyy.dat

The values of two body Green's functions are outputted in the order indicated by OneBodyG file. Here, xxx is the header indicated by CDataFileHead in ModPara file and yyy is a number given by NDataIdxStart...NDataIdxStart+NDataQtySmp, where both NDataIdxStart and NDataQtySmp are defined in ModPara file.

5

Algorithm

5.1 Variational MonteCarlo Method

適当な完全系に対するマルコフ連鎖を構成して重みつきサンプリングを行います。ここでは完全系として $S_z = 0$ の実空間配置 $\{|x\rangle\}$ を使用します。

$$|x\rangle = \prod_{n=1}^{N/2} c_{r_{n\uparrow}}^\dagger \prod_{n=1}^{N/2} c_{r_{n\downarrow}}^\dagger |0\rangle \quad (5.1)$$

ここで、 n 番目の σ 電子の位置を $r_{n\sigma}$ としました。

5.1.1 Importance sampling

マルコフ連鎖の重みを

$$\rho(x) = \frac{|\langle x|\psi\rangle|^2}{\langle\psi|\psi\rangle} \geq 0, \sum_x \rho(x) = 1 \quad (5.2)$$

とすると演算子 A の期待値は

$$\langle A \rangle = \frac{\langle\psi|A|\psi\rangle}{\langle\psi|\psi\rangle} = \sum_x \frac{\langle\psi|A|x\rangle\langle x|\psi\rangle}{\langle\psi|\psi\rangle} = \sum_x \rho(x) \frac{\langle\psi|A|x\rangle}{\langle\psi|x\rangle} \quad (5.3)$$

となります。 x に関する和を重み付きサンプリングに置き換えます。また、Local Green's function $G_{ij\sigma\sigma'}(x)$ は

$$G_{ij\sigma\sigma'}(x) = \frac{\langle\psi|c_{i\sigma}^\dagger c_{j\sigma'}|\psi\rangle}{\langle\psi|x\rangle} \quad (5.4)$$

で定義されます。なお、サンプリングに使用する乱数生成については、メルセンヌツイスター法を使用しています [3]。

5.2 Bogoliubov representation

In the spin system, the spin indices in input files of `transfer`, `InterAll`, and correlation functions are specified as those of the Bogoliubov representation. Spin operators are

written by using creation/annihilation operators as follows:

$$S_{iz} = \sum_{\sigma=-S}^S \sigma c_{i\sigma}^\dagger c_{i\sigma} \quad (5.5)$$

$$S_i^+ = \sum_{\sigma=-S}^{S-1} \sqrt{S(S+1) - \sigma(\sigma+1)} c_{i\sigma+1}^\dagger c_{i\sigma} \quad (5.6)$$

$$S_i^- = \sum_{\sigma=-S}^{S-1} \sqrt{S(S+1) - \sigma(\sigma+1)} c_{i\sigma}^\dagger c_{i\sigma+1} \quad (5.7)$$

5.3 Relation between Pfaffian Slater determinant and single Slater determinant

In this section, we show relation between Pfaffian Slater determinant and single Slater determinant. We also discuss meaning of the singular value decomposition of coefficients f_{ij} .

5.3.1 Relation between f_{ij} and $\Phi_{i\sigma}$

Pfaffian Slater determinant [one-body part of the many-variable variational Monte Carlo (mVMC) method] is defined as

$$|\phi_{\text{Pf}}\rangle = \left(\sum_{i,j=1}^{N_s} f_{ij} c_{i\uparrow}^\dagger c_{j\downarrow}^\dagger \right)^{N_e/2} |0\rangle, \quad (5.8)$$

where N_s is number of sites, N_e is number of total particles, and f_{ij} are variational parameters. For simplicity, we assume that f_{ij} are real number. Single Slater determinant is defined as

$$|\phi_{\text{SL}}\rangle = \left(\prod_{n=1}^{N_e/2} \psi_{n\uparrow}^\dagger \right) \left(\prod_{m=1}^{N_e/2} \psi_{m\downarrow}^\dagger \right) |0\rangle, \quad (5.9)$$

$$\psi_{n\sigma}^\dagger = \sum_{i=1}^{N_s} \Phi_{i\sigma} c_{i\sigma}^\dagger. \quad (5.10)$$

We note that Φ is the normalized orthogonal basis, i.e.,

$$\sum_{i=1}^{N_s} \Phi_{i\sigma} \Phi_{i\sigma'} = \delta_{\sigma\sigma'}, \quad (5.11)$$

where δ_{nm} is the Kronecker's delta. Due to this normalized orthogonality, we obtain following relation:

$$[\psi_{n\sigma}^\dagger, \psi_{m\sigma}]_+ = \delta_{nm}, \quad (5.12)$$

$$G_{ij\sigma} = \langle c_{i\sigma}^\dagger c_{j\sigma} \rangle = \frac{\langle \phi_{\text{SL}} | c_{i\sigma}^\dagger c_{j\sigma} | \phi_{\text{SL}} \rangle}{\langle \phi_{\text{SL}} | \phi_{\text{SL}} \rangle} \quad (5.13)$$

$$= \sum_n \Phi_{i\sigma} \Phi_{jn\sigma}. \quad (5.14)$$

Here, we rewrite ϕ_{SL} and obtain explicit relation between f_{ij} and $\Phi_{in\sigma}$. By using the commutation relation for $\psi_{n\sigma}^\dagger$, we rewrite ϕ_{SL} as

$$|\phi_{\text{SL}}\rangle \propto \prod_{n=1}^{N_e/2} \left(\psi_{n\uparrow}^\dagger \psi_{\mu(n)\downarrow}^\dagger \right) |0\rangle, \quad (5.15)$$

where $\mu(n)$ represents permutation of sequence of $n = 1, 2, \dots, N_e/2$. For simplicity, we take identity permutation and obtain the relation

$$|\phi_{\text{SL}}\rangle \propto \prod_{n=1}^{N_e/2} \left(\psi_{n\uparrow}^\dagger \psi_{n\downarrow}^\dagger \right) |0\rangle = \prod_{n=1}^{N_e/2} K_n^\dagger |0\rangle \quad (5.16)$$

$$\propto \left(\sum_{n=1}^{N_e/2} K_n^\dagger \right)^{N_e/2} |0\rangle = \left(\sum_{i,j=1}^{N_s} \left[\sum_{n=1}^{N_e/2} \Phi_{in\uparrow} \Phi_{jn\downarrow} \right] c_{i\uparrow}^\dagger c_{j\downarrow}^\dagger \right) |0\rangle, \quad (5.17)$$

where $K_n^\dagger = \psi_{n\uparrow}^\dagger \psi_{n\downarrow}^\dagger$ and we use the relation $K_n^\dagger K_m^\dagger = K_m^\dagger K_n^\dagger$. This result shows that f_{ij} can be expressed by the coefficients of the single Slater determinant as

$$f_{ij} = \sum_{n=1}^{N_e/2} \Phi_{in\uparrow} \Phi_{jn\downarrow}. \quad (5.18)$$

We note that this is one of expression of f_{ij} for single Slater determinant, i.e, f_{ij} depend on the pairing degrees of freedom (choices of $\mu(n)$) and gauge degrees of freedom (we can arbitrary change the sign of Φ as $\Phi_{in\sigma} \rightarrow -\Phi_{in\sigma}$). This large degrees of freedom is the origin of huge redundancy of f_{ij} .

5.3.2 Singular value decomposition of f_{ij}

We define matrices F , Φ_\uparrow , Φ_\downarrow , and Σ as

$$(F)_{ij} = f_{ij}, \quad (\Phi_\uparrow)_{in} = \Phi_{in\uparrow}, \quad (\Phi_\downarrow)_{in} = \Phi_{in\downarrow}, \quad (5.19)$$

$$\Sigma = \text{diag}[1, \dots, 1, 0, 0, 0] \quad (\# \text{ of } 1 = N_e/2). \quad (5.20)$$

By using these notations, we can describe the singular value decomposition of f_{ij} (or equivalently F) as

$$F = \Phi_\uparrow \Sigma \Phi_\downarrow^t. \quad (5.21)$$

This result indicates that f_{ij} can be described by the mean-field solutions if the number of nonzero singular values are $N_e/2$ and all the nonzero singular values of F are one. In other word, the singular values including their numbers offers the quantitative criterion how the Pfaffian Slater determinant deviates from the single Slater determinant.

6

Acknowledgement

T.B.D

A

Program for the unrestricted Hartree-Fock approximation

In mVMC package, there is a program to calculate the initial values of the pair orbital parameters f_{ij} for mVMC by using the unrestricted Hartree-Fock (UHF) approximation (relation between Pfaffian Slater determinant and single Slater determinant is explained in sec. 5.3). It is noted that the target system of this program is the itinerant electron system.

A.1 Overview

In UHF approximation, two-body interaction terms are approximated as one-body interaction terms by taking into account of the fluctuation, $\delta A \equiv A - \langle A \rangle$, up to the first order. As an example, we consider the inter-site coulomb interactions

$$\mathcal{H}_V = \sum_{i,j} V_{ij} n_i n_j, \quad (\text{A.1})$$

where we define $i \equiv (i, \sigma)$, $j \equiv (j, \sigma')$ for simplicity. Then, the interaction terms can be approximated as

$$\begin{aligned} n_i n_j &= (\langle n_i \rangle + \delta n_i)(\langle n_j \rangle + \delta n_j) - [\langle c_i^\dagger c_j \rangle + \delta(c_i^\dagger c_j)] [\langle c_j^\dagger c_i \rangle + \delta(c_j^\dagger c_i)] \\ &\sim \langle n_i \rangle n_j + \langle n_j \rangle n_i - \langle c_i^\dagger c_j \rangle c_j^\dagger c_i - \langle c_j^\dagger c_i \rangle c_i^\dagger c_j - \langle n_i \rangle \langle n_j \rangle + \langle c_j^\dagger c_i \rangle \langle c_i^\dagger c_j \rangle. \end{aligned} \quad (\text{A.2})$$

このような形式で、その他の相互作用についても近似を行うことで、一体問題に帰着させることができます。計算では、上記の各平均値が self-consistent になるまで計算を行います。

A.1.1 ソースコード

ソースコード一式は `src/ComplexUHF/src` 以下に入っています。

A.1.2 コンパイル方法

コンパイルは mVMC のコンパイルと同様に mVMC のフォルダ直下で

```
$ make mvmc
```

を実行することで行われます。コンパイルが終了すると、`src/ComplexUHF/src` に実行ファイル UHF が作成されます。

A.1.3 Input files

入力ファイル指定用ファイル (namelist.def)

UHF で指定するファイルは以下のファイルです。namelist.def は 4.2.1 で定義されているファイルと同じ様式です。

- ModPara
- LocSpin
- Trans
- CoulombIntra
- CoulombInter
- Hund
- PairHop
- Exchange
- Orbital
- Initial

基本的には mVMC と同じファイルとなりますが、

- ModPara ファイルで指定されるパラメータ
- Initial ファイルの追加

が mVMC と異なります。以下、その詳細を記載します。

ModPara ファイルで指定するパラメータ

UHF で指定するパラメータは以下のパラメータです。

- Nsite
- Ne
- Mix
- EPS
- IterationMax

Nsite, Ne は mVMC と共通のパラメータで、以下の三つが UHF 独特のパラメータです。

- Mix
linear mixing を double 型で指定します。mix=1 とすると完全に新しい Green 関数に置き換えられます。

- **EPS**

収束判定条件を `int` 型で指定します。新しく計算された Green 関数と一つ前の Green 関数の残差が $10^{-\text{EPS}}$ の場合に、計算が打ち切られます。

- **IterationMax**

ループの最大数を `int` 型で指定します。

なお、mVMC で使用するその他パラメータが存在する場合は Warning が標準出力されます (計算は中断せずに実行されます)。

Initial ファイル

グリーン関数 $G_{ij\sigma_1\sigma_2} \equiv \langle c_{i\sigma_1}^\dagger c_{j\sigma_2} \rangle$ の初期値を与えます。ファイル様式は **Trans** ファイルと同じで、 $t_{ij\sigma_1\sigma_2}$ の代わりに $G_{ij\sigma_1\sigma_2}$ の値を記述します。なお、値を指定しないグリーン関数には 0 が入ります。

A.2 Usage

UHF 自体は mVMC と同じように

```
$ UHF namelist.def
```

で動きます。計算の流れは以下の通りです。

1. ファイル読み込み
2. ハミルトニアン作成
3. グリーン関数の計算 (self-consistent になるまで)
4. f_{ij} 、各種ファイルの出力

計算後に出力されるファイルおよび出力例は以下の通りです。

- `zvo_result.dat`: エネルギーと粒子数が出力されます。

```
energy -15.2265348135
num    36.0000000000
```

- `zvo_check.dat`: イタレーションのステップ数、グリーン関数の残差の絶対値の平均、収束過程のエネルギー、粒子数を順に出力します。

```
0  0.004925645652 -544.963484605164 36.000000
1  0.002481594941 -278.304285708488 36.000000
2  0.001274395448 -147.247026925130 36.000000
3  0.000681060599 -82.973664527606 36.000000
...
```

- `zvo_UHF_cisajs.dat`: 収束した一体グリーン関数 $G_{ij\sigma_1\sigma_2} \equiv \langle c_{i\sigma_1}^\dagger c_{j\sigma_2} \rangle$ 。全成分について $i, \sigma_1, j, \sigma_2, \text{Re}[G_{ij\sigma_1\sigma_2}], \text{Im}[G_{ij\sigma_1\sigma_2}]$ の順に出力されます。

```

0    0    0    0 0.5037555283 0.0000000000
0    0    0    1 0.4610257618 0.0003115503
0    1    0    0 0.4610257618 -0.0003115503
0    1    0    1 0.4962444717 0.0000000000
...
```

- `zvo_eigen.dat`: 収束したハミルトニアン固有値が低エネルギー順に出力されます。

```

1  -2.9425069199
2  -2.9425069198
3  -1.5005359205
...
```

- `zvo_gap.dat`: 全電子数を N_{tot} とした場合に、 $\Delta E = E(N_{\text{tot}} + 1) - E(N_{\text{tot}})$ が出力されます。

```

5.2208232631
```

- `zvo_orbital_opt.dat`: スレータ行列式から生成した f_{ij} 。InOrbital ファイルと同じ形式のファイルが出力されます。 f_{ij} が Orbital ファイルを参照し計算され、同種のパラメータについては平均化した値が採用されます。

References

- [1] M. Wimmer: ACM Trans. Math. Software 38 30 (2012).
- [2] D. Tahara, M. Imada, Journal of the Physical Society of Japan **77**, 114701 (2008).
- [3] <http://www.math.sci.hiroshima-u.ac.jp/m-mat/MT/SFMT>.