

Stuff Goes Bad: Erlang in Anger

Fred Hébert 著、elixir.jp 訳

2018 年 6 月 26 日

Git commit ID: [108e37e](#)



STUFF GOES BAD: ERLANG IN ANGER

STUFF GOES BAD: ERLANG IN ANGER IS A TRADEMARK OF THE UNIVERSITY OF CALIFORNIA, BERKELEY.



Fred Hébert および Heroku 社著の **Stuff Goes Bad: Erlang in Anger** は [クリエイティブ・コモンズ 表示 - 非営利 - 継承 4.0 国際ライセンス](#) として公開されています。また日本語訳もライセンス条件は原文に従います。

次の皆様のサポート、レビュー、そして編集に感謝します。

Jacob Vorreuter、**Seth Falcon**、**Raoul Duke**、**Nathaniel Waisbrot**、**David Holland**、**Alisdair Sullivan**、**Lukas Larsson**、**Tim Chevalier**、**Paul Bone**、**Jonathan Roes**、**Roberto Aloi**、**Dmytro Lytovchenko**、**Tristan Sloughter**。

表紙の画像は [sxc.hu](#) に掲載されている [drouu](#) による [fallout shelter](#) を改変したものです。

v1.1.0

2016-04-06

はじめに	vii
第 I 部 アプリケーションを書く	1
第 1 章 コードベースへの飛び込み方	2
1.1 生の Erlang	2
1.2 OTP アプリケーション	3
1.3 OTP リリース	7
1.4 演習	7
第 2 章 オープンソースの Erlang 製ソフトウェアをビルドする	9
2.1 プロジェクト構造	9
2.2 スーパーバイザーと start_link セマンティクス	12
2.3 演習	15
第 3 章 過負荷のための計画をたてる	17
3.1 よくある過負荷の原因	18
3.2 入力を制限する	20
3.3 データの破棄	23
3.4 演習	28
第 II 部 アプリケーションを診断する	29
第 4 章 リモートノードへの接続	30
4.1 ジョブ制御モード	30
4.2 Remsh	31

4.3	SSH デーモン	32
4.4	名前付きパイプ	33
4.5	演習	33
第 5 章	ランタイムメトリクス	34
5.1	Global View	34
5.2	Digging In	39
5.3	演習	46
第 6 章	クラッシュダンプを読む	48
6.1	一般的な見方	48
6.2	メールボックスがいっぱい	51
6.3	非常に多い（もしくは非常に少ない）プロセス	51
6.4	大量のポート数	52
6.5	メモリ割り当てができない	52
6.6	演習	52
第 7 章	Memory Leaks	54
7.1	Common Sources of Leaks	54
7.2	バイナリ	58
7.3	メモリフラグメンテーション	61
7.4	演習	68
第 8 章	CPU and Scheduler Hogs	70
8.1	Profiling and Reduction Counts	70
8.2	System Monitors	71
8.3	演習	73
第 9 章	トレース	74
9.1	トレースの原則	75
9.2	Recon によるトレース	76
9.3	実行例	78
9.4	演習	79
おわりに		81

1.1	Basho のオープンソースクラウドライブラリである riak_cs の依存関係を表したグラフです。このグラフは kernel や stdlib といった必ず依存するようなものは除いています。楕円はアプリケーションで、四角はライブラリアプリケーションです。	6
7.1	Erlang's Memory allocators and their hierarchy. Not shown is the special super carrier , optionally allowing to pre-allocate (and limit) all memory available to the Erlang VM since R16B03.	63
7.2	Example memory allocated in a specific sub-allocator	64
7.3	Example memory allocated in a specific sub-allocator	65
7.4	Example memory allocated in a specific sub-allocator	66
9.1	トレースされるのは、pid 指定とトレースパターンの交差した箇所です	75

はじめに

ソフトウェアを実行するにあたって

他のプログラミング言語と比較して、Erlang には障害が起きた場合の対処方法がかなり独特な部分があります。他のプログラミング言語には、その言語自体や開発環境、開発手法といったものがエラーを防ぐためにできる限りのことをしてくれる、という共通の考え方があります。実行時に何かがおかしくなるということは予防する必要があるもので、予防できなかった場合には、人々が考えてきたあらゆる解決策の範囲を超えてしまいます。

プログラムは一度書かれると、本番環境に投入され、そこではあらゆることが発生するでしょう。エラーがあったら、新しいバージョンを投入する必要がでてきます。

一方で、Erlang では障害というものは、それが開発者によるもの、運用者によるもの、あるいはハードウェアによるもの、それらのどれであろうとも起きるものである、という考え方に沿っています。プログラムやシステム内のすべてのエラーを取り除くというのは非実用的かつ不可能に近いものです。¹ エラーをあらゆるコストを払って予防するのではなく、エラーにうまく対処できれば、プログラムのたいていの予期せぬ動作もその「なんとかする」手法でうまく対応できるでしょう。

これが「Let it Crash」²という考え方の元になっています。この考えを元にとすると障害にうまく対処出来ること、かつシステム内のすべての複雑なバグが本番環境で発生する前に取り除くコストが極めて高いことから、プログラマーは対応方法がわかっているエラーだけ対処すべきで、それ以外は他のプロセス (やスーパーバイザー) や仮想マシンに任せるべきです。

たいていのバグが一時的なものであると仮定する³と、エラーに遭遇したときに単純にプロセスを再起動して安定して動いていた状態に戻すというのは、驚くほど良い戦略になりえます。

Erlang というのは人体の免疫システムと同様の手法が取られているプログラミング環境です。一方で、他のたいていの言語は体内に病原菌が一切入らないようにするような衛生についてだけを考えています。どちらも私にとって極めて重要なプログラミング環境ものです。ほぼすべての環境でそれぞれに衛生状況が異なります。実行時のエラーがうまく対処されて、そのまま生き残れるような治癒の仕組みを持っているプログラミング環境は Erlang の他にほとんどありません。

¹ 生命に関わるシステムは通常この議論の対象外です。

² Erlang 界隈の人々は、最近是不安がらせないようにということで「Let it Fail」のほうを好んで使うようです。

³ Jim Gray の [Why Do Computers Stop and What Can Be Done About It?](#)によれば、132 個中 131 個のバグが一時的なもの (非決定的で調査するときにはなくなっていて、再実行することで問題が解決するもの) です。

Erlang ではシステムになにか悪いことが起きてもすぐにはシステムが落ちないので、Erlang/OTP ではあなたが医者のようにシステムを診察する術も提供してくれます。システムの内部に入って、本番環境のその場でシステム内部を確認してまわって、実行中に内部をすべて注意深く観察して、ときには対話的に問題を直すことすらできるようになっています。このアナロジーを使い続けると、Erlang は、患者に診察所に来てもらったり、患者の日々の生活を止めることなく、問題を検出するための広範囲に及ぶ検査を実行したり、様々な種類の手術 (非常に侵襲性の高い手術でさえも) できるようにしてくれています。

本書は戦時において Erlang 衛生兵になるためのちょっとしたガイドになるよう書かれました。本書は障害の発生原因を理解する上で役立つ秘訣や裏ワザを集めた初めての書籍であり、また Erlang で作られた本番システムを開発者がデバッグするときに役立った様々なコードスニペットや実戦経験をあつめた辞書でもあります。

対象読者

本書は初心者向けではありません。たいていのチュートリアルや参考書、トレーニング講習などから実際に本番環境でシステムを走らせてそれを運用し、検査し、デバッグできるようになるまでには隔たりがあります。プログラマーが新しい言語や環境を学ぶ中で一般的なガイドラインから逸脱して、コミュニティの多くの人々が同様に取り組んでいる実世界の問題へと踏み出すまでには、明文化されていない手探りの期間が存在します。

本書は、読者は Erlang と OTP フレームワークの基礎には熟達していることを想定しています。Erlang/OTP の機能は—通常私がややこしいと思ったときには—私が適していると思うように説明しています。通常の Erlang/OTP の資料を読んで混乱してしまった読者には、必要に応じて何を参照すべきか説明があります。⁴⁵

本書を読むにあたり前提知識として必ずしも想定していないものは、Erlang 製ソフトウェアのデバッグ方法、既存のコードベースの読み進め方、あるいは本番環境への Erlang 製プログラムのデプロイのベストプラクティス⁶などです。

本書の読み進め方

本書は二部構成です。

第 I 部ではアプリケーションの書き方に焦点を当てます。この部ではコードベースへの飛び込み方 (第 1 章)、オープンソースの Erlang 製ソフトウェアを書く上での一般的な秘訣 (第 2 章)、そしてシステム設計における過負荷への計画の仕方 (第 3 章) を説明します。

第 II 部では Erlang 衛生兵になって、既存の動作しているシステムに取り組みます。この部では実行中のノードへの接続方法の解説 (第 4 章)、取得できる基本的な実行時のメトリクス (第 5 章) を説明します。またクラッシュダンプを使ったシステムの検死方法 (第 6 章)、メモリリークの検出方法と修正方法 (第 7 章)、

⁴ 無料の資料が必要であれば [Learn You Some Erlang](#) や通常の [Erlang ドキュメント](#) をおすすめします。

⁵ 訳注: 日本語資料としては、[Learn you some Erlang for great good!](#) 日本語訳とその書籍版をおすすめします。

⁶ Erlang を screen や tmux のセッションで実行する、というのはデプロイ戦略では**ありません**

そして暴走した CPU 使用率の検出方法 (第 8 章) を説明します。最終章では問題がシステムを落としてしまう前に理解するために、本番環境での Erlang の関数呼び出しを recon⁷を使ってトレースする方法を説明します。(第 9 章)

各章のあとにはすべてを理解したか確認したりより深く理解したい方向けに、いくつか補足的に質問やハンズオン形式の演習問題が付いてきます。

⁷ <http://ferd.github.io/recon/> — 本書を薄くするために使われるライブラリで、一般的に本番環境で使っても安心なものです

第I部

アプリケーションを書く

第1章

コードベースへの飛び込み方

「ソースを読め」というフレーズは言われるととっても煩わしい言葉ではありますが、Erlang プログラマとしてやっていくのであれば、しばしばそうしなければならないでしょう。ライブラリのドキュメントが不完全だったり、古かったり、あるいは単純にドキュメントが存在しなかったりします。また他の理由として、Erlang プログラマは Lisper に近いところが少しあって、ライブラリを書くときには自身に起こっている問題を解決するために書いて、テストをしたり、他の状況で試したりということはあまりしない傾向にあります。そしてそういった別のコンテキストで発生する問題を直したり、拡張する場合は自分で行う必要があります。

したがって、仕事で引き継ぎがあった場合でも、自分のシステムと連携するために問題を修正したりあるいは中身を理解する場合でも、何も知らないコードベースに飛び込まなければならなくなることはまず間違いないでしょう。これは取り組んでいるプロジェクトが自分自身で設計したわけではない場合はいつでも、たいていの言語でも同様です。

世間にある Erlang のコードベースには主に 3 つの種類があります。1 つめは生の Erlang コードベース、2 つめは OTP アプリケーション、3 つめは OTP リリースです。この章ではこれら 3 つのそれぞれに見ていき、それぞれを読み込んでいくのに役立つ秘訣をお教えします。

1.1 生の Erlang

生の Erlang コードベースに遭遇したら、各自でなんとかしてください。こうしたコードはなにか特に標準に従っているわけでもないの、何が起きているかは自分で深い道に分け入っていかなければなりません。

つまり、README.md ファイルの類がアプリケーションのエントリーポイントを示してくれていて、さらにいえば、ライブラリ作者に質問するための連絡先情報などがあることを願うのみということです。

幸いにも、生の Erlang に遭遇することは滅多にありません。あったとしても、だいたい初心者のプロジェクトか、あるいはかつて Erlang 初心者によって書かれた素晴らしいプロジェクトで真剣に書き直しが

必要になっているものです。一般的に、`rebar3` やその前身¹ のようなツールの出現によって、ほとんどの人が OTP アプリケーションを使うようになりました。

1.2 OTP アプリケーション

OTP アプリケーションを理解するのは通常かなり単純です。OTP アプリケーションはみな次のようなディレクトリ構造をしています。

```
doc/  
ebin/  
src/  
test/  
LICENSE.txt  
README.md  
rebar.config
```

わずかな違いはあるかもしれませんが、一般的な構造は同じです。

各 OTP アプリケーションは **app ファイル** を持っていて、`ebin/<AppName>.app` か、あるいはしばしば `src/<AppName>.app.src` という名前になっているはずです。² **app** ファイルには主に 2 つの種類があります。

```
{application, useragent, [  
  {description, "Identify browsers & OSes from useragent strings"},  
  {vsn, "0.1.2"},  
  {registered, []},  
  {applications, [kernel, stdlib]},  
  {modules, [useragent]}  
]}.
```

そして

```
{application, dispcount, [  
  {description, "A dispatching library for resources and task "  
    "limiting based on shared counters"},  
  {vsn, "1.0.0"},  
  {applications, [kernel, stdlib]},  
  {registered, []},
```

¹ <https://www.rebar3.org> — 第 2 章で簡単に紹介されるビルドツールです。

² ビルドシステムが最終的に `ebin` にファイルを生成します。この場合、多くの `src/<AppName>.app.src` ファイルはモジュールを示すものではなく、ビルドシステムがモジュール化の面倒を見ることになります。


```
{mod, {dispcount, []}},
{modules, [dispcount, dispcount_serv, dispcount_sup,
            dispcount_supersup, dispcount_watcher, watchers_sup]}
}].
```

の2種類です。

最初のケースは **ライブラリアプリケーション** と呼ばれていて、2つめのケースは標準 **アプリケーション** と呼ばれています。

1.2.1 ライブラリアプリケーション

ライブラリアプリケーションは通常 `appname_something` というような名前のモジュールと、`appname` という名前のモジュールを持っています。これは通常ライブラリの中心となるインターフェースモジュールで、提供される大半の機能がそこに含まれています。

モジュールのソースを見ることで、少しの労力でモジュールがどのように動作するか理解できます。もしモジュールが特定のビヘイビア (`gen_server` や `gen_fsm` など) を何度も使っているようであれば、おそらくスーパーバイザーの下でプロセスを起動して、然るべき方法で呼び出すことが想定されているでしょう。ビヘイビアが一つもなければ、そこにあるのは関数のステートレスなライブラリです。この場合、モジュールのエクスポートされた関数を見ることで、このライブラリの目的を素早く理解できるでしょう。

1.2.2 標準アプリケーション

標準的な OTP アプリケーションでは、エントリーポイントとして機能する2つの潜在的なモジュールがあります。

1. `appname`
2. `appname_app`

最初のファイルはライブラリアプリケーションで見たものと似た使われ方 (エントリーポイント) をします。一方で、2つめのファイルは `application` ビヘイビアを実装するもので、アプリケーションの階層構造の頂点を表すものになります。状況によっては最初のファイルは同時に両方の役割を果たします。

そのアプリケーションを単純にあなたのアプリケーションの依存先として追加しようとしているのであれば、`appname` の中を詳しく見てみましょう。そのアプリケーションの運用や修正を行う必要があるのであれば、かわりに `appname_app` の中を見てみましょう。

アプリケーションはトップレベルのスーパーバイザーを起動して、その `pid` を返します。このトップレベルのスーパーバイザーはそれが自動で起動するすべての子プロセスの仕様を含んでいます。³

プロセスが監視ツリーのより上位にあれば、アプリケーションの存続にとってより不可欠になってきま

³ 場合によっては、そのスーパーバイザーが子プロセスをまったく指定しないこともあります。その場合、子プロセスはその API の関数あるいはアプリケーションの起動プロセス内で動的に起動される、あるいはそのスーパーバイザーが (アプリケーションファイルの `env` タプル内の) OTP の環境変数が読み込まれるのを許可するためだけに存在しているかのどちらかです。

す。またプロセスの重要性は起動開始の早さによっても予測可能です。(監視ツリー内の子プロセスはすべて順番に深さ優先で起動されています。) プロセスが監視ツリー内であとの方で起動されたとしたら、おそらくそれより前に起動されたプロセスに依存しているでしょう。

さらに、同じアプリケーション内で依存しあっているワーカープロセス (たとえば、ソケット通信をバッファしているプロセスと、その通信プロトコルを理解するための有限ステートマシンにそのデータをリレーするプロセス) は、おそらく同じスーパーバイザーの下で再グループ化されていて、何かおかしいことが起きたらまとめて落ちるでしょう。これは熟慮の末の選択で、通常どちらかのプロセスがいなくなったり状態がおかしくなってしまったときに、両方のプロセスを再起動してまっさらな状態から始めるほうが、どう回復するかを考えるよりも単純だからです。

スーパーバイザーの再起動戦略はスーパーバイザー以下のプロセス間での関係性に影響を与えます。

- `one_for_one` と `simple_one_for_one` は、失敗は全体としてアプリケーションの停止に関係してくるものの、お互いに直接依存しあっていないプロセスに使われます。⁴
- `rest_for_one` はお互いに直列に依存しているプロセスを表現するときに使われます。
- `one_for_all` は全体がお互いに依存しあっているプロセスに使われます。

この構造の意味するところは、OTP アプリケーションを見るときは監視ツリーを上から順にたどるのが最も簡単であるということです。

監視された各ワーカープロセスでは、それが実装しているビヘイビアがそのプロセスの目的を知る上で良い手がかりとなります。

- `gen_server` はリソースを保持して、クライアント・サーバーパターン (より一般的にはリクエスト・レスポンスパターン) に沿っています。
- `gen_fsm` は有限ステートマシンなので一連のイベントやイベントに依存する入力と反応を扱います。プロトコルを実装するときによく使われます。
- `gen_event` はコールバック用のイベントのハブとして振る舞ったり、通知を扱う方法として使われます。

これらのモジュールはすべてある種の構造を持っています。通常はユーザーに晒されたインターフェースを表すエクスポートされた関数、コールバックモジュール用のエクスポートされた関数、プライベート関数の順です。

監視関係や各ビヘイビアの典型的な役割を下地に、他のモジュールに使われているインターフェースや実装されたビヘイビアを見ることで、いま読み込んでいるプログラムに関するたくさんの情報が明らかになります。

⁴ 開発者によっては `rest_for_one` がより適切な場面で `one_for_one` を使ったりします。起動順を正しく行うことを求めてそうするわけですが、先に言ったような再起動時や先に起動されたプロセスが死んだときの起動順については忘れてしまうのです。



図 1.1 Basho のオープンソースクラウドライブラリである **riak_cs** の依存関係を表したグラフです。このグラフは **kernel** や **stdlib** といった必ず依存するようなものは除いています。楕円はアプリケーションで、四角はライブラリアプリケーションです。

1.2.3 依存関係

すべてのアプリケーションには依存するものが存在します。⁵そして、これらの依存先にはそれぞれの依存が存在します。OTP アプリケーションには通常状態を共有するものではありません。したがって、コードのある部分が他の部分にどのように依存しているかは、アプリケーションの開発者が正しく実装していると想定すれば、アプリケーションファイルを見るだけで知ることが出来ます。図 1.1 は、アプリケーションファイルを見することで生成できるダイアグラムで、OTP アプリケーションの構造の理解に役立ちます。

こうした依存関係を使って各アプリケーションの短い解説を見ることで、何がどこにあるかの大きな地図を描くのに役立つでしょう。似たダイアグラムを生成するためには、**recon** の **script** ディレクトリ内のツールを使って `escript script/app_deps.erl` を実行してみましょう。⁶似たダイアグラムが

⁵ どんなに少なくとも **kernel** アプリケーションと **stdlib** アプリケーションに依存しています。

⁶ このスクリプトは **graphviz** に依存しています。

observer⁷アプリケーションを使うことで得られますが、各監視ツリーのものになります。これらをまとめることで、コードベースの中で何が何をしているかを簡単に見つけられるようになるでしょう。

1.3 OTP リリース

OTP リリースは世間で見かけるたいの OTP アプリケーションよりもそれほど難しいものではありません。OTP リリースは複数の OTP アプリケーションを本番投入可能な状態でパッケージ化したもので、これによって手動でアプリケーションの `application:start/2` を呼び出す必要なく起動と停止行えるようになっています。コンパイルされたリリースは、デフォルトのものよりも含まれるライブラリ数は多少異なりますが自分専用の Erlang VM のコピーを持っていて、単独で起動できるようになっています。もちろん、リリースに関してはまだ話すことはありますが、一般的に OTP アプリケーションのときと同じようなやり方で中身を確認していきます。

OTP リリース内には通常、`relx.config` または `rebar.config` ファイル内の `relx` タプルがあります。ここに、どのトップレベルアプリケーションがリリースに含まれているかとパッケージ化に関するオプションが書かれています。`relx` を使ったリリースはプロジェクトの Wiki ページ⁸や `rebar3`⁹のドキュメントサイトや `erlang.mk`¹⁰にあるドキュメントを読めば理解できます。

他のシステムは `systools` や `reltool` で使われる設定ファイルに依存しているでしょう。ここにリリースに含まれるすべてのアプリケーションが記述されていて、パッケージに関するオプションが少々¹¹書かれています。それらを理解するには、[既存のドキュメントを読むことをおすすめします](#)。¹²

1.4 演習

復習問題

1. コードベースがアプリケーションがリリースかはどうやって確認できますか
2. ライブラリアプリケーションとアプリケーションはどの点が異なりますか
3. 監視において `one_for_all` 戦略で管理されるプロセスとはどういうプロセスですか
4. `gen_server` ビヘイビアではなく `gen_fsm` ビヘイビアを使うのはどういう状況ですか

ハンズオン

https://github.com/ferd/recon_demo のコードをダウンロードしてください。このコードは本書内の演習問題のテストベッドとして使われます。このコードベースにまだ詳しくないという前提で、この章で説明された秘訣や裏ワザを使ってこのコードベースを理解できるか見てみましょう。

⁷ http://www.erlang.org/doc/apps/observer/observer_ug.html

⁸ <https://github.com/erlware/relx/wiki>

⁹ <https://www.rebar3.org/docs/releases>

¹⁰ <http://erlang.mk/guide/relx.html>

¹¹ 多数

¹² 訳注: 日本語訳版 https://www.ymotongpoo.com/works/lyse-ja/ja/24_release_is_the_word.html

1. このアプリケーションはライブラリですか。スタンドアロンシステムですか。
2. このアプリは何をしますか。
3. 依存するものはありますか。あるとすればなんですか。
4. このアプリケーションの README では非決定的である。これは真でしょうか。その理由も説明してください。
5. このアプリケーションの依存関係の連鎖を表現できますか。ダイアグラムを生成してください。
6. README で説明されているメインアプリケーションにより多くのプロセスを追加できますか。

第2章

オープンソースの ERLANG 製ソフトウェアをビルドする

多くの Erlang に関する書籍は Erlang/OTP アプリケーションのビルド方法に関しては説明していますが、Erlang のコミュニティが開発しているオープンソースとの連携方法まで含めた深い解説を行っているものはほとんどありません。中には意図的にその話題を避けているものさえあります。本章では Erlang のオープンソースとの連携に関して簡単に案内します。

世間で見かけるオープンソースコードの大半が OTP アプリケーションです。事実、OTP リリースをビルドする多くの人はひとかたまりの OTP アプリケーションとしてビルドしています。

あなたが書いているものがプロジェクトを作っている誰かに使われる可能性がある独立したコードであれば、おそらくそれは OTP アプリケーションでしょう。あなたが作っているものがユーザーがそのままの形でデプロイするような単独で動作するプロダクトであれば、それは OTP リリースでしょう。¹

サポートされている主なビルドツールは `rebar3` と `erlang.mk` です。前者はビルドツールでありパッケージマネージャーで、Erlang ライブラリと Erlang 製システムを繰り返し使える形で簡単に開発してリリースできるようにしてくれるものです。一方で後者は特殊な `makefile` で本番用やリリースにはそれほど向いていませんが、より柔軟な記述が出来るようになっています。本章では、`rebar3` がデファクトスタンダードになっていること、自分がよく知っていること、また `erlang.mk` は `rebar3` の依存先としてサポートされている事が多いといった理由から、`rebar3` を使ったビルドに焦点をあてます。

2.1 プロジェクト構造

OTP アプリケーションと OTP リリースのプロジェクト構造は異なります。OTP アプリケーションは（あるとすれば）トップレベルスーパーバイザーを 1 つ持っている想定できます。そしておそらく依存しているものがその下に固まってぶら下がっていると想定できます。OTP リリースは通常複数の OTP アプリケーションから成り、それらがお互いに依存していることもあればそうでないこともあります。これらの事実からアプリケーションの構成をする際に主に 2 つの方法に落ち着きます。

¹ OTP アプリケーションと OTP リリースのビルドの仕方についてはお手元にある Erlang の入門書に譲ります。

2.1.1 OTP アプリケーション

OTP アプリケーションでは、適切な構造は [1.2](#) の節で説明したとおりです。

```
1 _build/  
2 doc/  
3 src/  
4 test/  
5 LICENSE.txt  
6 README.md  
7 rebar.config  
8 rebar.lock
```

ここで新しいのは `_build/` ディレクトリと `rebar.lock` ファイルです。これらは `rebar3` によって自動的に生成されます。²

このディレクトリに `rebar3` がプロジェクトのすべてのビルドアーティファクトを置きます。動作させるのに必要なライブラリやパッケージのローカルコピーなどもそこに含まれます。主要な Erlang ツールはパッケージをグローバルにはインストールせず、³かわりにプロジェクト間での衝突を避けるためにすべてをプロジェクトローカルに保存します。

このような依存関係は `rebar.config` に数行設定を追加するだけで `rebar3` に指定できます。

```
1 {deps, [  
2   %% Hex.pm Packages  
3   myapp,  
4   {myapp, "1.0.0"},  
5   %% source dependencies  
6   {myapp, {git, "git://github.com/user/myapp.git", {ref, "aef728"}}},  
7   {myapp, {git, "https://github.com/user/myapp.git", {branch, "master"}}},  
8   {myapp, {hg, "https://othersite.com/user/myapp", {tag, "3.0.0"}}}  
9 ]}.
```

依存するものは `git`（または `hg`）のソースあるいは [hex.pm](#) からレベル順の幅優先探索で直接取得されます。その後コンパイルされて、特定のコンパイルオプションが設定ファイルの `{erl_opts, List}`. オプ

² 人によっては `rebar3` をアプリケーション内に直接パッケージします。これは `rebar3` やその前身を使ったことがない人がライブラリやプロジェクトとブートストラップできるようになされていたものです。自分のシステムのグローバルに `rebar3` をインストールして問題ありません。自分のシステムをビルドするのに特定のバージョンが必要であればローカルにコピーを持っておいても良いでしょう。

³ まだビルドされていないパッケージのローカルキャッシュは除きます。

ションとともに追加されます。⁴

`rebar3 compile` を呼んで、すべての依存物をダウンロードし、一度にそれらとあなたのアプリをビルドします。

あなたのアプリケーションのコードを公開するときは、`_build/`ディレクトリを**含まずに**配布しましょう。他の開発社があなたのアプリケーションと同じものに依存している可能性は高く、何度もそれを配布するのは意味がありません。その場にあるビルドシステム（この場合は `rebar3`）が重複した項目を見つけ出して、必要なものは1度だけしか取得しないようにしてくれるでしょう。

2.1.2 OTP リリース

OTP リリースの場合、構造は少し異なります。リリースはアプリケーションの集まりで、その構造はそれを反映したものになっています。

`src` にトップレベルアプリケーションを持つ代わりに、アプリケーションは `app` や `lib` 内で一階層下にあります。

```
_build/  
apps/  
  - myapp1/  
    - src/  
  - myapp2/  
    - src/  
doc/  
LICENSE.txt  
README.md  
rebar.config  
rebar.lock
```

この構造は複数の OTP アプリケーションが1つのコードレポジトリで管理されているような OTP リリースを生成するときに役立っています。`rebar3` と `erlang.mk` はともにリリースをまとめるときに `relx` ライブラリに依存しています。`Systool` や `Reltool` といった他のツールも以前はカバーされていて⁵、ユーザーに多くの力を提供します。

(`rebar.config` 内の) 上のようなディレクトリ構造の場合の `relx` 設定タプルは次のようになります。

```
1 {relx, [  
2   {release, {demo, "1.0.0"},
```

⁴ より詳しい話はこちらを参照してください。 <https://www.rebar3.org/docs/configuration>

⁵ <http://learnyoussomeerlang.com/release-is-the-word> 訳註: 日本語訳版は https://www.ymotongpoo.com/works/lyse-ja/ja/24_release_is_the_word.html

```
3 [myapp1, myapp2, ..., recon]],  
4  
5 {include_erts, false} % will use local Erlang install  
6 ]}
```

rebar3 release を呼ぶとリリースをビルドして、_build/default/rel/ディレクトリに置かれます。rebar3 tar を呼ぶと tarball を _build/default/rel/demo/demo-1.0.0.tar.gz に配置し、デプロイ可能となります。

2.2 スーパーバイザーと start_link セマンティクス

複雑な本番システムでは、多くの障害やエラーは一時的なもので、処理を再実行するのは良いことです—Jim Gray の論文⁶では、一時的なバグを扱う場合、システムの **Mean Times Between Failures (障害間隔平均時間) (MTBF)** で見た時に 4 倍良くなると引用していました。そして、スーパーバイザーは再起動を行うだけではありません。

Erlang のスーパーバイザーとその監視ツリーの非常に重要な点の一つに、**起動フェーズが同期的に行われる**こと、があります。各 OTP プロセスは兄弟や従兄弟のプロセスの起動を妨げる可能性があります。もしプロセスが死んだら、起動を何度も何度も繰り返され、最終的に起動できるようになる、さもないと頻繁に失敗することになります。

この点が人々がよくある間違いをおかしがちなところですが、クラッシュした子プロセスを再起動する前にバックオフやクールダウンの期間はありません。ネットワーク系アプリケーションが初期化フェーズで接続を確立しようとしてリモートサービスが落ちているとき、アプリケーションは無意味な再起動を多数繰り返した後に失敗します。そしてシステムが停止します。

多くの Erlang 開発者がスーパーバイザーにクールダウン期間を持たせるほうが良いという方向の主張をします。私は一つの単純な理由からそれに反対です。その理由とは**保証がすべて**ということです。

2.2.1 すべては保証のため

プロセスを再起動するという事は、プロセスを安定した、既知の状態に戻すことです。そこから、再度処理を試みます。もし初期化が安定していなければ、監視の価値は非常に低いでしょう。初期化プロセスは何が起きても安定しているべきです。そのような理由から、あるプロセスの兄弟プロセスや従兄弟プロセスが後に起動したときに、それらのプロセスはシステムにおいて自分が起動する以前に立ち上がった部分は健康であると知った状態で立ち上げられるでしょう。

もしこのような安定した状態を提供しない場合、あるいはシステム全体を非同期で起動しようとした場合、ループ内での try ... catch では提供されないような、このディレクトリ構造による利益をほとんど享受できないでしょう。

監視されたプロセスは**ベストエフォートではなく**、初期化フェーズが行われることを**保証**します。つま

⁶ <http://mononocqc.tumblr.com/post/35165909365/why-do-computers-stop>

りあなたがデータベースやサービスのクライアントを書いている場合、何が起きても常に接続可能であると言いたい場合を除いて、初期化フェーズの一部として接続が確立したかを書く必要はありません。

たとえば、データベースが同じホストにあり、あなたの Erlang システムよりも前に起動されているはずだとすれば、初期化の最中に接続を強制できるでしょう。そうであれば再起動もうまく動くはずです。これらの保証を壊す理解不能あるいは予期せぬことが起きた場合には、ノードがクラッシュします。それは期待する動作です。システムを起動する前提条件が満たされなかったからです。それはシステム全体に落ちたと伝えるべきアサーションです。

一方で、あなたのデータベースがリモートホストにある場合、コネクションに失敗する可能性があります。うまく行かない⁷というのは分散システムの現実です。このような場合、クライアントプロセスでできる唯一の保証は、クライアントはリクエストはさばけるということだけであり、データベースとの通信に関してはそのような保証は出来ません。クライアントは通信の断絶が起きている間は、たとえばすべての呼び出しに対して{error, not_connected}を返すといったことができるでしょう。

その上でデータベースへの再接続はクールダウンでもバックオフでも何でもいいですが、とりあえずあなたが最適だと思うそういうものを使って、システムの安定性を損なわずに行えるでしょう。最適化の一貫として初期化フェーズに行うこともできるでしょうが、何かが切断された場合にプロセスがあとになっても再接続できるようにすべきです。

外部サービスが落ちることが予想されるのであれば、システムでそのサービスの存在を保証すべきではありません。私たちが扱っているのは現実世界であって、外部依存先に障害が起きることは常にあり得るのです。

2.2.2 副作用

もちろん、そのようなクライアントを呼ぶライブラリやプロセスは、データベースなしに動作することを想定していなければ、その後エラーを吐きます。それはまったく異なる問題空間のまったく異なる問題で、ビジネスルールやクライアントで何が出来て何が出来ないかなどに依存するものです。しかし、ワークアラウンド可能なものもあります。たとえば、運用系のメトリクスを保存するサービスのクライアントを考えましょう。一クライアントを呼び出すコードはシステム全体に悪影響を及ぼすことなくエラーを無視できるでしょう。

初期化と監視での手法の違いは、クライアント自身ではなくクライアントの呼び出し側が障害にどの程度耐えられるか決められるという点です。障害耐性のあるシステムを設計する場合にこの点は非常に重要な特徴です。そうです、スーパーバイザーとは再起動についてですが、それは既知の安定した状態への再起動であるべきです。

2.2.3 例: 接続を保証しない初期化

次のコードはプロセスの状態として接続を保証しようとしています。

⁷ あるいはレイテンシが限りなく遅くなって障害状態と見分けがつかなくなったり


```
1 init(Args) ->
2     Opts = parse_args(Args),
3     {ok, Port} = connect(Opts),
4     {ok, #state{sock=Port, opts=Opts}}.
5
6 [...]
7
8 handle_info(reconnect, S = #state{sock=undefined, opts=Opts}) ->
9     %% ループで再接続を試みる
10    case connect(Opts) of
11        {ok, New} -> {noreply, S#state{sock=New}};
12        _ -> self() ! reconnect, {noreply, S}
13    end;
```

かわりに、次のように書き換えることを検討してみましょう。

```
1 init(Args) ->
2     Opts = parse_args(Args),
3     %% いずれにせよここでベストエフォートで接続を試みて
4     %% 接続が出来なかった場合には備えましょう。
5     self() ! reconnect,
6     {ok, #state{sock=undefined, opts=Opts}}.
7
8 [...]
9
10 handle_info(reconnect, S = #state{sock=undefined, opts=Opts}) ->
11     %% try reconnecting in a loop
12     case connect(Opts) of
13         {ok, New} -> {noreply, S#state{sock=New}};
14         _ -> self() ! reconnect, {noreply, S}
15     end;
```

初期化をより少ない保証で行えます。つまり**接続可能**から**接続マネージャー利用可能**という保証に変わりました。

2.2.4 要約

私が関わってきた本番システムは両方の手法が混ざったものでした。

設定ファイル、ファイルシステムへのアクセス (たとえばログ目的)、依存しているローカルのリソース (ログ用に UDP ポートを開ける)、ディスクやネットワークから安定した状態を復元するなどといったものはスーパーバイザーの要件として、どれだけ長時間かかってでも同期的に読み込むことに決めるでしょう。(アプリケーションによってはまれに起動に 10 分以上かかることもあるでしょうが、それはおそらく間違った情報を配信してしないよう、基準の状態として動作するために**必要な**ギガバイト単位のデータを同期しているのです。)

一方で、ローカルではないデータベースや外部のサービスに依存しているコードは、より素早い監視ツリーのブートとともに部分的な起動を適用させるでしょう。その理由は、もし通常の処理の最中に障害が何度も起きることが予想されるのであれば、それが始めに起きるか後で起きるかに違いはありません。いずれにせよその対応をしなければならないことになりはならず、またシステムのその部分に関して、保証の厳格さが少ないほうがしばしば良い解決策になります。

2.2.5 アプリケーション戦略

何があろうとも、ノードで障害が連続して起きることはノードへの死刑宣告ではありません。システムが様々な OTP アプリケーションに分割されてしまえば、ノードにとってどのアプリケーションが致命的でどれがそうでないかを定められるようになります。各 OTP アプリケーションは 3 つの方法で起動できます。temporary (一時的)、transient (暫定的)、permanent (永続的) のどれか一つを選択でき、`application:start(Name, Type)` と手動で起動するか、あるいはリリース内の設定ファイルに書くことで可能です。

- **permanent:** `application:stop/1` を手動で実行した場合を除いて、アプリケーションが終了したとき、システム全体が落ちます。
- **transient:** アプリケーションが `normal` が原因で終了した場合は問題ありません。他の理由で終了した場合はシステム全体を終了させます。
- **temporary:** アプリケーションはいかなる理由でも停止できます。停止したことは報告されますが、何も悪いことは起きません。

また**インクルードされたアプリケーション**としてアプリケーションを起動することも可能です。これは自分のスーパーバイザーの下で起動し、再起動も独自の戦略で行います。

2.3 演習

復習問題

1. Erlang の監視ツリーは深さ優先で起動されますか。それとも幅優先ですか。同期的ですか、非同期ですか。
2. 3 つのアプリケーション戦略は为什么呢。それぞれ何をするものでしょう。
3. アプリケーションとリリースのディレクトリ構造の主な違いは为什么呢。
4. リリースを使うべき場面はいつでしょう。

5. プロセスの `init` 関数に含まれるべき状態の例を2つ挙げてください。また含まれるべきでない状態の例も2つ挙げてください。

ハンズオン

https://github.com/ferd/recon_demo にあるコードを使って次に答えてください。

1. リリースにホストされている `main` アプリケーションを抜き出して独立したアプリケーションにして、他のプロジェクトにインクルード可能にしてください。
2. アプリケーションをどこかにホストしてください。(GitHub、Bitbucket、ローカルサーバーなど) そしてそのアプリケーションに依存するリリースをビルドしてください。
3. `main` アプリケーションのワーカー (`council_member`) はサーバーの起動とそこへの接続を自身の `init/1` 関数で行っています。この接続を `init` 関数の外で行なえますか。このアプリの用途においてそうすることの利点はあるでしょうか。

第3章

過負荷のための計画をたてる

私が実際に遭遇した最も一般的な障害原因は、圧倒的に稼働中ノードの **OutOfMemory** です。さらにそれは通常、境界外に出るメッセージキューに関連します。¹ これに対処する方法はたくさんありますが、自身が開発しているシステムを適切に理解することで、どう対処するかを決めることができます。

事象をととても単純化するために、私が取り組むプロジェクトのほとんどは、大きな浴室のシンクとして視覚化することができます。ユーザーとデータ入力が蛇口から流れています。**Erlang** システム自体はシンクとパイプであり、出力（データベース、外部 API、外部サービスなど）は下水道です。



キューがオーバーフローして **Erlang** ノードが死んでしまった場合、誰の責任かを解明できます。誰かがシンクに水を入れすぎましたか？ 下水道が渋滞していますか？ あまりにも小さなパイプを設計しましたか？

どのキューが爆発したかを判断することは必ずしも困難ではありません。これはクラッシュダンプから見つけられる情報です。ただし爆破原因の解明は少し複雑です。プロセスや **runtime** の調査に基づいて、

¹ メッセージキューが問題になる事例は 6 章、特に 6.2 節で説明されます。

高速にキューが溢れたのか、ブロックされたプロセスがメッセージを十分高速に処理できないか、などの原因を把握することができます。

最も難しい部分は、それをどのように修正するか決めることです。シンクがあまりにも詰まると、私たちは通常、浴室をもっと大きくすることから始めます（クラッシュしたプログラムの近辺から）。次に、シンクのドレインが小さすぎると分かり、それを最適化します。それから、パイプそのものが狭すぎるのが分かり、それを最適化します。下水道がそれ以上受け取ることができなくなるまで過負荷はシステムのさらに下に押し込まれます。そのタイミングで、システム全体への入力処理を助けるために、シンクを追加したり、浴槽を追加したりすることもあります。

そうこうしたところで、もはや浴室の範囲内では事象を改善できないこともあります。あまりにも多くのログが送信されるため、一貫性を必要とするデータベースにボトルネックがあったり、または単に事象を解決するための組織内の知識や人材が不足していることもあります。

こういった点を見つけることで、システムの **真のボトルネック** が何であるかを特定し、過去の全ての良いと思っていた（そして対応コストが高いかもしれない）最適化は、多かれ少なかれは無駄であることも特定できます。

私たちはより賢くなる必要があります。そして、世もレベルアップしています。私たちは、システムに入る情報をより軽いもの（圧縮、より良いアルゴリズムとデータ表現、キャッシングなど）に変換しようとしています。

それでもあまりの過負荷が来ることがあります、そしてシステムへの入力を制限するか、入力を廃棄するか、システムがクラッシュするサービスレベルを受け入れるか、を決めなければなりません。これらのメカニズムは、2つの幅広いストラテジーに分類されます：バックプレッシャーと負荷分散。

この章では、Erlang システムの爆発を引き起こす一般的なイベントとともに、それらを追求します。

3.1 よくある過負荷の原因

どんなにうまく取り組んでもたいていの人が遅かれ早かれ遭遇する、キューを爆発させ Erlang システムを過負荷にさせるよくある原因がいくつかあります。そうした原因は通常システムを大きくさせスケールアップさせる何かしらの助けが必要な兆候を表していたり、はたまた想定よりもずっと厳しく連鎖してしまう予期せぬ障害だったりします。

3.1.1 error_logger の爆発

皮肉なことにエラーログの責任を担うプロセスがもっとも壊れやすい部分の一つです。デフォルトの Erlang のインストールでは、`error_logger`² プロセスは優雅にディスクやネットワーク越しにログを書き込み、それはエラーが生成されるよりもずっと遅い速度での書き込みになってしまいます。

特に（エラーではなく）ユーザーが生成したログメッセージや大きなプロセスがクラッシュしたときのログではこうしたことが起きます。前者に関しては、`error_logger` は任意のレベルのメッセージが継続的にやってくることを想定していないからです。例外的な場合のみを想定していて、大量のトラフィックが

² http://www.erlang.org/doc/man/error_logger.html で定義されています。

来る場合は想定していないのです。後者に関しては、(プロセスのメールボックスも含めた) プロセス全体の状態がログされるためにコピーされるからです。たった数行のメッセージでもメモリを大量に増やす原因となりますし、もしそれがノードを Out Of Memory (OOM) にさせるに至らなくても、追加のメッセージの書き込み速度を下げるには十分です。

これに対する現行執筆時点での最適解は `lager` を代替のログライブラリとして使うことです。

`lager` がすべての問題を解決するわけではない一方で、分量が多いログメッセージを切り詰めて、補足的にある閾値を超えたときには OTP が生成したエラーメッセージを破棄して、ユーザーが送ったメッセージ用に自主規制のために自動的に非同期モードと同期モードを切り替えます。

ユーザーが送ったメッセージのサイズが非常に大きくかつワンオフのプロセスからやってくる、というような非常に固有の状況には対応出来ません。しかしながら、これは他の状況に比べるとずっと起こりにくいもので、プログラマーがずっと管理しやすい状況です。

3.1.2 ロックとブロック操作

ロック操作とブロック操作は新しいタスクを継続的に受け取るプロセス内で予想外に実行が長くなってしまったときに、しばしば問題になります。

私が経験してきたもっともよくある例は、接続を受け入れる間、あるいは TCP ソケットでメッセージを待つ間プロセスがブロックするというものです。このようなブロック操作の間、メッセージは好きなだけメッセージキューに積み上がっていきます。

特に悪い状況の例が、`lhttpc` ライブラリのフォークの中で私が書いた HTTP 接続用のプールマネージャー内にありました。私達の運用状況においてはたいはいはうまく動いていて、さらに接続のタイムアウトも 10 ミリ秒に設定して、接続待ちが長くなりすぎないようにしていました。³数週間完璧に稼働したあとに、リモートサーバーの一つが落ちたときに HTTP クライアントプールが供給できない状態になりました。

このデグレの背後にある原因は、リモートサーバーが落ちたときに、突然すべての接続操作が最低 10 ミリ秒かかるようになりました。この 10 ミリ秒は接続試行がまだ断念されるよりも短い時間です。中央のプロセスに秒間 9,000 メッセージが届くようになったあたりでは、各接続試行は通常 5 ミリ秒以下で、この障害と同様の状況になったのは、およそ秒間 18,000 メッセージが届くようになったあたりで、このあたりで手に負えなくなりました。

私達がいたった解決策は呼び出し元のプロセスに接続のタスクを譲って、プールマネージャーが自動で制限したかのように制限を強制することにしました。これでブロック操作はライブラリの全ユーザーに分散され、プールマネージャーによって行われるべき仕事はずっと少なくなり、より多くのリクエストを受け付けられるようになりました。

プログラム内でメッセージを受信するための中央的なハブになっている場所が**一つでも**あれば、できれば時間がかかるタスクはそこから取り除くべきでしょう。より多くのプロセスを追加することで予測可能な過負荷⁴に対応する一ブロック操作に対処する、またはかわりに”main” プロセスがブロックする間のバッファとして機能する一のは良いアイデアです。

³ 10 ミリ秒は非常に短いですが、リアルタイムビiddingに使われる共用サーバーでは問題ありません。

⁴ 本番環境で事実に基づいて過負荷になるもの

本質的には並行ではない処理に対してより多くのプロセスを管理する複雑さが増すので、守りのプログラミングを始める前に確実にその実装が必要であることを確認しましょう。

他の選択肢としては、ブロッキングタスクを非同期なものに変形させることです。もし処理がそうした変更を受け入れられるものであれば、長時間実行されるジョブを起動して、そのジョブの一意な識別子としてのトークンともとのリクエスト元を保持します。リソースが使えるようになったら、リソースからサーバーに対して先述のトークンと一緒にメッセージを送り返させます。結果サーバーはメッセージを受け取り、トークンとリクエスト元を対応させ、その間他のリクエストにブロックされることなく結果を返します。⁵

この選択肢は多くのプロセスを使う方法に比べてあいまいなものになりがちで、すぐにコールバック地獄になりえますが、使うリソースは少なくなるでしょう。

3.1.3 予期せぬメッセージ

OTP アプリケーションを使っている場合は知らないメッセージを受け取ることはまれです。なぜなら OTP ビヘイビアはすべてを `handle_info/2` にある節で処理することを期待しているので、予期せぬメッセージがたまることはあまりないでしょう。

しかしながら、あらゆる OTP 互換システムはビヘイビアを実装していないプロセスやメッセージハンドリングを頑張るビヘイビアではない方向で実装してしまったプロセスを持つことになります。あなたが十分に幸運であれば、監視ツール⁶が定常的なメモリ増加を示していて、大きなキューサイズを点検することで⁷どのプロセスに問題があるかわかるでしょう。そのあと、メッセージを必要のように処理することで問題を修正できます。

3.2 入力を制限する

Erlang システム内のメッセージキューが大きくなるのを管理する最も単純な方法は入力を制限することです。基本的にユーザーとのやり取りを遅くさせ（バックプレッシャーをかけています）ていることを意味しているため、追加の最適化の必要もなくすぐに問題を修正するという理由から最も単純な手法なのです。一方で、ユーザーにとっては本当にひどい体験となります。

データの入力を制限する最もよく知られた方法は、無制限に同期的に成長する可能性があるキューを持ったプロセスを呼び出すことです。次のリクエストに移る前にレスポンスを求めるようにすれば、一般的に問題の直接の原因は確実に軽減されるでしょう。

この手法の難しい部分はキューの成長の原因となるボトルネックは通常システムの周辺部ではなく、システムの深層部にあって、この問題が顕在化する前に行うほぼすべての最適化のあとに見つけることにな

⁵ redo アプリケーションはこうした処理を行うライブラリの例です。redo の `redo_block` モジュールにその処理があります。このあまりドキュメント化されていないモジュールは、パイプライン接続をブロッキングう接続にしますが、呼び出し元に対してパイプラインの面を維持している間だけそうします。—これによって呼び出し元はタイムアウトが発生したときに、サーバーがリクエストの受け入れを止めることなく、すべての未達の呼び出しが失敗したわけではなく 1 つの呼び出しだけが失敗したとわかります。

⁶ 5.1 の節を見ましょう

⁷ 5.2.1 の節を見ましょう

ります。このようなボトルネックはだいたいデータベースの操作、ディスクの操作、あるいはネットワーク越しのサービスでしょう。

これはつまり同期的な動作をシステムの深層部に導入すると、おそらく各階層ごとにバックプレッシャーに対応し、システムの周辺部までたどり着いてユーザーに「もう少しゆっくりしてください」と言えるようになるまで対応する必要が出て来るということです。このパターンを理解した開発者はしばしばユーザーごとにシステムのエン트리ポイントに API 制限を設けようとします。⁸特に基本的なシステムに対するサービスのクオリティ (QoS) を保証でき、リソースを公平に (あるいは不公平に) 望んだとおりにリソースを割り当てられるので、これは正当なやり方です。

3.2.1 タイムアウトはどれくらいの長さであるべきか

同期呼び出しによる過負荷に対処するためにバックプレッシャーを適用することにおいて特に扱いづらいのは、システムがどのタイミングでタイムアウトするべきかよりも、処理は通常どれくらいの時間がかかるのかを決定しなければならないことです。

この問題を最もうまく表現しようと思うと、最初のタイマーがシステムの周辺部で開始されるけれども、致命的な処理はシステムの深層部で起きているというような具合です。つまり、システムの周辺部にあるタイマーはシステムの深層部にあるタイマーよりも長い時間待つ必要があるでしょう。ただし、深層部で処理が成功していたとしても周辺部では操作はタイムアウトしたということにしたいのであれば別です。

この状況を脱する簡単な方法はタイムアウトを無期限にすることです。Pat Helland⁹がこれに対して興味深い回答をしています。

アプリケーション開発者によってはタイムアウトを設定せず、無制限に待機しても良いと主張するかもしれません。私がよく、彼らはタイムアウトを 30 年に設定した、ということにしています。そして次に私は愚かではなく合理的である必要があるんだという返事が来ます。**なぜ 30 年は愚かで、無制限は合理的なんでしょう？** 私は無制限に返事を待つようなメッセージアプリを見たことがありません...

つまり、究極的にはケースバイケースな問題です。多くの場合、フロー制御には異なる機構を使うほうがより実用的でしょう。¹⁰

3.2.2 許可を求める

バックプレッシャーのもう少し単純な例はブロックしたいリソース、それも速く出来ずビジネスやユーザーにとって致命的なリソースの確認です。呼び出し元がリソース要求の権利を求めたりそのリソースを

⁸ すべてのリクエストを等しく遅くするか、あるいは速度制限を設けるかはトレードオフがあって、ともに有効です。より多くの新規ユーザーがシステムにアクセスしてきたときに、ユーザーごとに速度制限をするということは依然としてキャパシティを大きくする必要がある、あるいはすべてのユーザーの限度を下げる必要があります。一方で、無差別にブロックする同期的なシステムはもっと簡単にあらゆる負荷に適用できますが、おそらく不公平でしょう。

⁹ [Idempotence is Not a Medical Condition](#) 2012 年 4 月 14 日発行

¹⁰ Erlang では、infinity という値を使うことでタイマーを作ることを回避でき、それによってリソースを多少節約出来ます。これを使う場合は一連の呼び出しの中のどこかで最低一つはきちんとタイムアウトを設定することを肝に命じておきましょう。

使うようなモジュールやプロシージャの裏で、これらのリソースのロックしましょう。使われる変数は様々あって、メモリ、CPU、全体の負荷、呼び出し回数の上限、並行処理、応答時間、これらの組み合わせ、などです。

SafetyValve¹¹アプリケーションはシステム全体に及ぶフレームワークで、バックプレッシャーが必要だとわかっているときに使えます。

サービスやシステムの障害により関係しそうなユースケースには、多くのサーキットブレーカーアプリケーションがあります。たとえば **breaky**¹²、**fuse**¹³、**Klarna** の **circuit_breaker**¹⁴ といった具合です。

または、プロセス、ETS、あるいはその他のツールなどを使ってアドホックな解決策を作ることも出来ます。重要なのは、システムの周辺部（あるいはサブシステム）がデータをブロックして、データを処理する権利を求めるけれども、コード内の致命的なボトルネックは権利が許可されるかどうかを決めるものです。

このように進める利点は、タイマーや抽象化のあらゆる層を同期的にするというような厄介なものを単純すべて避けられることです。かわりに、ボトルネックや周辺部の特定の場所あるいは制御点に見張りを置いて、その間にあるものはすべて最も読みやすい形で表現できます。

3.2.3 ユーザーが見るもの

バックプレッシャーで厄介なのはそれを報告することです。バックプレッシャーが暗黙的に同期呼び出し経由で行われたとき、それが過負荷によって起きていると知る唯一の方法はシステムが遅くなってあまり使えなくなる場合だけです。悲しいことに、これはハードウェアやネットワークの不調や、関係ない過負荷、そして遅いクライアントに起こりうる兆候でもあります。

システムの応答性によってシステムがバックプレッシャーを適用しているかを知ろうとすることは、その人に熱があるという診察結果から病気を診断しようとするようなものです。

機構として、許可を求めることは、一般的に何が起きているかを明示的に報告できるようなインターフェースを定義できるようにしています。たとえばシステム全体が過負荷になっていたり、あるいは処理を実行したり適宜調整できる限界の速度になったりした場合の報告などです。

システムを設計するときには選択をしなければなりません。ユーザーにアカウントごとの制限を設けるか、あるいはシステム全体で一つの制限を持つかです。

システム全体あるいはノード全体での制限というのは通常実装が簡単ですが、不公平に成りうるという欠点があります。あるユーザーがリクエストの 99% を行っていると、そのせいで他の大多数のユーザーがプラットフォームを使えない状態になってしまうでしょう。

一方で、アカウントごとの制限は非常に公平で、通常の制限よりもゆるい制限になるプレミアムユーザーを設定するというような気の利いたこともできるようになります。これは極めて素晴らしいことですが、欠点もあって、システムを使うユーザーの数が増えるほど、快適に動作するためのシステム全体の制限は引き上げられます。1 分間に 100 リクエストを投げられるユーザー 100 人がいると全体では 1 分間に 10000 リクエストとなります。同じ制限速度で 20 人新規ユーザーを追加すると、とたんにクラッシュが大量に発生

¹¹ <https://github.com/jlouis/safetyvalve>

¹² <https://github.com/mmmzeeman/breaky>

¹³ <https://github.com/jlouis/fuse>

¹⁴ https://github.com/klarna/circuit_breaker

するようになります。

システムを設計したときに作ったエラーに対するセーフマージンはユーザーの数が増えるにつれ徐々に失われていきます。その観点からビジネスが耐えられるかのトレードオフを考慮することが重要です。なぜなら、ユーザーはシステム全体がときどき落ちてしまうことよりもずっと、自分に割り当てられた使用量がいつも使えないことのほうが嫌だと思うからです。

3.3 データの破棄

Erlang システム以外から流入速度を落とせず、かつスケールアップもできない場合、データをドロップさせるか、クラッシュ（結局それでも大抵の場合は、処理中のデータをより乱暴にドロップ）させる必要があります。

これは全ての人が目を背けたくなる悲しい現実です。プログラマーや、ソフトウェアエンジニア、そしてコンピュータサイエンティストは、不要なデータは消去し、有用なデータはすべて保持するよう学んできています。地道な最適化をすることにより、Erlang システムは入力データを問題なく処理できる状態になります。

しかし、Erlang システム自身が全てのデータを十分な速度で処理できたとしても、Erlang システムの**後ろ**に控えるコンポーネントがブロックし、出力よりもデータ入力の方が速くなることもあります。

受信するデータ量を制限する選択肢がない場合は、クラッシュを避けるためにメッセージをドロップする必要があります。

3.3.1 Random Drop

Randomly dropping messages is the easiest way to do such a thing, and might also be the most robust implementation, due to its simplicity.

The trick is to define some threshold value between 0.0 and 1.0 and to fetch a random number in that range:

```
-module(drop).  
-export([random/1]).  
  
random(Rate) ->  
    maybe_seed(),  
    random:uniform() =< Rate.  
  
maybe_seed() ->  
    case get(random_seed) of  
        undefined -> random:seed(erlang:now());  
        {X,X,X} -> random:seed(erlang:now());  
        _ -> ok  
    end.
```

If you aim to keep 95% of the messages you send, the authorization could be written by a call to `case drop:random(0.95) of true -> send(); false -> drop() end`, or a shorter `drop:random(0.95) andalso send()` if you don't need to do anything specific when dropping a message.

The `maybe_seed()` function will check that a valid seed is present in the process dictionary and use it rather than a crappy one, but only if it has not been defined before, in order to avoid calling `now()` (a monotonic function that requires a global lock) too often.

There is one 'gotcha' to this method, though: the random drop must ideally be done at the producer level rather than at the queue (the receiver) level. The best way to avoid overloading a queue is to not send data its way in the first place. Because there are no bounded mailboxes in Erlang, dropping in the receiving process only guarantees that this process will be spinning wildly, trying to get rid of messages, and fighting the schedulers to do actual work.

On the other hand, dropping at the producer level is guaranteed to distribute the work equally across all processes.

This can give place to interesting optimizations where the working process or a given monitor process¹⁵ uses values in an ETS table or `application:set_env/3` to dynamically increase and decrease the threshold to be used with the random number. This allows control over how many messages are dropped based on overload, and the configuration data can be fetched by any process rather efficiently by using `application:get_env/2`.

Similar techniques could also be used to implement different drop ratios for different message priorities, rather than trying to sort it all out at the consumer level.

3.3.2 Queue Buffers

Queue buffers are a good alternative when you want more control over the messages you get rid of than with random drops, particularly when you expect overload to be coming in bursts rather than a constant stream in need of thinning.

Even though the regular mailbox for a process has the form of a queue, you'll generally want to pull **all** the messages out of it as soon as possible. A queue buffer will need two processes to be safe:

- The regular process you'd work with (likely a `gen_server`);
- A new process that will do nothing but buffer the messages. Messages from the outside should go to this process.

To make things work, the buffer process only has to remove all the messages it can from its mailbox and put them in a queue data structure¹⁶ it manages on its own. Whenever the server is ready to do more work, it can ask the buffer process to send it a given number of messages that it can work

¹⁵ Any process tasked with checking the load of specific processes using heuristics such as `process_info(Pid, message_queue_len)` could be a monitor

¹⁶ The `queue` module in Erlang provides a purely functional queue data structure that can work fine for such a buffer.

on. The buffer process picks them from its queue, forwards them to the server, and goes back to accumulating data.

Whenever the queue grows beyond a certain size¹⁷ and you receive a new message, you can then pop the oldest one and push the new one in there, dropping the oldest elements as you go.¹⁸

This should keep the entire number of messages received to a rather stable size and provide a good amount of resistance to overload, somewhat similar to the functional version of a ring buffer.

The **PO Box**¹⁹ library implements such a queue buffer.

3.3.3 Stack Buffers

Stack buffers are ideal when you want the amount of control offered by queue buffers, but you have an important requirement for low latency.

To use a stack as a buffer, you'll need two processes, just like you would with queue buffers, but a list²⁰ will be used instead of a queue data structure.

The reason the stack buffer is particularly good for low latency is related to issues similar to bufferbloat²¹. If you get behind on a few messages being buffered in a queue, all the messages in the queue get to be slowed down and acquire milliseconds of wait time. Eventually, they all get to be too old and the entire buffer needs to be discarded.

On the other hand, a stack will make it so only a restricted number of elements are kept waiting while the newer ones keep making it to the server to be processed in a timely manner.

Whenever you see the stack grow beyond a certain size or notice that an element in it is too old for your QoS requirements you can just drop the rest of the stack and keep going from there. **PO Box** also offers such a buffer implementation.

A major downside of stack buffers is that messages are not necessarily going to be processed in the order they were submitted — they're nicer for independent tasks, but will ruin your day if you expect a sequence of events to be respected.

¹⁷ To calculate the length of a queue, it is preferable to use a counter that gets incremented and decremented on each message sent or received, rather than iterating over the queue every time. It takes slightly more memory, but will tend to distribute the load of counting more evenly, helping predictability and avoiding more sudden build-ups in the buffer's mailbox

¹⁸ You can alternatively make a queue that pops the newest message and queues up the oldest ones if you feel previous data is more important to keep.

¹⁹ Available at: <https://github.com/ferd/pobox>, the library has been used in production for a long time in large scale products at Heroku and is considered mature

²⁰ Erlang lists **are** stacks, for all we care. They provide push and pop operations that take O(1) complexity and are very fast

²¹ <http://queue.acm.org/detail.cfm?id=2071893>

3.3.4 Time-Sensitive Buffers

If you need to react to old events **before** they are too old, then things become more complex, as you can't know about it without looking deep in the stack each time, and dropping from the bottom of the stack in a constant manner gets to be inefficient. An interesting approach could be done with buckets, where multiple stacks are used, with each of them containing a given time slice. When requests get too old for the QoS constraints, drop an entire bucket, but not the entire buffer.

It may sound counter-intuitive to make some requests a lot worse to benefit the majority — you'll have great medians but poor 99 percentiles — but this happens in a state where you would drop messages anyway, and is preferable in cases where you do need low latency.

3.3.5 Dealing With Constant Overload

Being under constant overload may require a new solution. Whereas both queues and buffers will be great for cases where overload happens from time to time (even if it's a rather prolonged period of time), they both work more reliably when you expect the input rate to eventually drop, letting you catch up.

You'll mostly get problems when trying to send so many messages they can't make it all to one process without overloading it. Two approaches are generally good for this case:

- Have many processes that act as buffers and load-balance through them (scale horizontally)
- use ETS tables as locks and counters (reduce the input)

ETS tables are generally able to handle a ton more requests per second than a process, but the operations they support are a lot more basic. A single read, or adding or removing from a counter atomically is as fancy as you should expect things to get for the general case.

ETS tables will be required for both approaches.

Generally speaking, the first approach could work well with the regular process registry: you take N processes to divide up the load, give them all a known name, and pick one of them to send the message to. Given you're pretty much going to assume you'll be overloaded, randomly picking a process with an even distribution tends to be reliable: no state communication is required, work will be shared in a roughly equal manner, and it's rather insensitive to failure.

In practice, though, we want to avoid atoms generated dynamically, so I tend to prefer to register workers in an ETS table with `read_concurrency` set to `true`. It's a bit more work, but it gives more flexibility when it comes to updating the number of workers later on.

An approach similar to this one is used in the `lhttpc`²² library mentioned earlier, to split load balancers on a per-domain basis.

²² The `lhttpc_lb` module in this library implements it.

For the second approach, using counters and locks, the same basic structure still remains (pick one of many options, send it a message), but before actually sending a message, you must atomically update an ETS counter²³. There is a known limit shared across all clients (either through their supervisor, or any other config or ETS value) and each request that can be made to a process needs to clear this limit first.

This approach has been used in `dispcount`²⁴ to avoid message queues, and to guarantee low-latency responses to any message that won't be handled so that you do not need to wait to know your request was denied. It is then up to the user of the library whether to give up as soon as possible, or to keep retrying with different workers.

3.3.6 How Do You Drop

Most of the solutions outlined here work based on message quantity, but it's also possible to try and do it based on message size, or expected complexity, if you can predict it. When using a queue or stack buffer, instead of counting entries, all you may need to do is count their size or assign them a given load as a limit.

I've found that in practice, dropping without regard to the specifics of the message works rather well, but each application has its share of unique compromises that can be acceptable or not²⁵.

There are also cases where the data is sent to you in a "fire and forget" manner — the entire system is part of an asynchronous pipeline — and it proves difficult to provide feedback to the end-user about why some requests were dropped or are missing. If you can reserve a special type of message that accumulates dropped responses and tells the user "N messages were dropped for reason X", that can, on its own, make the compromise far more acceptable to the user. This is the choice that was made with Heroku's `logplex` log routing system, which can spit out `L10 errors`, alerting the user that a part of the system can't deal with all the volume right now.

In the end, what is acceptable or not to deal with overload tends to depend on the humans that use the system. It is often easier to bend the requirements a bit than develop new technology, but sometimes it is just not avoidable.

²³ By using `ets:update_counter/3`.

²⁴ <https://github.com/ferd/dispcount>

²⁵ Old papers such as [Hints for Computer System Designs](#) by Butler W. Lampson recommend dropping messages: "Shed load to control demand, rather than allowing the system to become overloaded." The paper also mentions that "A system cannot be expected to function well if the demand for any resource exceeds two-thirds of the capacity, unless the load can be characterized extremely well," adding that "The only systems in which cleverness has worked are those with very well-known loads."

3.4 演習

復習問題

1. Erlang システム内での過負荷のよくある原因を挙げてください
2. 過負荷の対応策の主な戦略を2つ答えてください
3. 長時間稼働する処理はどのようにして安全にできますか
4. 同期処理を行うとき、タイムアウトはどのように設定しますか
5. タイムアウト以外の代替案はなんですか
6. どんなときにスタックバッファの前にキューバッファを選びますか

自由回答問題

1. **真のボトルネック**とはなんですか。それはどうやったら見つけられるでしょうか。
2. サードパーティの API を呼び出すアプリケーションでは、応答時間は他のサーバーの正常性によって大きく変化します。同じサービスへの他の並行呼び出しをブロックすることにより時折発生する遅いリクエストを予防するようにするにはシステムをどう設計すればよいでしょうか。
3. データがスタックバッファ内にバックアップされた過負荷のレイテンシに敏感なサービスに対して新しいリクエストを送ったら、そのリクエストには何が起きるでしょうか。
4. 部分的に送信停止する過負荷機構をバックプレッシャーも提供できるような機構に変えるにはどうしたらいいでしょうか
5. バックプレッシャー機構を部分的に送信停止する機構に変えるにはどうしたらいいでしょうか。
6. ユーザーにとって、リクエストをドロップしたりブロックするときにどういうリスクがあるでしょうか。メッセージの重複やメッセージの喪失をどうやって防げばよいでしょうか。
7. API 設計をする際に過負荷対策を忘れてしまっていたあとに、急にバックプレッシャーや部分的な送信停止を追加する必要がある出てきたら、設計にどういう影響があるでしょうか。

第II部

アプリケーションを診断する

第4章

リモートノードへの接続

旧来、稼働中のサーバープログラムとやり取りする方法は二つあります。一つは、インタラクティブシェルを利用可能にした `screen` や `tmux` のセッションをバックグラウンドに残しておき、それに接続することです。もう一つは、管理関数や、動的にリロードする一括設定ファイルを実装する方法です。

インタラクティブセッションを利用する方法は通常、ソフトウェアが厳密な REPL(Read-Eval-Print-Loop, 対話型評価環境) で動作している限りは問題のない方法です。プログラムによる管理・設定を行う方法では、あなたが必要と思うどんなタスクであっても慎重に計画し、またそれを正しく理解している必要があります。ほとんどすべてのシステムで後者の方法は試されていますので、説明は飛ばすことにします。私がいちばん興味があるのは、事態が既に悪化していて、その事態に対処する関数が存在しない場合です。

Erlang は REPL というより”インタラクタ”に近いものを使っています。基本的には、Erlang 仮想マシンは REPL を必要とせず、バイトコードがうまく具合に動作するよう専念すれば良いのです。シェルの必要はありませんね。しかしながら、同時実行とマルチプロセッシングを可能にする仕組みや素晴らしい分散サポートのおかげで、Erlang では任意の Erlang プロセスで動作するソフトウェア内包の REPL を利用できます。

これはつまり、一つの `screen` セッションと一つのシェルを使うのとは異なり、たくさんの Erlang シェルを好きなだけ同時につかって、一つの仮想マシンとのやり取りを行えるということです。¹

この機能のもっとも一般的な利用方法は、接続したい二ノードが持つ `cookie` を利用する方法²ですが、`cookie` を利用しない方法もいくつかあります。多くの方法では名前付きノードが必要で、どんな方法でも **アプリアリ**な 接続確認手段は必要です。

4.1 ジョブ制御モード

ジョブ制御モード (Job Control Mode, JCL mode) は、Erlang シェルで `^G` を押した時に得られるメニューのことです。このメニューの中に、リモートシェルの接続を許可するオプションがあります。

¹ このメカニズムの詳細は <http://ferd.ca/repl-a-bit-more-and-less-than-that.html> 参照

² 詳細は <http://learnyousomeerlang.com/distribunomicon#cookies> か http://www.erlang.org/doc/reference_manual/distributed.html#id83619 参照

```
(somenode@ferdmbp.local)1>
User switch command
--> h
  c [nn]          - connect to job
  i [nn]          - interrupt job
  k [nn]          - kill job
  j              - list all jobs
  s [shell]       - start local shell
  r [node [shell]] - start remote shell
  q              - quit erlang
  ? | h          - this message
--> r 'server@ferdmbp.local'
--> c
Eshell Vx.x.x (abort with ^G)
(server@ferdmbp.local)1>
```

こうすると、ジョブ管理や行編集はローカルシェルにより実行されますが、実際の評価はリモートで行われます。このリモートシェルが評価を行った結果、出力はすべて、ローカルシェルに転送されます。

シェルを終了するには`^G`を再び押して、ジョブ制御モードに戻ってください。先程も行ったように、ジョブ制御はローカルで行われますから、`^G q`により終了させても安全です。

```
(server@ferdmbp.local)1>
User switch command
--> q
```

全クラスタに自動的に接続することがないように、最初のシェルを `hidden` モード (これには引数 `-hidden` が使えます) にしても良いですね。

4.2 Remsh

呼び出し方は異なりますが、ジョブ制御モードを通じた方法にきわめて似た仕組みがあります。ジョブ制御モードの一連の手順は、ロングネームを使う場合、以下のようにシェルを起動することで省略することができます。

```
1 erl -name local@domain.name -remsh remote@domain.name
```

ショートネームを使う場合は、以下ようになります。

```
1 erl -sname local@domain -remsh remote@domain
```

その他の引数 (例えば `-hidden` や `-setcookie $COOKIE`) も利用可能です。下で動いている仕組みはジョブ制御モードの時と同じですが、最初のシェルはローカルではなくリモートで立ち上がります (ジョブ制御では依然としてローカルです)。リモートシェルから抜ける際にも最も安全な方法は先ほどと変わらず、`^G` です。

4.3 SSH デーモン

Erlang/OTP には SSH の実装が標準で備わっており、サーバーとクライアントのどちらの方式でも動作します。SSH の実装の一部として用意されているデモアプリケーションは、Erlang で動作するリモートシェルを提供します。

これを起動するには普通、SSH リモート接続を行うためにあなたの鍵を所定の位置に配置しなければなりませんが、簡単なテスト目的なら、以下のようにして実行することができます。

```
$ mkdir /tmp/ssh
$ ssh-keygen -t rsa -f /tmp/ssh/ssh_host_rsa_key
$ ssh-keygen -t rsa1 -f /tmp/ssh/ssh_host_key
$ ssh-keygen -t dsa -f /tmp/ssh/ssh_host_dsa_key
$ erl
1> application:ensure_all_started(ssh).
{ok,[crypto,asn1,public_key,ssh]}
2> ssh:daemon(8989, [{system_dir, "/tmp/ssh"},
2>                  {user_dir, "/home/ferd/.ssh"}]).
{ok,<0.52.0>}
```

ここではほんの少しオプションを設定しただけです。`system_dir` はホストファイルの置き場、`user_dir` は SSH 設定ファイルの置き場を設定しています。この他にも多くのオプションがあり、特定のパスワードを許可したり、公開鍵の取り扱いを変えたりすることが可能です³。

デーモンに接続するには、どんな SSH クライアントでも、以下のようにします。

```
$ ssh -p 8989 ferd@127.0.0.1
Eshell Vx.x.x (abort with ^G)
1>
```

こうすれば、Erlang を手元のマシンでインストールしていなくても、Erlang を利用できますね。シェルから立ち去るときには、(ターミナルを閉じて) SSH セッションを切れば十分です。`q()` や `init:stop()` のような関数は**実行しない**でください。リモートホストが終了してしまいます⁴。

もし接続する際に問題が発生したら、`ssh` にオプションとして `-oLogLevel=DEBUG` をつければ、デバッ

³ ちゃんとした SSH リモート接続を行うには、詳細な手順と全オプションの説明 <http://www.erlang.org/doc/man/ssh.html#daemon-3> を参照してください。

⁴ これは、どんな方法を使うにせよ、リモートの Erlang ノードとやり取りする際には共通です。

グ出力が見られます。

4.4 名前付きパイプ

あまり知られてはいませんが、分散 Erlang を明示的に用いずに Erlang ノードに接続する方法として、名前付きパイプを利用するものがあります。これは Erlang を `run_erl` で起動すれば実現できます。`run_erl` が名前付きパイプの中に Erlang をラップしてくれます⁵。

```
$ run_erl /tmp/erl_pipe /tmp/log_dir "erl"
```

第一引数は名前付きパイプとして振る舞うファイル名です。第二引数はログの保存場所になります⁶。ノードに接続するには、`to_erl` プログラムを使います。

```
$ to_erl /tmp/erl_pipe
Attaching to /tmp/erl_pipe (^D to exit)

1>
```

シェルに接続できました。標準入出力を閉じる (コマンドは`^D`) ことで、シェルを実行させたまま切断ができます。

4.5 演習

復習問題

1. リモートノードに接続する4つの方法はなんですか？
2. 名前のないノードに接続することはできますか？
3. ジョブ制御モードに入るコマンドはなんですか？
4. 標準出力に多くのデータを吐き出すシステムの場合、リモートシェルの接続方法で避けるべき方法は何ですか？
5. リモート接続をした際に、`^G` で切断してはいけない場合とはどんな時ですか？
6. セッションを切断するときに決して行ってはいけないコマンドはなんですか？
7. この章で説明した方法はすべて、複数ユーザーが同じ Erlang ノードに問題なく接続できるような方法でしょうか？

⁵ "erl" が実行されるコマンドです。引数はその後に追加できます。例えば "erl +K true" でカーネルポーリングが有効になります。

⁶ この方法を使うと出力のたびに `fsync` が呼びだされますので、標準出力を介して多くの入出力が発生する場合は、性能にかなり影響するかもしれません。

第5章

ランタイムメトリクス

実運用を考えた際、Erlang VM で最も良いセールスポイントの一つとして、ありとあらゆる内部調査やデバッグ、プロファイリング、実行時分析の透過性が挙げられます。

プログラム上で取得できるランタイムメトリクスがある利点として、これらメトリクスに依存したツールを作ることも簡単ですし、何らかのタスクや監視を自動化するのも同じように単純です¹。それに、必要であれば、ツールを介さずに VM から直接情報を受け取ることも可能です。

システムを健全に保ちつつ成長させる実用的な方法は、すべての角度から一大域的にも、局所的にも一監視できるようにしておくことです。将来起きることが通常の挙動なのか否かを先んじて知らせる一般的な方法はありません。

あなたのシステムが通常の状態下でどのように見えているのか。考えを形にするには、多くのデータを保持して、それらをことあるごとに観察したくなるでしょう。何かがうまく行かなくなったその日、あなたがこれまで培ってきたすべての観察方法を使えば、どこが不調で何を修正すべきかを簡単に見つけだせます。

この章（また、このあとの章のほとんど）では、紹介する概念や機能のほとんどは、標準ライブラリー正規 OTP ディストリビューションの一部—に含まれるコードからアクセス可能です。

しかしながら、これら機能は一箇所にまとまっているわけではありませんし、システムの中で自らの足を撃ちぬくことも非常に簡単にできてしまいます。これらは便利ツールというより、基本的な構成要素に近いものにもなりがちです。

したがって、本書をより軽く、利用しやすくするために、よく使う操作は、実運用で利用しても安全な recon² ライブラリにまとめ直されています。

5.1 Global View

For a view of the VM in the large, it's useful to track statistics and metrics general to the VM, regardless of the code running on it. Moreover, you should aim for a solution that allows long-term views of each metric — some problems show up as a very long accumulation over weeks that couldn't be

¹ 自動化プロセスが何かしらは正措置を行おうとして、暴走したり、やり過ぎたりしないか保証するほうが、より一層複雑です

² <http://ferd.github.io/recon/>

detected over small time windows.

Good examples for issues exposed by a long-term view include memory or process leaks, but also could be regular or irregular spikes in activities relative to the time of the day or week, which can often require having months of data to be sure about it.

For these cases, using existing Erlang metrics applications is useful. Common options are:

- `folsom`³ to store metrics in memory within the VM, whether global or app-specific..
- `vmstats`⁴ and `statsderl`⁵, sending node metrics over to graphite through `statsd`⁶.
- `exometer`⁷, a fancy-pants metrics system that can integrate with `folsom` (among other things), and a variety of back-ends (graphite, collectd, statsd, Riak, SNMP, etc.). It's the newest player in town
- `ehmon`⁸ for output done directly to standard output, to be grabbed later through specific agents, splunk, and so on.
- custom hand-rolled solutions, generally using ETS tables and processes periodically dumping the data.⁹
- or if you have nothing and are in trouble, a function printing stuff in a loop in a shell¹⁰.

It is generally a good idea to explore them a bit, pick one, and get a persistence layer that will let you look through your metrics over time.

5.1.1 Memory

The memory reported by the Erlang VM in most tools will be a variant of what is reported by `erlang:memory()`:

```
1> erlang:memory().
[{total,13772400},
 {processes,4390232},
 {processes_used,4390112},
 {system,9382168},
 {atom,194289},
 {atom_used,173419},
 {binary,979264},
 {code,4026603},
 {ets,305920}]
```

³ <https://github.com/boundary/folsom>

⁴ <https://github.com/ferd/vmstats>

⁵ <https://github.com/lpgauth/statsderl>

⁶ <https://github.com/etsy/statsd/>

⁷ <https://github.com/Feuerlabs/exometer>

⁸ <https://github.com/heroku/ehmon>

⁹ Common patterns may fit the `ectr` application, at <https://github.com/heroku/ectr>

¹⁰ The `recon` application has the function `recon:node_stats_print/2` to do this if you're in a pinch

This requires some explaining.

First of all, all the values returned are in bytes, and they represent memory **allocated** (memory actively used by the Erlang VM, not the memory set aside by the operating system for the Erlang VM). It will sooner or later look much smaller than what the operating system reports.

The `total` field contains the sum of the memory used for processes and `system` (which is incomplete, unless the VM is instrumented!). `processes` is the memory used by Erlang processes, their stacks and heaps. `system` is the rest: memory used by ETS tables, atoms in the VM, refc binaries¹¹, and some of the hidden data I mentioned was missing.

If you want the total amount of memory owned by the virtual machine, as in the amount that will trip system limits (`ulimit`), this value is more difficult to get from within the VM. If you want the data without calling `top` or `htop`, you have to dig down into the VM's memory allocators to find things out.¹²

Fortunately, `recon` has the function `recon_alloc:memory/1` to figure it out, where the argument is:

- `used` reports the memory that is actively used for allocated Erlang data;
- `allocated` reports the memory that is reserved by the VM. It includes the memory used, but also the memory yet-to-be-used but still given by the OS. This is the amount you want if you're dealing with `ulimit` and OS-reported values.
- `unused` reports the amount of memory reserved by the VM that is not being allocated. Equivalent to `allocated - used`.
- `usage` returns a percentage (0.0 .. 1.0) of used over allocated memory ratios.

There are additional options available, but you'll likely only need them when investigating memory leaks in chapter 7

5.1.2 CPU

Unfortunately for Erlang developers, CPU is very hard to profile. There are a few reasons for this:

- The VM does a lot of work unrelated to processes when it comes to scheduling — high scheduling work and high amounts of work done by the Erlang processes are hard to characterize.
- The VM internally uses a model based on **reductions**, which represent an arbitrary number of work actions. Every function call, including BIFs, will increment a process reduction counter. After a given number of reductions, the process gets descheduled.
- To avoid going to sleep when work is low, the threads that control the Erlang schedulers will do busy looping. This ensures the lowest latency possible for sudden load spikes. The VM flag

¹¹ See Section 7.2

¹² See Section 7.3.2

+sbwt none|very_short|short|medium|long|very_long can be used to change this value.

These factors combine to make it fairly hard to find a good absolute measure of how busy your CPU is actually running Erlang code. It will be common for Erlang nodes in production to do a moderate amount of work and use a lot of CPU, but to actually fit a lot of work in the remaining place when the workload gets higher.

The most accurate representation for this data is the scheduler wall time. It's an optional metric that needs to be turned on by hand on a node, and polled at regular intervals. It will reveal the time percentage a scheduler has been running processes and normal Erlang code, NIFs, BIFs, garbage collection, and so on, versus the amount of time it has spent idling or trying to schedule processes.

The value here represents **scheduler utilization** rather than CPU utilization. The higher the ratio, the higher the workload.

While the basic usage is explained in the Erlang/OTP reference manual¹³, the value can be obtained by calling recon:

```
1> recon:scheduler_usage(1000).
[{1,0.9919596133421669},
 {2,0.9369579039389054},
 {3,1.9294092120138725e-5},
 {4,1.2087551402238991e-5}]
```

The function `recon:scheduler_usage(N)` will poll for `N` milliseconds (here, 1 second) and output the value of each scheduler. In this case, the VM has two very loaded schedulers (at 99.2% and 93.7% respectively), and two mostly unused ones at far below 1%. Yet, a tool like `htop` would report something closer to this for each core:

```
1 [||||||||||||||||||||||||||| 70.4%]
2 [||||||| 20.6%]
3 [|||||||||||||||||||||||||||100.0%]
4 [||||||||||||||| 40.2%]
```

The result being that there is a decent chunk of CPU usage that would be mostly free for scheduling actual Erlang work (assuming the schedulers are busy waiting more than trying to select tasks to run), but is being reported as busy by the OS.

Another interesting behaviour possible is that the scheduler usage may show a higher rate (1.0) than what the OS will report. Schedulers waiting for OS resources are considered utilized as they cannot handle more work. If the OS itself is holding up on non-CPU tasks it is still possible for Erlang's

¹³ http://www.erlang.org/doc/man/erlang.html#statistics_scheduler_wall_time

schedulers not to be able to do more work and report a full ratio.

These behaviours may especially be important to consider when doing capacity planning, and can be better indicators of headroom than looking at CPU usage or load.

5.1.3 Processes

Trying to get a global view of processes is helpful when trying to assess how much work is being done in the VM in terms of **tasks**. A general good practice in Erlang is to use processes for truly concurrent activities — on web servers, you will usually get one process per request or connection, and on stateful systems, you may add one process per-user — and therefore the number of processes on a node can be used as a metric for load.

Most tools mentioned in section 5.1 will track them in one way or another, but if the process count needs to be done manually, calling the following expression is enough:

```
1> length(processes()).  
56535
```

Tracking this value over time can be extremely helpful to try and characterize load or detect process leaks, along with other metrics you may have around.

5.1.4 Ports

In a manner similar to processes, **Ports** should be considered. Ports are a datatype that encompasses all kinds of connections and sockets opened to the outside world: TCP sockets, UDP sockets, SCTP sockets, file descriptors, and so on.

There is a general function (again, similar to processes) to count them: `length(erlang:ports())`. However, this function merges in all types of ports into a single entity. Instead, one can use `recon` to get them sorted by type:

```
1> recon:port_types().  
[{"tcp_inet",21480},  
 {"efile",2},  
 {"udp_inet",2},  
 {"0/1",1},  
 {"2/2",1},  
 {"inet_gethost 4 ",1}]
```

This list contains the types and the count for each type of port. The type name is a string and is defined by the Erlang VM itself.

All the `*_inet` ports are usually sockets, where the prefix is the protocol used (TCP, UDP, SCTP).

The `efile` type is for files, while `"0/1"` and `"2/2"` are file descriptors for standard I/O channels (**stdin** and **stdout**) and standard error channels (**stderr**), respectively.

Most other types will be given names of the driver they're talking to, and will be examples of **port programs**¹⁴ or **port drivers**¹⁵.

Again, tracking these can be useful to assess load or usage of a system, detect leaks, and so on.

5.2 Digging In

Whenever some 'in the large' view (or logging, maybe) has pointed you towards a potential cause for an issue you're having, it starts being interesting to dig around with a purpose. Is a process in a weird state? Maybe it needs tracing¹⁶! Tracing is great whenever you have a specific function call or input or output to watch for, but often, before getting there, a lot more digging is required.

Outside of memory leaks, which often need their own specific techniques and are discussed in Chapter 7, the most common tasks are related to processes, and ports (file descriptors and sockets).

5.2.1 Processes

By all means, processes are an important part of a running Erlang system. And because they're so central to everything that goes on, there's a lot to want to know about them. Fortunately, the VM makes a lot of information available, some of which is safe to use, and some of which is unsafe to use in production (because they can return data sets large enough that the amount of memory copied to the shell process and used to print it can kill the node).

All the values can be obtained by calling `process_info(Pid, Key)` or `process_info(Pid, [Keys])`¹⁷. Here are the commonly used keys¹⁸:

Meta

`dictionary` returns all the entries in the process dictionary¹⁹. Generally safe to use, because people shouldn't be storing gigabytes of arbitrary data in there.

`group_leader` the group leader of a process defines where IO (files, output of `io:format/1-3`) goes.²⁰

`registered_name` if the process has a name (as registered with `erlang:register/2`), it is

¹⁴ http://www.erlang.org/doc/tutorial/c_port.html

¹⁵ http://www.erlang.org/doc/tutorial/c_portdriver.html

¹⁶ See Chapter 9

¹⁷ In cases where processes contain sensitive information, data can be forced to be kept private by calling `process_flag(sensitive, true)`

¹⁸ For **all** options, look at http://www.erlang.org/doc/man/erlang.html#process_info-2

¹⁹ See <http://www.erlang.org/course/advanced.html#dict> and <http://ferd.ca/on-the-use-of-the-process-dictionary-in-erlang.html>

²⁰ See <http://learnyousomeerlang.com/building-otp-applications#the-application-behaviour> and http://erlang.org/doc/apps/stdlib/io_protocol.html for more details.

given here.

`status` the nature of the process as seen by the scheduler. The possible values are:

`exiting` the process is done, but not fully cleared yet;

`waiting` the process is waiting in a receive ... end;

`running` self-descriptive;

`runnable` ready to run, but not scheduled yet because another process is running;

`garbage_collecting` self-descriptive;

`suspended` whenever it is suspended by a BIF, or as a back-pressure mechanism because a socket or port buffer is full. The process only becomes runnable again once the port is no longer busy.

Signals

`links` will show a list of all the links a process has towards other processes and also ports (sockets, file descriptors). Generally safe to call, but to be used with care on large supervisors that may return thousands and thousands of entries.

`monitored_by` gives a list of processes that are monitoring the current process (through the use of `erlang:monitor/2`).

`monitors` kind of the opposite of `monitored_by`; it gives a list of all the processes being monitored by the one polled here.

`trap_exit` has the value `true` if the process is trapping exits, `false` otherwise.

Location

`current_function` displays the current running function, as a tuple of the form `{Mod, Fun, Arity}`.

`current_location` displays the current location within a module, as a tuple of the form `{Mod, Fun, Arity, [{File, FileName}, {line, Num}]}`.

`current_stacktrace` more verbose form of the preceding option; displays the current stacktrace as a list of 'current locations'.

`initial_call` shows the function that the process was running when spawned, of the form `{Mod, Fun, Arity}`. This may help identify what the process was spawned as, rather than what it's running right now.

Memory Used

`binary` Displays the all the references to refc binaries²¹ along with their size. Can be unsafe to use if a process has a lot of them allocated.

`garbage_collection` contains information regarding garbage collection in the process. The content is documented as 'subject to change' and should be treated as such. The information tends to contains entries such as the number of garbage collections the process has went through, options for full-sweep garbage collections, and heap sizes.

`heap_size` A typical Erlang process contains an 'old' heap and a 'new' heap, and goes through

²¹ See Section 7.2

```
{work, [{reductions, 35}]}
```

For the sake of convenience, `recon:info/1` will accept any pid-like first argument and handle it: literal pids, strings ("`<0.12.0>`"), registered atoms, global names (`{global, Atom}`), names registered with a third-party registry (e.g. with `gproc: {via, gproc, Name}`), or tuples (`{0, 12, 0}`). The process just needs to be local to the node you're debugging.

If only a category of information is wanted, the category can be used directly:

```
2> recon:info(self(), work).
{work, [{reductions, 11035}]}
```

or can be used in exactly the same way as `process_info/2`:

```
3> recon:info(self(), [memory, status]).
[{memory, 10600}, {status, running}]
```

This latter form can be used to fetch unsafe information.

With all this data, it's possible to find out all we need to debug a system. The challenge then is often to figure out, between this per-process data, and the global one, which process(es) should be targeted.

When looking for high memory usage, for example it's interesting to be able to list all of a node's processes and find the top N consumers. Using the attributes above and the `recon:proc_count(Attribute, N)` function, we can get these results:

```
4> recon:proc_count(memory, 3).
[{<0.26.0>, 831448,
  [{current_function, {group, server_loop, 3}},
   {initial_call, {group, server, 3}}]},
 {<0.25.0>, 372440,
  [user,
   {current_function, {group, server_loop, 3}},
   {initial_call, {group, server, 3}}]},
 {<0.20.0>, 372312,
  [code_server,
   {current_function, {code_server, loop, 1}},
   {initial_call, {erlang, apply, 2}}]}]
```

Any of the attributes mentioned earlier can work, and for nodes with long-lived processes that can cause problems, it's a fairly useful function.

There is however a problem when most processes are short-lived, usually too short to inspect

through other tools, or when a moving window is what we need (for example, what processes are busy accumulating memory or running code **right now**).

For this use case, Recon has the `recon:proc_window(Attribute, Num, Milliseconds)` function.

It is important to see this function as a snapshot over a sliding window. A program's timeline during sampling might look like this:

```
--w---- [Sample1] ---x-----y----- [Sample2] ---z--->
```

The function will take two samples at an interval defined by `Milliseconds`.

Some processes will live between `w` and die at `x`, some between `y` and `z`, and some between `x` and `y`. These samples will not be too significant as they're incomplete.

If the majority of your processes run between a time interval `x` to `y` (in absolute terms), you should make sure that your sampling time is smaller than this so that for many processes, their lifetime spans the equivalent of `w` and `z`. Not doing this can skew the results: long-lived processes that have 10 times the time to accumulate data (say reductions) will look like huge consumers when they're not one.²²

The function, once running gives results like follows:

```
5> recon:proc_window(reductions, 3, 500).
[<0.46.0>,51728,
 [{current_function,{queue,in,2}},
  {initial_call,{erlang,apply,2}}],
 <0.49.0>,5728,
 [{current_function,{dict,new,0}},
  {initial_call,{erlang,apply,2}}],
 <0.43.0>,650,
 [{current_function,{timer,sleep,1}},
  {initial_call,{erlang,apply,2}}]]
```

With these two functions, it becomes possible to hone in on a specific process that is causing issues or misbehaving.

5.2.2 OTP プロセス

対象のプロセスが OTP プロセスの場合（本番環境のほとんどのプロセスはおそらく OTP プロセスです）、それらのプロセスを調査するための多くのツールをすぐに見つけられます。

通常は `sys`²³ が知りたいツールでしょう。 `sys` モジュールのドキュメントを読めば、なぜそんなに便利な

²² Warning: this function depends on data gathered at two snapshots, and then building a dictionary with entries to differentiate them. This can take a heavy toll on memory when you have many tens of thousands of processes, and a little bit of time.

²³ <http://www.erlang.org/doc/man/sys.html>

のかわかるはずでです。OTP プロセスに対する下記のような機能を持っています。

- 全てのメッセージと状態遷移を、シェルやファイルまたは参照可能な内部バッファにすらログギン
できます
- 統計情報（リダクション、メッセージ数、時間など）
- プロセスの状態（状態などのメタデータ）
- (`#state{}` レコードに) プロセスの状態を取得
- 状態の書き換え
- コールバックとして使えるようにデバッグ関数をカスタマイズ

また、プロセスの実行を中断、再開する機能も提供します。

これらの機能の詳細は割愛しますが、それらの機能が存在しているということは認識しておいてくだ
さい。

5.2.3 Ports

Similarly to processes, Erlang ports allow a lot of introspection. The info can be accessed by call-
ing `erlang:port_info(Port, Key)`, and more info is available through the `inet` module. Most of it
has been regrouped by the `recon:port_info/1-2` functions, which work using a somewhat similar
interface to their process-related counterparts.

Meta

- `id` internal index of a port. Of no particular use except to differentiate ports.
- `name` type of the port — with names such as `"tcp_inet"`, `"udp_inet"`, or `"efile"`, for exam-
ple.
- `os_pid` if the port is not an `inet` socket, but rather represents an external process or program,
this value contains the `os pid` related to the said external program.

Signals

- `connected` Each port has a controlling process in charge of it, and this process' `pid` is the
connected one.
- `links` ports can be linked with processes, much like other processes can be. The list of linked
processes is contained here. Unless the process has been owned by or manually linked to
a lot of processes, this should be safe to use.
- `monitors` ports that represent external programs can have these programs end up monitor-
ing Erlang processes. These processes are listed here.

IO

- `input` the number of bytes read from the port.
- `output` the number of bytes written to the port.

Memory Used

- `memory` this is the memory (in bytes) allocated by the runtime system for the port. This num-

ber tends to be small-ish and excludes space allocated by the port itself.

`queue_size` Port programs have a specific queue, called the driver queue²⁴. This return the size of this queue, in bytes.

Type-Specific

`Inet Ports` Returns inet-specific data, including statistics²⁵, the local address and port number for the socket (`sockname`), and the inet options used²⁶

`Others` currently no other form than inet ports are supported in recon, and an empty list is returned.

The list can be obtained as follows:

```
1> recon:port_info("#Port<0.818>").
[{meta,[{id,6544},{name,"tcp_inet",{os_pid,undefined}}]},
 {signals,[{connected,<0.56.0>},
           {links,[<0.56.0>}]},
           {monitors,[]}]},
 {io,[{input,0},{output,0}]},
 {memory_used,[{memory,40},{queue_size,0}]},
 {type,[{statistics,[{recv_oct,0},
                    {recv_cnt,0},
                    {recv_max,0},
                    {recv_avg,0},
                    {recv_dvi,...},
                    {...}|...]},
        {peername,[{50,19,218,110},80]},
        {sockname,[{97,107,140,172},39337]},
        {options,[{active,true},
                  {broadcast,false},
                  {buffer,1460},
                  {delay_send,...},
                  {...}|...}]}}]
```

On top of this, functions to find out specific problematic ports exist the way they do for processes. The gotcha is that so far, recon only supports them for inet ports and with restricted attributes: the number of octets (bytes) sent, received, or both (`send_oct`, `recv_oct`, `oct`, respectively), or the number of packets sent, received, or both (`send_cnt`, `recv_cnt`, `cnt`, respectively).

So for the cumulative total, which can help find out who is slowly but surely eating up all your bandwidth:

²⁴ The driver queue is available to queue output from the emulator to the driver (data from the driver to the emulator is queued by the emulator in normal Erlang message queues). This can be useful if the driver has to wait for slow devices etc, and wants to yield back to the emulator.

²⁵ <http://www.erlang.org/doc/man/inet.html#getstat-1>

²⁶ <http://www.erlang.org/doc/man/inet.html#setopts-2>

```
2> recon:inet_count(oct, 3).
[{{#Port<0.6821166>,15828716661,
  [{recv_oct,15828716661},{send_oct,0}]}},
 {{#Port<0.6757848>,15762095249,
  [{recv_oct,15762095249},{send_oct,0}]}},
 {{#Port<0.6718690>,15630954707,
  [{recv_oct,15630954707},{send_oct,0}]}}
```

Which suggest some ports are doing only input and eating lots of bytes. You can then use `recon:port_info("#Port<0.6821166>")` to dig in and find who owns that socket, and what is going on with it.

Or in any other case, we can look at what is sending the most data within any time window²⁷ with the `recon:inet_window(Attribute, Count, Milliseconds)` function:

```
3> recon:inet_window(send_oct, 3, 5000).
[{{#Port<0.11976746>,2986216, [{send_oct,4421857688}]}},
 {{#Port<0.11704865>,1881957, [{send_oct,1476456967}]}},
 {{#Port<0.12518151>,1214051, [{send_oct,600070031}]}}
```

For this one, the value in the middle of the tuple is what `send_oct` was worth (or any chosen attribute for each call) during the specific time interval chosen (5 seconds here).

There is still some manual work involved into properly linking a misbehaving port to a process (and then possibly to a specific user or customer), but all the tools are in place.

5.3 演習

復習問題

1. Erlang のメモリではどのような値が報告されますか。
2. グローバルビュー向けのプロセス関連で有益なメトリクスはなんでしょう。
3. ポートとはどんなもので、グローバルではどのように監視されているでしょう。
4. Erlang システムにおいてなぜ `top` や `htop` が信頼できないのでしょうか。代替手段はなんでしょう。
5. プロセス用に得られる 2 種類のシグナル関係の情報を挙げてください。
6. 特定のプロセスがどのコードを動かしているかをどうやって見つけられるでしょう。
7. 特定のプロセスのメモリ関連の情報にはどのような種類があるでしょう。
8. プロセスが大量の処理をしているかどうかをどうやって見極めますか。
9. 本番システム内のプロセスを調査する際に取得すると危険な値を 2 つ、3 つ挙げてください。

²⁷ See the explanations for the `recon:proc_window/3` in the preceding subsection

10. sys モジュール経由で OTP プロセスに提供されるいくつかの機能は为什么呢。
11. inet ポートを調査しているときに得られる値にはどんなものがあるでしょうか。
12. ポートの種類（ファイル、TCP、UDP）はどのように見つけられるでしょうか。

自由回答問題

1. グローバルメトリクス内で利用できる長時間のウィンドウが欲しくなる理由は为什么呢。
2. 次の問題を見つけるときに使うべき関数は `recon:proc_count/2` と `recon:proc_window/3` のどちらでしょうか。
3. (a) リダクション
(b) メッセージキューの長さ
(c) メモリ
4. あるプロセスのスーパーバイザーがどれかにに関する情報はどうやって見つけますか。
5. `recon:inet_count/2` や `recon:inet_window/3` はそれぞれいつ使うべきでしょう。
6. OS から報告されたメモリと Erlang の `memory` 関数から報告されるメモリの違いを説明してください。
7. ときどき Erlang が実際にはさほど稼働していないのに、非常に稼働率が上がっているように見えるのはなぜでしょうか。
8. あるノード上のプロセスの何割が実行可能だがすぐにはスケジュールできない状況になっているかを調べる方法を教えてください。

ハンズオン

次のコードを使って回答してください。 https://github.com/ferd/recon_demo:

1. システムメモリとはなんですか。
2. ノードは多くの CPU リソースを使っていますか。
3. メールボックスが溢れているプロセスはありますか。
4. どの chatty プロセス (`council_member`) が一番メモリを使っていますか。
5. どの chatty プロセスが一番 CPU を使用していますか。
6. どの chatty プロセスが一番帯域を消費していますか。
7. どの chatty プロセスが TCP で一番メッセージを送っていますか。また一番メッセージを送っていないものも答えてください。
8. ノード上のあるプロセスが複数の接続やファイルディスクリプタを同時に保持しがちかどうか、どのように判断しますか。
9. 今現在あるノード上でほとんどのプロセスから同時に呼ばれている関数を見つけれられますか。

第 6 章

クラッシュダンプを読む

Erlang ノードはクラッシュすると、クラッシュダンプを出力します。¹

フォーマットについては Erlang のオフィシャルドキュメントにほとんど書かれており²、深く掘り下げたい人は誰でもそのドキュメントを見ることで、データが意味していることを把握することができるでしょう。特定のデータについては更に VM の一部についても理解していないと理解することが難しいものがありますが、このドキュメントに載せるには複雑過ぎます。

クラッシュダンプはデフォルトで `erl_crash.dump` という名前で、Erlang プロセスが動いている場所へ出力されます。この挙動 (ファイル名も含めて) は `ERL_CRASH_DUMP` 環境変数³を指定することで上書きできます。

6.1 一般的な見方

クラッシュダンプを読むことは**事後に**ノードが死んだ可能性のある理由を理解するのに役立つことがあります。それらを素早く見るために `recon` の `erl_crashdump_analyzer.sh`⁴を使う方法があり、それをクラッシュダンプに対して実行します。

```
$ ./recon/script/erl_crashdump_analyzer.sh erl_crash.dump
analyzing erl_crash.dump, generated on: Thu Apr 17 18:34:53 2014
```

```
Slogan: eheap_alloc: Cannot allocate 2733560184 bytes of memory
(of type "old_heap").
```

¹ ダンプ中に `ulimits` の制限を超えて OS に殺されたり、セグメンテーションフォールトしない限りは

² http://www.erlang.org/doc/apps/erts/crash_dump.html

³ Heroku のルーティングとテレメトリチームは [heroku_crashdumps](#) アプリケーションを使ってクラッシュダンプのパスと名前を設定しています。これをプロジェクトに追加して、起動時にダンプの名前をつけ、それらを事前に指定した場所に置くことができます。

⁴ https://github.com/ferd/recon/blob/master/script/erl_crashdump_analyzer.sh

Memory:

===

```
processes: 2912 Mb
processes_used: 2912 Mb
system: 8167 Mb
atom: 0 Mb
atom_used: 0 Mb
binary: 3243 Mb
code: 11 Mb
ets: 4755 Mb
---
total: 11079 Mb
```

Different message queue lengths (5 largest different):

===

```
1 5010932
2 159
5 158
49 157
4 156
```

Error logger queue length:

===

0

File descriptors open:

===

```
UDP: 0
TCP: 19951
Files: 2
---
Total: 19953
```

Number of processes:

===

36496

Processes Heap+Stack memory sizes (words) used in the VM (5 largest


```
different):
```

```
===
```

```
1 284745853
1 5157867
1 4298223
2 196650
12 121536
```

```
Processes OldHeap memory sizes (words) used in the VM (5 largest
different):
```

```
===
```

```
3 318187
9 196650
14 121536
64 75113
15 46422
```

```
Process States when crashing (sum):
```

```
===
```

```
1 Garbing
74 Scheduled
36421 Waiting
```

このデータダンプはあなたの目の前にある問題を直接指摘してはくれませんが、どこを見れば良いのかの良い手がかりとなります。例えば、ここではこのノードはメモリ不足となりましたが、15GB あるうちの11079MB を使用していました (我々が使っていた最大のインスタンスサイズだったので私はこれを覚えています!)。これは以下の事柄に対するひとつの症状となり得ます。

- メモリフラグメンテーション;
- C コードまたはドライバのメモリリーク;
- クラッシュダンプを生成する前にガベージコレクトされてしまった大量のメモリ⁵。

より一般的にメモリに関して驚くべきものを探すには、それをプロセスの数とメールボックスのサイズに相関させます。どちらか一方が他方を説明してくれるかもしれません。

この特定のダンプでは、1つのプロセスのメールボックスに5百万のメッセージが格納されていたと示されています。これは取得できるすべてのメッセージがパターンマッチしないか、過負荷になっています。そ

⁵ 特にここではリファレンスカウントされたバイナリメモリです。これはグローバルのヒープ領域に格納されますが、クラッシュダンプを生成する前にガベージコレクトされ消えます。従ってそのバイナリメモリは過小にレポートされます。より詳しくは [7](#) を参照

こには数百のメッセージをキューに溜めた数十のプロセスも存在しています。— これは過負荷または競合を指すことがあります。あなたの一般的なクラッシュダンプについて一般的なアドバイスをするのは難しいですが、これらを理解するのに役立つ方法はまだいくつかあります。

6.2 メールボックスがいっぱい

いっぱいメールボックスについては、大きなカウンターを見るのが最良の方法です。もし大きなメールボックスが1つある場合は、クラッシュダンプのそのプロセスについて調べてください。メッセージがパターンマッチしないか、過負荷のために発生しているかどうかを把握してください。もし同様のノードが動いているのなら、そこに接続して調査することができます。いっぱい溜まっているメールボックスがたくさんあると分かっている場合は、クラッシュ時に何の関数が動いていたか把握するため `recon` の `queue_fun.awk` を使うことができます。

```
1 $ awk -v threshold=10000 -f queue_fun.awk /path/to/erl_crash.dump
2 MESSAGE QUEUE LENGTH: CURRENT FUNCTION
3 =====
4 10641: io:wait_io_mon_reply/2
5 12646: io:wait_io_mon_reply/2
6 32991: io:wait_io_mon_reply/2
7 2183837: io:wait_io_mon_reply/2
8 730790: io:wait_io_mon_reply/2
9 80194: io:wait_io_mon_reply/2
10 ...
```

これはクラッシュダンプに対して実行され、メールボックスに少なくとも 10000 メッセージあるプロセスに対して実行がスケジュールされていた関数をすべて出力します。この実行の場合は、すべてのノードが `io:format/2` の呼び出しのために IO 待ちでロックしていたことをスクリプトが示していました。

6.3 非常に多い（もしくは非常に少ない）プロセス

正常かどうかを判別するためにプロセス数を数えることは、ノードの通常時のプロセス数を把握している場合にはとても有用です⁶。

アプリケーションによりませんが、通常よりも多い場合には何かがリークしているか、過負荷かもしれません。

プロセス数が通常時と比較して極めて少ない場合、ノードが下記のような出力をして（プロセスを）終了していないかを見てください。

⁶ 詳細は 5.1.3 を参照のこと

```
Kernel pid terminated (application_controller)
({application_terminated, <AppName>, shutdown})
```

このような場合、そのアプリケーション (**AppName**) がスーパーバイザ内で再起動制限に引っかかったため、ノードがシャットダウンを行ったことが原因です。一連の問題の原因を詳しく調べるにはエラーログが役に立ちます。

6.4 大量のポート数

プロセス数のカウントと同様に、ポート数も通常時の数を把握している時にはシンプルでとても有用です⁷。

ポート数が多い場合、DoS 攻撃や使わなくなったリソースのリークなどに、過負荷になっている可能性があります。リークしているポートの種類 (TCP, UTP, ファイル) を見てみることで、リソースの競合やそれらのリソースを使っているコードが間違っているかどうか分かる可能性があります。

6.5 メモリ割り当てができない

これらは、おそらくあなたが非常によく見る類のクラッシュです。カバーすべきことが多くあるため、7 章ではその内容の理解と、稼働中のシステムでのデバッグで必要となることについてまとめています。

いずれにせよ、クラッシュダンプは何が問題であったかを事後に把握するために役立ちます。プロセスのメッセージボックスと個々のヒープは通常、問題に対する良い指標です。メールボックスにメールが大量にあるわけではないのにメモリが不足している時には、**recon** スクリプトにより返されるプロセスヒープとスタックサイズを見てみてください。

(サイズが) 上に大きく外れている場合には、いくつかのプロセスによりノードのほとんどのメモリが食いつぶされているかもしれないとわかります。同等の量の場合、(スクリプトから) 返されたメモリの量が多くないかを確認してください。

多い (少ない) ようであれば、ダンプの「メモリ」セクションでタイプ (ETS やバイナリーなど) が非常に大きくないかをチェックしてください。想定外のリソースのリークが見つかるかもしれません。

6.6 演習

復習問題

1. クラッシュダンプが生成される場所をどのように指定しますか?
2. クラッシュダンプがノードがメモリ不足で落ちていることを示している場合、通常どのように探しますか?
3. プロセス数が疑わしいほど少ない場合、どこを見るべきでしょうか?
4. ノードが大量のメモリを確保したプロセスとともに死んだことがわかる場合、それがどれであるか

⁷ 詳細は 5.1.4 を参照のこと

見つけるために何をすることができますか?

ハンズオン

6.1 の章にあるクラッシュダンプの分析を使用します。

1. 問題を指し示すことができる特定の異常値は何でしょうか?
2. 繰り返されるエラーは問題のように見えますか? そうではない場合、それは何になるのでしょうか?

第 7 章

MEMORY LEAKS

There are truckloads of ways for an Erlang node to bleed memory. They go from extremely simple to astonishingly hard to figure out (fortunately, the latter type is also rarer), and it's possible you'll never encounter any problem with them.

You will find out about memory leaks in two ways:

1. A crash dump (see Chapter 6);
2. By finding a worrisome trend in the data you are monitoring.

This chapter will mostly focus on the latter kind of leak, because they're easier to investigate and see grow in real time. We will focus on finding what is growing on the node and common remediation options, handling binary leaks (they're a special case), and detecting memory fragmentation.

7.1 Common Sources of Leaks

Whenever someone calls for help saying "oh no, my nodes are crashing", the first step is always to ask for data. Interesting questions to ask and pieces of data to consider are:

- Do you have a crash dump and is it complaining about memory specifically? If not, the issue may be unrelated. If so, go dig into it, it's full of data.
- Are the crashes cyclical? How predictable are they? What else tends to happen at around the same time and could it be related?
- Do crashes coincide with peaks in load on your systems, or do they seem to happen at more or less any time? Crashes that happen especially **during** peak times are often due to bad overload management (see Chapter 3). Crashes that happen at any time, even when load goes down following a peak are more likely to be actual memory issues.

If all of this seems to point towards a memory leak, install one of the metrics libraries mentioned

in Chapter 5 and/or recon and get ready to dive in.¹

The first thing to look at in any of these cases is trends. Check for all types of memory using `erlang:memory()` or some variant of it you have in a library or metrics system. Check for the following points:

- Is any type of memory growing faster than others?
- Is there any type of memory that's taking the majority of the space available?
- Is there any type of memory that never seems to go down, and always up (other than atoms)?

Many options are available depending on the type of memory that's growing.

7.1.1 Atom

Don't use dynamic atoms! Atoms go in a global table and are cached forever. Look for places where you call `erlang:binary_to_term/1` and `erlang:list_to_atom/1`, and consider switching to safer variants (`erlang:binary_to_term(Bin, [safe])` and `erlang:list_to_existing_atom/1`).

If you use the `xmerl` library that ships with Erlang, consider open source alternatives² or figuring the way to add your own SAX parser that can be safe³.

If you do none of this, consider what you do to interact with the node. One specific case that bit me in production was that some of our common tools used random names to connect to nodes remotely, or generated nodes with random names that connected to each other from a central server.⁴ Erlang node names are converted to atoms, so just having this was enough to slowly but surely exhaust space on atom tables. Make sure you generate them from a fixed set, or slowly enough that it won't be a problem in the long run.

7.1.2 Binary

See Section 7.2.

7.1.3 Code

The code on an Erlang node is loaded in memory in its own area, and sits there until it is garbage collected. Only two copies of a module can coexist at one time, so looking for very large modules should be easy-ish.

¹ See Chapter 4 if you need help to connect to a running node

² I don't dislike `exml` or `erlsom`

³ See Ulf Wiger at <http://erlang.org/pipermail/erlang-questions/2013-July/074901.html>

⁴ This is a common approach to figuring out how to connect nodes together: have one or two central nodes with fixed names, and have every other one log to them. Connections will then propagate automatically.

If none of them stand out, look for code compiled with HiPE⁵. HiPE code, unlike regular BEAM code, is native code and cannot be garbage collected from the VM when new versions are loaded. Memory can accumulate, usually very slowly, if many or large modules are native-compiled and loaded at run time.

Alternatively, you may look for weird modules you didn't load yourself on the node and panic if someone got access to your system!

7.1.4 ETS

ETS tables are never garbage collected, and will maintain their memory usage as long as records will be left undeleted in a table. Only removing records manually (or deleting the table) will reclaim memory.

In the rare cases you're actually leaking ETS data, call the undocumented `ets:i()` function in the shell. It will print out information regarding number of entries (`size`) and how much memory they take (`mem`). Figure out if anything is bad.

It's entirely possible all the data there is legit, and you're facing the difficult problem of needing to shard your data set and distribute it over many nodes. This is out of scope for this book, so best of luck to you. You can look into compression of your tables if you need to buy time, however.⁶

7.1.5 Processes

There are a lot of different ways in which process memory can grow. Most interesting cases will be related to a few common cases: process leaks (as in, you're leaking processes), specific processes leaking their memory, and so on. It's possible there's more than one cause, so multiple metrics are worth investigating. Note that the process count itself is skipped and has been covered before.

Links and Monitors

Is the global process count indicative of a leak? If so, you may need to investigate unlinked processes, or peek inside supervisors' children lists to see what may be weird-looking.

Finding unlinked (and unmonitored) processes is easy to do with a few basic commands:

```
1> [P || P <- processes(),
    [{_,Ls},{_,Ms}] <- [process_info(P, [links,monitors])],
    []==Ls, []==Ms].
```

This will return a list of processes with neither. For supervisors, just fetching `supervisor:count_children(SupervisorPidOrName)` and seeing what looks normal can be a good

⁵ http://www.erlang.org/doc/man/HiPE_app.html

⁶ See the [compressed option for ets:new/2](#)

pointer.

Memory Used

The per-process memory model is briefly described in Subsection 7.3.2, but generally speaking, you can find which individual processes use the most memory by looking for their `memory` attribute. You can look things up either as absolute terms or as a sliding window.

For memory leaks, unless you're in a predictable fast increase, absolute values are usually those worth digging into first:

```
1> recon:proc_count(memory, 3).
[{<0.175.0>,325276504,
  [myapp_stats,
   {current_function,{gen_server,loop,6}},
   {initial_call,{proc_lib,init_p,5}}]},
 {<0.169.0>,73521608,
  [myapp_giant_sup,
   {current_function,{gen_server,loop,6}},
   {initial_call,{proc_lib,init_p,5}}]},
 {<0.72.0>,4193496,
  [gproc,
   {current_function,{gen_server,loop,6}},
   {initial_call,{proc_lib,init_p,5}}]}]
```

Attributes that may be interesting to check other than `memory` may be any other fields in Subsection 5.2.1, including `message_queue_len`, but `memory` will usually encompass all other types.

Garbage Collections

It is very well possible that a process uses lots of memory, but only for short periods of time. For long-lived nodes with a large overhead for operations, this is usually not a problem, but whenever memory starts being scarce, such spiky behaviour might be something you want to get rid of.

Monitoring all garbage collections in real-time from the shell would be costly. Instead, setting up Erlang's system monitor⁷ might be the best way to go at it.

Erlang's system monitor will allow you to track information such as long garbage collection periods and large process heaps, among other things. A monitor can temporarily be set up as follows:

```
1> erlang:system_monitor().
undefined
2> erlang:system_monitor(self(), [{long_gc, 500}]).
undefined
```

⁷ http://www.erlang.org/doc/man/erlang.html#system_monitor-2


```
3> flush().
Shell got {monitor,<4683.31798.0>,long_gc,
           [{timeout,515},
            {old_heap_block_size,0},
            {heap_block_size,75113},
            {mbuf_size,0},
            {stack_size,19},
            {old_heap_size,0},
            {heap_size,33878}]}
5> erlang:system_monitor(undefined).
{<0.26706.4961>,[{long_gc,500}]}
6> erlang:system_monitor().
undefined
```

The first command checks that nothing (or nobody else) is using a system monitor yet — you don't want to take this away from an existing application or coworker.

The second command will be notified every time a garbage collection takes over 500 milliseconds. The result is flushed in the third command. Feel free to also check for `{large_heap, NumWords}` if you want to monitor such sizes. Be careful to start with large values at first if you're unsure. You don't want to flood your process' mailbox with a bunch of heaps that are 1-word large or more, for example.

Command 5 unsets the system monitor (exiting or killing the monitor process also frees it up), and command 6 validates that everything worked.

You can then find out if such monitoring messages tend to coincide with the memory increases that seem to result in leaks or overuses, and try to catch culprits before things are too bad. Quickly reacting and digging into the process (possibly with `recon:info/1`) may help find out what's wrong with the application.

7.1.6 Nothing in Particular

If nothing seems to stand out in the preceding material, binary leaks (Section 7.2) and memory fragmentation (Section 7.3) may be the culprits. If nothing there fits either, it's possible a C driver, NIF, or even the VM itself is leaking. Of course, a possible scenario is that load on the node and memory usage were proportional, and nothing specifically ended up being leaky or modified. The system just needs more resources or nodes.

7.2 バイナリ

Erlang のバイナリは 2 つの主な型から成ります：ProcBin と refc バイナリです⁸。64 バイトまでのバイナリはプロセスのヒープ上に直接割り当てられ、それらの全ライフサイクルはそのヒープ上で費やされま

⁸ http://www.erlang.org/doc/efficiency_guide/binaryhandling.html#id65798

す。それより大きいバイナリは、バイナリのためだけのグローバルヒープ上に割り当てられ、バイナリを使うプロセスは、ローカルヒープ内にローカル参照を保持します。これらのバイナリは参照をカウントされており、割り当ての解除は、ある特定のバイナリを参照しているすべてのプロセスのすべての参照がガベージコレクトされたときに1回だけ発生します。

99% のケースでは、このメカニズムは正常に動作します。しかしながら、一部のケースでは、このプロセスはうまくいきません:

1. メモリの割り当てとガベージコレクションを保証することについてほとんど機能しません。
2. 最終的には様々なデータ構造の大きなスタックやヒープを広げ、それらを集め、そして沢山の `refc` バイナリと動きます。バイナリでヒープを満たすことは（たとえ仮想ヒープが、その `refc` バイナリの実際のサイズに対するカウントに使われていても）、長い時間がかかってしまうかもしれません。それは、ガベージコレクションの間に長い遅延を発生させます。

7.2.1 リークを検出する

参照カウントされたバイナリによるリークを検出することは十分に簡単です。すべての各プロセスのバイナリ参照のリストを基準とし（`binary` 属性を使って）、ガベージコレクションを強制的に実行し、別のスナップショットを取得し、その差を計算します。

この作業は `recon:bin_leak(Max)` を使い、その前後でノードの全体メモリ使用量を見ることで端的に実行することができます。

```
1> recon:bin_leak(5).
[<0.4612.0>,-5580,
  [{current_function,{gen_fsm,loop,7}},
   {initial_call,{proc_lib,init_p,5}}]],
<0.17479.0>,-3724,
  [{current_function,{gen_fsm,loop,7}},
   {initial_call,{proc_lib,init_p,5}}]],
<0.31798.0>,-3648,
  [{current_function,{gen_fsm,loop,7}},
   {initial_call,{proc_lib,init_p,5}}]],
<0.31797.0>,-3266,
  [{current_function,{gen,do_call,4}},
   {initial_call,{proc_lib,init_p,5}}]],
<0.22711.1>,-2532,
  [{current_function,{gen_fsm,loop,7}},
   {initial_call,{proc_lib,init_p,5}}]]]
```

この例では、どれくらいの独立したバイナリが保持された後に開放されているかを差分として表しています。この `-5580` は、この関数が実行される前と後で `5580` 少ない `refc` バイナリが存在したことを表しています。

これが常時一定量あることを示しているのは普通のことですし、すべての数字が何かが悪いことを示しているわけではありません。もしあなたが、VM が使用しているメモリがこの関数の呼び出しよりも後に大幅に減っていることを確認したら、それはアイドル状態の `refc` バイナリがあるということかもしれません。

同様に、もしそうではなく、あなたがいくつかのプロセスがびっくりするほど大量の `refc` バイナリを保持していることを見つけるのであれば⁹、それは問題があるというよい証拠となるかもしれません。

さらに、あなたは `recon` でサポートされている特別な `binary_memory` 属性を使うことによって、バイナリメモリの合計中最もメモリを消費しているものを検証することができます：

```
1> recon:proc_count(binary_memory, 3).
[{<0.169.0>,77301349,
  [app_sup,
    {current_function,{gen_server,loop,6}},
    {initial_call,{proc_lib,init_p,5}}]},
 {<0.21928.1>,9733935,
  [{current_function,{erlang,hibernate,3}},
   {initial_call,{proc_lib,init_p,5}}]},
 {<0.12386.1172>,7208179,
  [{current_function,{erlang,hibernate,3}},
   {initial_call,{proc_lib,init_p,5}}]}]
```

この関数は `N` の、`refc` バイナリの参照が保持しているメモリ量によって並び替えられた上位のプロセスを返し、バイナリの実際の量を返す代わりに、いくつかの大きなバイナリを保持する特定のプロセスを示してくれます。

7.2.2 Fixing Leaks

Once you've established you've got a binary memory leak using `recon:bin_leak(Max)`, it should be simple enough to look at the top processes and see what they are and what kind of work they do.

Generally, `refc` binaries memory leaks can be solved in a few different ways, depending on the source:

- call garbage collection manually at given intervals (icky, but somewhat efficient);
- stop using binaries (often not desirable);
- use `binary:copy/1-2`¹⁰ if keeping only a small fragment (usually less than 64 bytes) of a larger binary;¹¹
- move work that involves larger binaries to temporary one-off processes that will die when

⁹ 筆者は Heroku でのメモリリークの調査中に、いくつかのプロセスが 10 万件ほどの `refc` バイナリを保持しているのを見つけました！

¹⁰ <http://www.erlang.org/doc/man/binary.html#copy-1>

¹¹ It might be worth copying even a larger fragment of a `refc` binary. For example, copying 10 megabytes off a 2 gigabytes binary should be worth the short-term overhead if it allows the 2 gigabytes binary to be garbage-collected while keeping the smaller fragment longer.

they're done (a lesser form of manual GC!);

- or add hibernation calls when appropriate (possibly the cleanest solution for inactive processes).

The first two options are frankly not agreeable and should not be attempted before all else failed. The last three options are usually the best ones to be used.

Routing Binaries

There's a specific solution for a specific use case some Erlang users have reported. The problematic use case is usually having a middleman process routing binaries from one process to another one. That middleman process will therefore acquire a reference to every binary passing through it and risks being a common major source of refc binaries leaks.

The solution to this pattern is to have the router process return the pid to route to and let the original caller move the binary around. This will make it so that only processes that do **need** to touch the binaries will do so.

A fix for this can be implemented transparently in the router's API functions, without any visible change required by the callers.

7.3 メモリフラグメンテーション

メモリフラグメンテーションの問題は 7.3.2 の章で記述されているように Erlang のメモリモデルと密接に関連しています。これは長時間動いている Erlang ノードの最も難しい問題 (個々のノードの稼働時間が数ヶ月にも達する時によく起こる) の一つで、比較的まれに見られます。

一般的なメモリフラグメンテーションの症状は、ピーク時に大量のメモリが割り当てられ、その後に解放されないというものです。ノードが内部的にレポートするメモリ使用量 (`erlang:memory()` を通した) が OS がレポートするものに比べてとても少ない場合は、明らかにこれが要因です。

7.3.1 Finding Fragmentation

The `recon_alloc` module was developed specifically to detect and help point towards the resolution of such issues.

Given how rare this type of issue has been so far over the community (or happened without the developers knowing what it was), only broad steps to detect things are defined. They're all vague and require the operator's judgement.

Check Allocated Memory

Calling `recon_alloc:memory/1` will report various memory metrics with more flexibility than `erlang:memory/0`. Here are the possibly relevant arguments:

1. call `recon_alloc:memory(usage)`. This will return a value between 0 and 1 representing a

percentage of memory that is being actively used by Erlang terms versus the memory that the Erlang VM has obtained from the OS for such purposes. If the usage is close to 100%, you likely do not have memory fragmentation issues. You're just using a lot of it.

2. check if `recon_alloc:memory(allocated)` matches what the OS reports.¹² It should match it fairly closely if the problem is really about fragmentation or a memory leak from Erlang terms.

That should confirm if memory seems to be fragmented or not.

Find the Guilty Allocator

Call `recon_alloc:memory(allocated_types)` to see which type of util allocator (see Section 7.3.2) is allocating the most memory. See if one looks like an obvious culprit when you compare the results with `erlang:memory()`.

Try `recon_alloc:fragmentation(current)`. The resulting data dump will show different allocators on the node with various usage ratios.¹³

If you see very low ratios, check if they differ when calling `recon_alloc:fragmentation(max)`, which should show what the usage patterns were like under your max memory load.

If there is a big difference, you are likely having issues with memory fragmentation for a few specific allocator types following usage spikes.

7.3.2 Erlang's Memory Model

The Global Level

To understand where memory goes, one must first understand the many allocators being used. Erlang's memory model, for the entire virtual machine, is hierarchical. As shown in Figure 7.1, there are two main allocators, and a bunch of sub-allocators (numbered 1-9). The sub-allocators are the specific allocators used directly by Erlang code and the VM for most data types:¹⁴

1. `temp_alloc`: does temporary allocations for short use cases (such as data living within a single C function call).
2. `eheap_alloc`: heap data, used for things such as the Erlang processes' heaps.
3. `binary_alloc`: the allocator used for reference counted binaries (what their 'global heap' is). Reference counted binaries stored in an ETS table remain in this allocator.
4. `ets_alloc`: ETS tables store their data in an isolated part of memory that isn't garbage collected, but allocated and deallocated as long as terms are being stored in tables.
5. `driver_alloc`: used to store driver data in particular, which doesn't keep drivers that generate Erlang terms from using other allocators. The driver data allocated here contains locks/mu-

¹² You can call `recon_alloc:set_unit(Type)` to set the values reported by `recon_alloc` in bytes, kilobytes, megabytes, or gigabytes

¹³ More information is available at http://ferd.github.io/recon/recon_alloc.html

¹⁴ The complete list of where each data type lives can be found in erts/emulator/beam/erl_alloc.types

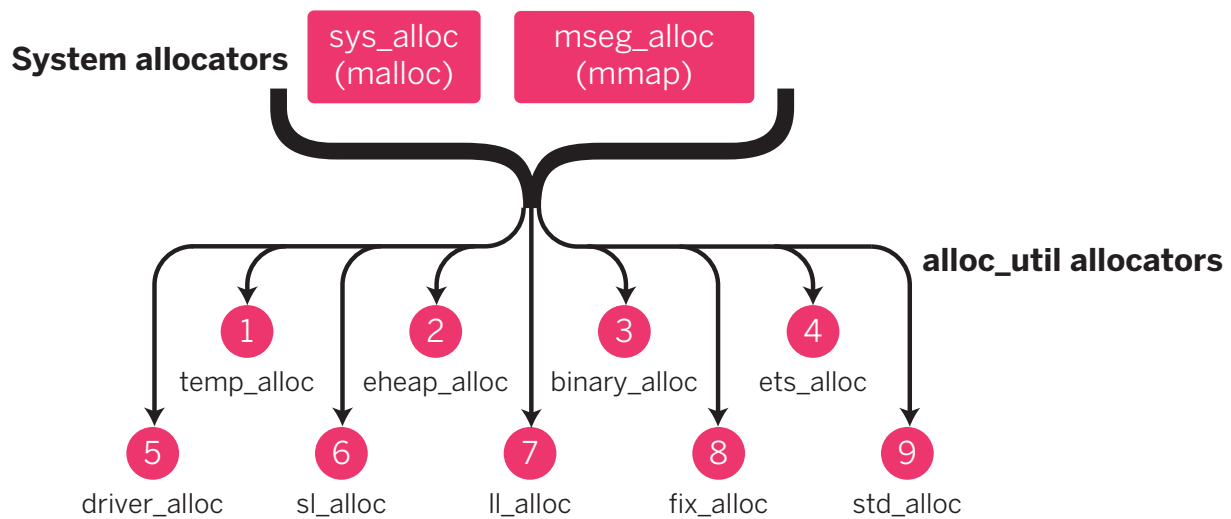


図 7.1 Erlang’s Memory allocators and their hierarchy. Not shown is the special **super carrier**, optionally allowing to pre-allocate (and limit) all memory available to the Erlang VM since R16B03.

texes, options, Erlang ports, etc.

6. `sl_alloc`: short-lived memory blocks will be stored there, and include items such as some of the VM’s scheduling information or small buffers used for some data types’ handling.
7. `ll_alloc`: long-lived allocations will be in there. Examples include Erlang code itself and the atom table, which stay there.
8. `fix_alloc`: allocator used for frequently used fixed-size blocks of memory. One example of data used there is the internal processes’ C struct, used internally by the VM.
9. `std_alloc`: catch-all allocator for whatever didn’t fit the previous categories. The process registry for named process is there.

By default, there will be one instance of each allocator per scheduler (and you should have one scheduler per core), plus one instance to be used by linked-in drivers using async threads. This ends up giving you a structure a bit like in Figure 7.1, but split it in N parts at each leaf.

Each of these sub-allocators will request memory from `mseg_alloc` and `sys_alloc` depending on the use case, and in two possible ways. The first way is to act as a multiblock carrier (`mbcs`), which will fetch chunks of memory that will be used for many Erlang terms at once. For each `mbc`, the VM will set aside a given amount of memory (about 8MB by default in our case, which can be configured by tweaking VM options), and each term allocated will be free to go look into the many multiblock carriers to find some decent space in which to reside.

Whenever the item to be allocated is greater than the single block carrier threshold (`sbct`)¹⁵, the allocator switches this allocation into a single block carrier (`sbc`). A single block carrier will request

¹⁵ http://erlang.org/doc/man/erts_alloc.html#M_sbct

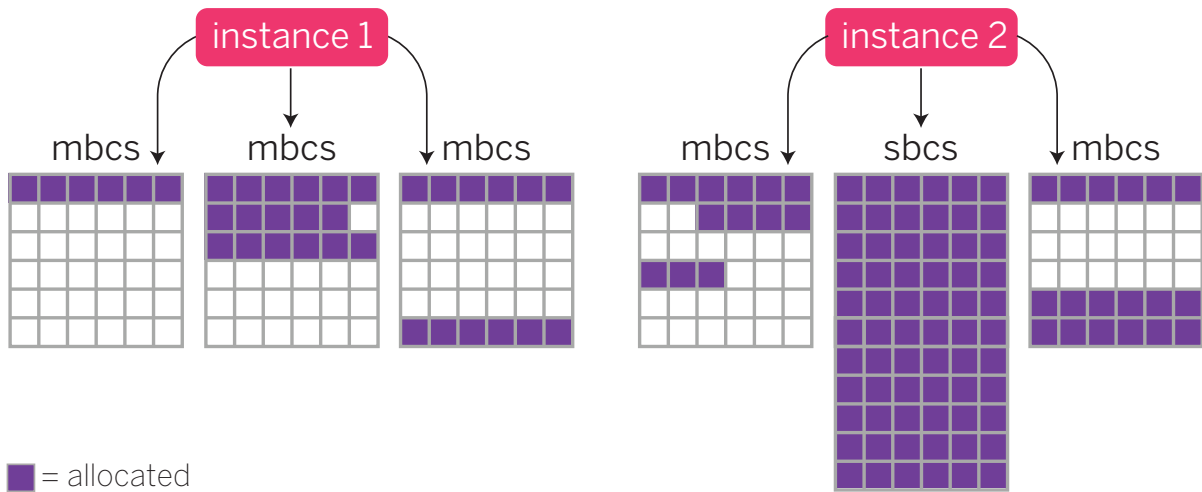


图 7.2 Example memory allocated in a specific sub-allocator

memory directly from `mseg_alloc` for the first `mmsbc`¹⁶ entries, and then switch over to `sys_alloc` and store the term there until it's deallocated.

So looking at something such as the binary allocator, we may end up with something similar to Figure 7.2

Whenever a multiblock carrier (or the first `mmsbc`¹⁷ single block carriers) can be reclaimed, `mseg_alloc` will try to keep it in memory for a while so that the next allocation spike that hits your VM can use pre-allocated memory rather than needing to ask the system for more each time.

You then need to know the different memory allocation strategies of the Erlang virtual machine:

1. Best fit (bf)
2. Address order best fit (aobf)
3. Address order first fit (aoff)
4. Address order first fit carrier best fit (aoffcbf)
5. Address order first fit carrier address order best fit (aoffcaobf)
6. Good fit (gf)
7. A fit (af)

Each of these strategies can be configured individually for each `alloc_util` allocator¹⁸

¹⁶ http://erlang.org/doc/man/erts_alloc.html#M_mmsbc

¹⁷ http://erlang.org/doc/man/erts_alloc.html#M_mmsbc

¹⁸ http://erlang.org/doc/man/erts_alloc.html#M_as

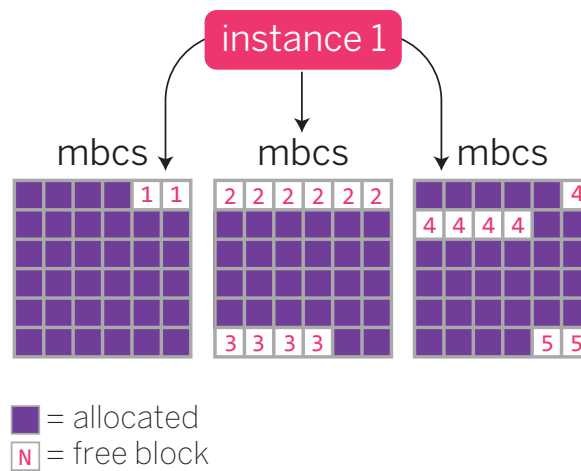


図 7.3 Example memory allocated in a specific sub-allocator

For **best fit** (bf), the VM builds a balanced binary tree of all the free blocks' sizes, and will try to find the smallest one that will accommodate the piece of data and allocate it there. In Figure 7.3, having a piece of data that requires three blocks would likely end in area 3.

Address order best fit (aobf) will work similarly, but the tree instead is based on the addresses of the blocks. So the VM will look for the smallest block available that can accommodate the data, but if many of the same size exist, it will favor picking one that has a lower address. If I have a piece of data that requires three blocks, I'll still likely end up in area 3, but if I need two blocks, this strategy will favor the first mbc in Figure 7.3 with area 1 (instead of area 5). This could make the VM have a tendency to favor the same carriers for many allocations.

Address order first fit (aoff) will favor the address order for its search, and as soon as a block fits, aoff uses it. Where aobf and bf would both have picked area 3 to allocate four blocks in Figure 7.3, this one will get area 2 as a first priority given its address is lowest. In Figure 7.4, if we were to allocate four blocks, we'd favor block 1 to block 3 because its address is lower, whereas bf would have picked either 3 or 4, and aobf would have picked 3.

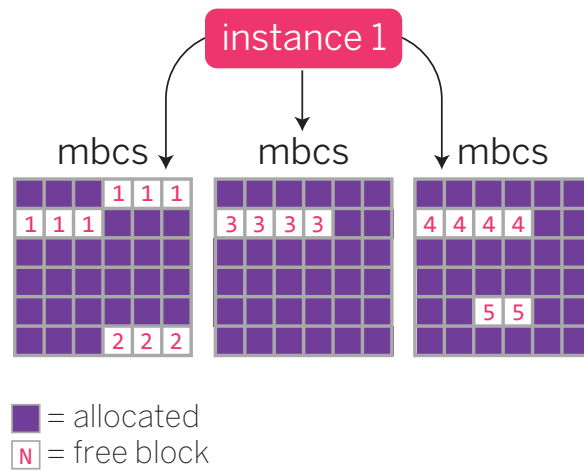


图 7.4 Example memory allocated in a specific sub-allocator

Address order first fit carrier best fit (aoffcbf) is a strategy that will first favor a carrier that can accommodate the size and then look for the best fit within that one. So if we were to allocate two blocks in Figure 7.4, bf and aobf would both favor block 5, aoff would pick block 1. aoffcbf would pick area 2, because the first mbc can accommodate it fine, and area 2 fits it better than area 1.

Address order first fit carrier address order best fit (aoffcaobf) will be similar to aoffcbf, but if multiple areas within a carrier have the same size, it will favor the one with the smallest address between the two rather than leaving it unspecified.

Good fit (gf) is a different kind of allocator; it will try to work like best fit (bf), but will only search for a limited amount of time. If it doesn't find a perfect fit there and then, it will pick the best one encountered so far. The value is configurable through the mbsd¹⁹ VM argument.

A fit (af), finally, is an allocator behaviour for temporary data that looks for a single existing memory block, and if the data can fit, af uses it. If the data can't fit, af allocates a new one.

Each of these strategies can be applied individually to every kind of allocator, so that the heap allocator and the binary allocator do not necessarily share the same strategy.

Finally, starting with Erlang version 17.0, each alloc_util allocator on each scheduler has what is called a **mbcs pool**. The mbc pool is a feature used to fight against memory fragmentation on the VM. When an allocator gets to have one of its multiblock carriers become mostly empty,²⁰ the carrier becomes **abandoned**.

This abandoned carrier will stop being used for new allocations, until new multiblock carriers start being required. When this happens, the carrier will be fetched from the mbc pool. This can be done across multiple alloc_util allocators of the same type across schedulers. This allows the VM

¹⁹ http://www.erlang.org/doc/man/erts_alloc.html#M_mbsd

²⁰ The threshold is configurable through http://www.erlang.org/doc/man/erts_alloc.html#M_acul

to cache mostly-empty carriers without forcing deallocation of their memory.²¹ It also enables the migration of carriers across schedulers when they contain little data, according to their needs.

The Process Level

On a smaller scale, for each Erlang process, the layout still is a bit different. It basically has this piece of memory that can be imagined as one box:

```
1 [      ]
```

On one end you have the heap, and on the other, you have the stack:

```
1 [heap |      | stack]
```

In practice there's more data (you have an old heap and a new heap, for generational GC, and also a virtual binary heap, to account for the space of reference-counted binaries on a specific sub-allocator not used by the process — `binary_alloc` vs. `eheap_alloc`):

```
1 [heap    ||      stack]
```

The space is allocated more and more up until either the stack or the heap can't fit in anymore. This triggers a minor GC. The minor GC moves the data that can be kept into the old heap. It then collects the rest, and may end up reallocating more space.

After a given number of minor GCs and/or reallocations, a full-sweep GC is performed, which inspects both the new and old heaps, frees up more space, and so on. When a process dies, both the stack and heap are taken out at once. reference-counted binaries are decreased, and if the counter is at 0, they vanish.

When that happens, over 80% of the time, the only thing that happens is that the memory is marked as available in the sub-allocator and can be taken back by new processes or other ones that may need to be resized. Only after having this memory unused — and the multiblock carrier unused also — is it returned to `mseg_alloc` or `sys_alloc`, which may or may not keep it for a while longer.

7.3.3 異なるアロケーション戦略でメモリフラグメンテーションを修正する

メモリアロケーションに関する VM のオプションを調整することが助けになるかもしれません。

あなたはメモリ負荷とメモリ使用量の種類が何かについてよく理解し、大量の徹底的なテストを覚悟する必要があります。 `recon_alloc` モジュールはガイダンスを提供するためのいくつかの役立つ機能を含ん

²¹ In cases this consumes too much memory, the feature can be disabled with the options `+MBacul 0`.

であり、この時点でモジュールのドキュメント²²を読むべきです。

あなたは平均的なデータサイズがどれくらいかや、アロケーションとアロケーション解除の頻度、データが `mbcs` か `sbc` に収まるかどうかについて把握する必要があります。その上で `recon_alloc` のたくさんのオプションを試し、別の戦略を試し、それらをデプロイし、改善したかマイナスの影響があったかを見る必要があります。

これは近道のないとても長いプロセスで、しかも問題はノードごとに数ヶ月ごとにしか起こりませんので、あなたは長期間それに携わることになるでしょう。

7.4 演習

復習問題

1. Erlang のプログラムにおいてよくあるリークの原因をいくつか挙げてください。
2. Erlang での主要な 2 種類のバイナリはなんでしょう。
3. どの特定のデータ型もリークの原因でないように思われる場合、何が原因になりうるでしょう。
4. 多くのメモリを保持したプロセスとともにノードが死んだとき、どのノードが死んだかをどうやって見つけられるでしょう。
5. コードはどうやってリークを起こせるでしょう。
6. ガベージコレクションの実行に時間がかかりすぎているかどうかをどうやって見つけられるでしょう。

自由回答問題

1. プロセスの殺し忘れ、あるいはプロセスのメモリの使いすぎによって起こされたリークはどうやって確認できるでしょう。
2. あるプロセスが 150MB のログファイルをバイナリモード開いてある情報を取り出し、その情報を ETS テーブルに保存しようとしています。バイナリメモリリークがあるとわかった場合に、そのノード上でのバイナリメモリの使用量を最小にするには何をすべきでしょう。
3. ETS テーブルのサイズの成長が速すぎるのを検出するためには何をしたら良いでしょう。
4. ノードがフラグメンテーションで苦労しそうかを検出するためにどのような手順を踏めばよいでしょう。またそれが NIF やドライバーがメモリリークの原因であろうという意見にどう反論できるでしょう。
5. (`message_queue_len` の値を見ることで) メールボックスが大きくなっているプロセスがデータをリークさせている、あるいは新規メッセージをまったく処理できていなさそうかを、どうやって検出できるでしょう。
6. 大きなメモリフットプリントのプロセスがガベージコレクションをほとんど実行していなさそうに見えます。これはどう説明できるでしょう。

²² http://ferd.github.io/recon/recon_alloc.html

7. ノードに対するアロケーション戦略はいつ変更すべきでしょうか。この設定は手で調整すべきでしょうか、あるいはコードで記述すべきでしょうか。

ハンズオン

1. あなたが知っているあるいはうんようしなければならないどんな Erlang システム（トイシステム含む）でもいいので、それを使ってそこにバイナリメモリリークがあるかどうかを判断してください。

第 8 章

CPU AND SCHEDULER HOGS

While memory leaks tend to absolutely kill your system, CPU exhaustion tends to act like a bottleneck and limits the maximal work you can get out of a node. Erlang developers will have a tendency to scale horizontally when they face such issues. It is often an easy enough job to scale out the more basic pieces of code out there. Only centralized global state (process registries, ETS tables, and so on) usually need to be modified.¹ Still, if you want to optimize locally before scaling out at first, you need to be able to find your CPU and scheduler hogs.

It is generally difficult to properly analyze the CPU usage of an Erlang node to pin problems to a specific piece of code. With everything concurrent and in a virtual machine, there is no guarantee you will find out if a specific process, driver, your own Erlang code, NIFs you may have installed, or some third-party library is eating up all your processing power.

The existing approaches are often limited to profiling and reduction-counting if it's in your code, and to monitoring the scheduler's work if it might be anywhere else (but also your code).

8.1 Profiling and Reduction Counts

To pin issues to specific pieces of Erlang code, as mentioned earlier, there are two main approaches. One will be to do the old standard profiling routine, likely using one of the following applications:²

- `eprof`,³ the oldest Erlang profiler around. It will give general percentage values and will mostly report in terms of time taken.

¹ Usually this takes the form of sharding or finding a state-replication scheme that's suitable, and little more. It's still a decent piece of work, but nothing compared to finding out most of your program's semantics aren't applicable to distributed systems given Erlang usually forces your hand there in the first place.

² All of these profilers work using Erlang tracing functionality with almost no restraint. They will have an impact on the run-time performance of the application, and shouldn't be used in production.

³ <http://www.erlang.org/doc/man/eprof.html>

- `fprof`,⁴ a more powerful replacement of `eprof`. It will support full concurrency and generate in-depth reports. In fact, the reports are so deep that they are usually considered opaque and hard to read.
- `eflame`,⁵ the newest kid on the block. It generates flame graphs to show deep call sequences and hot-spots in usage on a given piece of code. It allows one to quickly find issues with a single look at the final result.

It will be left to the reader to thoroughly read each of these application's documentation. The other approach will be to run `recon:proc_window/3` as introduced in Subsection 5.2.1:

```
1> recon:proc_window(reductions, 3, 500).
[{<0.46.0>,51728,
  [{current_function,{queue,in,2}},
   {initial_call,{erlang,apply,2}}]},
 {<0.49.0>,5728,
  [{current_function,{dict,new,0}},
   {initial_call,{erlang,apply,2}}]},
 {<0.43.0>,650,
  [{current_function,{timer,sleep,1}},
   {initial_call,{erlang,apply,2}}]}]
```

The reduction count has a direct link to function calls in Erlang, and a high count is usually the synonym of a high amount of CPU usage.

What's interesting with this function is to try it while a system is already rather busy,⁶ with a relatively short interval. Repeat it many times, and you should hopefully see a pattern emerge where the same processes (or the same **kind** of processes) tend to always come up on top.

Using the code locations⁷ and current functions being run, you should be able to identify what kind of code hogs all your schedulers.

8.2 System Monitors

If nothing seems to stand out through either profiling or checking reduction counts, it's possible some of your work ends up being done by NIFs, garbage collections, and so on. These kinds of work may not always increment their reductions count correctly, so they won't show up with the previous methods, only through long run times.

To find about such cases, the best way around is to use `erlang:system_monitor/2`, and look for

⁴ <http://www.erlang.org/doc/man/fprof.html>

⁵ <https://github.com/proger/eflame>

⁶ See Subsection 5.1.2

⁷ Call `recon:info(PidTerm, location)` or `process_info(Pid, current_stacktrace)` to get this information.

`long_gc` and `long_schedule`. The former will show whenever garbage collection ends up doing a lot of work (it takes time!), and the latter will likely catch issues with busy processes, either through NIFs or some other means, that end up making them hard to de-schedule.⁸

We've seen how to set such a system monitor In Garbage Collection in 7.1.5, but here's a different pattern⁹ I've used before to catch long-running items:

```
1> F = fun(F) ->
    receive
        {monitor, Pid, long_schedule, Info} ->
            io:format("monitor=long_schedule pid=~p info=~p~n", [Pid, Info]);
        {monitor, Pid, long_gc, Info} ->
            io:format("monitor=long_gc pid=~p info=~p~n", [Pid, Info])
    end,
    F(F)
end.
2> Setup = fun(Delay) -> fun() ->
    register(temp_sys_monitor, self()),
    erlang:system_monitor(self(), [{long_schedule, Delay}, {long_gc, Delay}]),
    F(F)
end end.
3> spawn_link(Setup(1000)).
<0.1293.0>
monitor=long_schedule pid=<0.54.0> info=[{timeout,1102},
                                         {in,{some_module,some_function,3}},
                                         {out,{some_module,some_function,3}}]
```

Be sure to set the `long_schedule` and `long_gc` values to large-ish values that might be reasonable to you. In this example, they're set to 1000 milliseconds. You can either kill the monitor by calling `exit(whereis(temp_sys_monitor), kill)` (which will in turn kill the shell because it's linked), or just disconnect from the node (which will kill the process because it's linked to the shell.)

This kind of code and monitoring can be moved to its own module where it reports to a long-term logging storage, and can be used as a canary for performance degradation or overload detection.

8.2.1 Suspended Ports

An interesting part of system monitors that didn't fit anywhere but may have to do with scheduling is regarding ports. When a process sends too many message to a port and the port's internal queue gets full, the Erlang schedulers will forcibly de-schedule the sender until space is freed. This may

⁸ Long garbage collections count towards scheduling time. It is very possible that a lot of your long schedules will be tied to garbage collections depending on your system.

⁹ If you're on 17.0 or newer versions, the shell functions can be made recursive far more simply by using their named form, but to have the widest compatibility possible with older versions of Erlang, I've let them as is.

end up surprising a few users who didn't expect that implicit back-pressure from the VM.

This kind of event can be monitored by passing in the atom `busy_port` to the system monitor. Specifically for clustered nodes, the atom `busy_dist_port` can be used to find when a local process gets de-scheduled when contacting a process on a remote node whose inter-node communication was handled by a busy port.

If you find out you're having problems with these, try replacing your sending functions where in critical paths with `erlang:port_command(Port, Data, [nosuspend])` for ports, and `erlang:send(Pid, Msg, [nosuspend])` for messages to distributed processes. They will then tell you when the message could not be sent and you would therefore have been descheduled.

8.3 演習

復習問題

1. CPU 利用率に関する問題を特定するための主なアプローチ 2 つとは何ですか？
2. プロファイル用のツールの名前をいくつか挙げてください。本番環境で使用する場合、どの方法が好ましいですか？ またそれはなぜですか？
3. ロングスケジュールモニター¹⁰が、CPU やスケジューラの使いすぎを見つけるのに便利なのはなぜですか？

自由回答

1. ほとんど仕事をしない (リダクションカウンタを増やさない) プロセスが長期間スケジューリングされているのを見つけた場合、そのプロセスもしくは実行しているコードについて何が考えられますか？
2. あなたはシステムモニターを設定して、通常の Erlang コードでそれを起動できますか？ プロセスが平均しておよそどれぐらいの長さスケジューリングされているかを見つけるために、システムモニターを利用できますか？ 既存のシステムにすでにあるものよりもより適切にそれを行えるようなプロセスを、シェルから手動で手当たり次第に起動する必要があるかもしれません。

¹⁰ システムモニター (`erlang:system_monitor/2`) で監視できる項目に `long_schedule` があります。これは NIF や driver で bump reductions をせずに CPU ガメるひとを見つけるための監視項目です。http://erlang.org/doc/man/erlang.html#system_monitor-2 も参考になるかと思います

第9章

トレース

Erlang と BEAM VM の機能で、およそどれぐらいのことをトレースできるかはあまり知られておらず、また全然使われていません。

使えるところが限られているので、デバッガのことは忘れてください¹。Erlang では、トレースは開発中あるいは稼働中の本番システムの診断など、システムのライフサイクルのどこでも便利です。

トレースを行ういくつかの Erlang プログラムがあります。

- `sys`² は OTP に標準で付属されており、利用者はトレース機能のカスタマイズや、あらゆる種類のイベントのログギングなどができます。多くの場合、開発用として完全かつ最適です。一方で、IO をリモートシェルにリダイレクトしないですし、メッセージのトレースのレート制限機能を持たないため、本番環境にはあまり向きません。このモジュールのドキュメントを読むことをお勧めします。
- `dbg`³ も Erlang/OTP に標準で付属しています。使い勝手の面ではインターフェースは少しイケてませんが、必要なことをやるには十分です。問題点としては、**何をやっているのか知らないといけない**ということです。なぜなら `dbg` はノードのすべてをログギングすることや、2 秒もかからずにノードを落とすこともできるからです。
- **トレース BIF** は `erlang` モジュールの一部として提供されています。このリストの全てのアプリケーションで使われているローレベルの部品ですが、抽象化が低いため、利用するのは困難です。
- `redbug`⁴ は `eper`⁵ スイートの一部で、本番環境環境でも安全に使えるトレースライブラリです。内部にレート制限機能を持ち、使いやすい素敵なインターフェースを持っていますが、利用するには `eper` が依存するもの全てを追加する必要があります。ツールキットは包括的で、興味をひくもの

¹ デバッガでブレークポイントを追加してステップ実行する時の代表的な問題は、多くの Erlang プログラムとうまくやりとりができないことです。あるプロセスがブレークポイントで止まっても、その他のプロセスは動作し続けます。そのため、プロセスがデバッグ対象のプロセスとやりとりが必要なきにはすぐに、プロセス呼び出しがタイムアウトしてクラッシュし、おそらくノード全体を落としてしまいます。ですから、デバックは非常に限定的なものとなります。一方でトレースはプログラムの実行を邪魔することは無く、また必要なデータをすべて取得することができます。

² <http://www.erlang.org/doc/man/sys.html>

³ <http://www.erlang.org/doc/man/dbg.html>

⁴ <https://github.com/massemanet/eper/blob/master/doc/redbug.txt>

⁵ <https://github.com/massemanet/eper>

です。

- `recon_trace`⁶は `recon` によるトレースです。 `redbug` と同程度の安全性を目的としていましたが、依存関係はありません。インターフェースは異なり、またレート制限のオプションも完全に同じではありません。関数呼び出しもトレースすることができますが、メッセージのトレースはできません⁷。

この章では `recon_trace` によるトレースにフォーカスしていきますが、使われている用語やコンセプトの多くは、Erlang の他のトレースツールにも活用できます。

9.1 トレースの原則

Erlang のトレース BIF は全ての Erlang コードをトレースすることを可能にします⁸。BIF は **pid 指定**と**トレースパターン**に分かれています。

pid 指定により、ユーザはどのプロセスをターゲットにするかを決めることができます。pid は、特定の pid, 全ての pid, 既存の pid, あるいは new pid（関数呼び出しの時点ではまだ生成されていないプロセス）で指定できます。

トレースパターンは関数の代わりになります。関数の指定は2つに分かれており、MFA(モジュール、関数、アリティ) と Erlang のマッチの仕様で引数に制約を加えています⁹

特定の関数呼び出しがトレースされるかどうかを定義している箇所は、9.1 にあるように、両者の共通部分です。

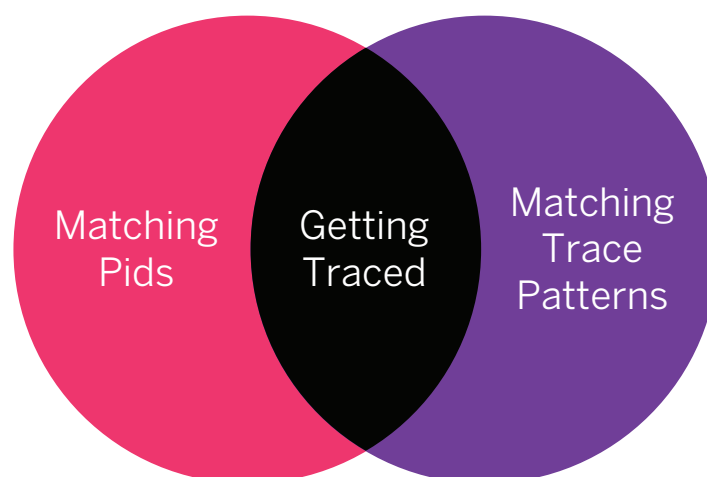


図 9.1 トレースされるのは、pid 指定とトレースパターンの交差した箇所です

⁶ http://ferd.github.io/recon/recon_trace.html

⁷ メッセージのトレース機能は将来のバージョンでサポートされるかもしれません。ライブラリの著者は OTP を使っている時には必要性を感じておらず、またビヘイビアと特定の引数へのマッチングにより、ユーザはおよそ同じことを実現できます

⁸ プロセスに機密情報が含まれている場合、`process_flag(sensitive, true)` を呼ぶことで、データを非公開にすることを強制できます

⁹ http://www.erlang.org/doc/apps/erts/match_spec.html

pid 指定がプロセスを除外、あるいはトレースパターンが指定の呼び出しを除外した場合、トレースは受信されません。

dbg（およびトレース BIF）のようなツールは、このベン図を念頭に置いて作業することを前提としています。pid 指定およびトレースパターンを別々に指定し、その結果が何であろうとも、両者の共通部分が表示されることになります。

一方で redbug や recon_trace のようなツールでは、これらを抽象化しています。

9.2 Recon によるトレース

デフォルトでは Recon は全てのプロセスにマッチしますが、デバッグ時のほとんどのケースはこれで問題ありません。多くの場合、あなたがいじくりたいと思う面白い部分は、トレースするパターンの指定です。Recon ではいくつかの方法をサポートしています。

最も基本的な指定方法は {Mod, Fun, Arity} で、Mod はモジュール名、Fun は関数名、Arity はアリティつまりトレース対象の関数の引数の数です。いずれもワイルドカードの ('_') で置き換えることができます。本番環境での実行は明らかに危険なため、Recon は ({'_','_','_'} のように) あまりにも広範囲あるいは全てにマッチするような指定は禁止しています。

より賢明な方法は、アリティを引数のリストにマッチする関数で置き換えることです。その関数は ETS で利用できるもの¹⁰と同様に、マッチの指定で利用されるものに限定されています。また、複数のパターンをリストで指定して、マッチするパターンを増やすこともできます。

レート制限は静的な値によるカウントか、一定期間内にマッチした数の 2 つの方法で行うことができます。

より詳細には立ち入らず、ここではいくつかの例と、トレースの方法を見ていきます。

```
%% queue モジュールからの全ての呼び出しを、最大で 10 回まで出力
recon_trace:calls({queue, '_', '_'}, 10)

%% lists:seq(A,B) の全ての呼び出しを、最大で 100 回まで出力
recon_trace:calls({lists, seq, 2}, 100)

%% lists:seq(A,B) の全ての呼び出しを、最大で 1 秒あたり 100 回まで出力
recon_trace:calls({lists, seq, 2}, {100, 1000})

%% lists:seq(A,B,2) の全ての呼び出し（2 つずつ増えていきます）を、最大で 100 回まで出力
recon_trace:calls({lists, seq, fun([_,_,2]) -> ok end}, 100)

%% 引数としてバイナリを指定して呼び出された iolist_to_binary/1 への全ての呼び出し
%% （意味のない変換をトラッキングしている一例）
recon_trace:calls({erlang, iolist_to_binary,
                  fun([X]) when is_binary(X) -> ok end},
                  10)
```

¹⁰ <http://www.erlang.org/doc/man/ets.html#fun2ms-1>

```

%% 指定の Pid から queue モジュールの呼び出しを、最大で 1 秒あたり 50 回まで
recon_trace:calls({queue, '_', '_'}, {50,1000}, [{pid, Pid}])

%% リテラル引数のかわりに、関数のアリティでトレースを出力
recon_trace:calls(TSpec, Max, [{args, arity}])

%% dict と lists モジュールの filter/2 関数にマッチして、かつ new プロセスからの呼び出しのみ
recon_trace:calls([dict,filter,2],[lists,filter,2], 10, [{pid, new}])

%% 指定モジュールの handle_call/3 関数の、new プロセスおよび
%% gproc で登録済の既存プロセスからの呼び出しをトレース
recon_trace:calls({Mod,handle_call,3}, {1,100}, [{pid, [{via, gproc, Name}, new]}])

%% 指定の関数呼び出しの結果を表示します。重要なポイントは、
%% return_trace() の呼び出しもしくは {return_trace} へのマッチです
recon_trace:calls({Mod,Fun,fun(_) -> return_trace() end}, Max, Opts)
recon_trace:calls({Mod,Fun,[['_', []], [{return_trace}]}], Max, Opts)

```

各々の呼び出しはそれ以前の呼び出しを上書きし、また全ての呼び出しは `recon_trace:clear/0` でキャンセルすることができます。

組み合わせることが可能なオプションはもう少しあります。

`{pid, PidSpec}`

トレースするプロセスの指定です。有効なオプションは `all`, `new`, `existing`, あるいはプロセスディスクリプタ (`{A,B,C}`, `"<A.B.C>"`, 名前をあらわすアトム、`{global, Name}`, `{via, Registrar, Name}`, あるいは `pid`) のどれかです。リストにすることで、複数指定することも可能です。

`{timestamp, formatter | trace}`

デフォルトでは `formatter` プロセスは受信したメッセージにタイムスタンプを追加します。正確なタイムスタンプが必要な場合、`{timestamp, trace}` オプションを追加することで、トレースするメッセージの中のタイムスタンプを使うことを強制できます。

`{args, arity | args}`

関数呼び出しでアリティを表示するか、(デフォルトの) リテラル表現を出力するか

`{scope, global | local}`

デフォルトでは `'global'`(明示的な関数呼び出し) だけがトレースされ、内部的な呼び出しはトレースされません。ローカルの呼び出しのトレースを強制するには、`{scope, local}` を渡します。これは、`Module:Fun(Args)` ではなく `Fun(Args)` だけで呼び出される、プロセス内のコード変更をトラッキングしたいときに便利です。

特定の関数の特定の呼び出しやらをパターンマッチするこれらのオプションにより、開発環境・本番環境の多くの問題点をより早く診断できます。

「うーん、このおかしい挙動を引き起こしているのは何なのか、たぶんもっと多くのログを吐けばわかるかもしれない」という発想になったときには、通常はトレースすることが、デプロイや（ログを）読みやすいように変更しなくても必要なデータを入手することができる近道となります。

9.3 実行例

最初に、どこかのプロセスの `queue:new` 関数をトレースしてみましょう

```
1> recon_trace:calls({queue, new, '_'}, 1).
1
13:14:34.086078 <0.44.0> queue:new()
Recon tracer rate limit tripped.
```

最大1メッセージに制限されているため、`recon` が制限に達したことを知らせてくれます。
全ての `queue:in/2` 呼び出しを見て、`queue` に挿入される内容をみてみましょう。

```
2> recon_trace:calls({queue, in, 2}, 1).
1
13:14:55.365157 <0.44.0> queue:in(a, {[], []})
Recon tracer rate limit tripped.
```

希望する内容を見るために、トレースパターンをリスト中の全引数にマッチする `fun(_)` を使うように変更して、`return_trace()` を返します。この最後の部分は、リターン値を含む各々の呼び出しのトレースそのものを生成します。

```
3> recon_trace:calls({queue, in, fun(_) -> return_trace() end}, 3).
1

13:15:27.655132 <0.44.0> queue:in(a, {[], []})

13:15:27.655467 <0.44.0> queue:in/2 --> {[a], []}

13:15:27.757921 <0.44.0> queue:in(a, {[], []})
Recon tracer rate limit tripped.
```

引数リストのマッチは、より複雑な方法で行うことができます。

```
4> recon_trace:calls(
4>   {queue, '_',
4>   fun([A,_]) when is_list(A); is_integer(A) andalso A > 1 ->
4>     return_trace()
```

```

4>     end},
4>     {10,100}
4> ).
32

13:24:21.324309 <0.38.0> queue:in(3, {[],[]})

13:24:21.371473 <0.38.0> queue:in/2 --> {[3],[]}

13:25:14.694865 <0.53.0> queue:split(4, {[10,9,8,7],[1,2,3,4,5,6]})

13:25:14.695194 <0.53.0> queue:split/2 --> {[4,3,2],[1]},{[10,9,8,7],[5,6]}}

5> recon_trace:clear().
ok

```

上記のパターンでは、特定の関数（'_'）にはマッチしていないことに注意してください。fun は2つの引数を持つ関数に限定され、また最初の引数はリストもしくは1よりも大きい数値です。

レート制限を緩めて非常に広範囲にマッチするパターン（あるいは制限を非常に高い数値にする）にした場合、ノードの安定性に影響を与える可能性があり、また recon_trace はそれに対して何も支援できなくなるかもしれないということに注意してください。同様に、非常に大量の関数呼び出し（関数や io の全ての呼び出しなど）をトレースした場合、ライブラリで注意してはいませんが、そのノードが処理できるプロセスよりも多くのトレースメッセージが生成されるリスクがあります。

よくわからない場合、最も制限した量でトレースを開始し、少しずつ増やして行ってください。

9.4 演習

復習問題

1. Erlang では通常なぜデバッガの使用が制限されていますか？
2. OTP プロセスをトレースする時に使用できるオプションは？
3. 指定の関数やプロセスがトレースされるかどうかを決めるのは何？
4. recon_trace あるいはその他のツールで、トレースを止める方法は？
5. エクスポートされていない関数の呼び出しをトレースする方法は？

自由回答

1. トレースにタイムスタンプを記録する時に、VM のトレース機能を直接利用するようにしたくなるのはどういう時ですか？ これによる欠点は何ですか？
2. ノードから送信されるトラフィックが SSL 経由の、マルチテナントシステムを想像してみてください。ただし、（顧客からのクレームに対応するため）送信されるデータをバリデートしたいので、平

文中身を参照できる必要があります。ssl ソケット経由で送信されたデータを覗くための方法を考えられますか？ しかも、その他の顧客宛のデータは覗かずにです。

ハンズオン

https://github.com/ferd/recon_demo にあるコードを利用してください（コードの中身をきちんと理解している必要があるかもしれません）

1. メッセージを吐きまくるプロセス (council_member) は自身にメッセージを送ることができますか？（ヒント：これは登録された名前 (register_name) で動作しますか？ その吐きまくるプロセスを確認、また、自身にメッセージを送ったかを知る必要はありますか？）
2. 全体で送られるメッセージの頻度を見積もることはできますか？
3. いずれかのトレースツールを使って、ノードをクラッシュさせることはできますか？（ヒント：非常に柔軟性が高いので、dbg を使うと簡単です）

おわりに

ソフトウェアの運用とデバッグは決して終わることはありません。新しいバグやややこしい動作がつねにあちこちに出現しつづけるでしょう。いかに整ったシステムを扱う場合でも、おそらく本書のようなマニュアルを何十も書けるくらいのことがあるでしょう。

本書を読んだことで、次に何か悪いことが起きたとしても、**それほど悪いことにはならないことを願っています**。それでも、本番システムをデバッグする機会がおそらく山ほどあることでしょう。いかなる堅牢な橋でも腐食しないように常にペンキを塗り替えるわけです。

みなさんのシステム運用がうまく行くことを願っています。