

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

# TERMINAL

```

~ Distributed JavaScript Runtime ~
-----
[INFO] Server started at http://127.0.0.1:3001
[INFO] Added worker: http://127.0.0.1:4001
[INFO] Added worker: http://127.0.0.1:4002
[INFO] Ran request: domain/keepHelloCount
[INFO] Ran request: domain/sayHello

```

```
>- gateway
>- repository
>- proxy
>- data
>- default
```

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

## TERMINAL

```
┌┐┌┐┌┐┌┐
~ Distributed JavaScript Runtime ~
-----
[INFO] Server started at http://127.0.0.1:3001
[INFO] Added worker: http://127.0.0.1:4001
[INFO] Added worker: http://127.0.0.1:4002
[INFO] Ran request: domain/keepHelloCount
[INFO] Ran request: domain/sayHello
```

- > gateway
- > repository
- > proxy
- > data
- > default

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

## TERMINAL

```
┌┐┌┐┌┐┌┐
~ Distributed JavaScript Runtime ~
-----
[INFO] Server started at http://127.0.0.1:3001
[INFO] Added worker: http://127.0.0.1:4001
[INFO] Added worker: http://127.0.0.1:4002
[INFO] Ran request: domain/keepHelloCount
[INFO] Ran request: domain/sayHello
```

> gateway

> repository

> proxy

> data

> default

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

# TERMINAL

```

~ Distributed JavaScript Runtime ~
-----
[INFO] Server started at http://127.0.0.1:3001
[INFO] Added worker: http://127.0.0.1:4001
[INFO] Added worker: http://127.0.0.1:4002
[INFO] Ran request: domain/keepHelloCount
[INFO] Ran request: domain/sayHello

```

 gateway

```
> repository
```

 proxy

```
> data
```

**>\_ default**

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

## TERMINAL

```
┌┐┌┐┌┐┌┐
~ Distributed JavaScript Runtime ~
-----
[INFO] Server started at http://127.0.0.1:3001
[INFO] Added worker: http://127.0.0.1:4001
[INFO] Added worker: http://127.0.0.1:4002
[INFO] Ran request: domain/keepHelloCount
[INFO] Ran request: domain/sayHello
```

>\_ gateway

>\_ repository


>\_ proxy

>\_ data

>\_ default

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

## TERMINAL

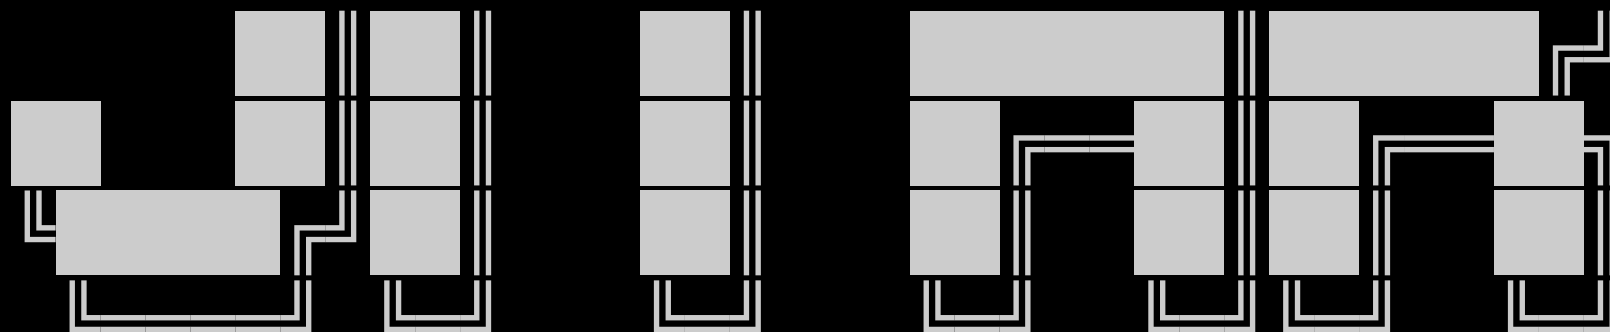

~ Distributed JavaScript Runtime ~

```
[INFO] Server started at http://127.0.0.1:3002
[INFO] Provided web client
```

```
> gateway
> repository
> proxy
> data
> default
```