```
    "dev": "vite",
    "build": "npm run build-domain && npm run build-webui",
    "build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
    "build-webui": "vite build",
    "standalone": "jitar start --service=services/standalone.json",
    "data": "jitar start --service=services/data-worker.json",
    "default": "jitar start --service=services/default-worker.json",
    "gateway": "jitar start --service=services/gateway.json",
    "repository": "jitar start --service=services/repository.json",
    "proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

~ Distributed JavaScript Runtime ~

```
-----------------------------------------
[INFO] Server started at http://127.0.0.1:4002
[INFO] RPC procedures: [
  domain/sayHello
]
```

- gateway
- repository
- proxy
- data
- default

```
  "dev": "vite",
  "build": "npm run build-domain && npm run build-webui",
  "build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
  "build-webui": "vite build",
  "standalone": "jitar start --service=services/standalone.json",
  "data": "jitar start --service=services/data-worker.json",
  "default": "jitar start --service=services/default-worker.json",
  "gateway": "jitar start --service=services/gateway.json",
  "repository": "jitar start --service=services/repository.json",
  "proxy": "jitar start --service=services/proxy.json"
```

RMINAL

Distributed JavaScript Runtime ~

FO] Server started at http://127.0.0.1:4002
FO] RPC procedures: [
domain/sayHello

- gateway
- repository
- proxy
- data
- default

```
run build-domain && npm run build-webui",
n": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
: "vite build",
 "jitar start --service=services/standalone.json",
tart --service=services/data-worker.json",
r start --service=services/default-worker.json",
ar start --service=services/gateway.json",
itar start --service=services/repository.json",
start --service=services/proxy.json"
```

```
aScript Runtime ~
------------------------------
ted at http://127.0.0.1:4002
dures: [
llo
```

- gateway
- repository
- proxy
- data
- default

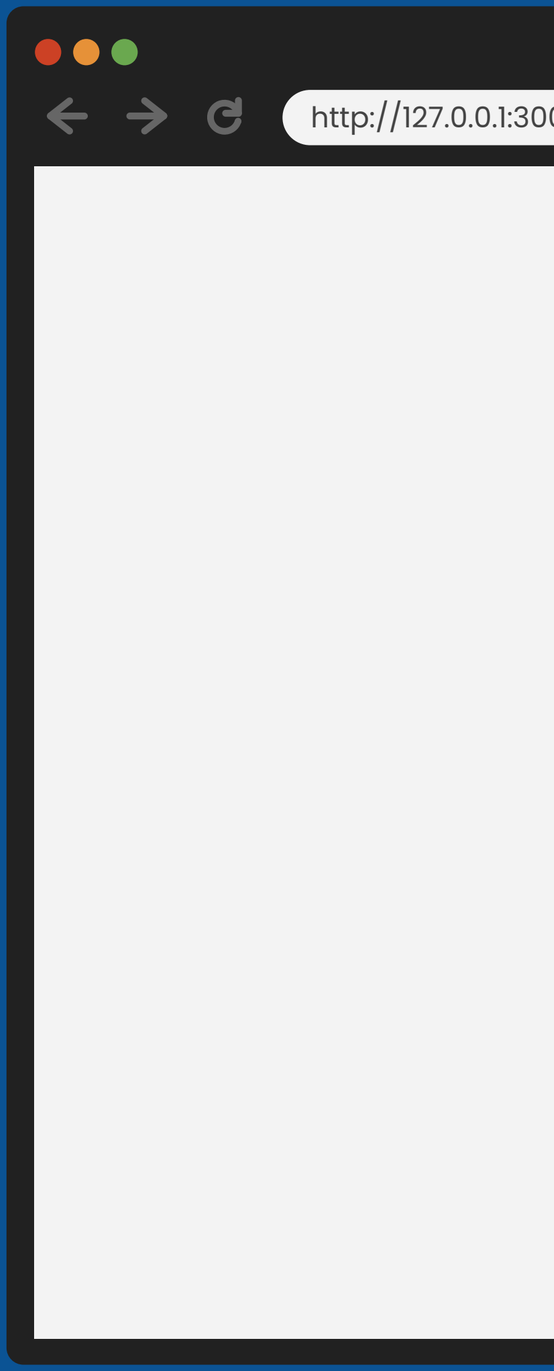

-domain && npm run build-webui",
f dist && tsc -p tsconfig.build.json && jitar build",
ild",
rt --service=services/standalone.json",
rvice=services/data-worker.json",
service=services/default-worker.json",
--service=services/gateway.json",
--service=services/repository.json",
ervice=services/proxy.json"
untime ~
tp://127.0.0.1:4002
gateway
repository
proxy
data
default

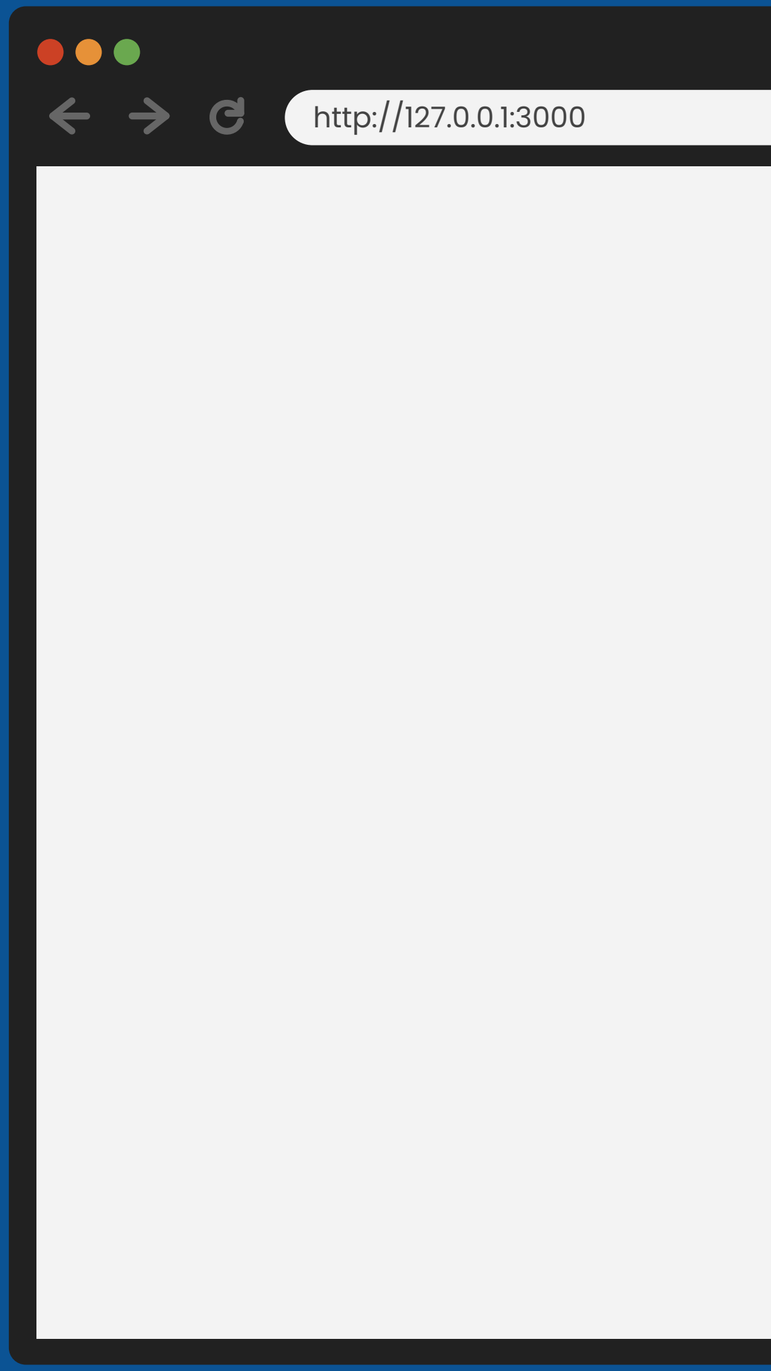
http://127.0.0.1:3000

```
 npm run build-webui",
 -p tsconfig.build.json && jitar build",

:services/standalone.json",
es/data-worker.json",
ices/default-worker.json",
rvices/gateway.json",
ervices/repository.json",
ces/proxy.json"
```

```
-------------
4002
```

- gateway
- repository
- proxy
- data
- default

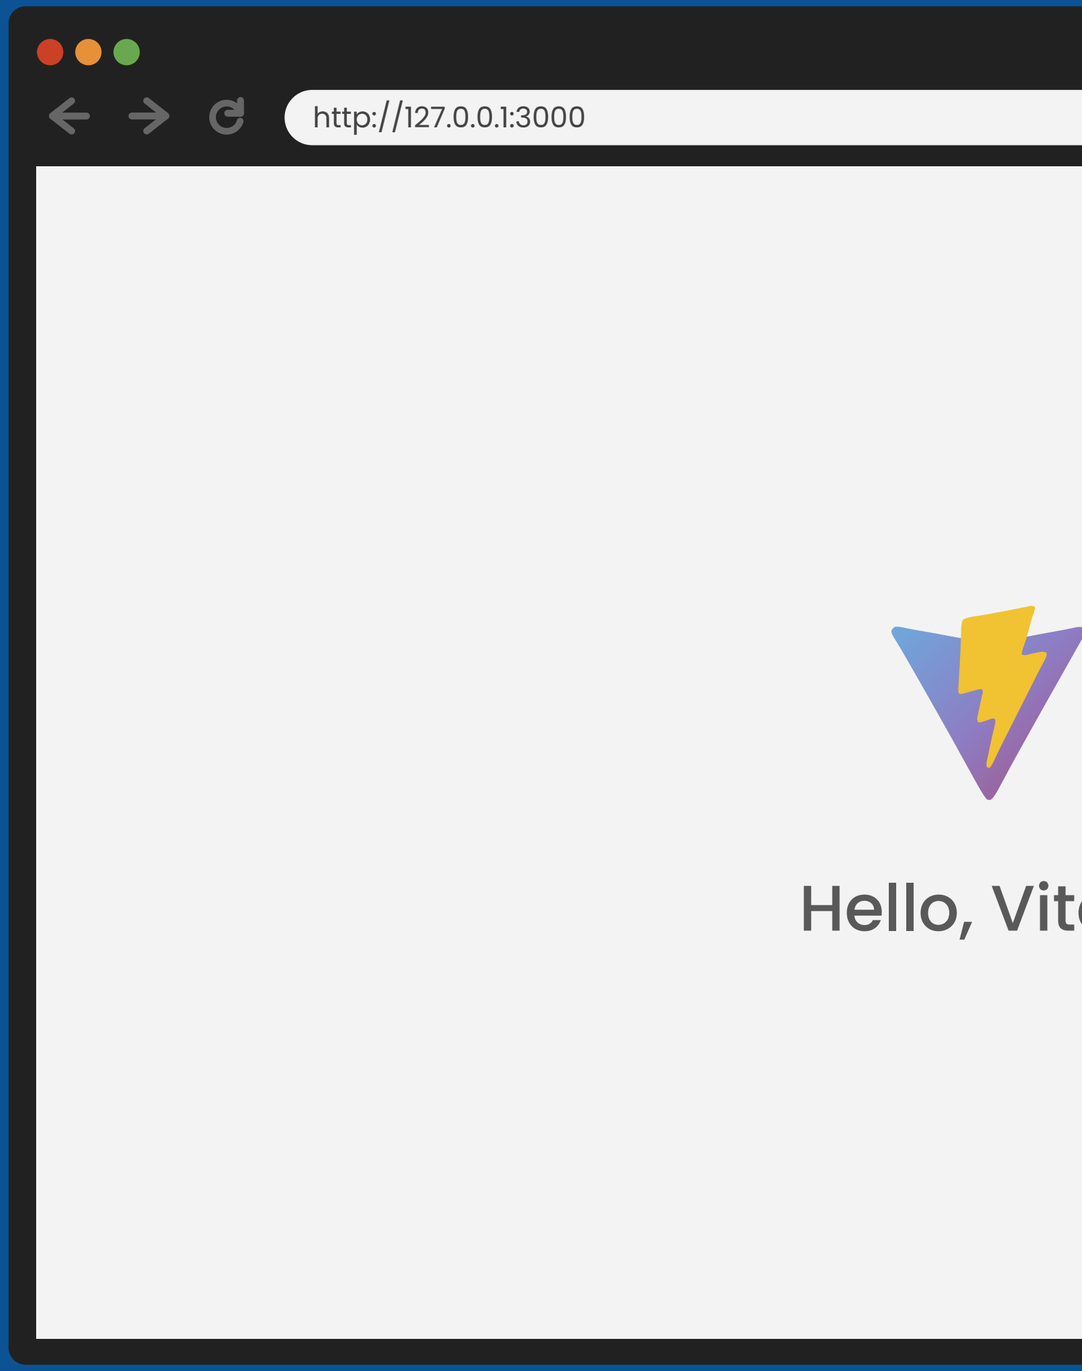

```
d-webui",
uild.json && jitar build",

dalone.json",
er.json",
worker.json",
ay.json",
itory.json",
"
```

```
_
```

- gateway
- repository
- proxy
- data
- default

Web Browser

http://127.0.0.1:3000

Hello, Vite + React +

```
build",
```

- gateway
- repository
- proxy
- data
- default

Web Browser

http://127.0.0.1:3000

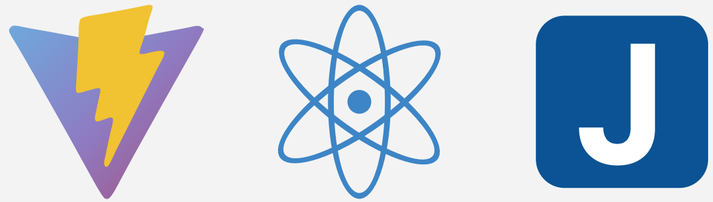

Hello, Vite + React + Jitar 3!

Web Browser

http://127.0.0.1:3000

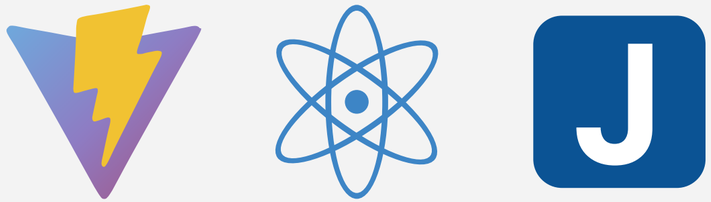

Hello, Vite + React + Jitar 3!

Web Browser

http://127.0.0.1:3000

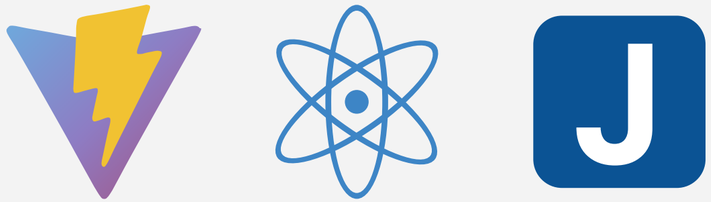

Hello, Vite + React + Jitar 3!

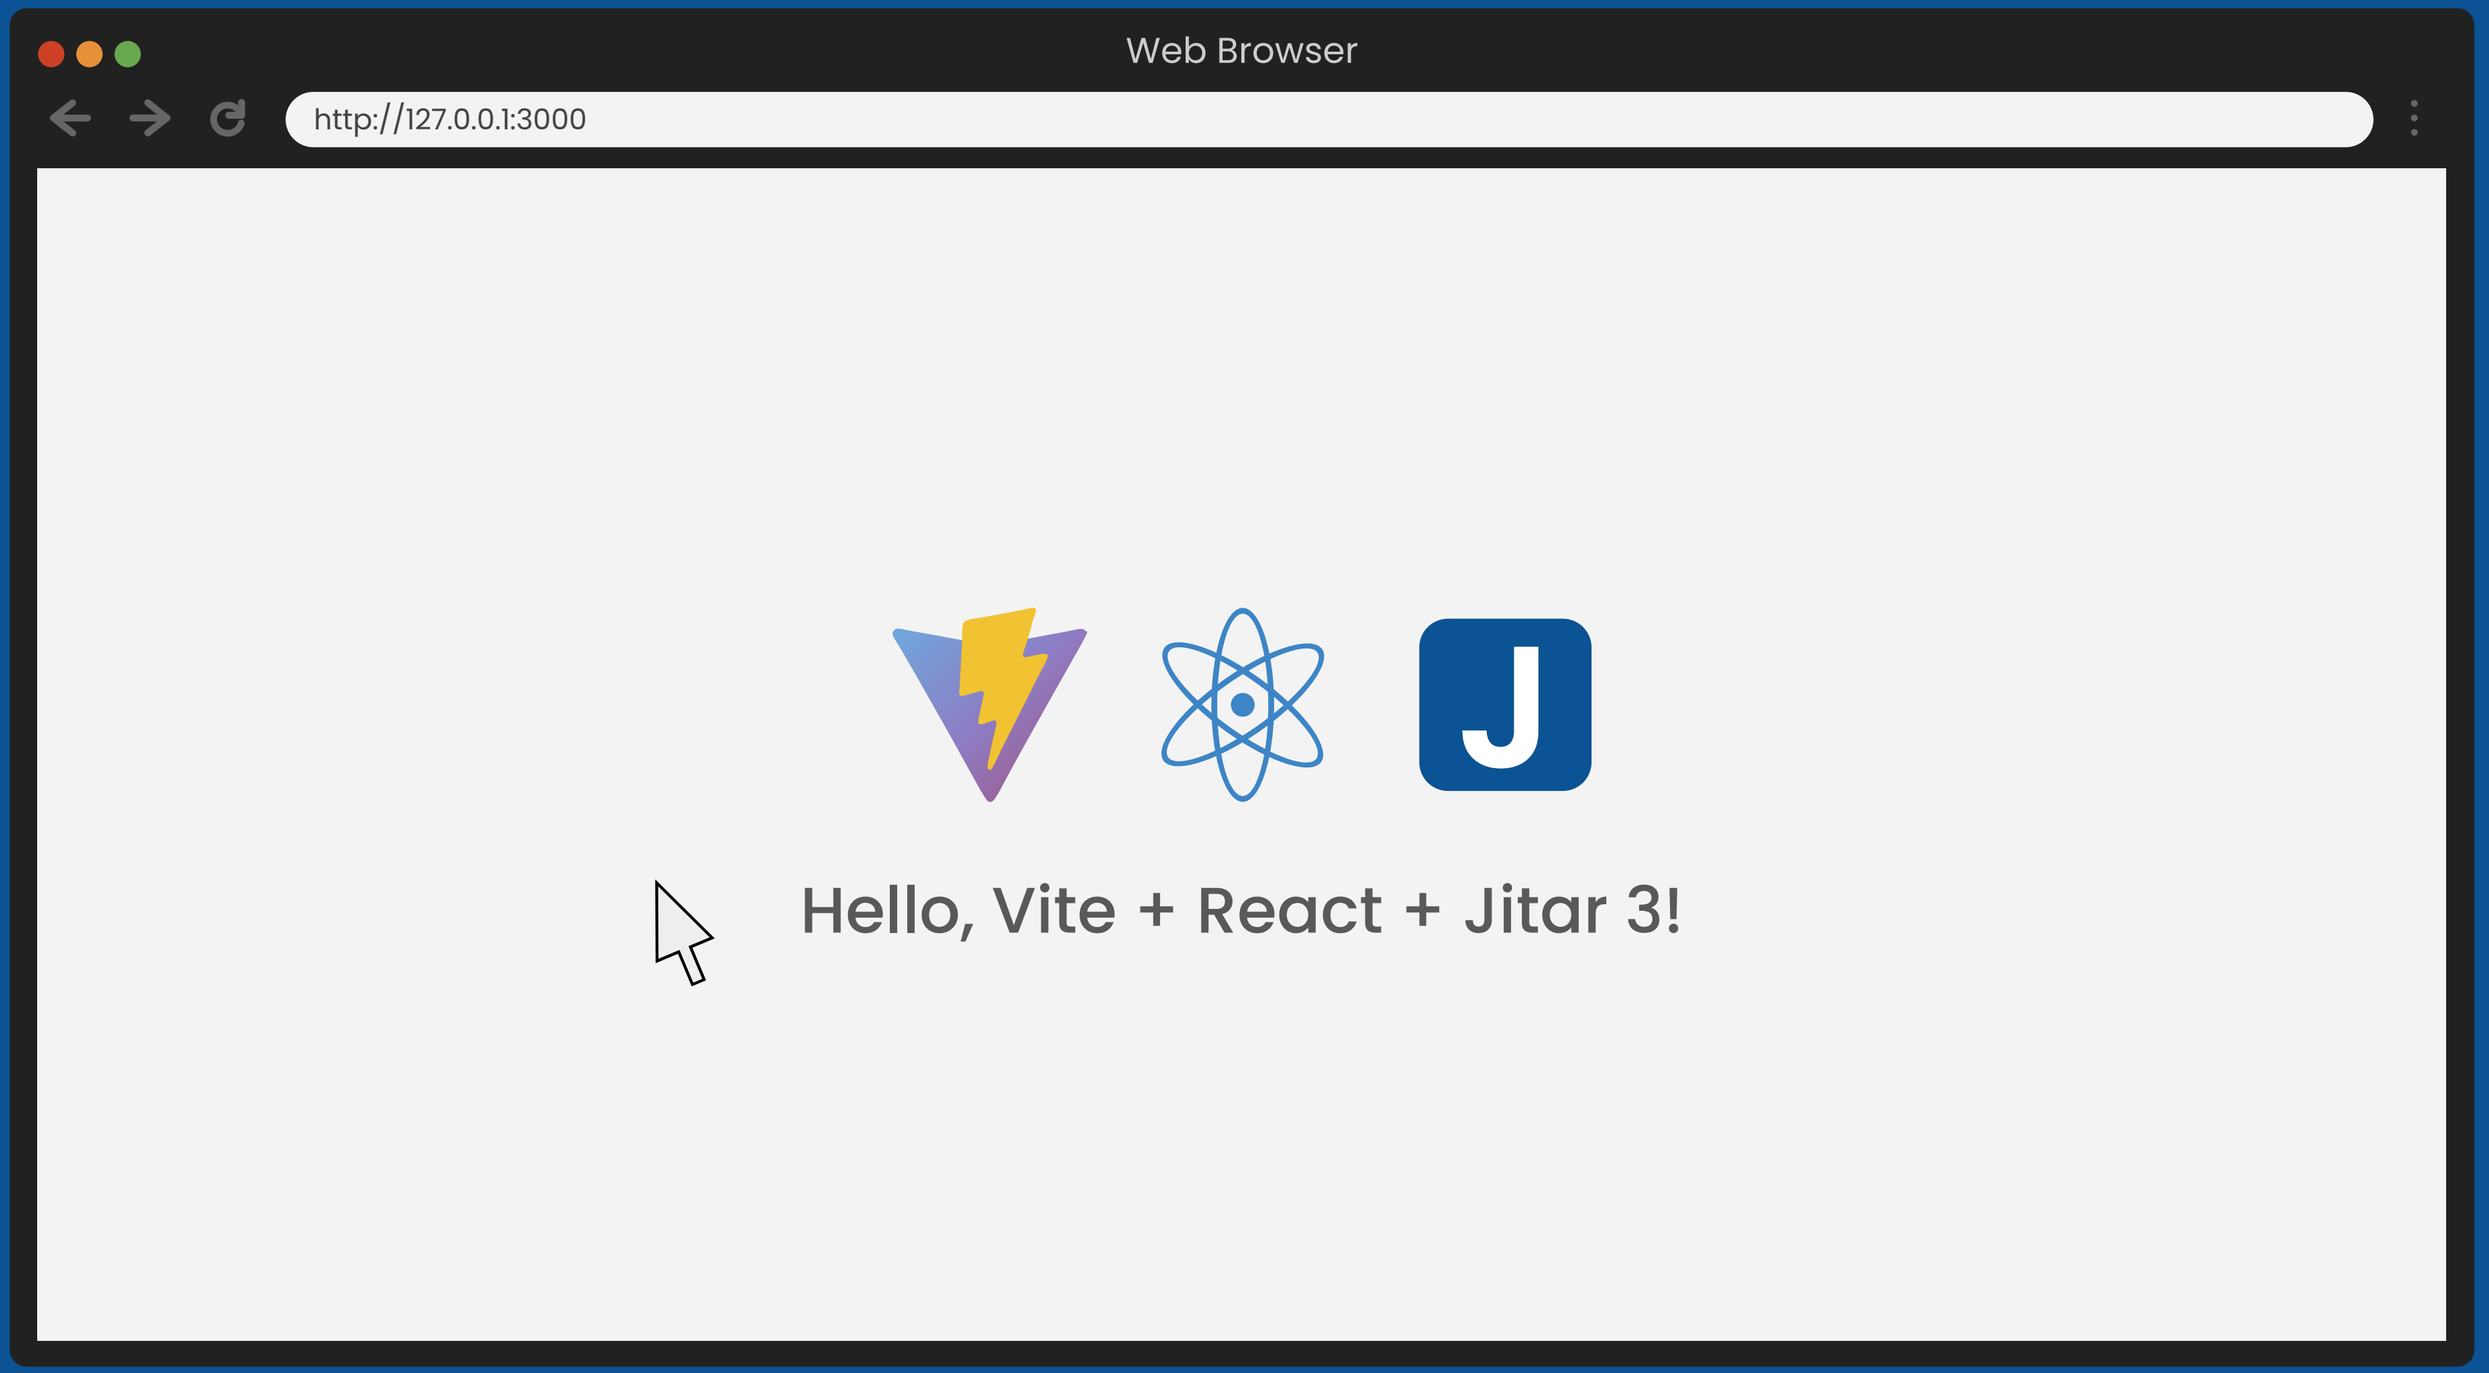
Web Browser
http://127.0.0.1:3000
Hello, Vite + React + Jitar 3!

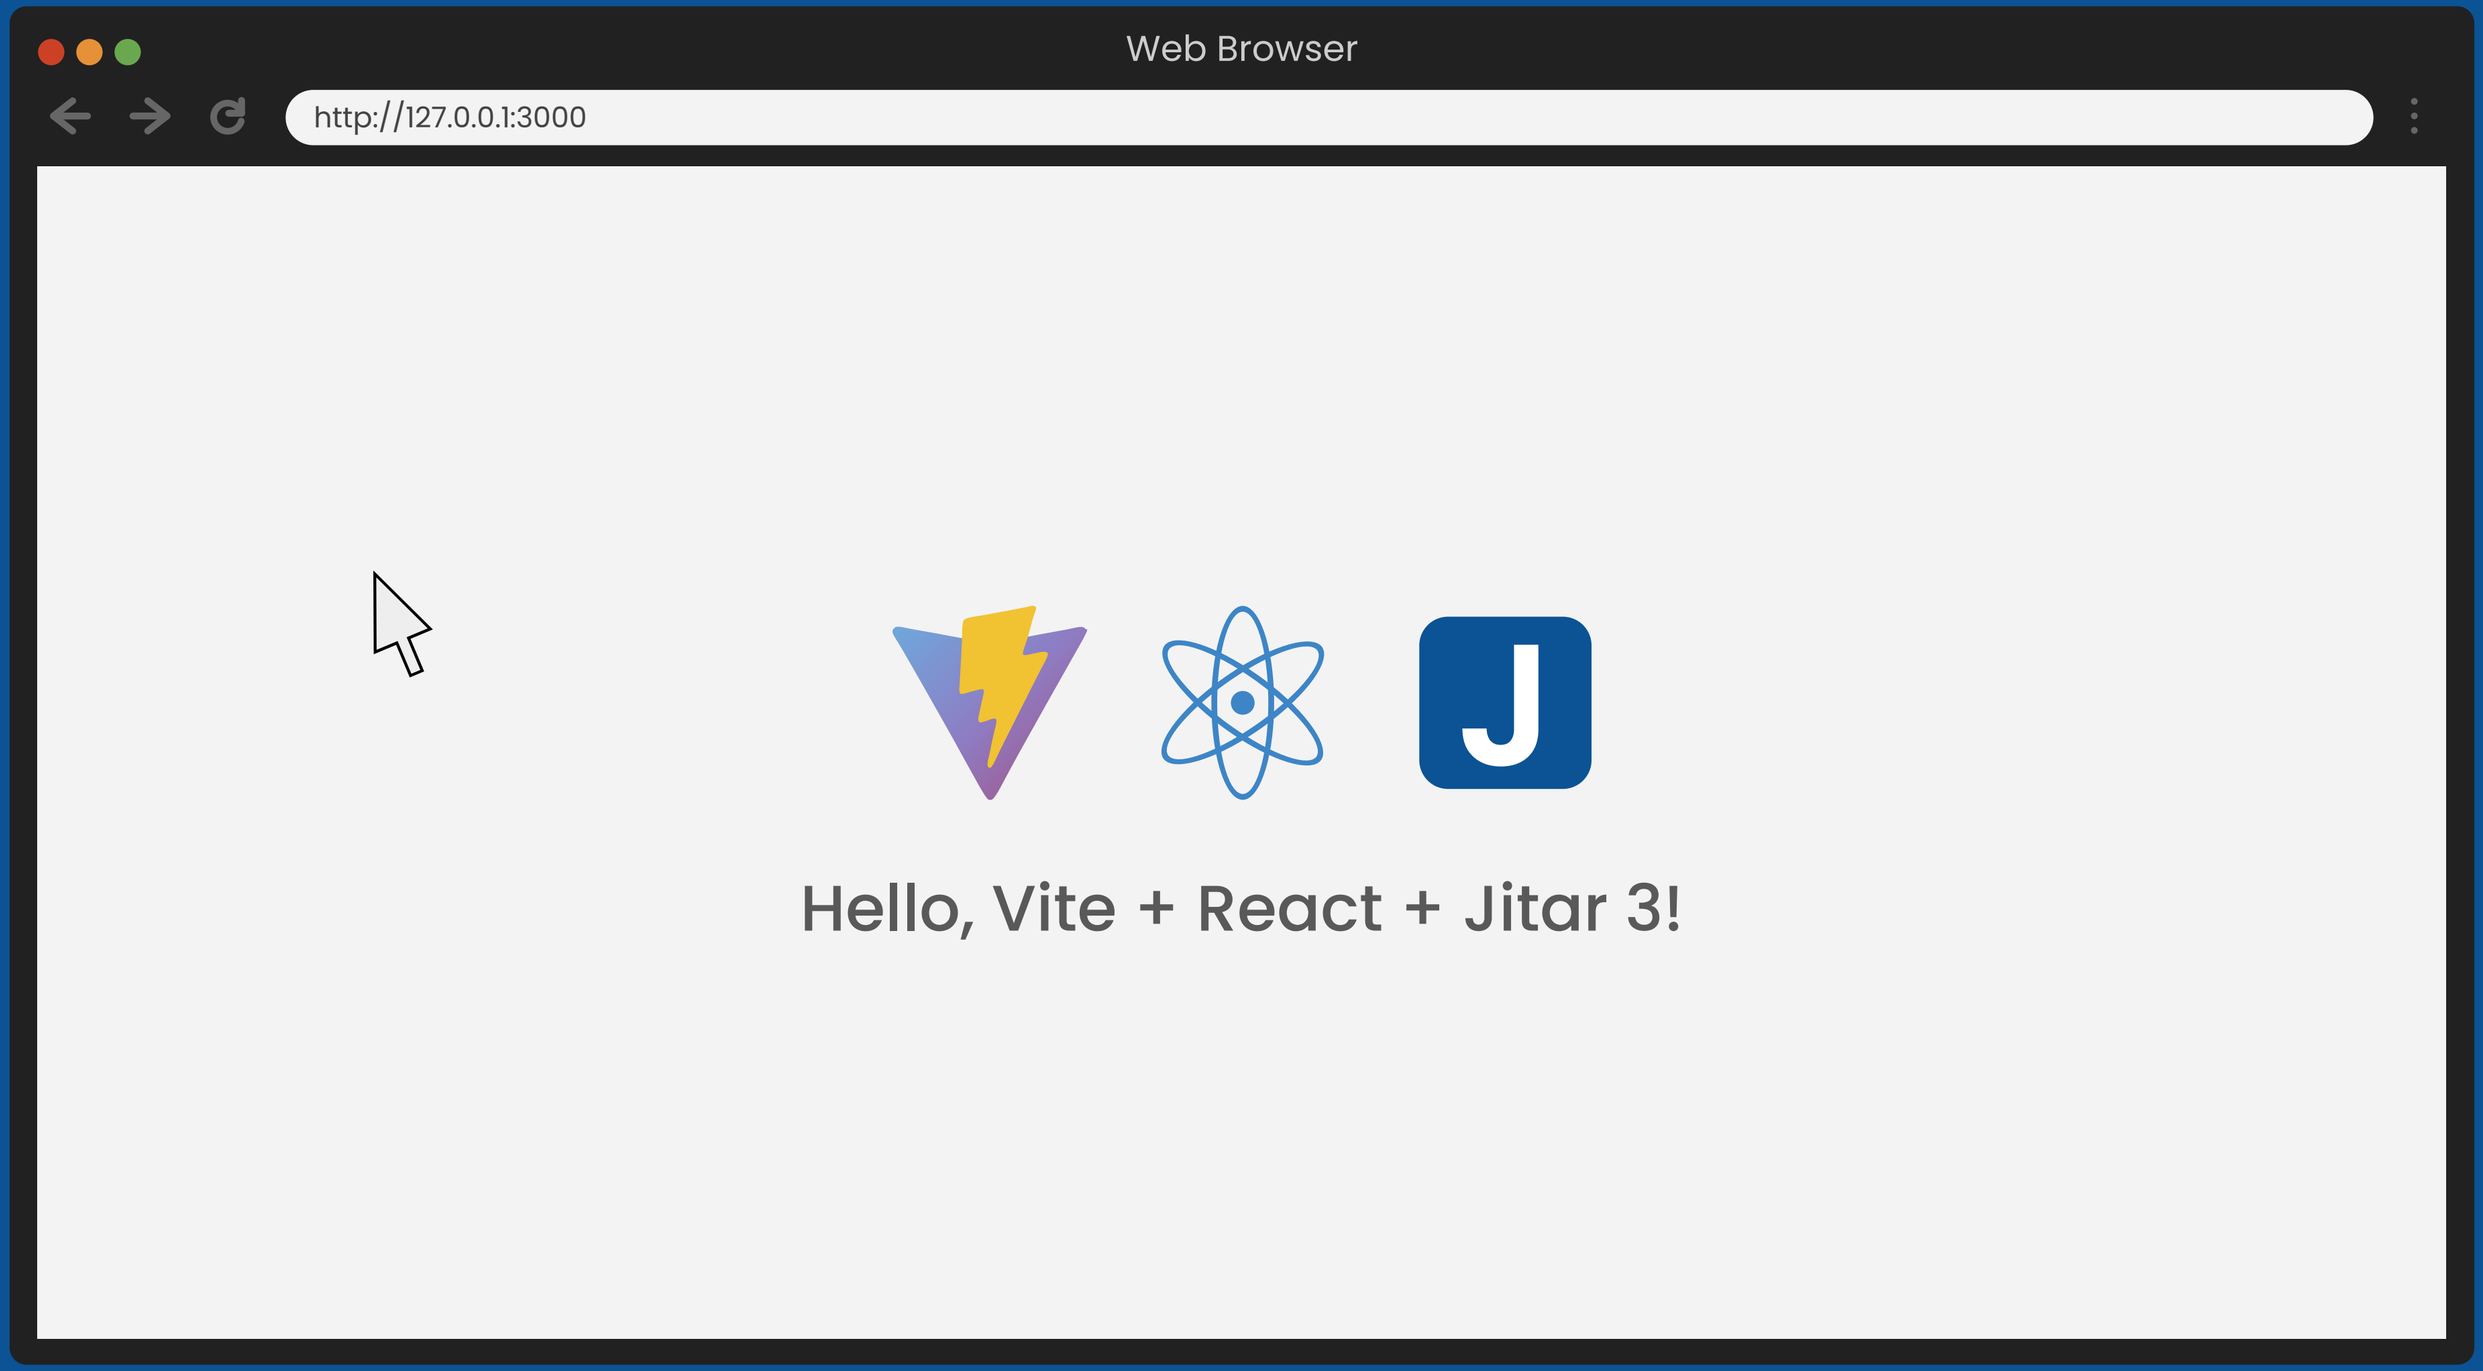
Web Browser
http://127.0.0.1:3000
Hello, Vite + React + Jitar 3!

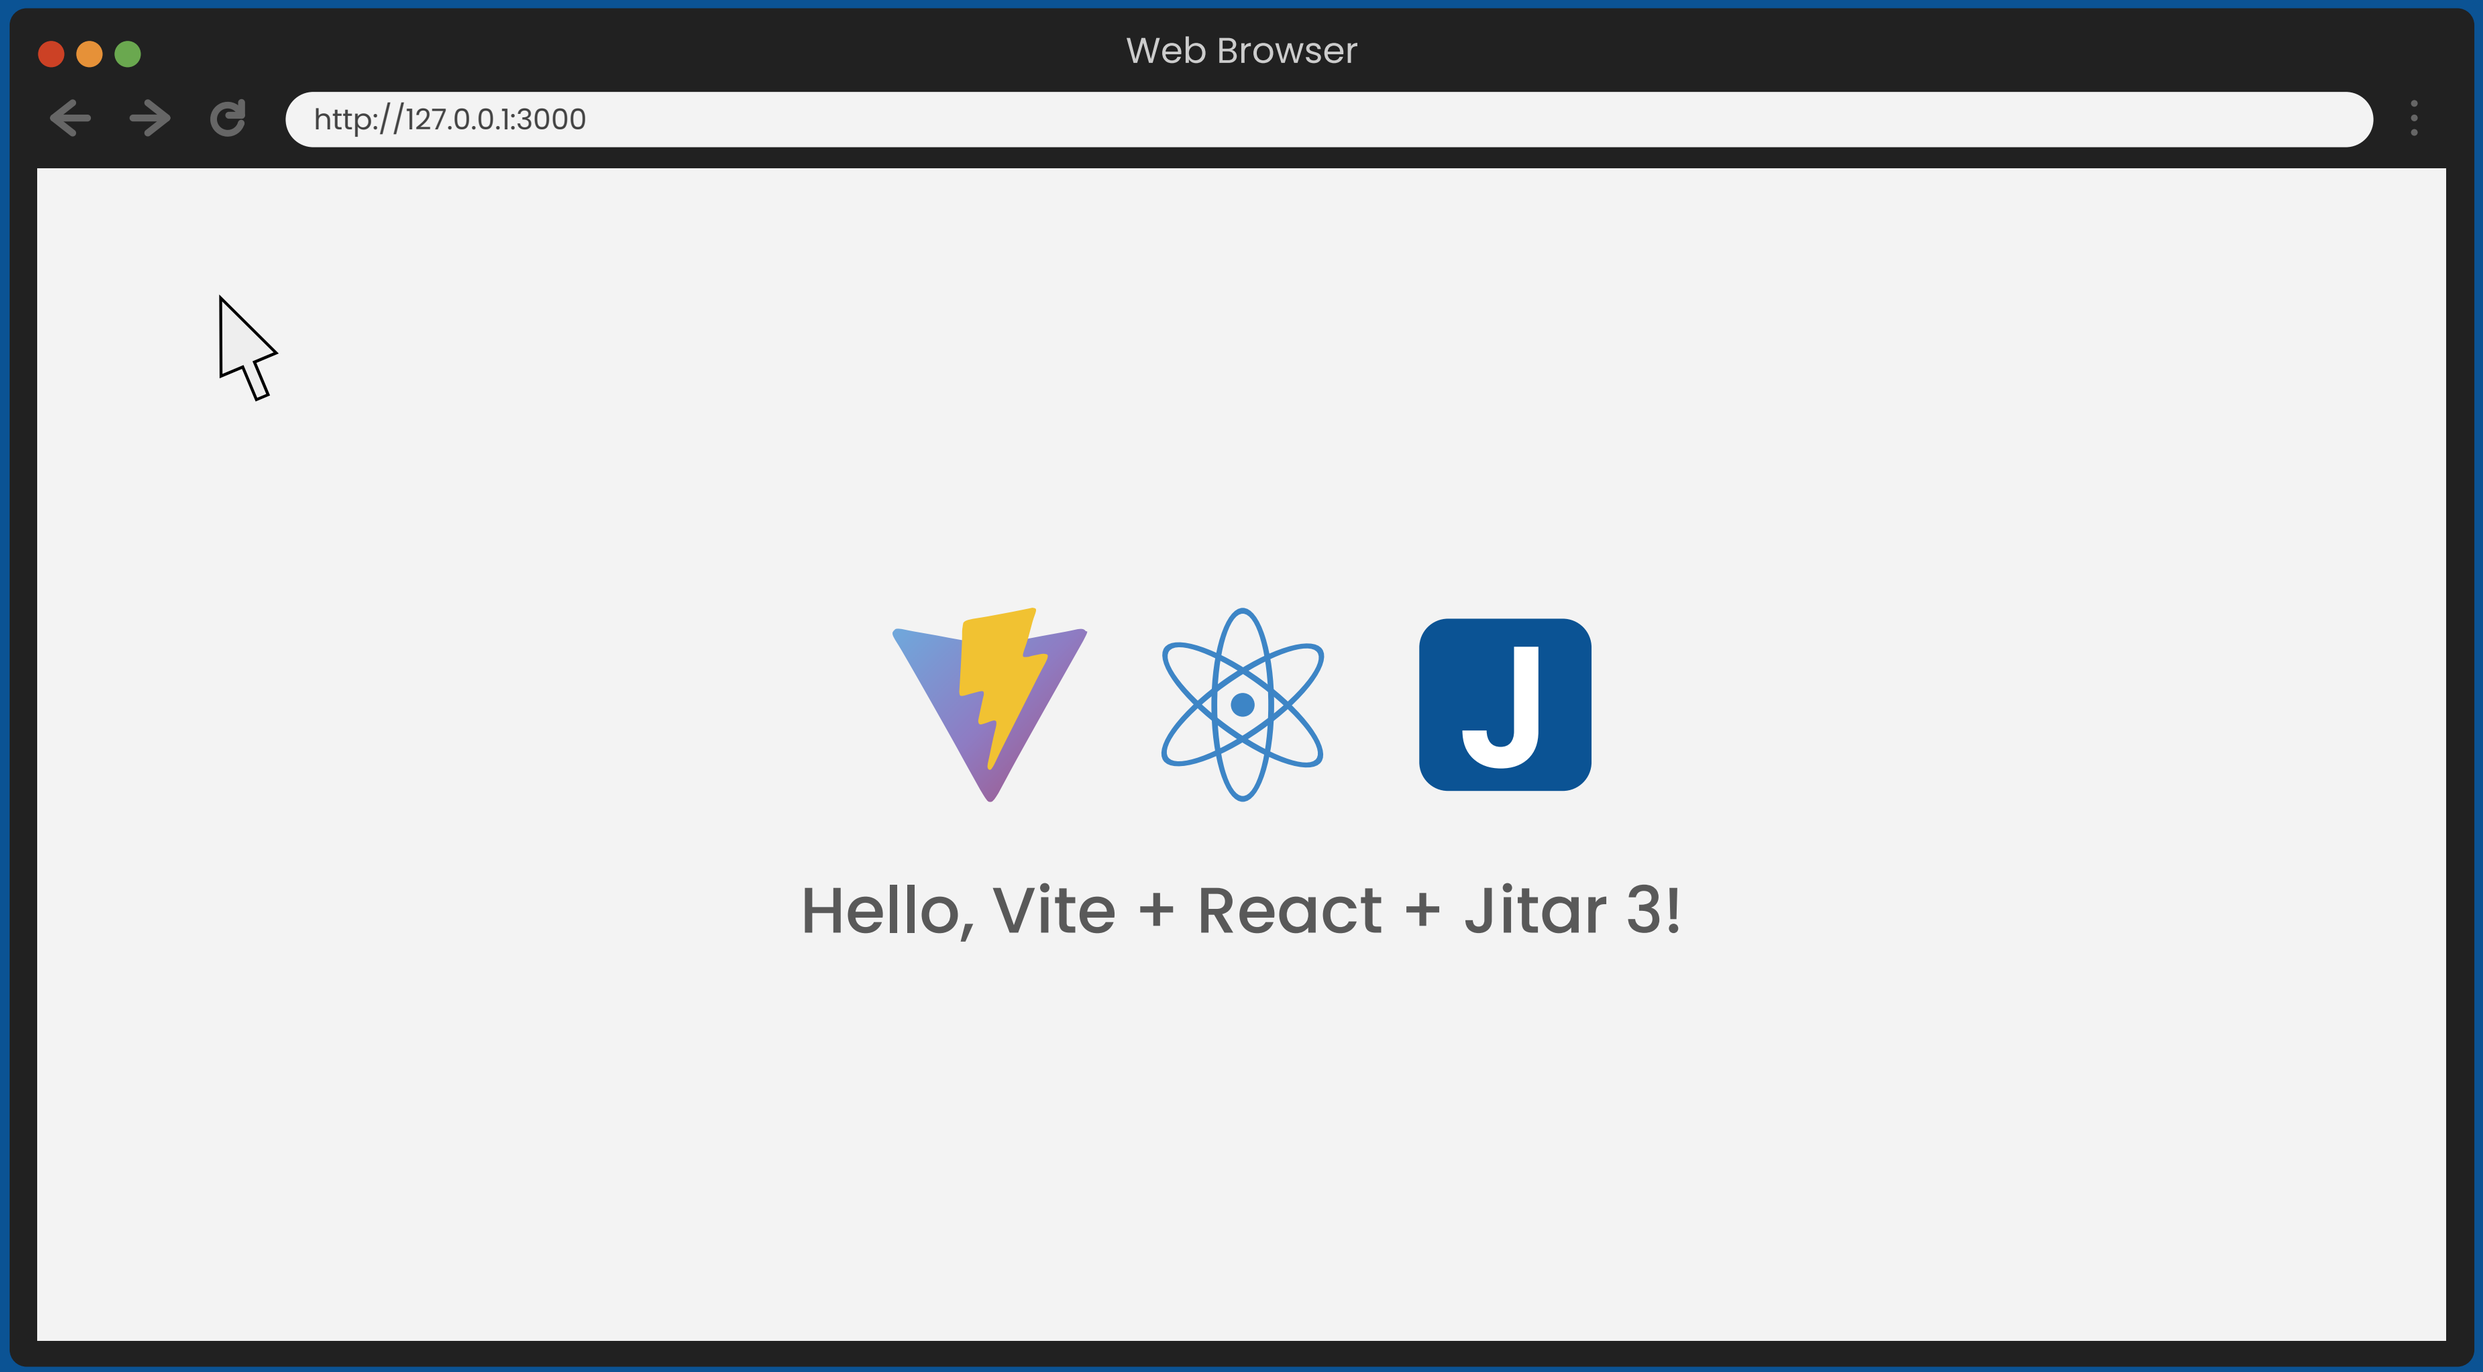
Web Browser
http://127.0.0.1:3000
Hello, Vite + React + Jitar 3!

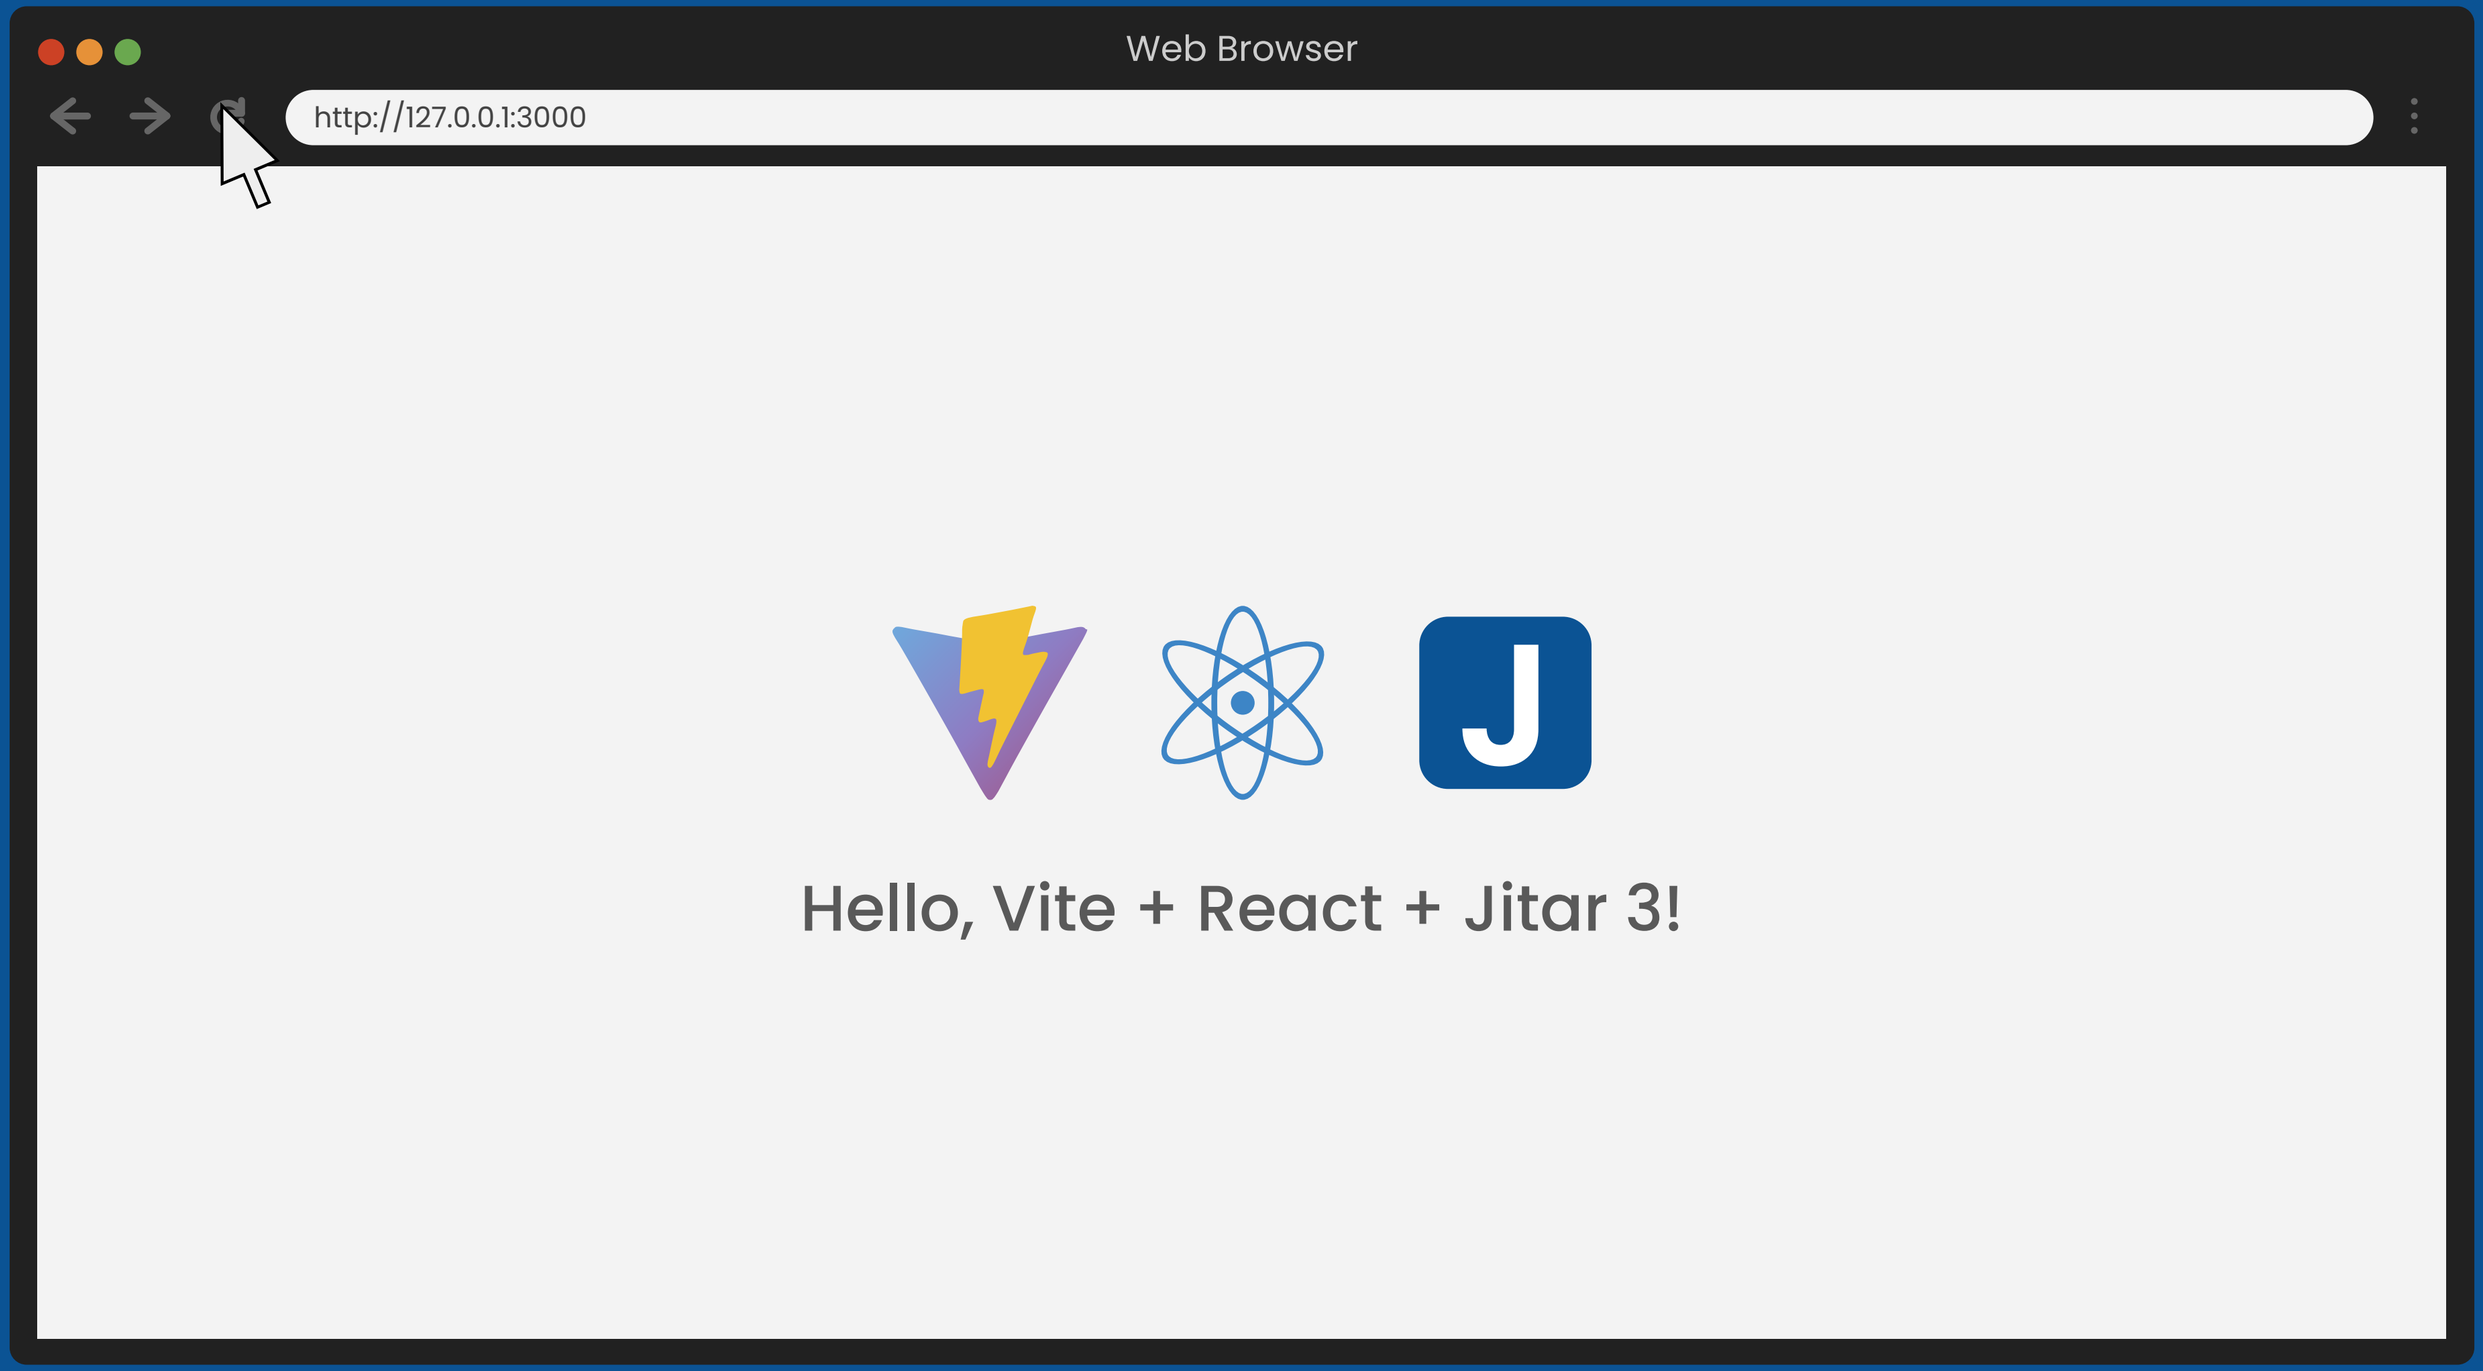
Web Browser
http://127.0.0.1:3000
Hello, Vite + React + Jitar 3!

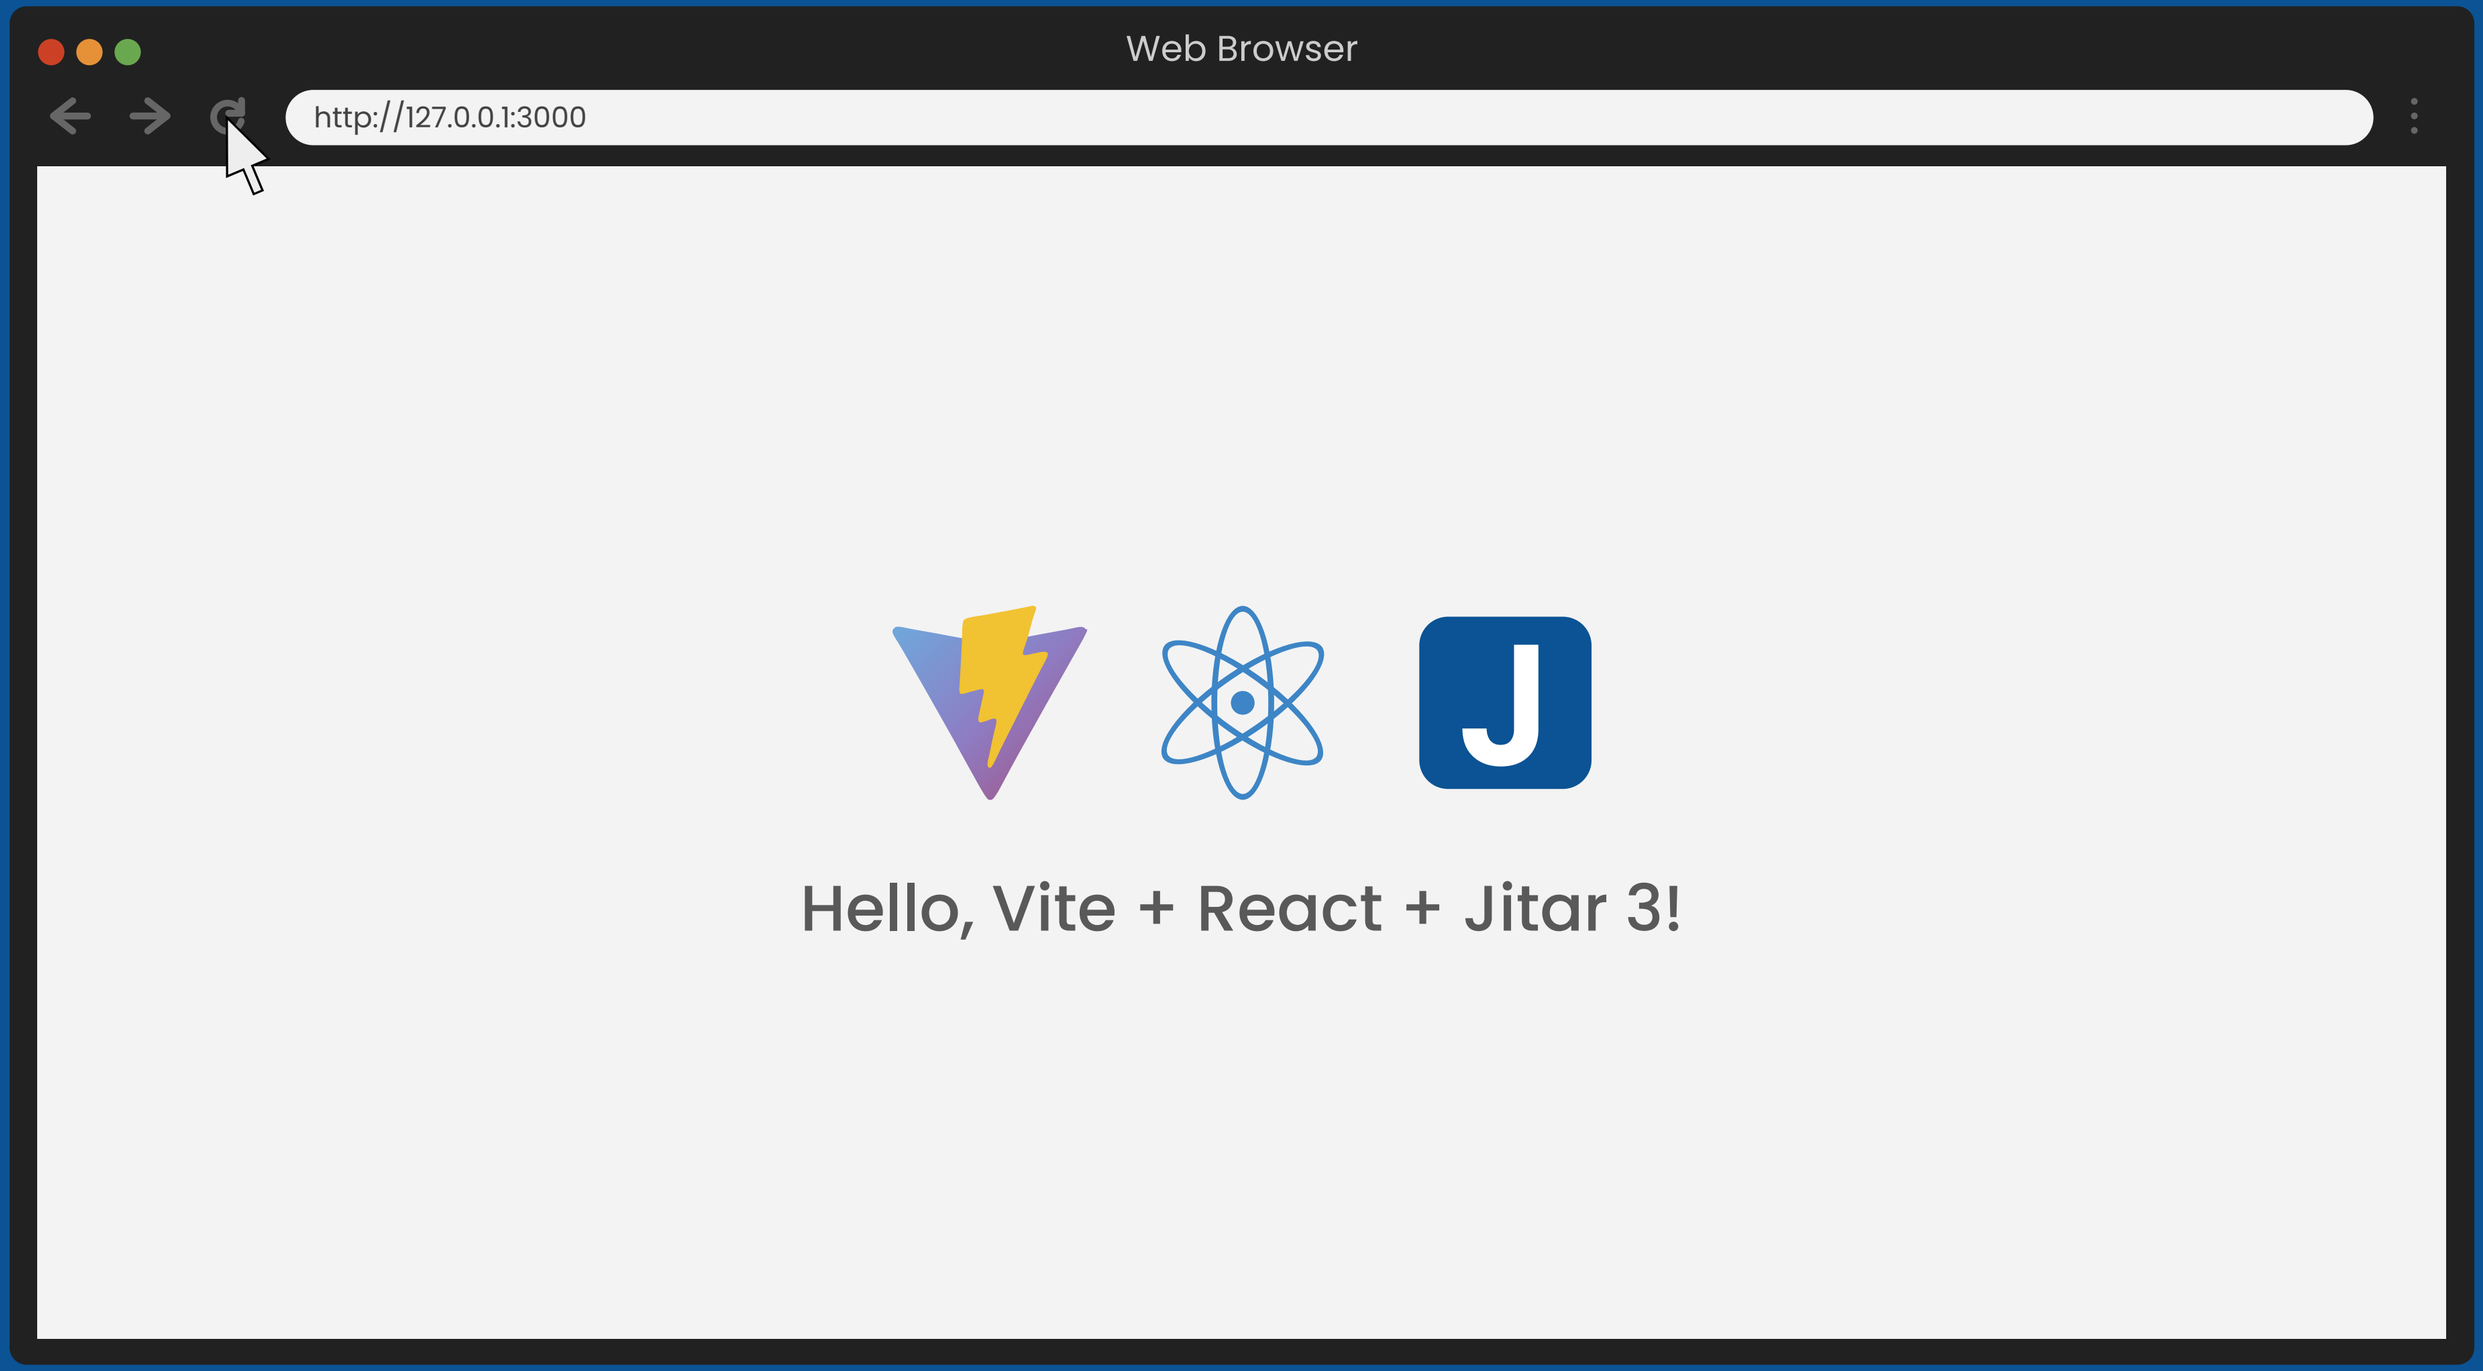
Web Browser
http://127.0.0.1:3000
Hello, Vite + React + Jitar 3!

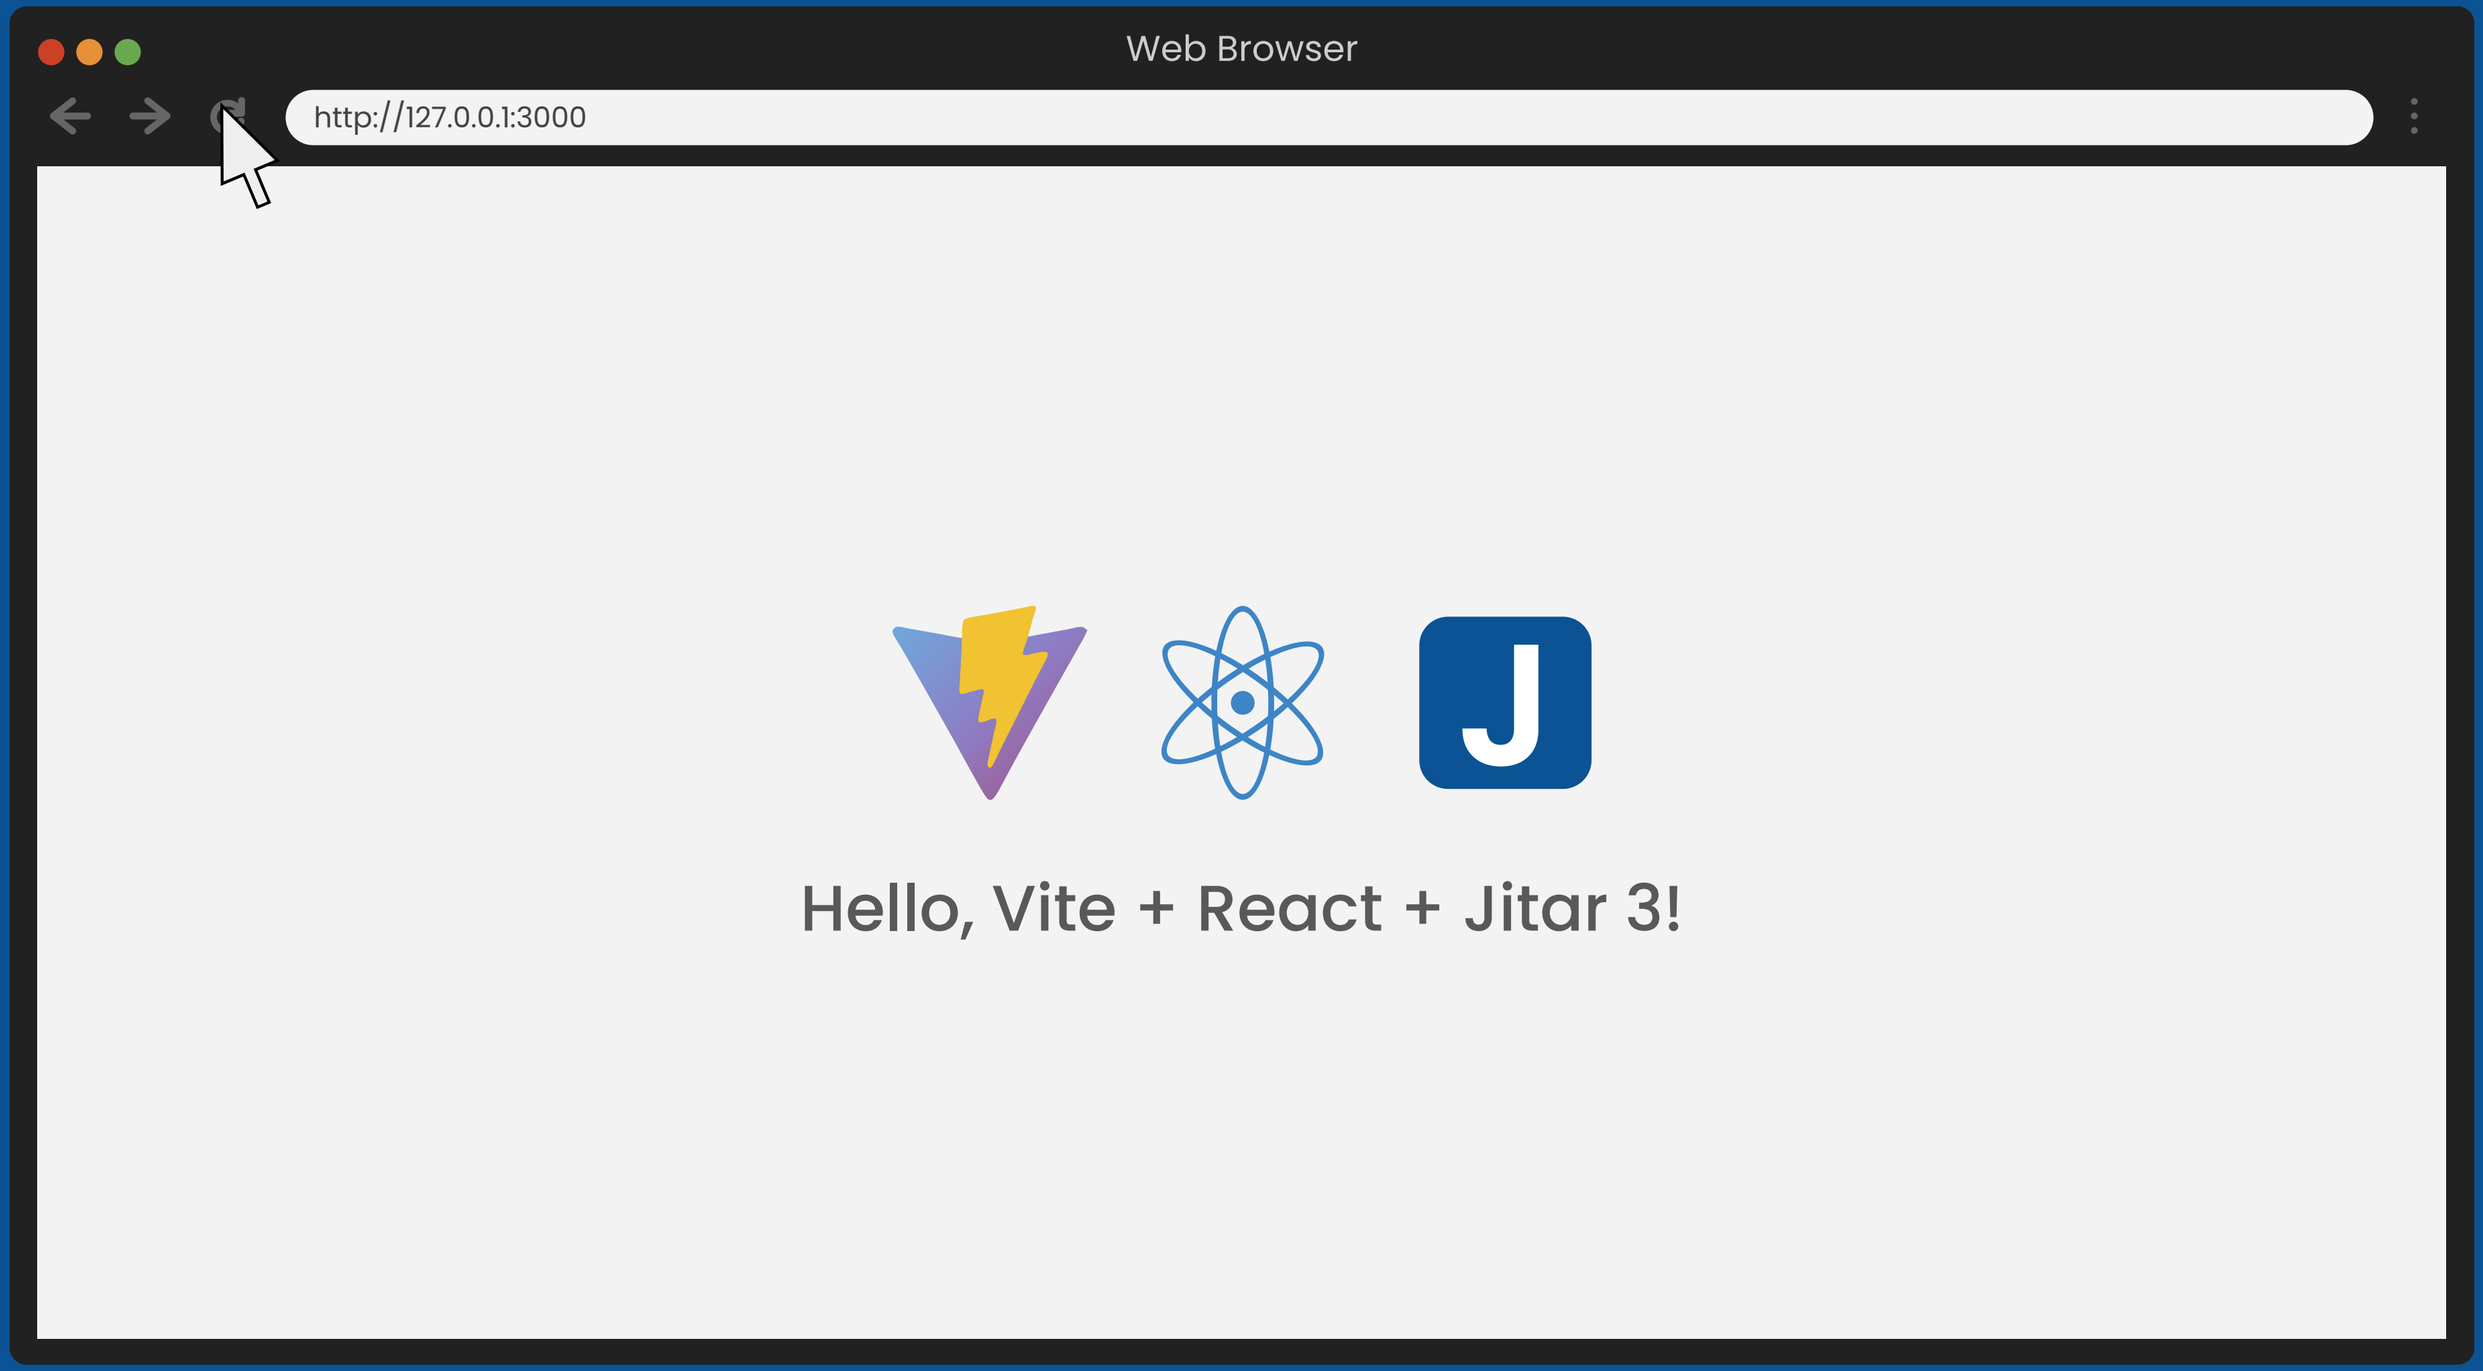
Web Browser
http://127.0.0.1:3000
Hello, Vite + React + Jitar 3!

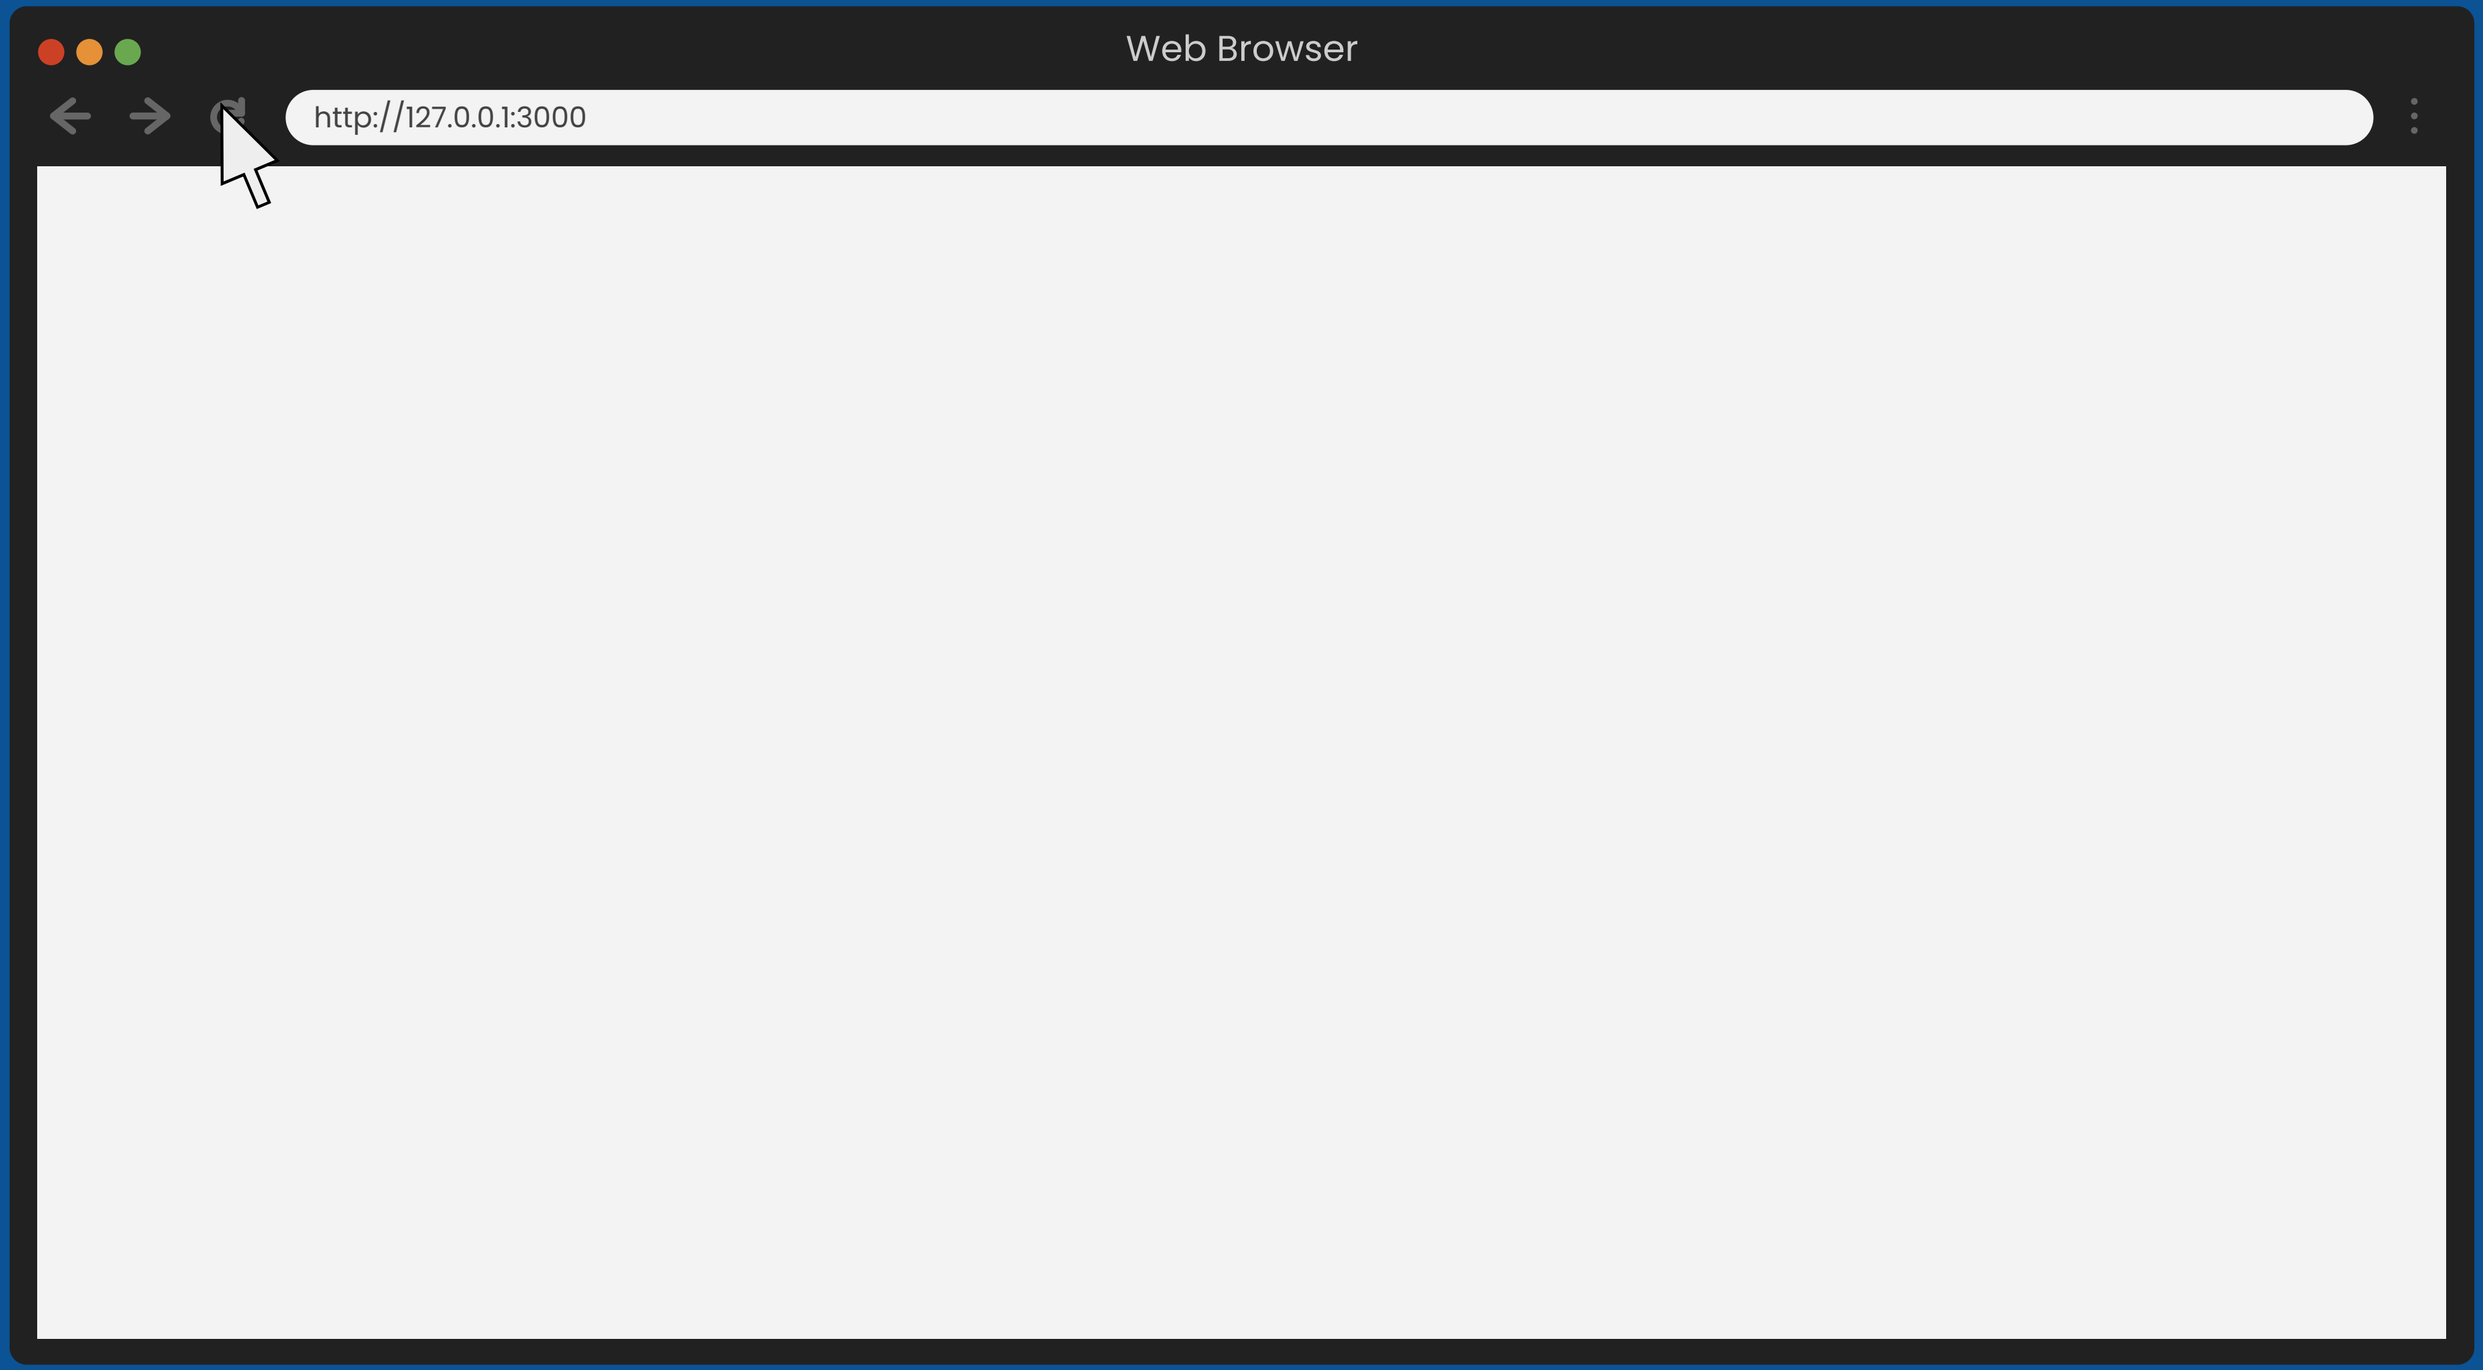
Web Browser
http://127.0.0.1:3000

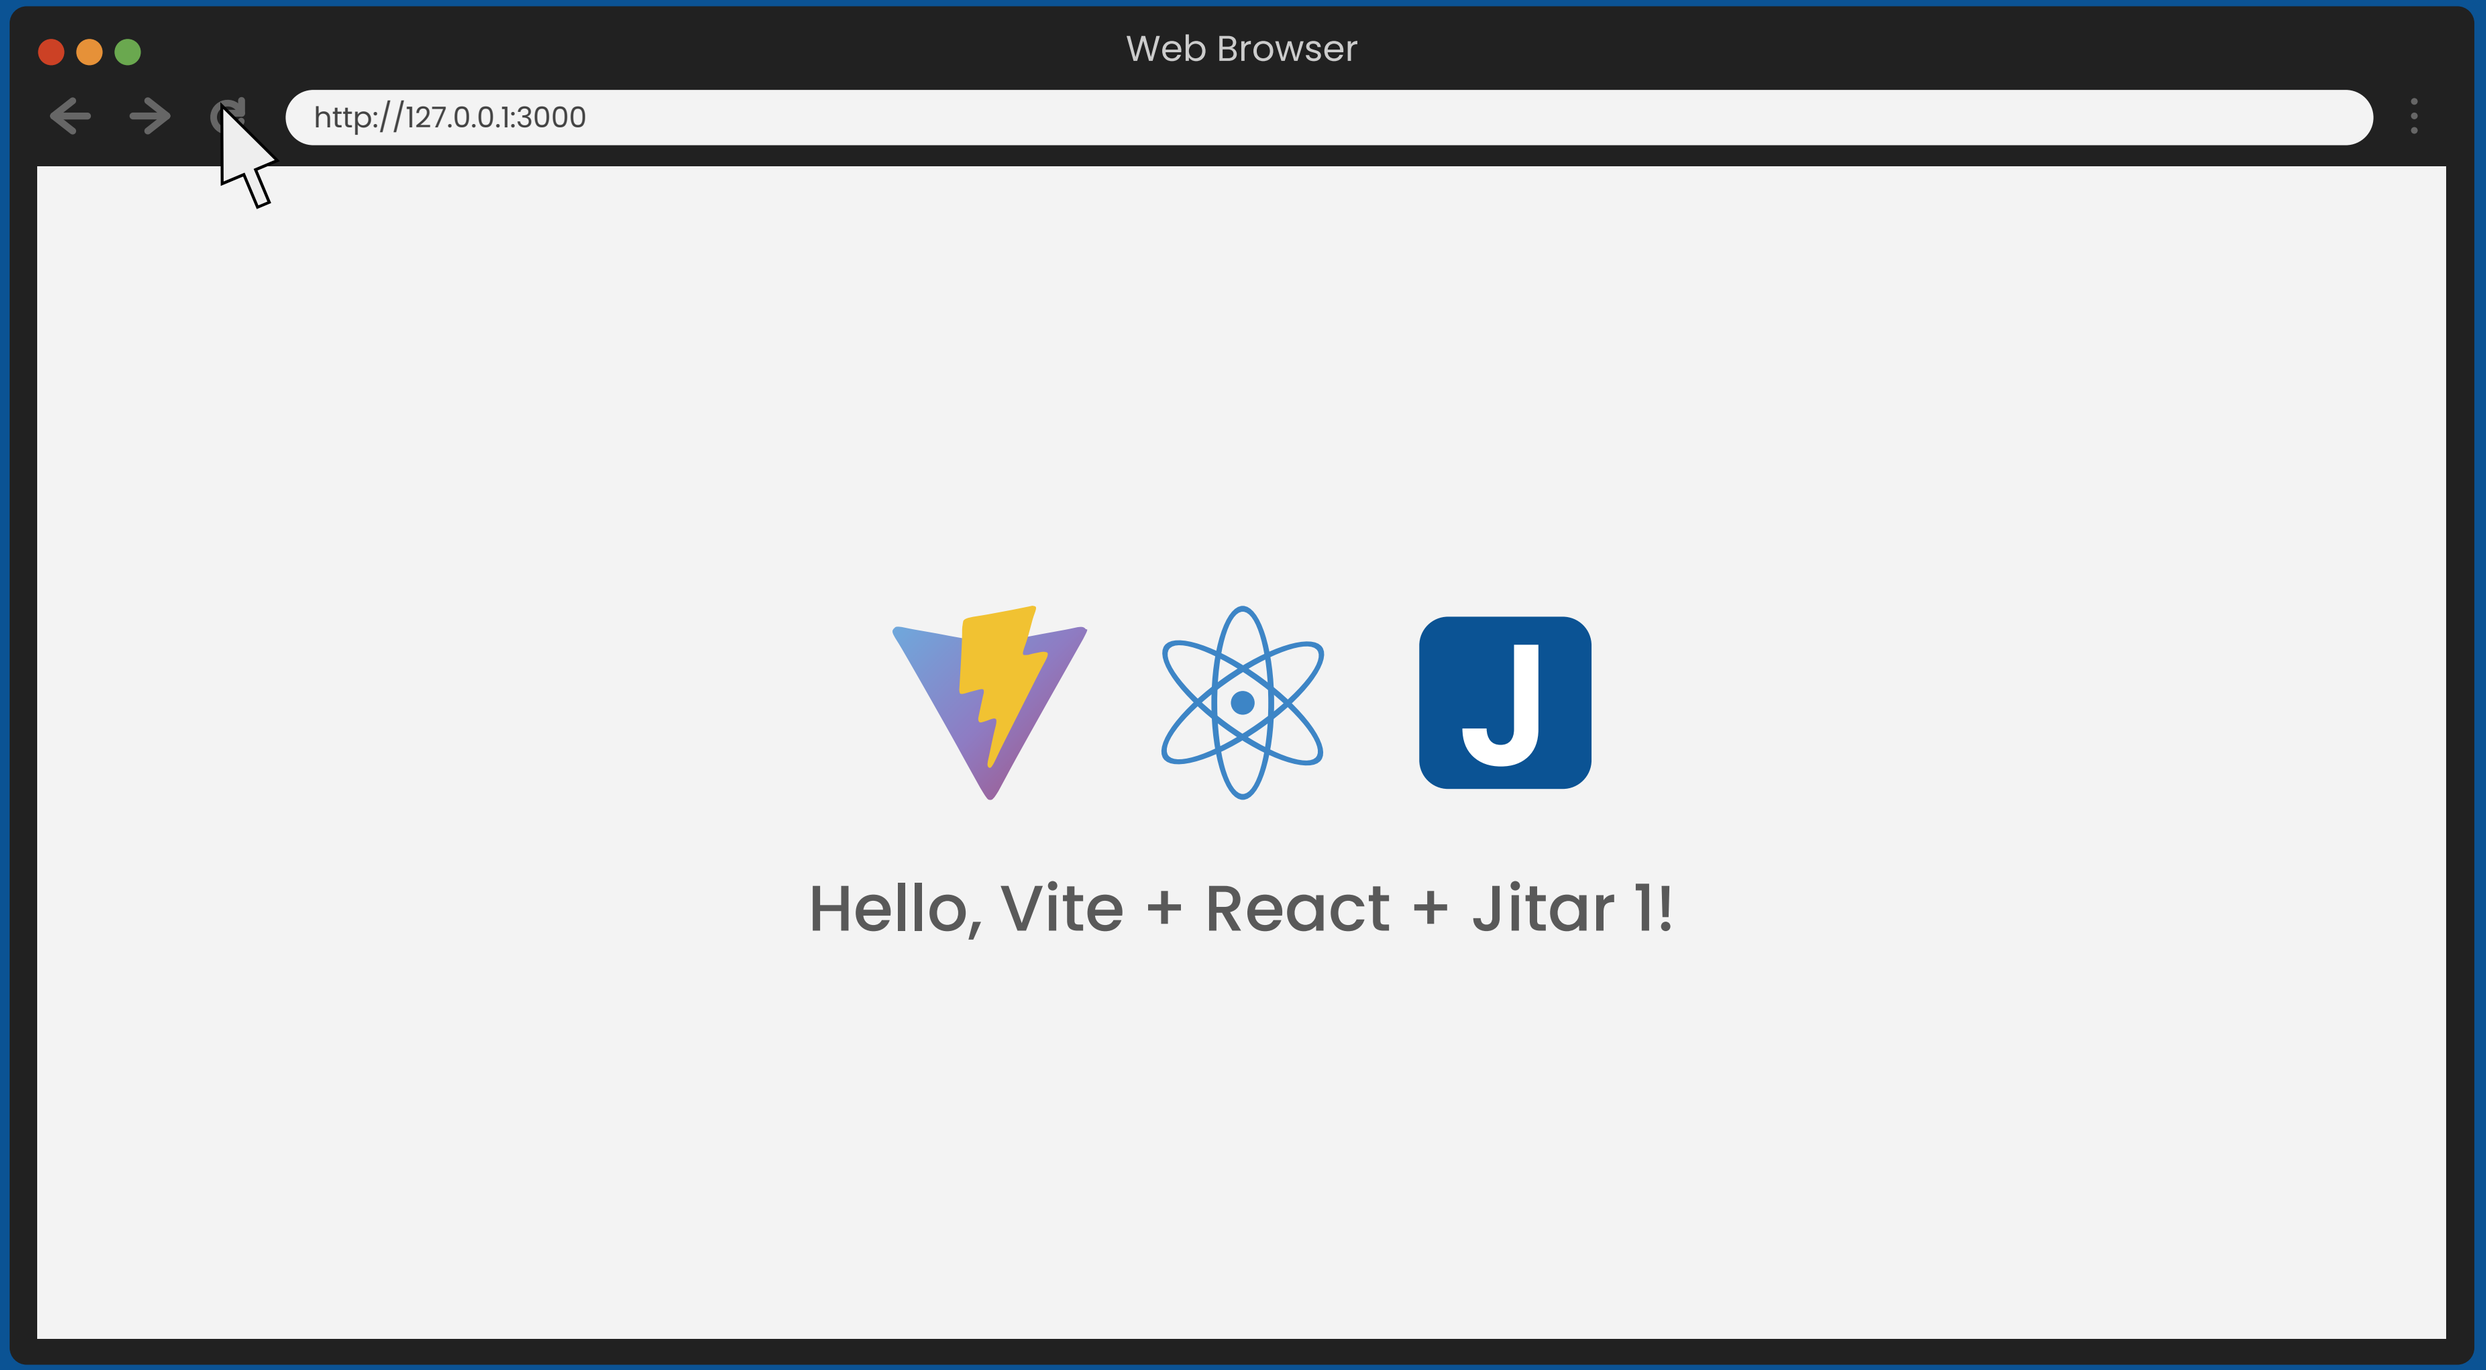
Web Browser
http://127.0.0.1:3000
Hello, Vite + React + Jitar 1!

Web Browser

http://127.0.0.1:3000

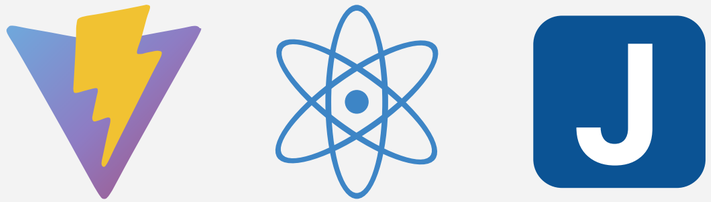

Hello, Vite + React + Jitar 1!

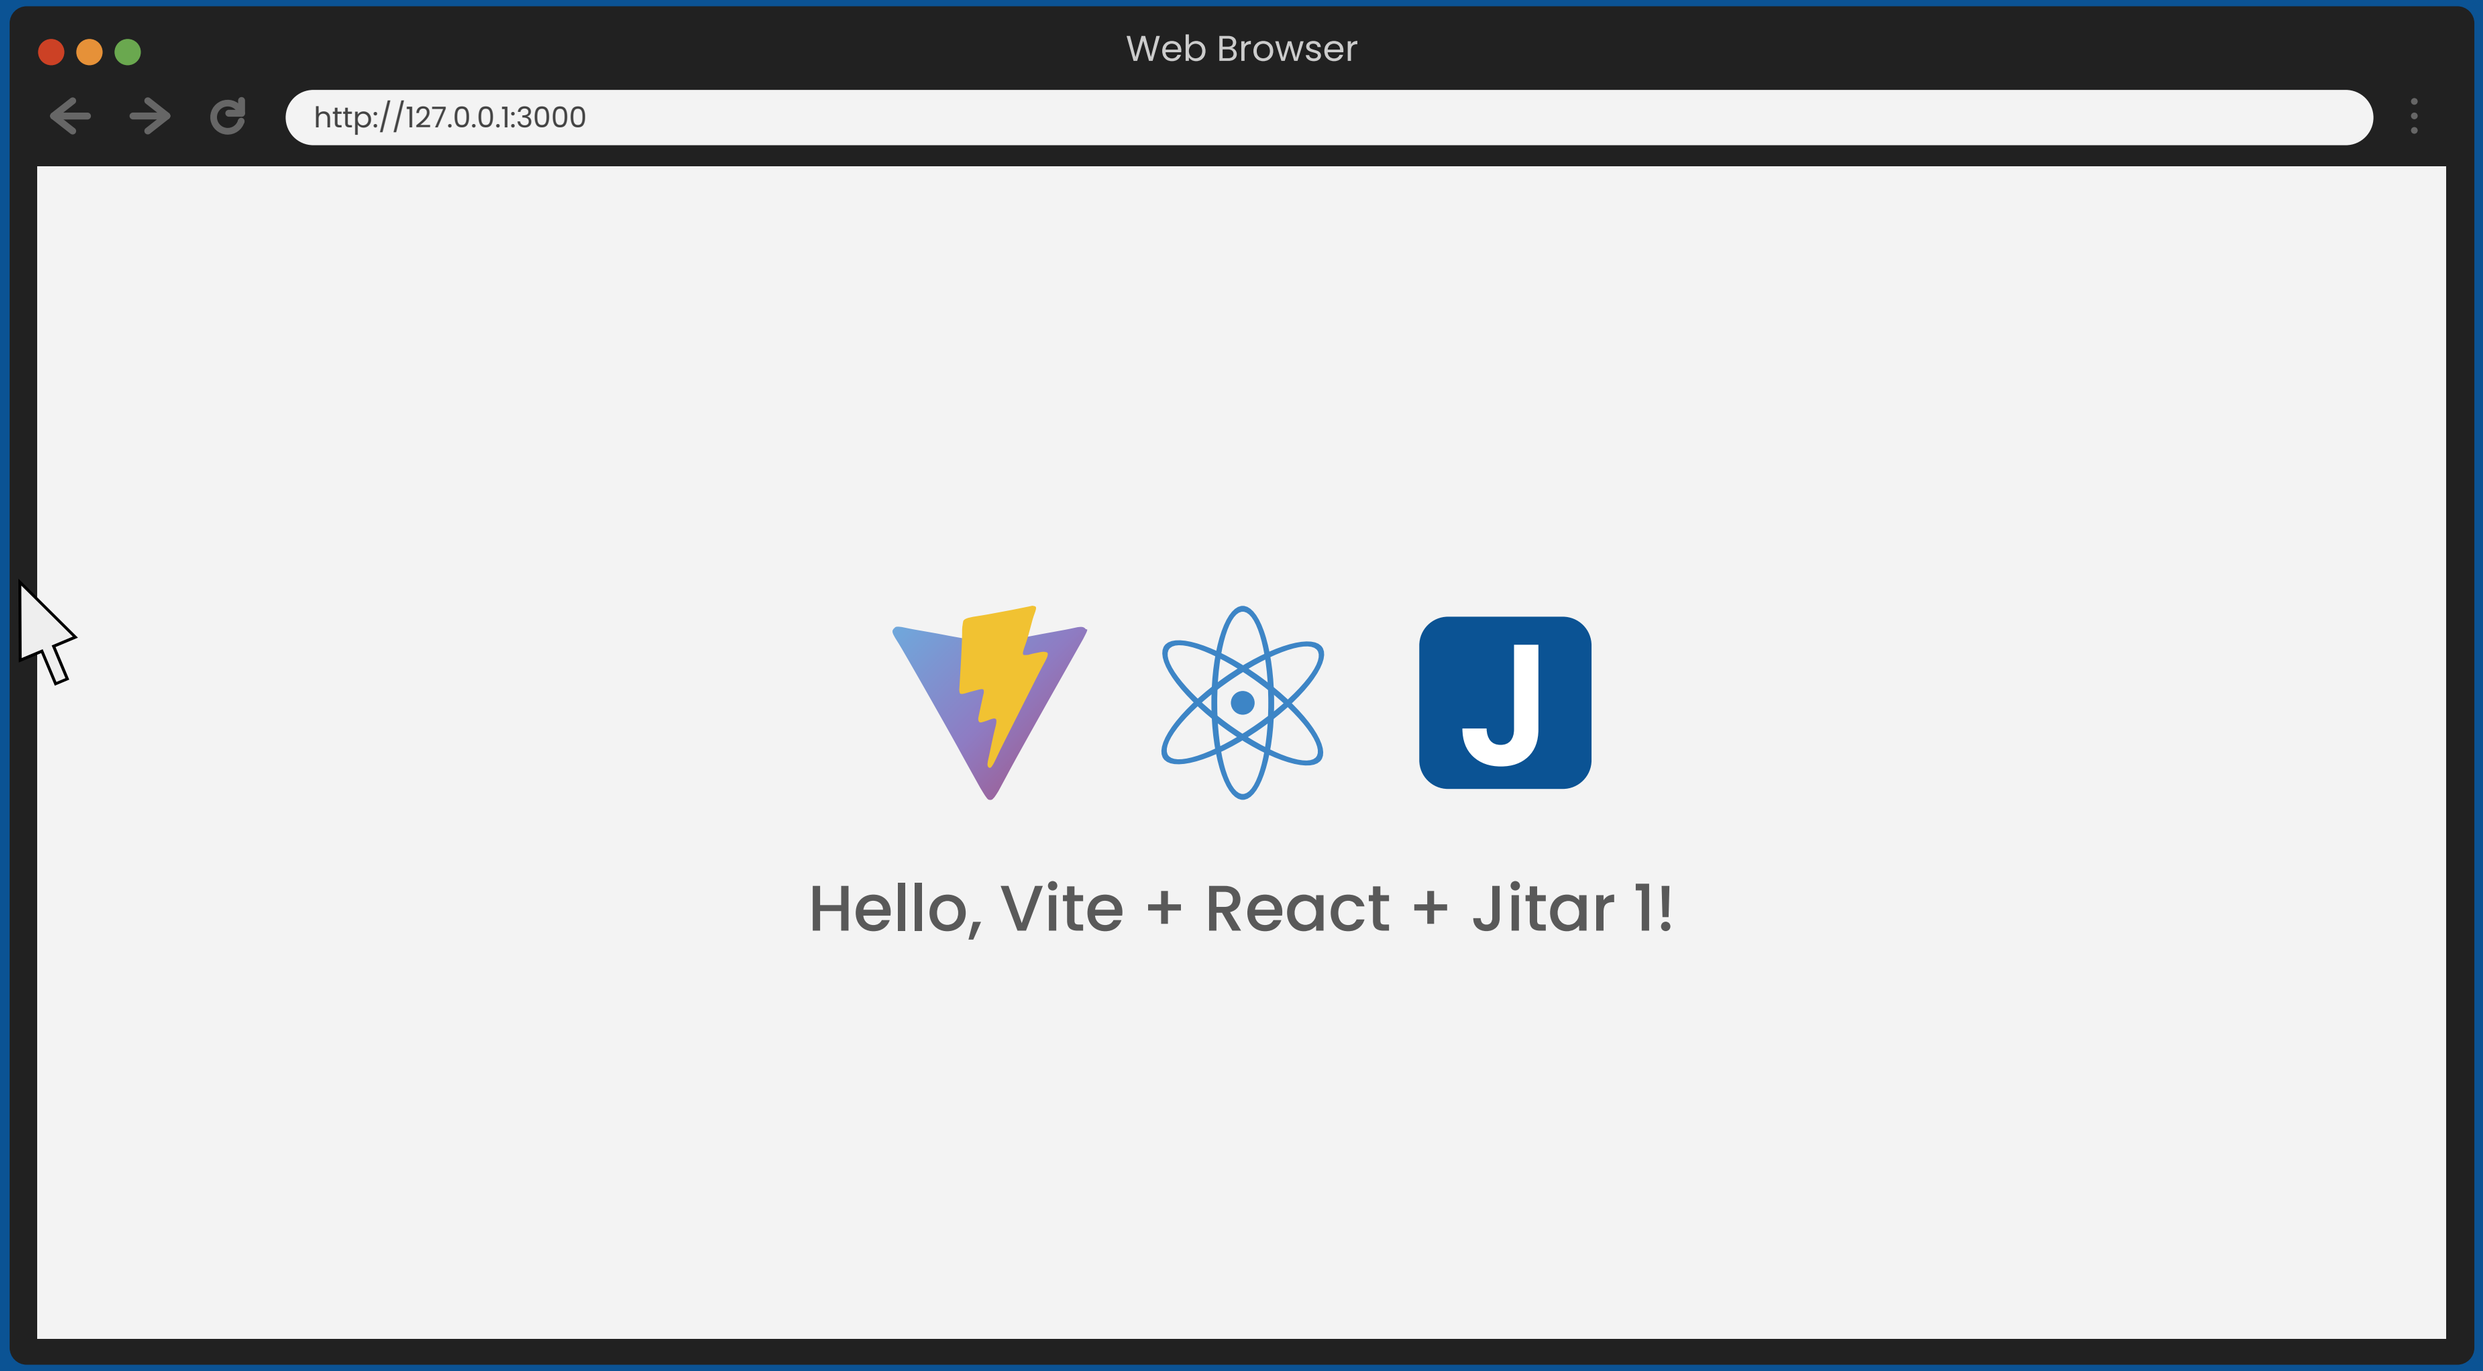
Web Browser
http://127.0.0.1:3000
Hello, Vite + React + Jitar 1!

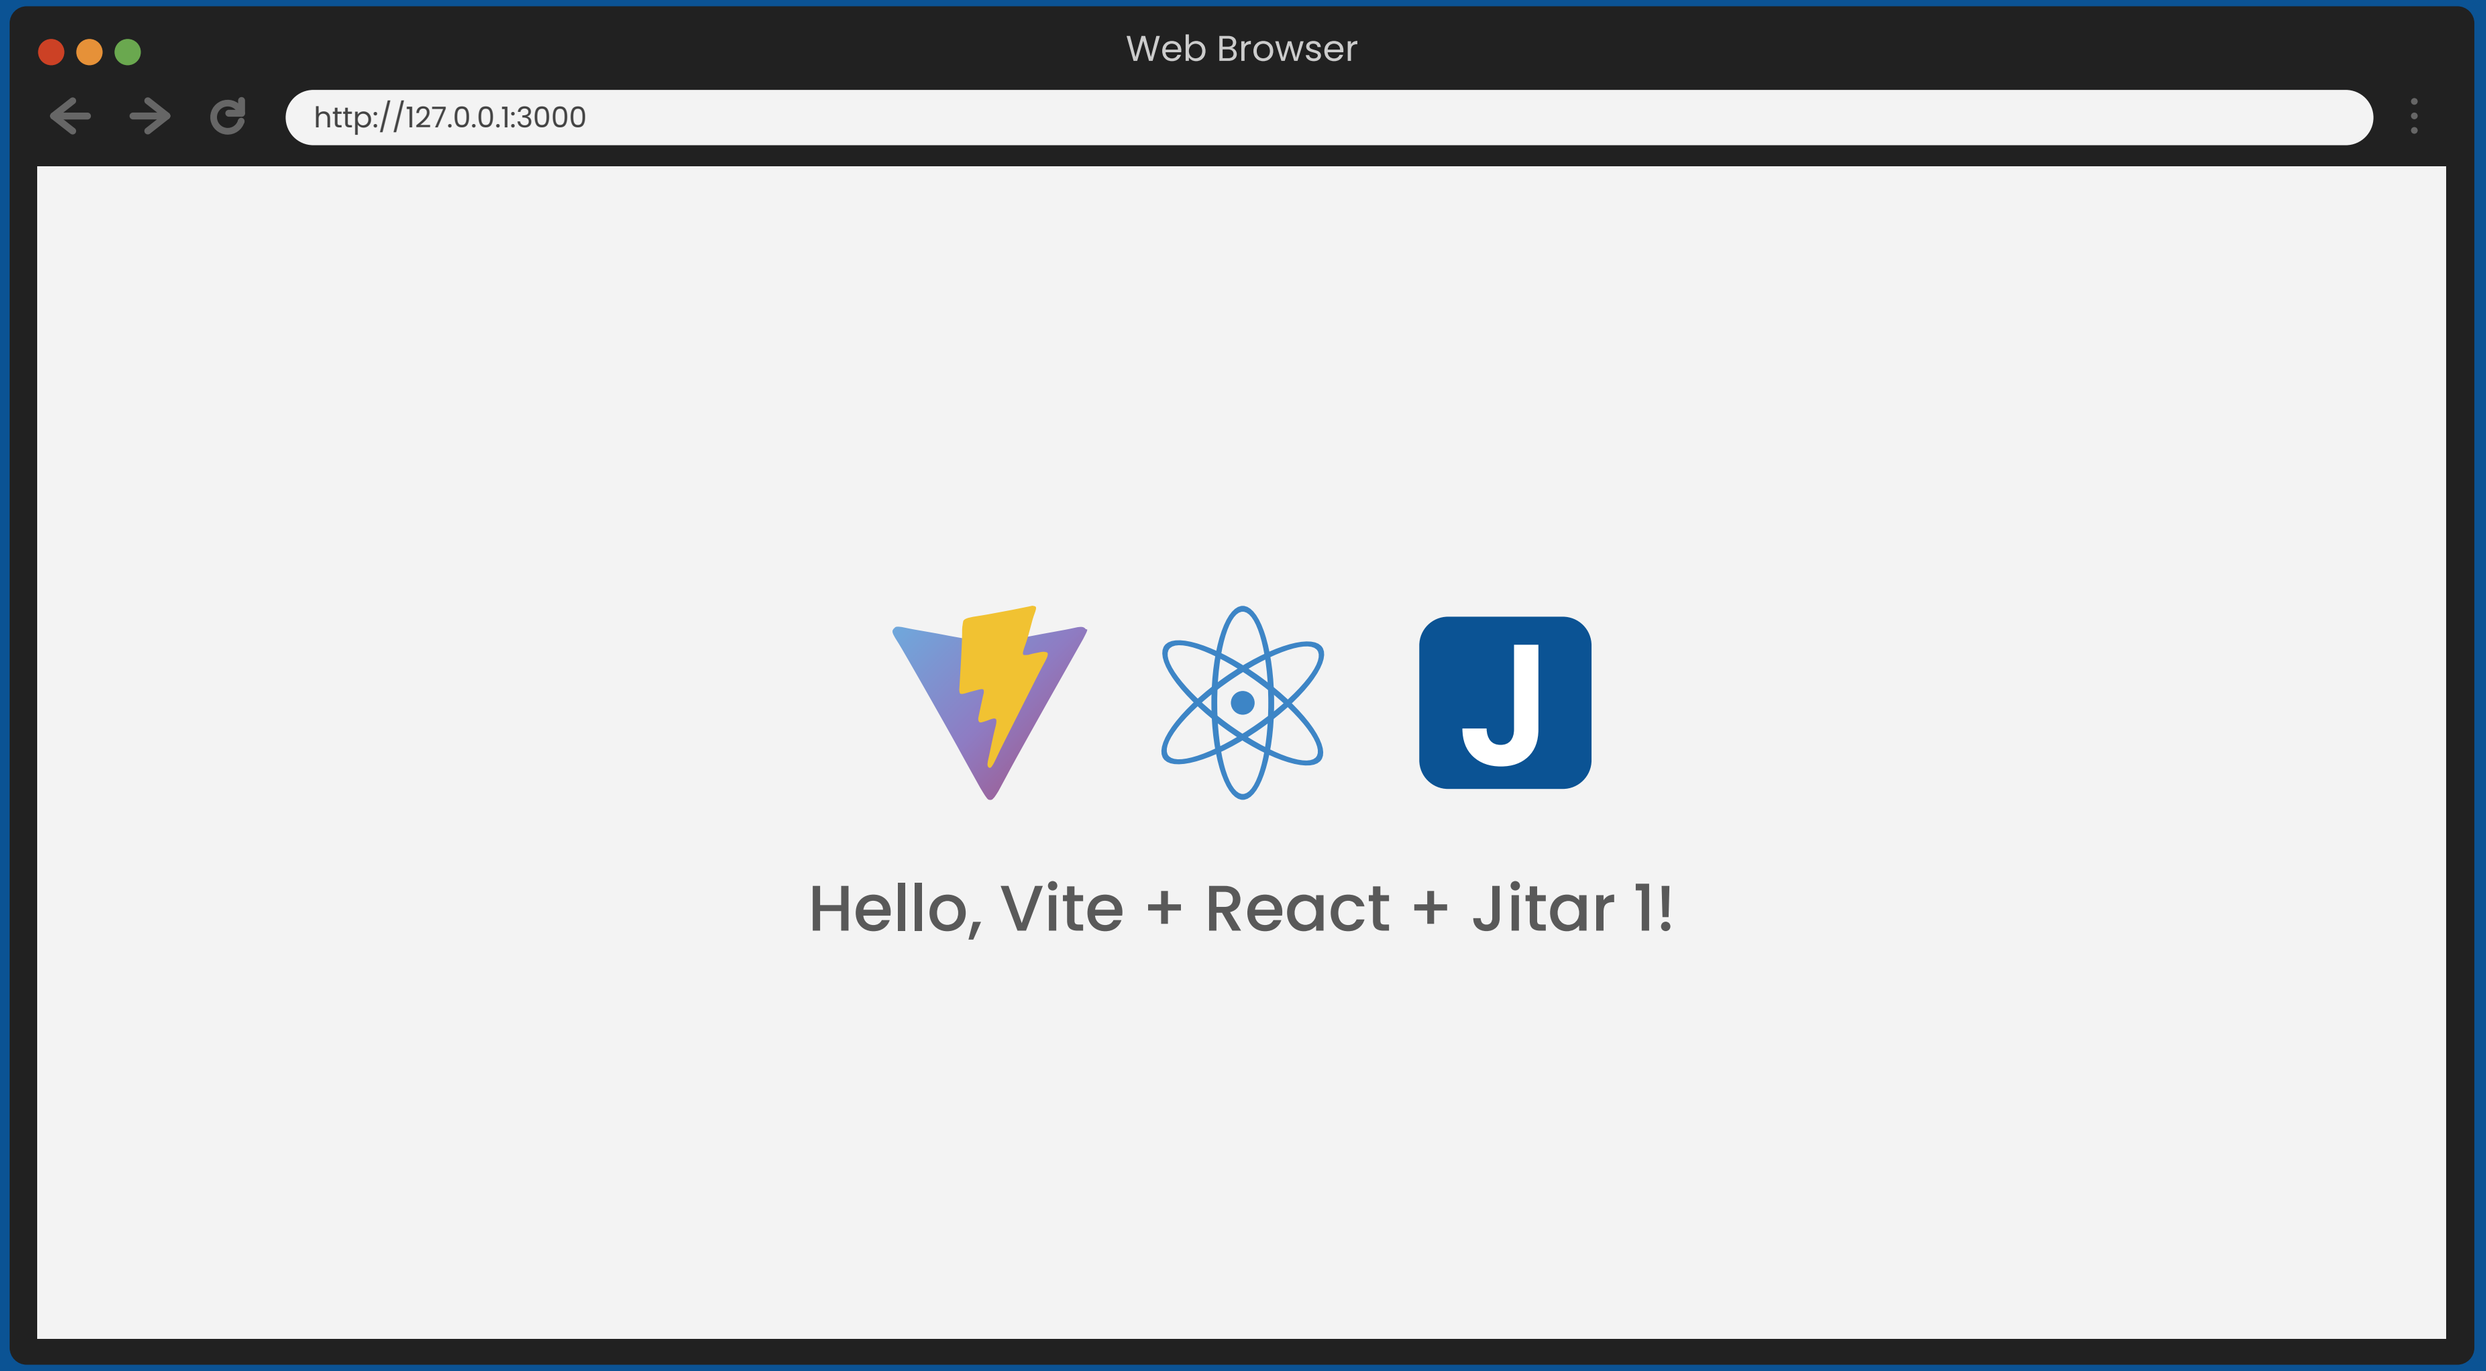
Web Browser
http://127.0.0.1:3000
Hello, Vite + React + Jitar 1!