~ Distributed JavaScript Runtime ~ [INFO] Server started at http://127.0.0.1:3000 [INFO] RPC procedures: [domain/sayHello [INFO] Provided web client [INFO] Ran request: domain/sayHello



TERMINAL

```
~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:3000
[INFO] RPC procedures: [
    domain/sayHello
]
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
```



TERMINAL

```
~ Distributed JavaScript Runtime ~
```

[INFO] Server started at http://127.0.0.1:3000 [INFO] RPC procedures: [domain/sayHello

[INFO] Provided web client

[INFO] Ran request: domain/sayHello

LORER

app

CODE


TERMINAL


```
~ Distributed JavaScript Runtime ~
```

```
[INFO] Server started at http://127.0.0.1:3000
[INFO] RPC procedures: [
domain/sayHello
```

[INFO] Provided web client

[INFO] Ran request: domain/sayHello

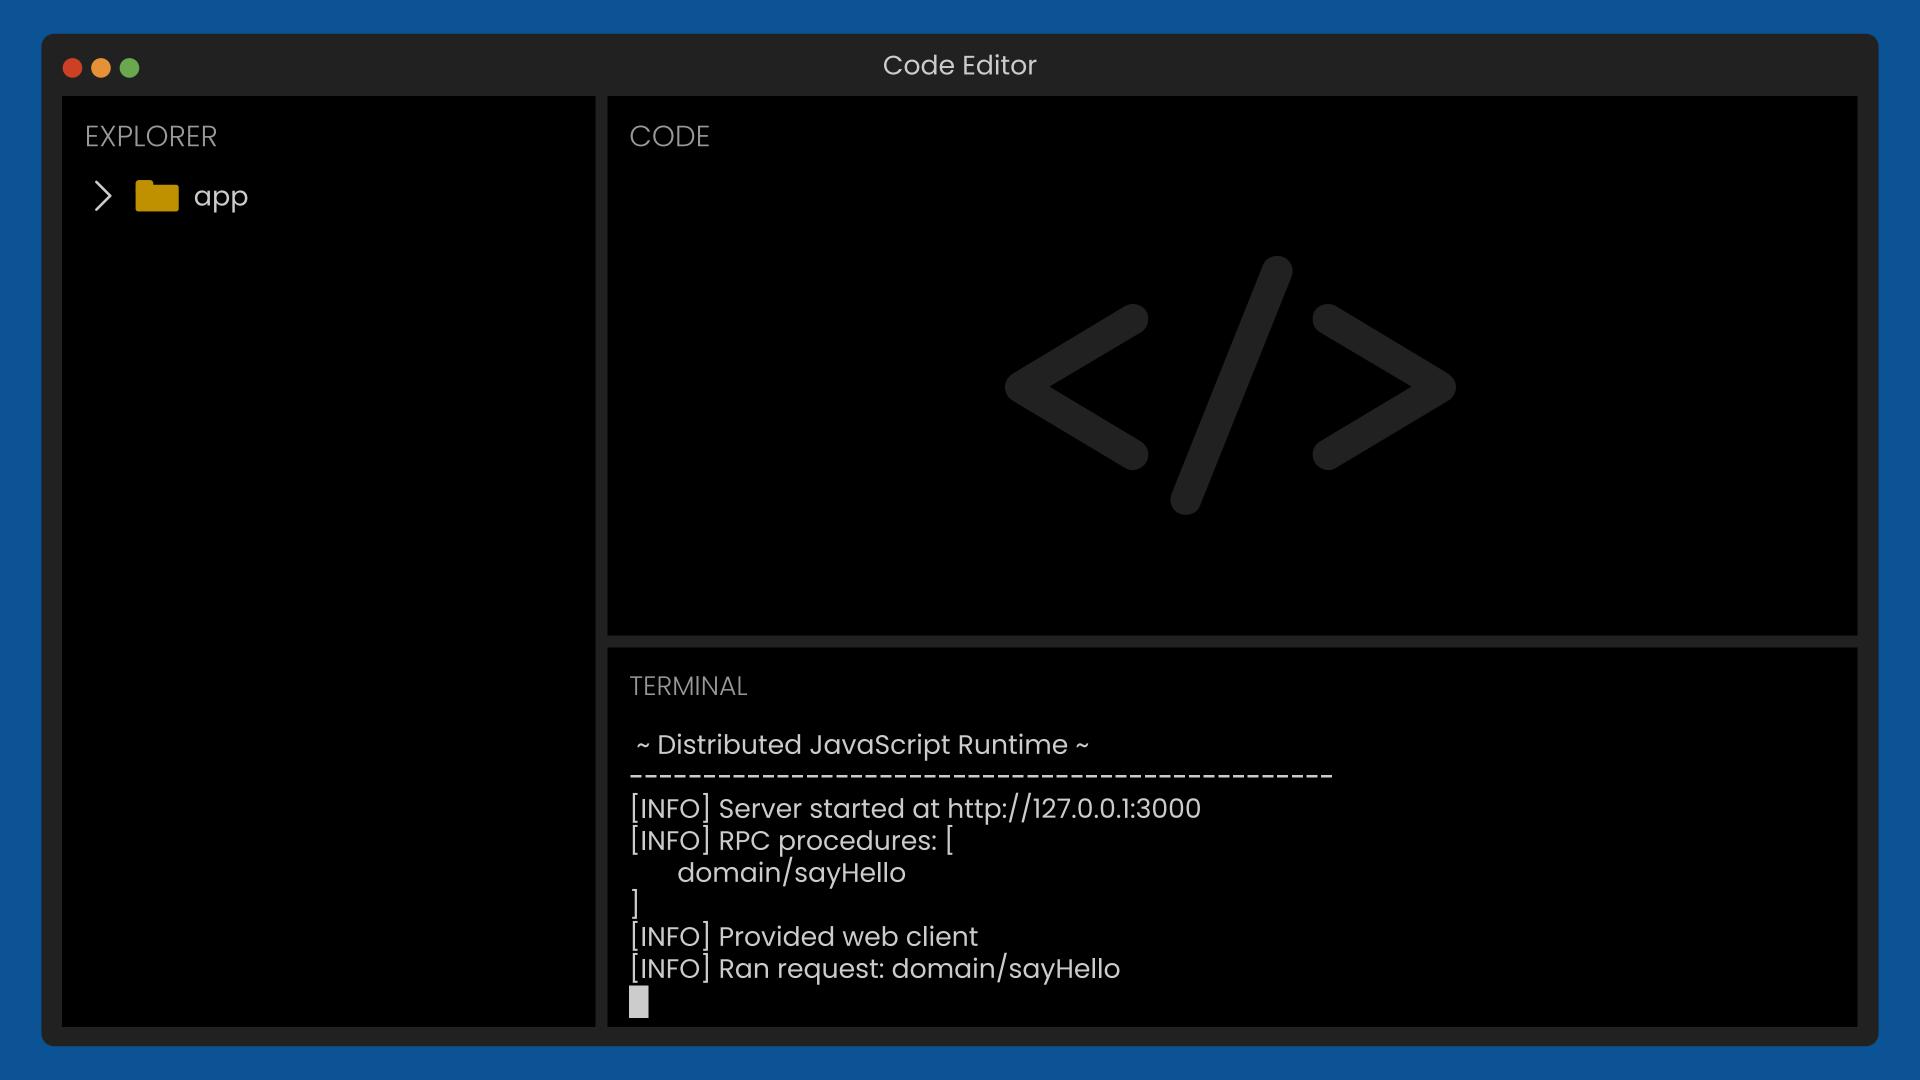

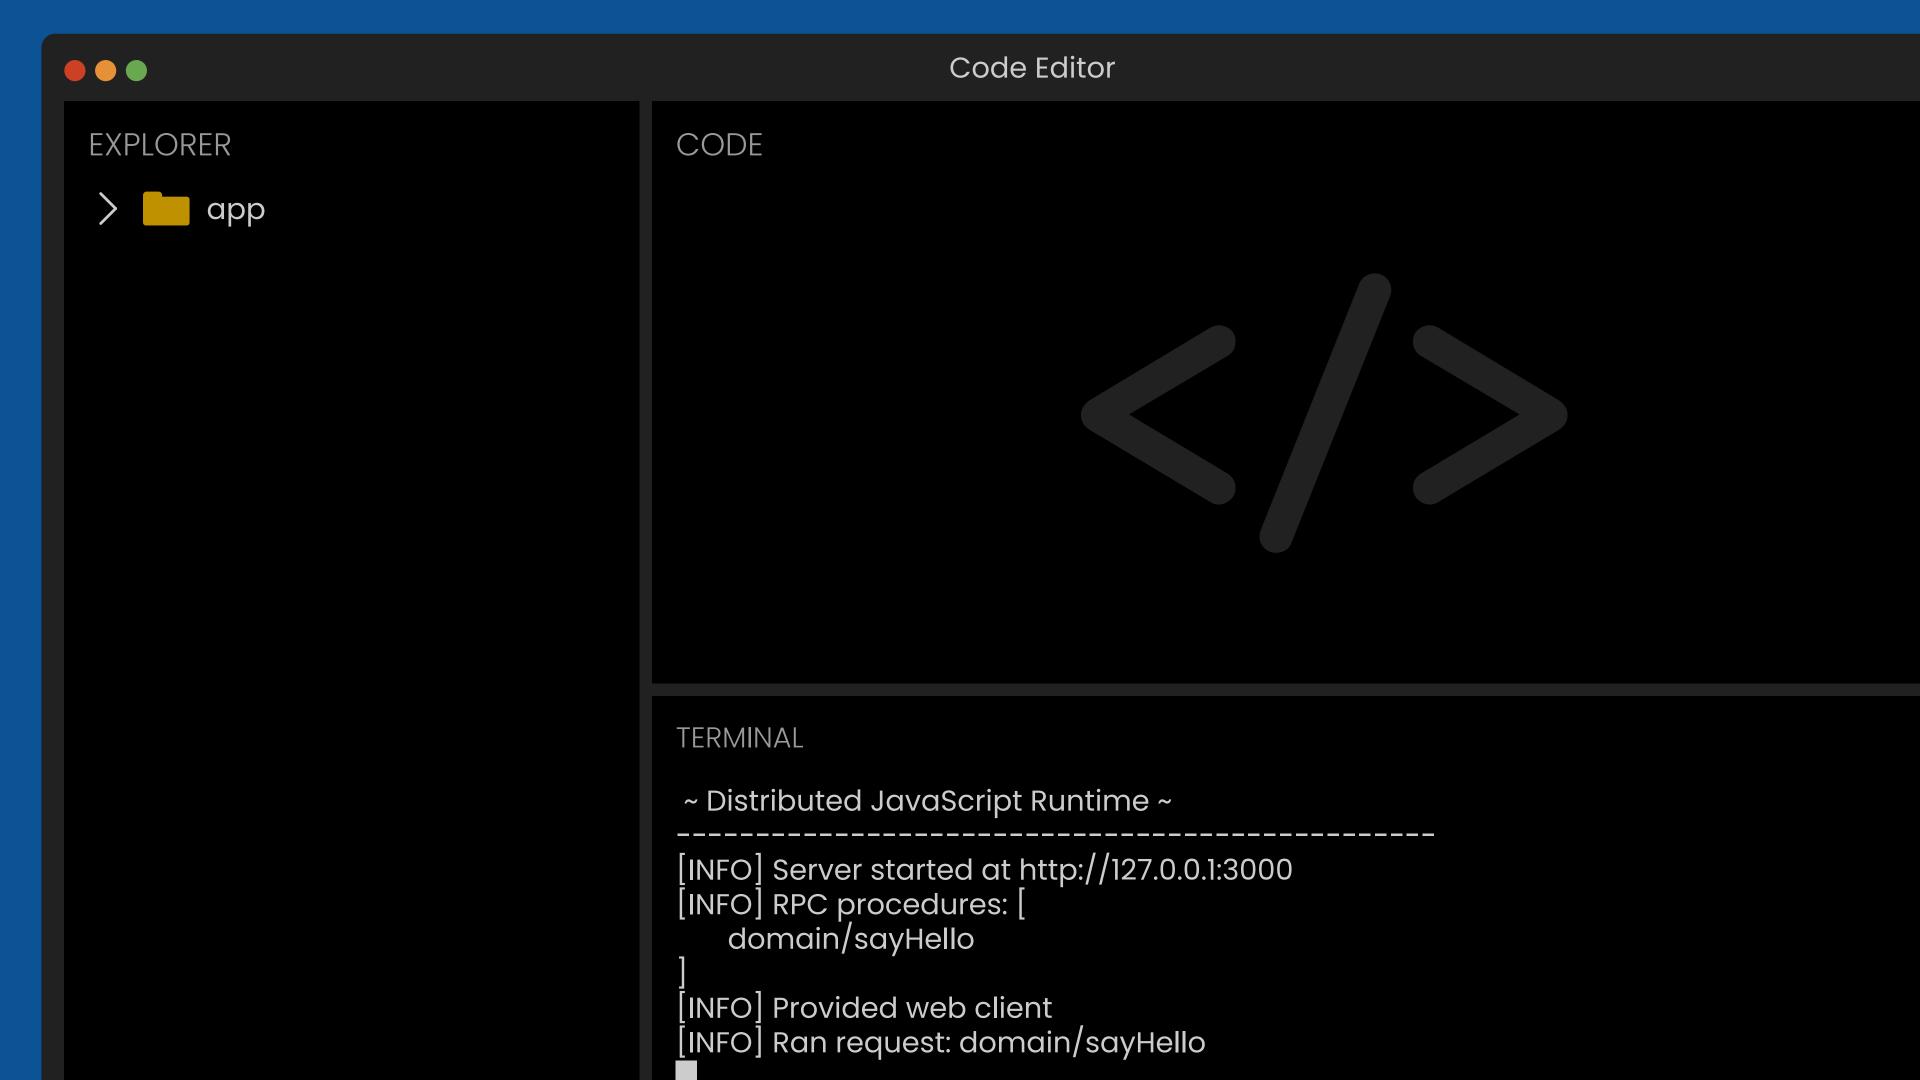



Code Editor

EXPLORER



CODE



TERMINAL

