

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL



~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:4001

[INFO] RPC procedures: [
 domain/keepHelloCount

]



```
> gateway
> repository
> proxy
> data
```

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

app> █

- > gateway
- > repository
- > proxy
- > data
- > terminal

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

app> npm run default

- > gateway
- > repository
- > proxy
- > data
- > terminal

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

```
app> npm run default
```



- > gateway
- > repository
- > proxy
- > data
- > default

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

```
app> npm run default
```




- > gateway
- > repository
- > proxy
- > data
- > default

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

```
app> npm run default
```

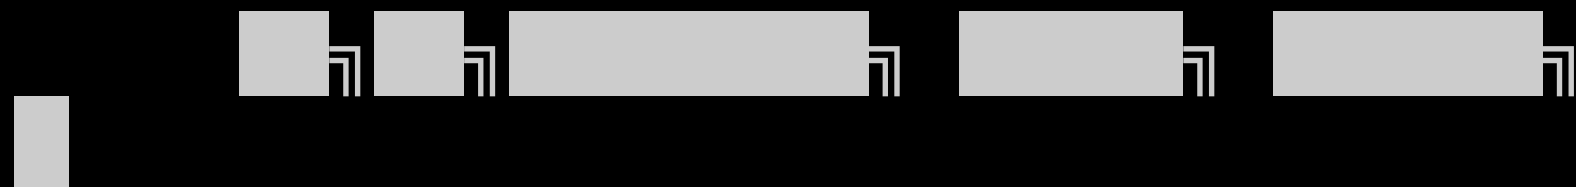


```
>- gateway
>- repository
>- proxy
>- data
>- default
```

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

```
app> npm run default
```

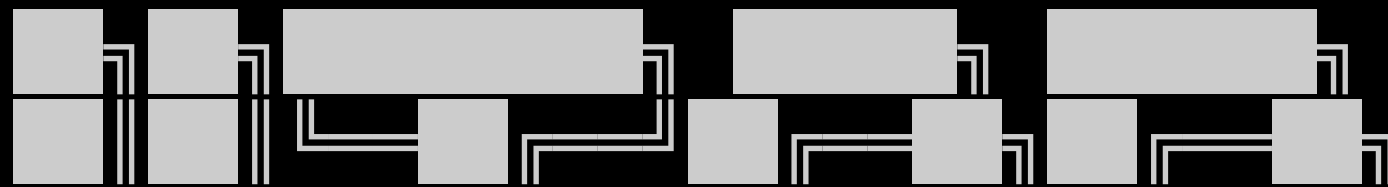


- > gateway
- > repository
- > proxy
- > data
- > default

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

app> npm run default

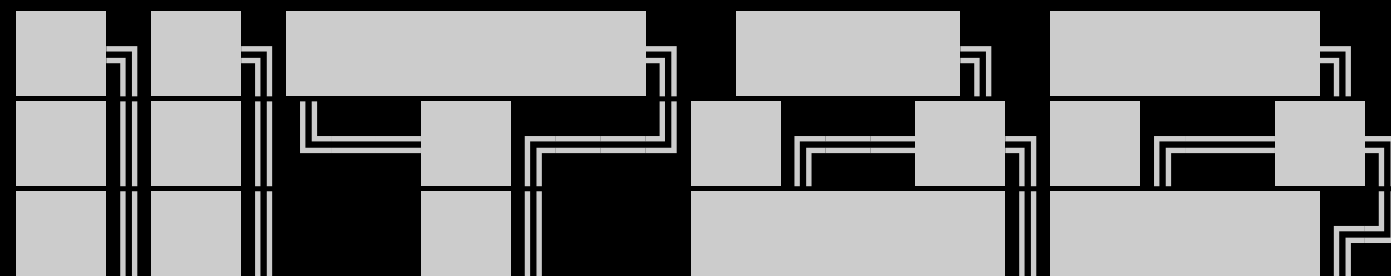


- > gateway
- > repository
- > proxy
- > data
- > default

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

```
app> npm run default
```

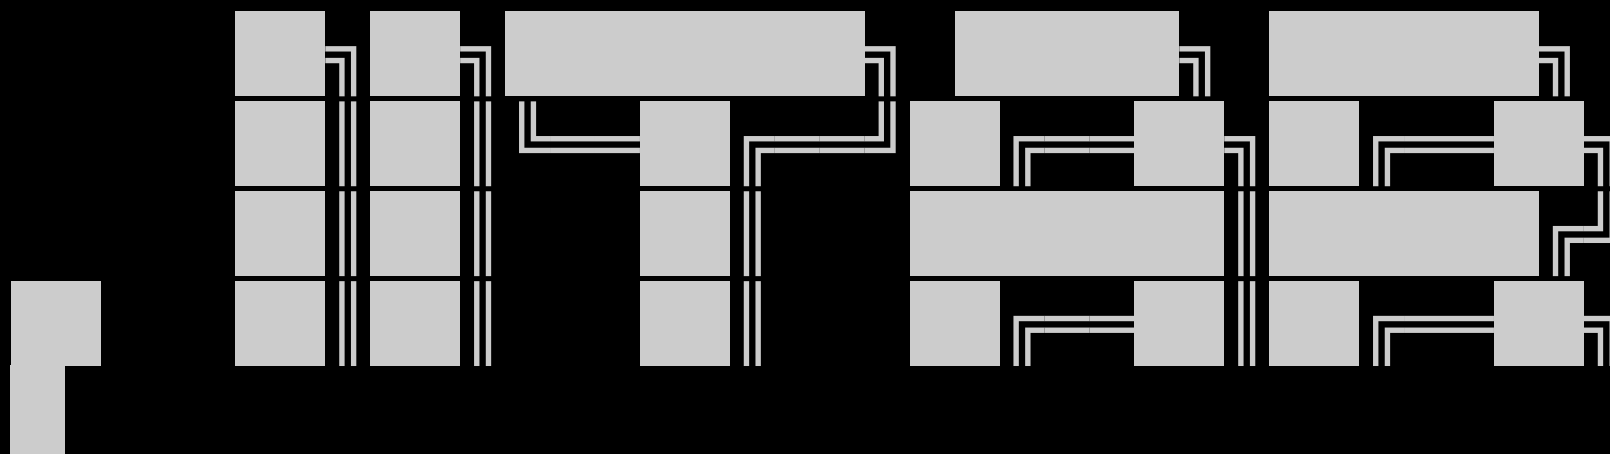


```
> gateway
> repository
> proxy
> data
> default
```

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

app> npm run default

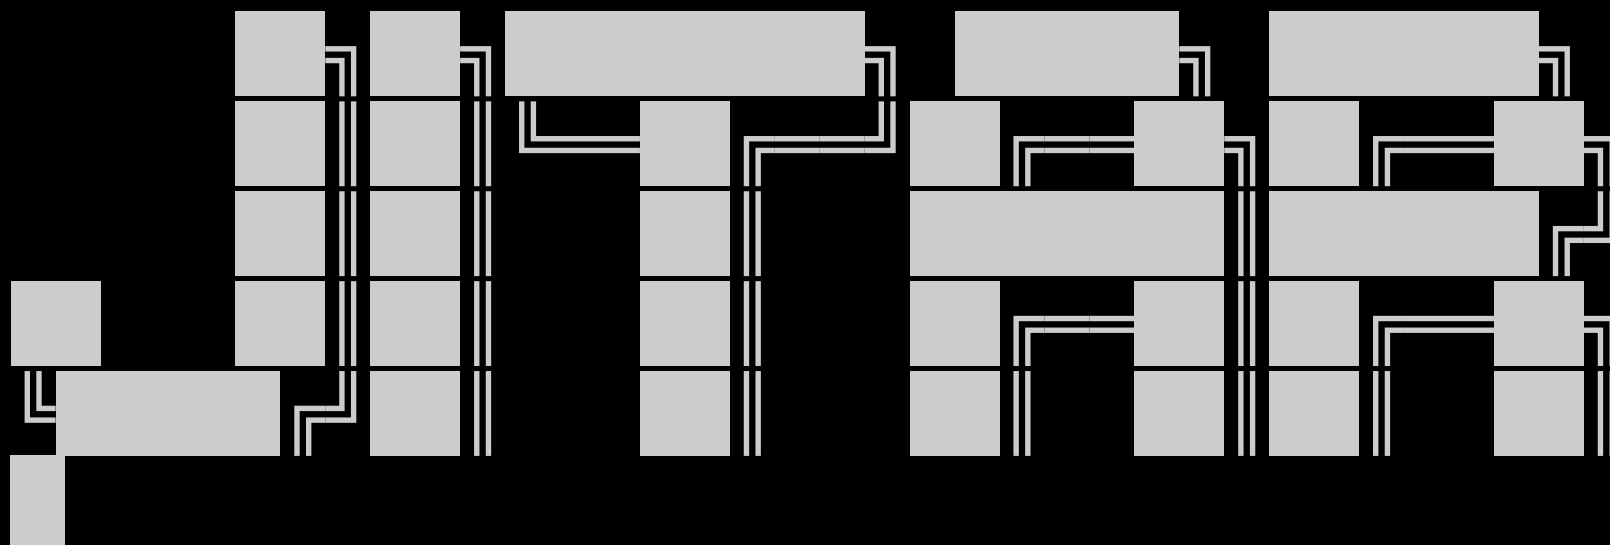


```
> gateway  
> repository  
> proxy  
> data  
> default
```

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL


app> npm run default

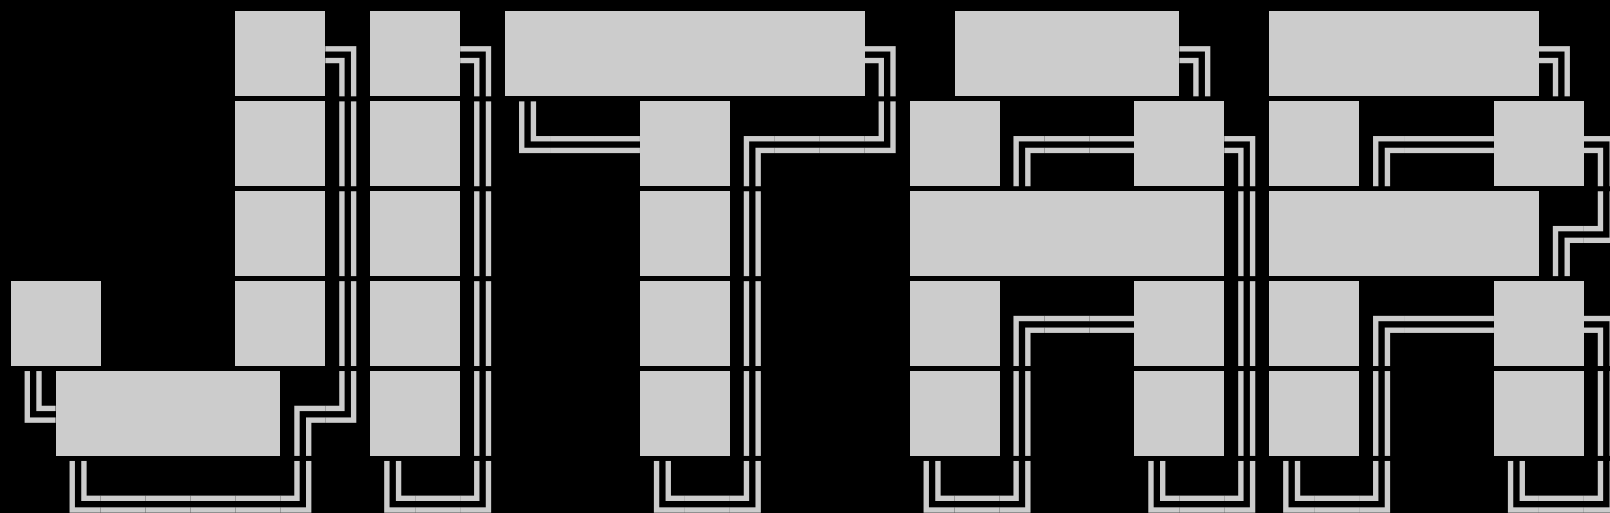

```
> gateway  
> repository  
> proxy  
> data  
> default
```

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

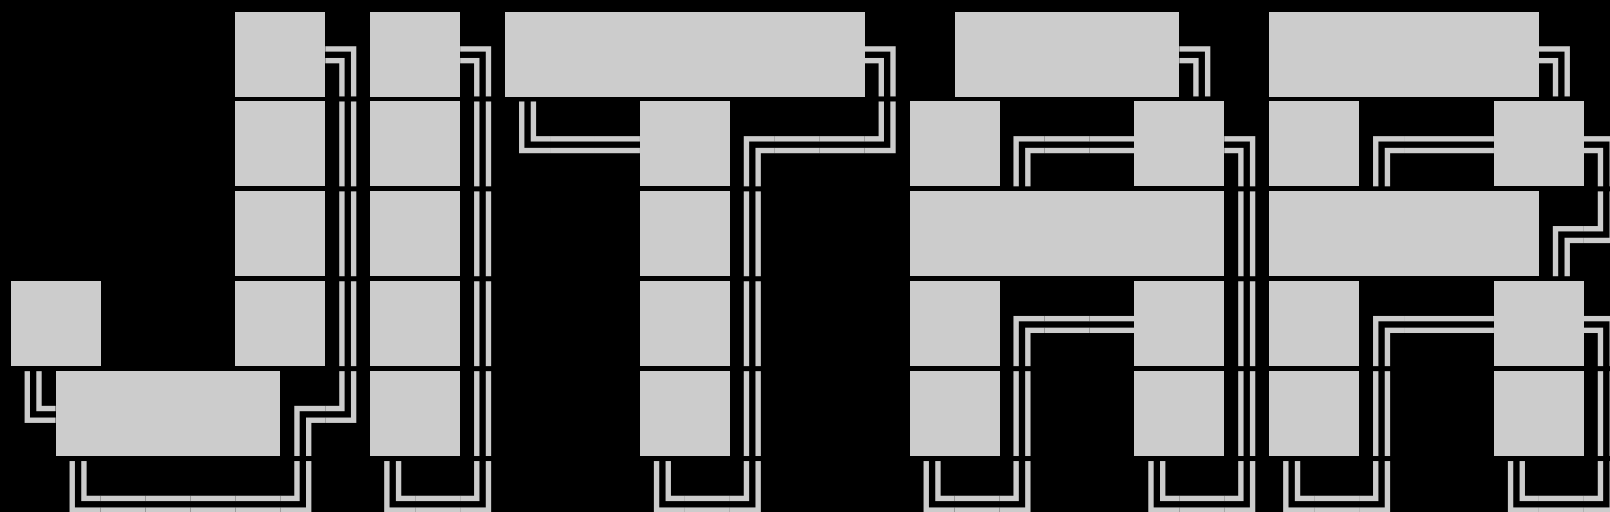


~ Distributed JavaScript Runtime ~



```
> gateway  
> repository  
> proxy  
> data  
> default
```

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

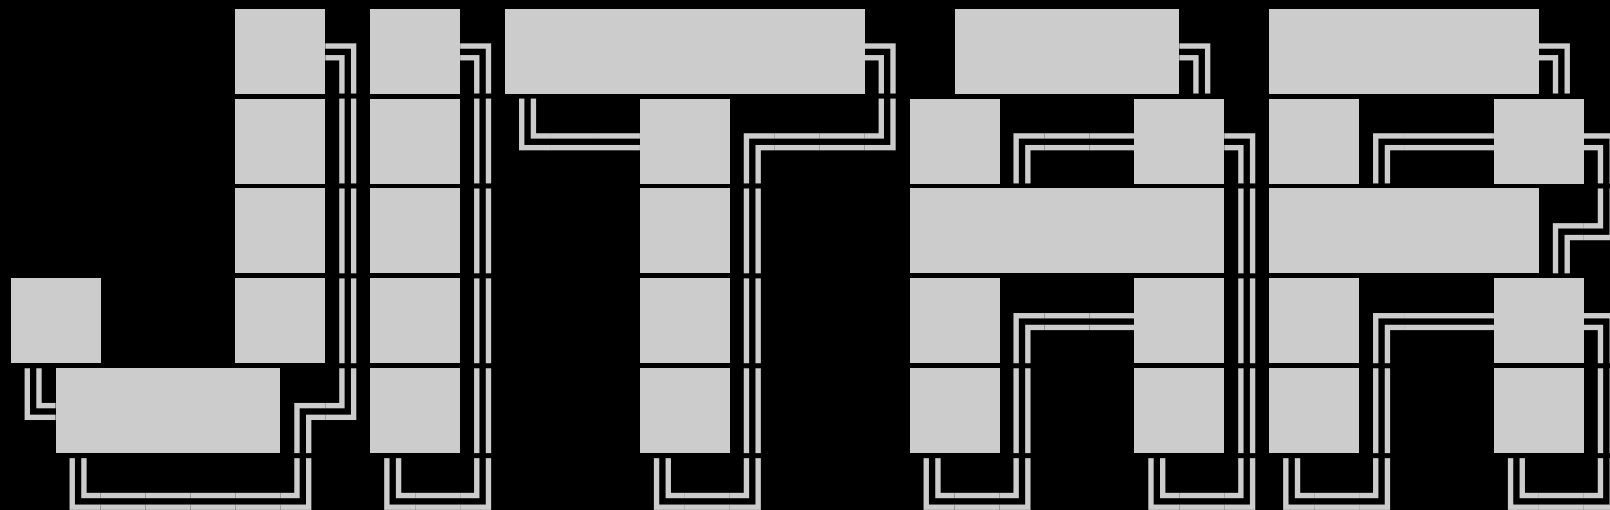


~ Distributed JavaScript Runtime ~



```
> gateway  
> repository  
> proxy  
> data  
> default
```

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

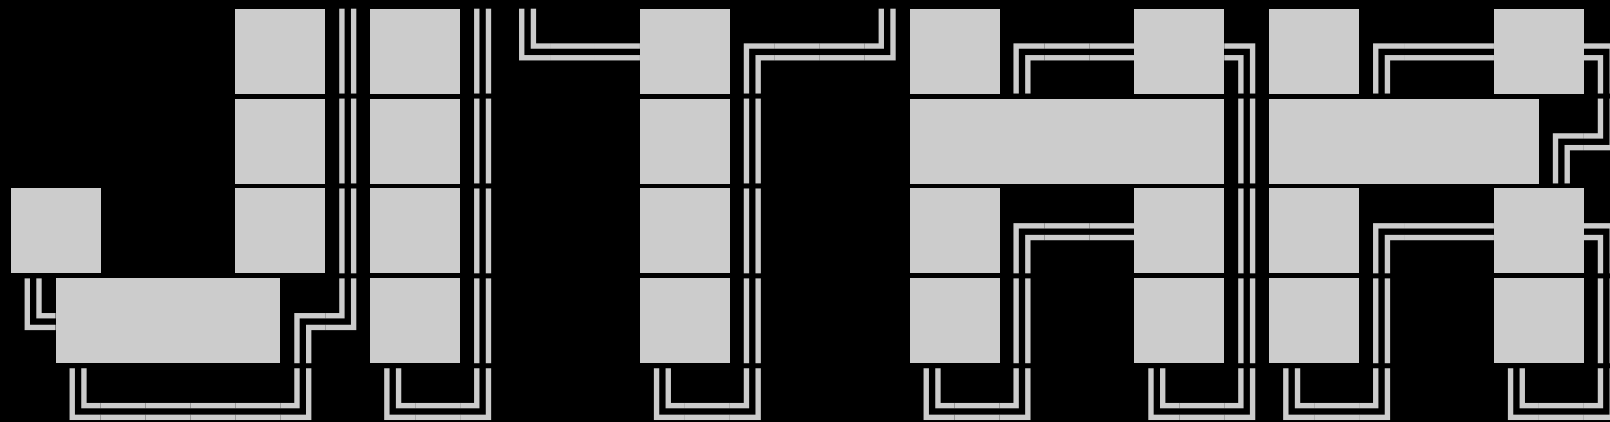


~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:4002

```
> gateway
> repository
> proxy
> data
> default
```

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

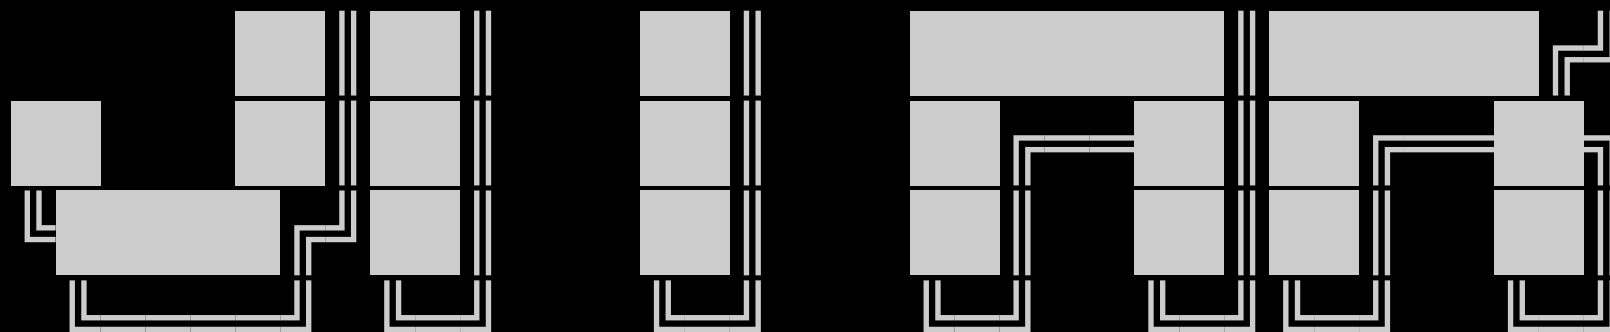

~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:4002


[INFO] RPC procedures: [



```
> gateway
> repository
> proxy
> data
> default
```

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

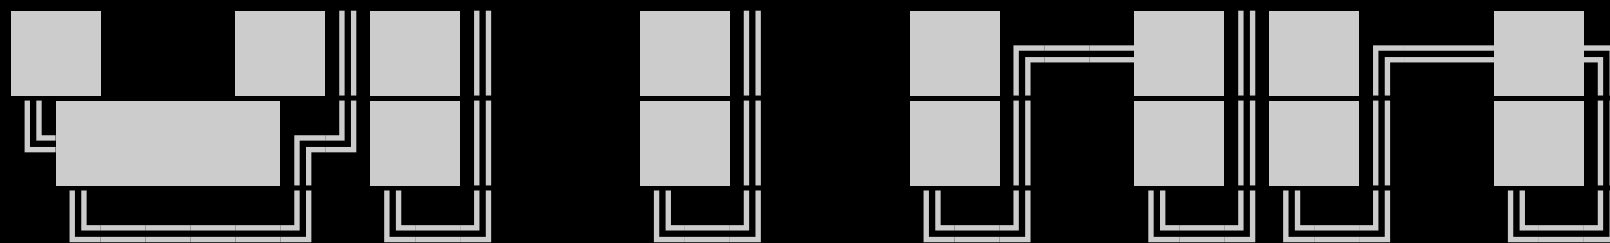

~ Distributed JavaScript Runtime ~

```
[INFO] Server started at http://127.0.0.1:4002
[INFO] RPC procedures: [
  domain/sayHello
```

```
> gateway
> repository
> proxy
> data
> default
```

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL



~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:4002

[INFO] RPC procedures: [
 domain/sayHello

]



- > gateway
- > repository
- > proxy
- > data
- > default