


```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

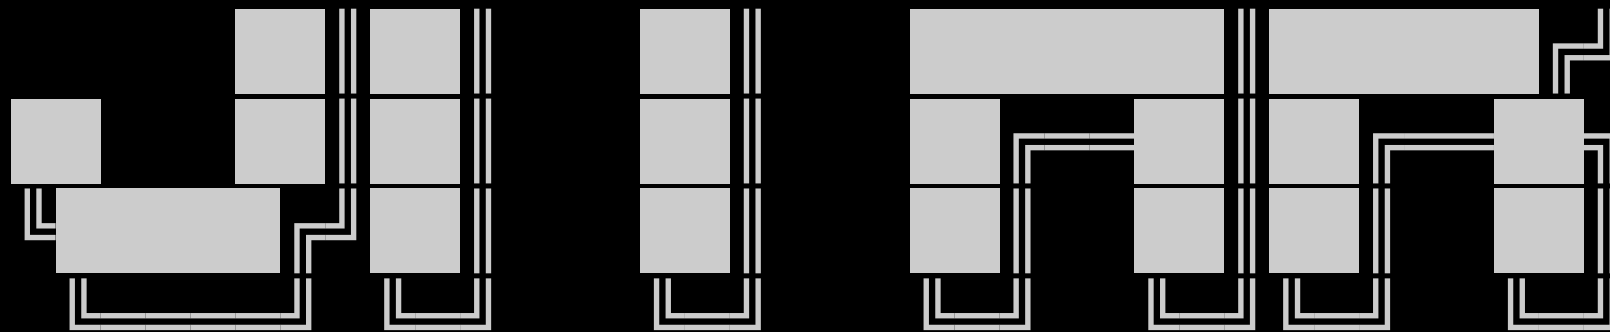


~ Distributed JavaScript Runtime ~

```
[INFO] Server started at http://127.0.0.1:3002
[INFO] Provided web client
```

```
> gateway
> repository
> proxy
> data
> default
```

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

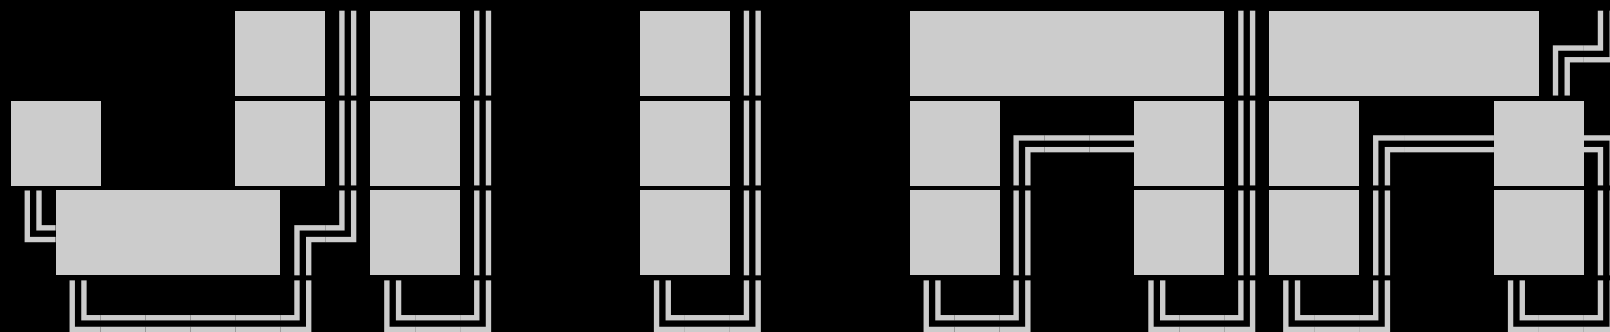


~ Distributed JavaScript Runtime ~

```
[INFO] Server started at http://127.0.0.1:3002
[INFO] Provided web client
```

```
> gateway
> repository
> proxy
> data
> default
```

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

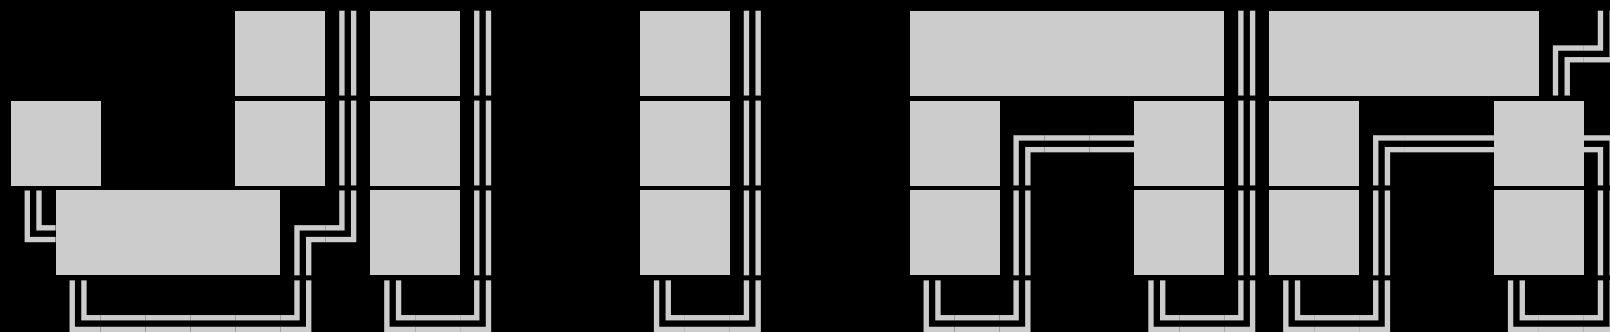


~ Distributed JavaScript Runtime ~

```
[INFO] Server started at http://127.0.0.1:3002
[INFO] Provided web client
```

```
> gateway
> repository
> proxy
> data
> default
```

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

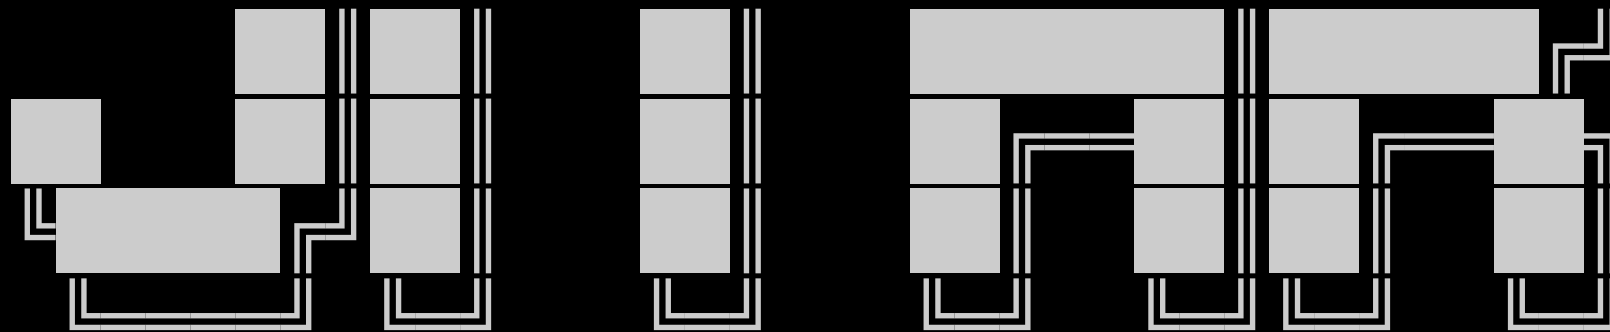


~ Distributed JavaScript Runtime ~

```
[INFO] Server started at http://127.0.0.1:3002
[INFO] Provided web client
```

```
> gateway
> repository
> proxy
> data
> default
```

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

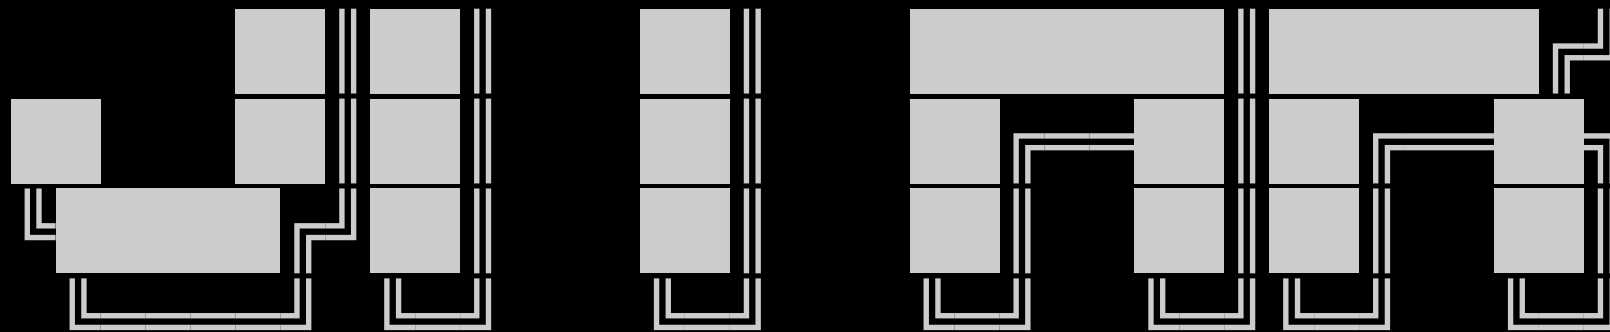

~ Distributed JavaScript Runtime ~

```
[INFO] Server started at http://127.0.0.1:3002
[INFO] Provided web client
```

 gateway


>_ repository

 data

>_ default

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

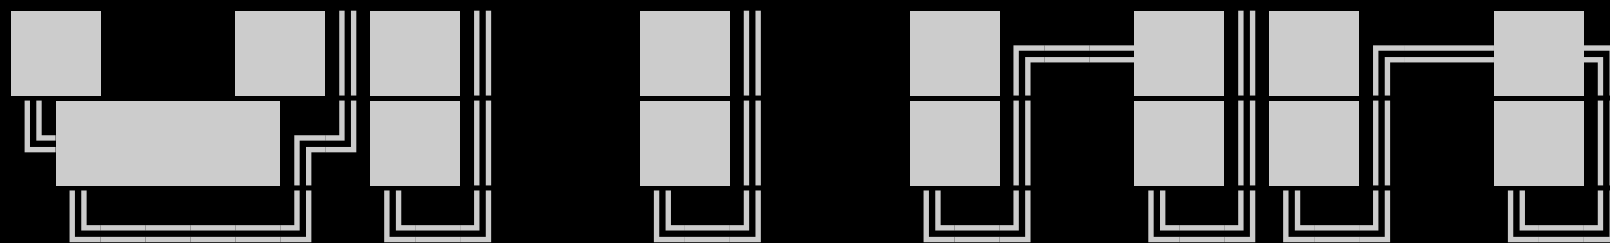

~ Distributed JavaScript Runtime ~

```
[INFO] Server started at http://127.0.0.1:3000
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
```

```
> gateway
> repository
> proxy
> data
> default
```