```
> jitar init --name=app --template=react
Intializing project 'app' with 'react' template.
SUCCESS! Run the following commands to continue:
cd app
npm install
npm run build
npm run standalone
>
```

TERMINAL

```
> jitar init --name=app --template=react
Intializing project 'app' with 'react' template.
SUCCESS! Run the following commands to continue:
cd app
npm install
npm run build
npm run standalone
> cd app
```

```
> jitar init --name=app --template=react
Intializating project 'app' with 'react' template.
SUCCESS! Run the following commands to continue:
cd app
npm install
npm run build
npm run standalone
> cd app
app> █
```

TERMINAL

```
> jitar init --name=app --template=react
Intializing project 'app' with 'react' template.
SUCCESS! Run the following commands to continue:
cd app
npm install
npm run build
npm run standalone
> cd app
app> npm install
```

Intializating project 'app' with 'react' template.
SUCCESS! Run the following commands to continue:
cd app
npm install
npm run build
npm run standalone
> cd app
app> npm install

TERMINAL

SUCCESS! Run the following commands to continue:
cd app
npm install
npm run build
npm run standalone
> cd app
app> npm install
0% [   ] 100%

```
SUCCESS! Run the following commands to continue:
cd app
npm install
npm run build
npm run standalone
> cd app
app> npm install
0% [█                  ] 100%
█
```

SUCCESS! Run the following commands to continue:
cd app
npm install
npm run build
npm run standalone
> cd app
app> npm install
0% [▌▌   ] 100%
▌

TERMINAL

SUCCESS! Run the following commands to continue:
cd app
npm install
npm run build
npm run standalone
> cd app
app> npm install
0% [▮▮▮   ] 100%
▮

SUCCESS! Run the following commands to continue:
cd app
npm install
npm run build
npm run standalone
> cd app
app> npm install
0% [IIIII   ] 100%

SUCCESS! Run the following commands to continue:
cd app
npm install
npm run build
npm run standalone
> cd app
app> npm install
0% [||||||] 100%

TERMINAL

SUCCESS! Run the following commands to continue:
cd app
npm install
npm run build
npm run standalone
> cd app
app> npm install
0% [▮▮▮▮▮▮▮   ] 100%
▮

```
SUCCESS! Run the following commands to continue:
cd app
npm install
npm run build
npm run standalone
> cd app
app> npm install
0% [▮▮▮▮▮▮▮▮    ] 100%
▮
```

```
SUCCESS! Run the following commands to continue:
cd app
npm install
npm run build
npm run standalone
> cd app
app> npm install
0% [IIIIIIIII   ] 100%
█
```

```
SUCCESS! Run the following commands to continue:
cd app
npm install
npm run build
npm run standalone
> cd app
app> npm install
0% [‖‖‖‖‖‖‖‖‖‖‖  ] 100%
█
```

TERMINAL

SUCCESS! Run the following commands to continue:
cd app
npm install
npm run build
npm run standalone
> cd app
app> npm install
0% [▮▮▮▮▮▮▮▮▮▮▮] 100%
▮

SUCCESS! Run the following commands to continue:
cd app
npm install
npm run build
npm run standalone
> cd app
app> npm install
0% [▮▮▮▮▮▮▮▮▮▮▮] 100% ✓
app> ▮

SUCCESS! Run the following commands to continue:
cd app
npm install
npm run build
npm run standalone
> cd app
app> npm install
0% [▮▮▮▮▮▮▮▮▮▮▮] 100% ✓
app> npm run build▮

```
cd app
npm install
npm run build
npm run standalone
> cd app
app> npm install
0% [▮▮▮▮▮▮▮▮▮▮▮] 100% ✓
app> npm run build
▮
```

```
npm install
npm run build
npm run standalone
> cd app
app> npm install
0% [▮▮▮▮▮▮▮▮▮▮▮▮] 100% ✓
app> npm run build
[INFO] Built default segment (1 module, 1 procedure, 0 classes)
app> █
```

```
npm install
npm run build
npm run standalone
> cd app
app> npm install
0% [IIIIIIIIIII] 100% ✓
app> npm run build
[INFO] Built default segment (1 module, 1 procedure, 0 classes)
app> npm run standalone▉
```

TERMINAL

```
npm run build
npm run standalone
> cd app
app> npm install
0% [∎∎∎∎∎∎∎∎∎∎] 100% ✓
app> npm run build
[INFO] Built default segment (1 module, 1 procedure, 0 classes)
app> npm run standalone
█
```
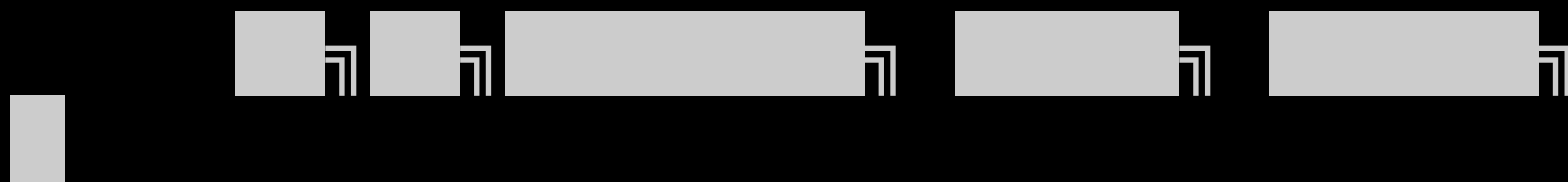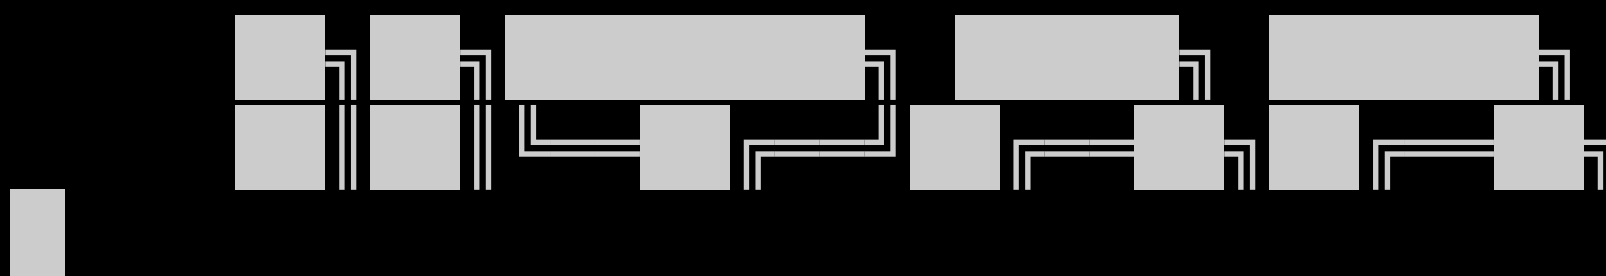
```
npm run standalone
> cd app
app> npm install
0% [IIIIIIIIIII] 100% ✓
app> npm run build
[INFO] Built default segment (1 module, 1 procedure, 0 classes)
app> npm run standalone
```
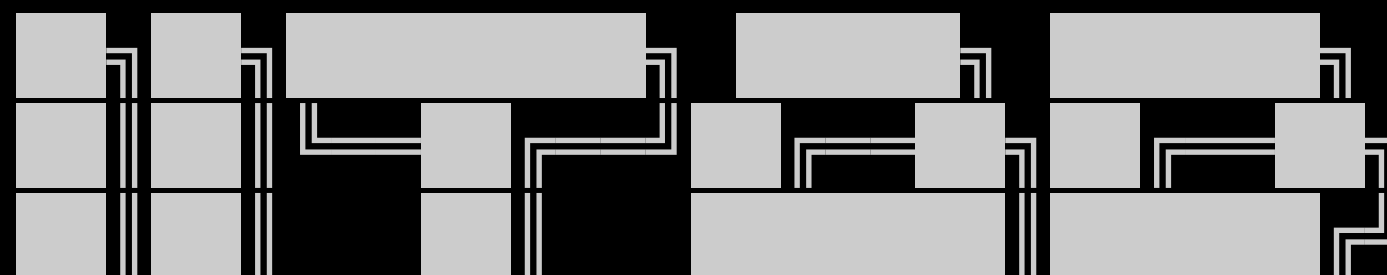
```
> cd app
app> npm install
0% [IIIIIIIIIII] 100% ✓
app> npm run build
[INFO] Built default segment (1 module, 1 procedure, 0 classes)
app> npm run standalone
```

```
app> npm install
0% [IIIIIIIIIII] 100% ✓
app> npm run build
[INFO] Built default segment (1 module, 1 procedure, 0 classes)
app> npm run standalone
```

```
0% [∎∎∎∎∎∎∎∎∎∎] 100% ✓
app> npm run build
[INFO] Built default segment (1 module, 1 procedure, 0 classes)
app> npm run standalone
```
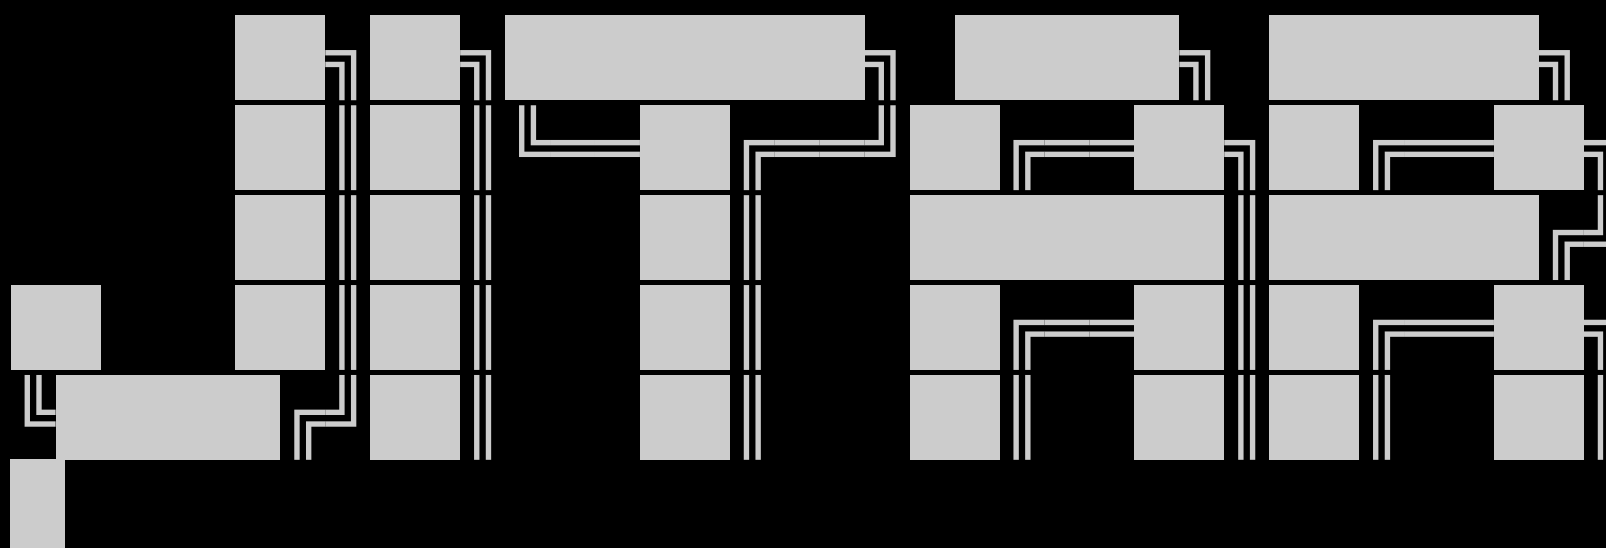
```
app> npm run build
[INFO] Built default segment (1 module, 1 procedure, 0 classes)
app> npm run standalone
```
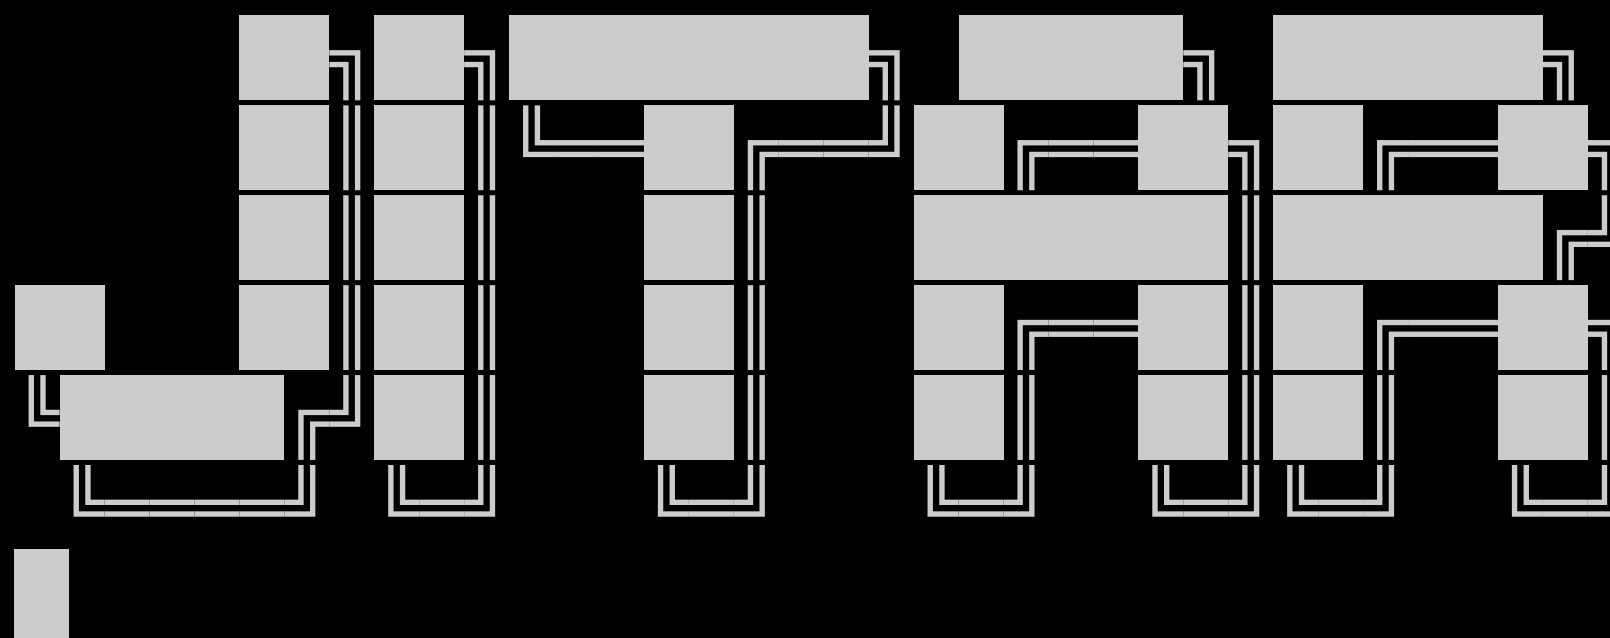
[INFO] Built default segment (1 module, 1 procedure, 0 classes)
app> npm run standalone

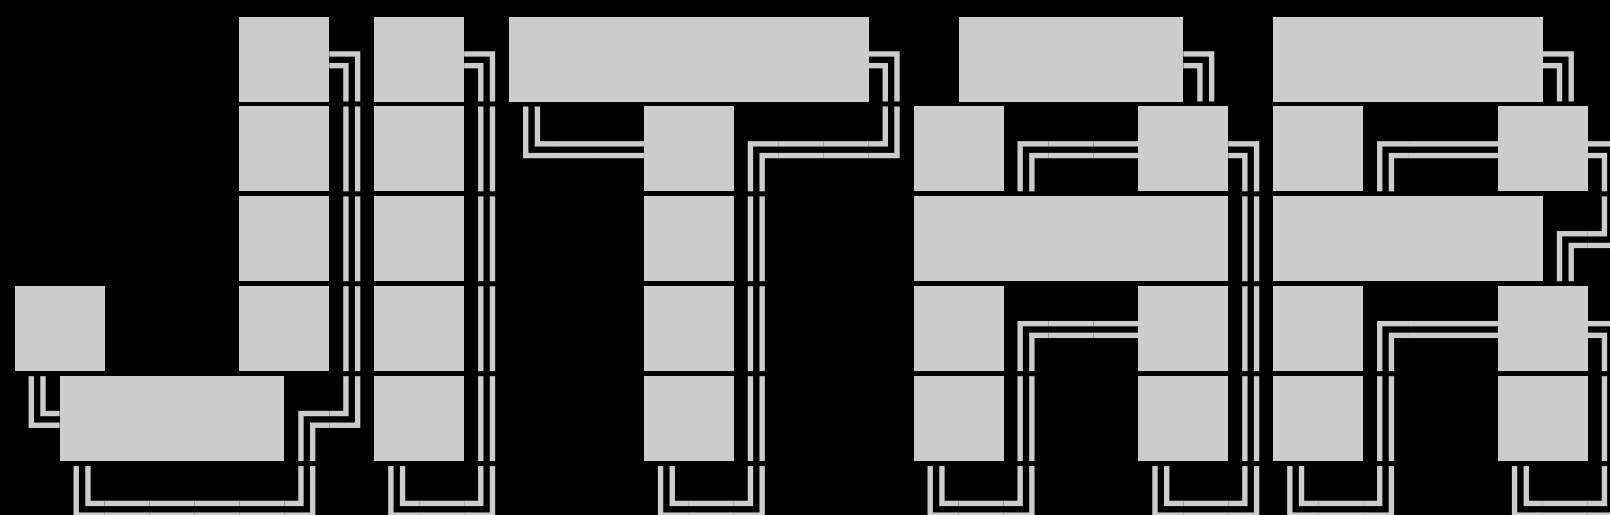app> npm run standalone

TERMINAL

JITAA

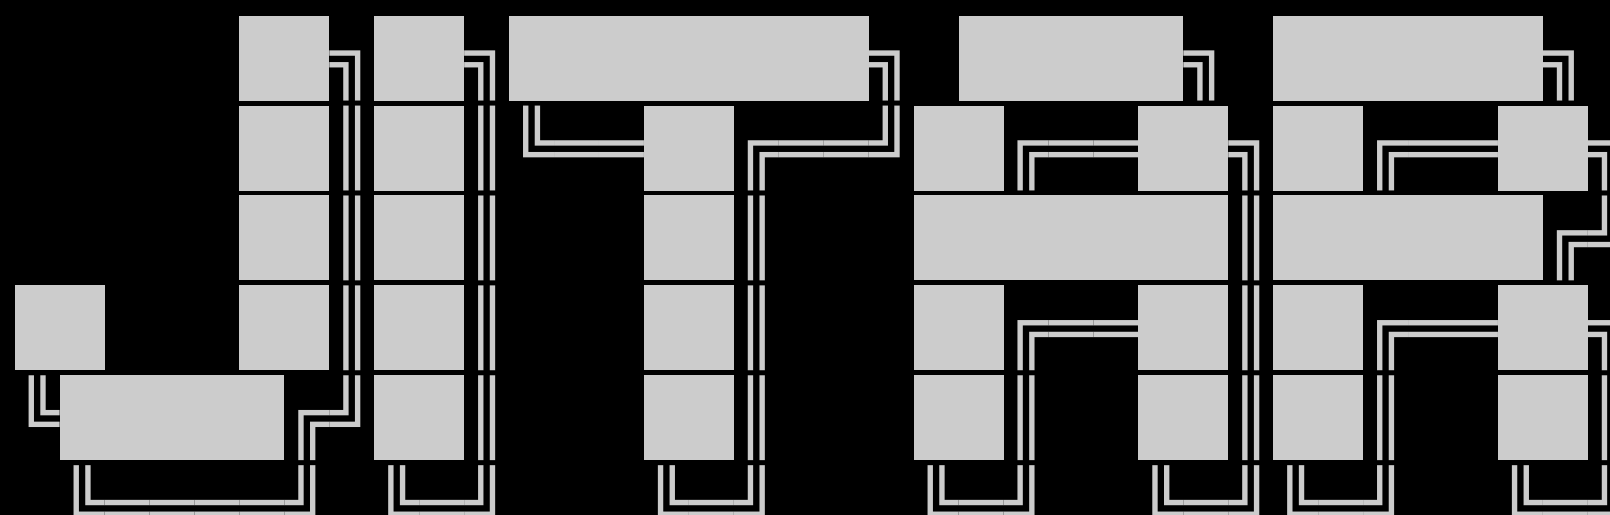~ Distributed JavaScript Runtime ~

JITAR

~ Distributed JavaScript Runtime ~

TERMINAL

JITAR

~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:3000

```
 ▄█   █▄   ▄█  ▄█▄    ▄████▄
███   ███ ███ ███▀▄  ███▄▄███
███   ███ ███  █▀    ███▀▀███
 ▀██████▀  ███       ███  ███
```

~ Distributed JavaScript Runtime ~

_____
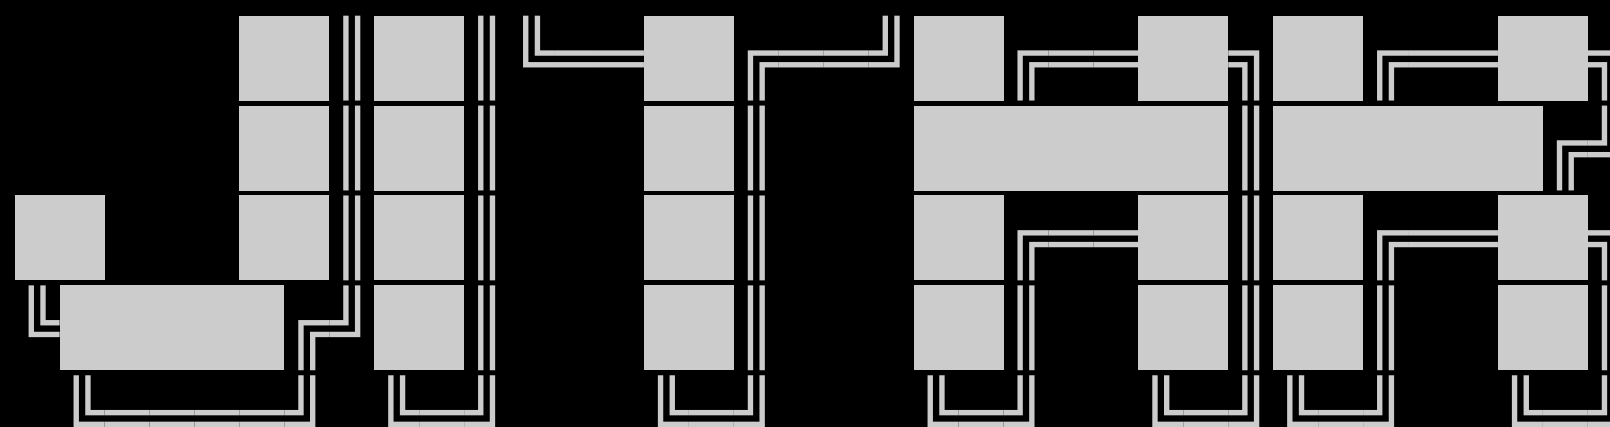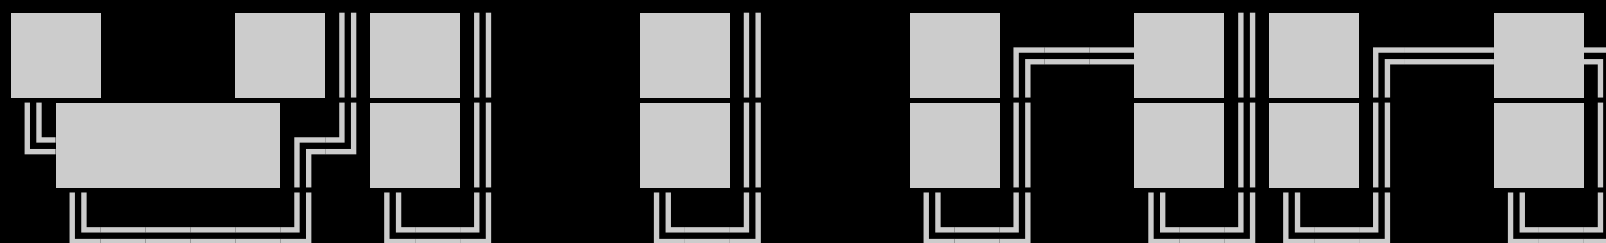
[INFO] Server started at http://127.0.0.1:3000
[INFO] RPC procedures: [
█

TERMINAL

```
~ Distributed JavaScript Runtime ~

_____
[INFO] Server started at http://127.0.0.1:3000
[INFO] RPC procedures: [
  sayHello
```

~ Distributed JavaScript Runtime ~

_____
[INFO] Server started at http://127.0.0.1:3000
[INFO] RPC procedures: [
  sayHello
]