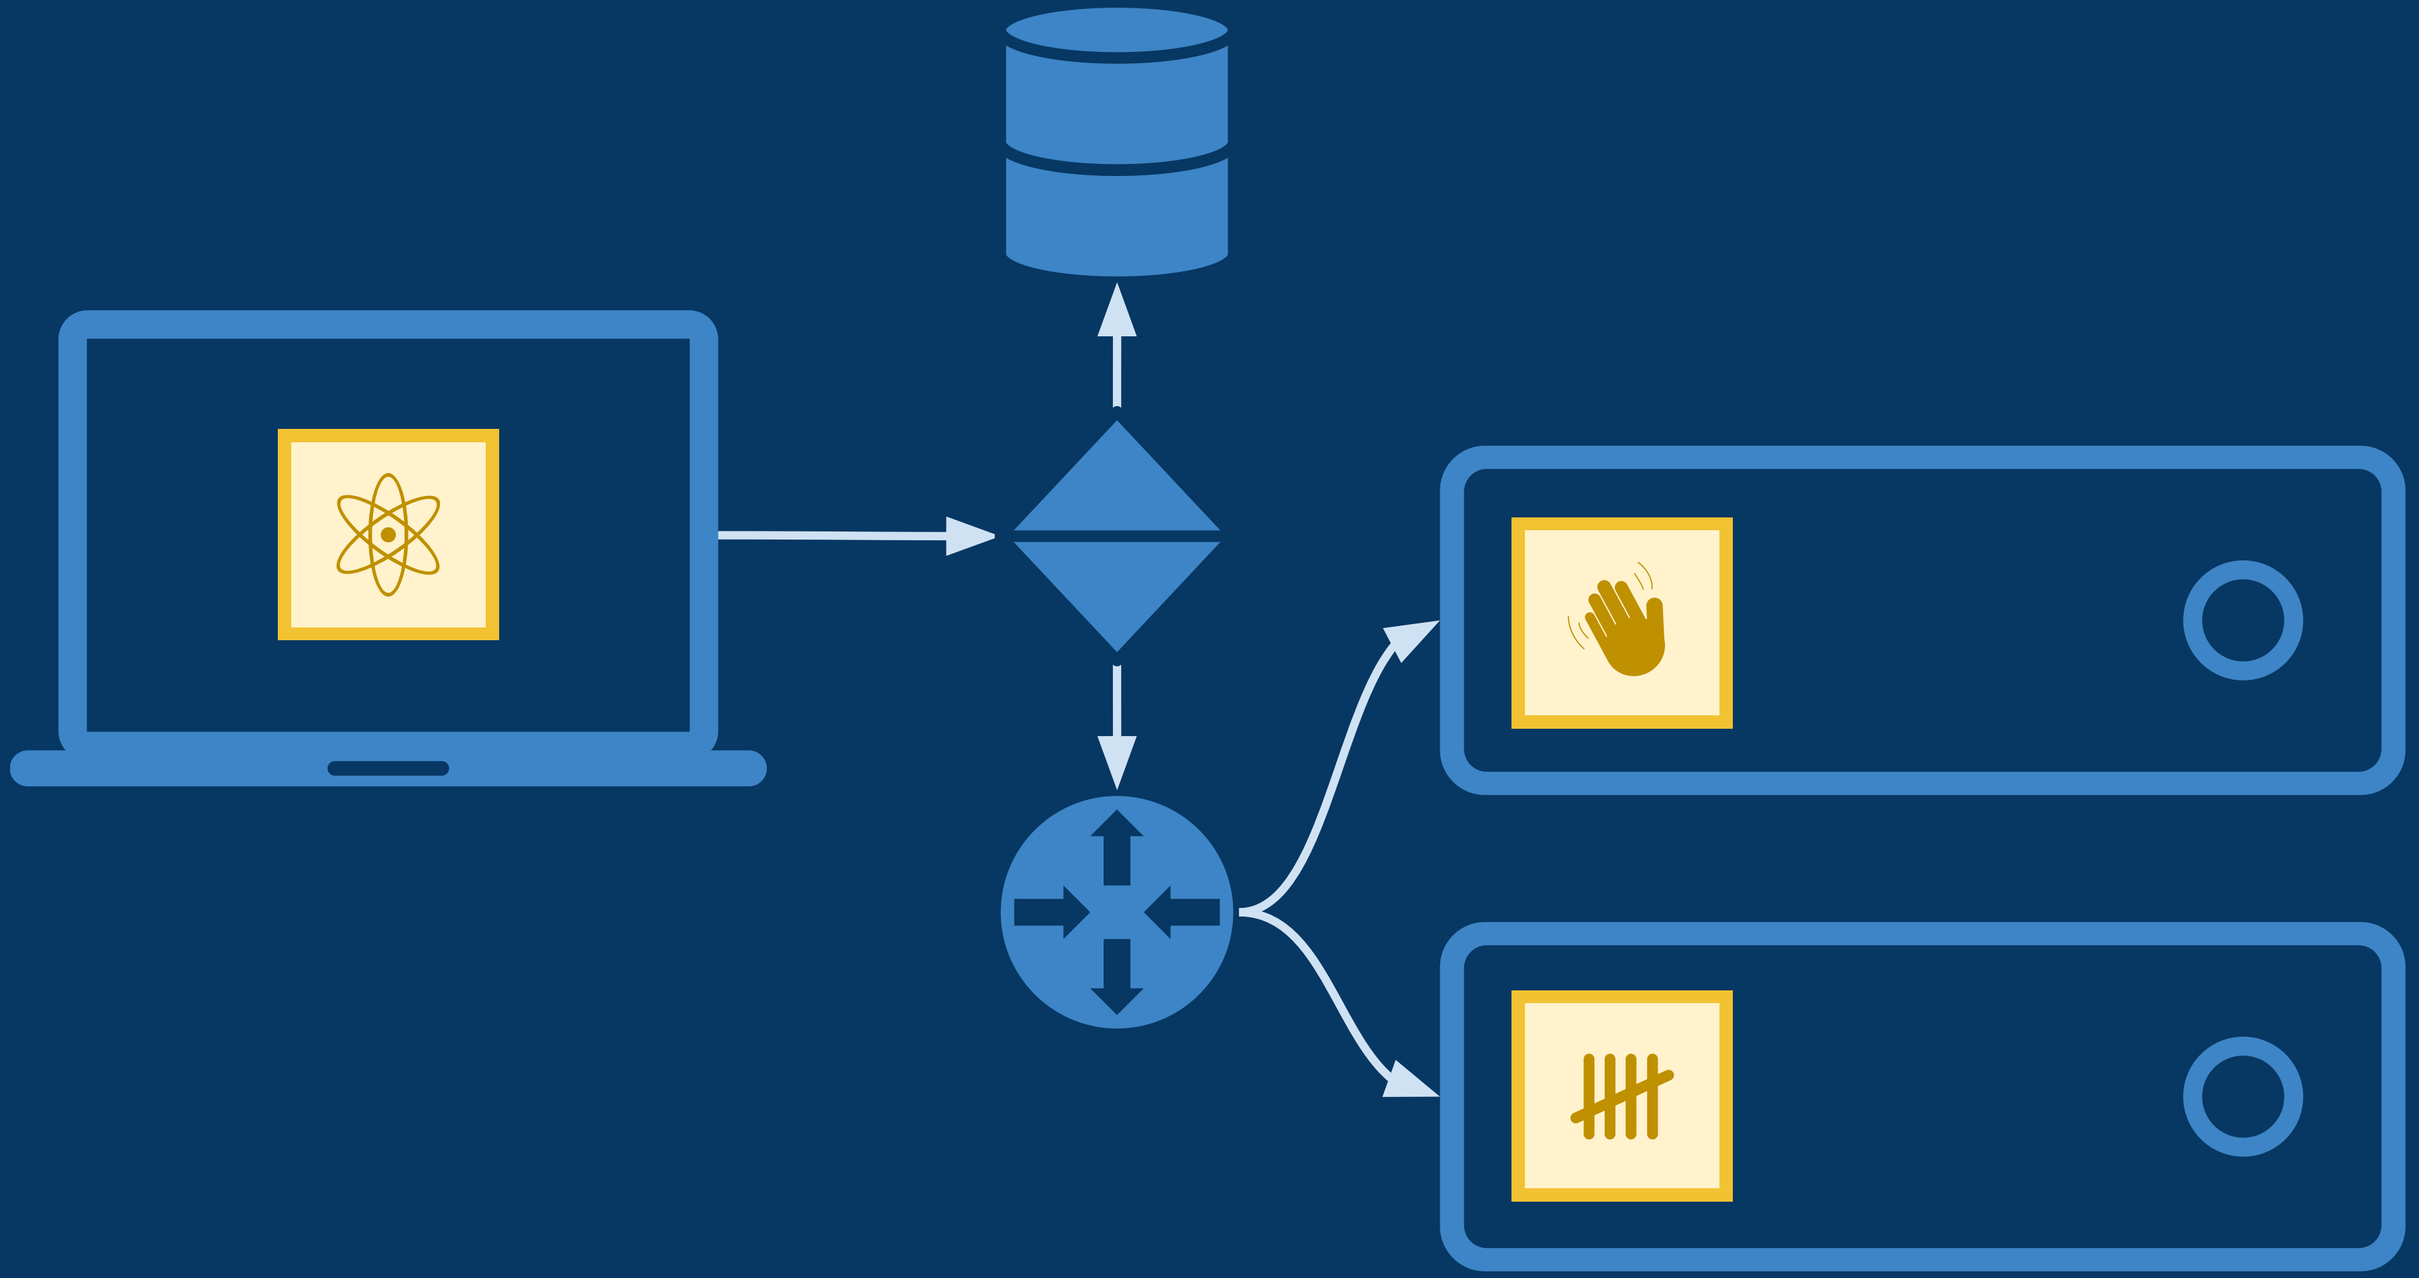

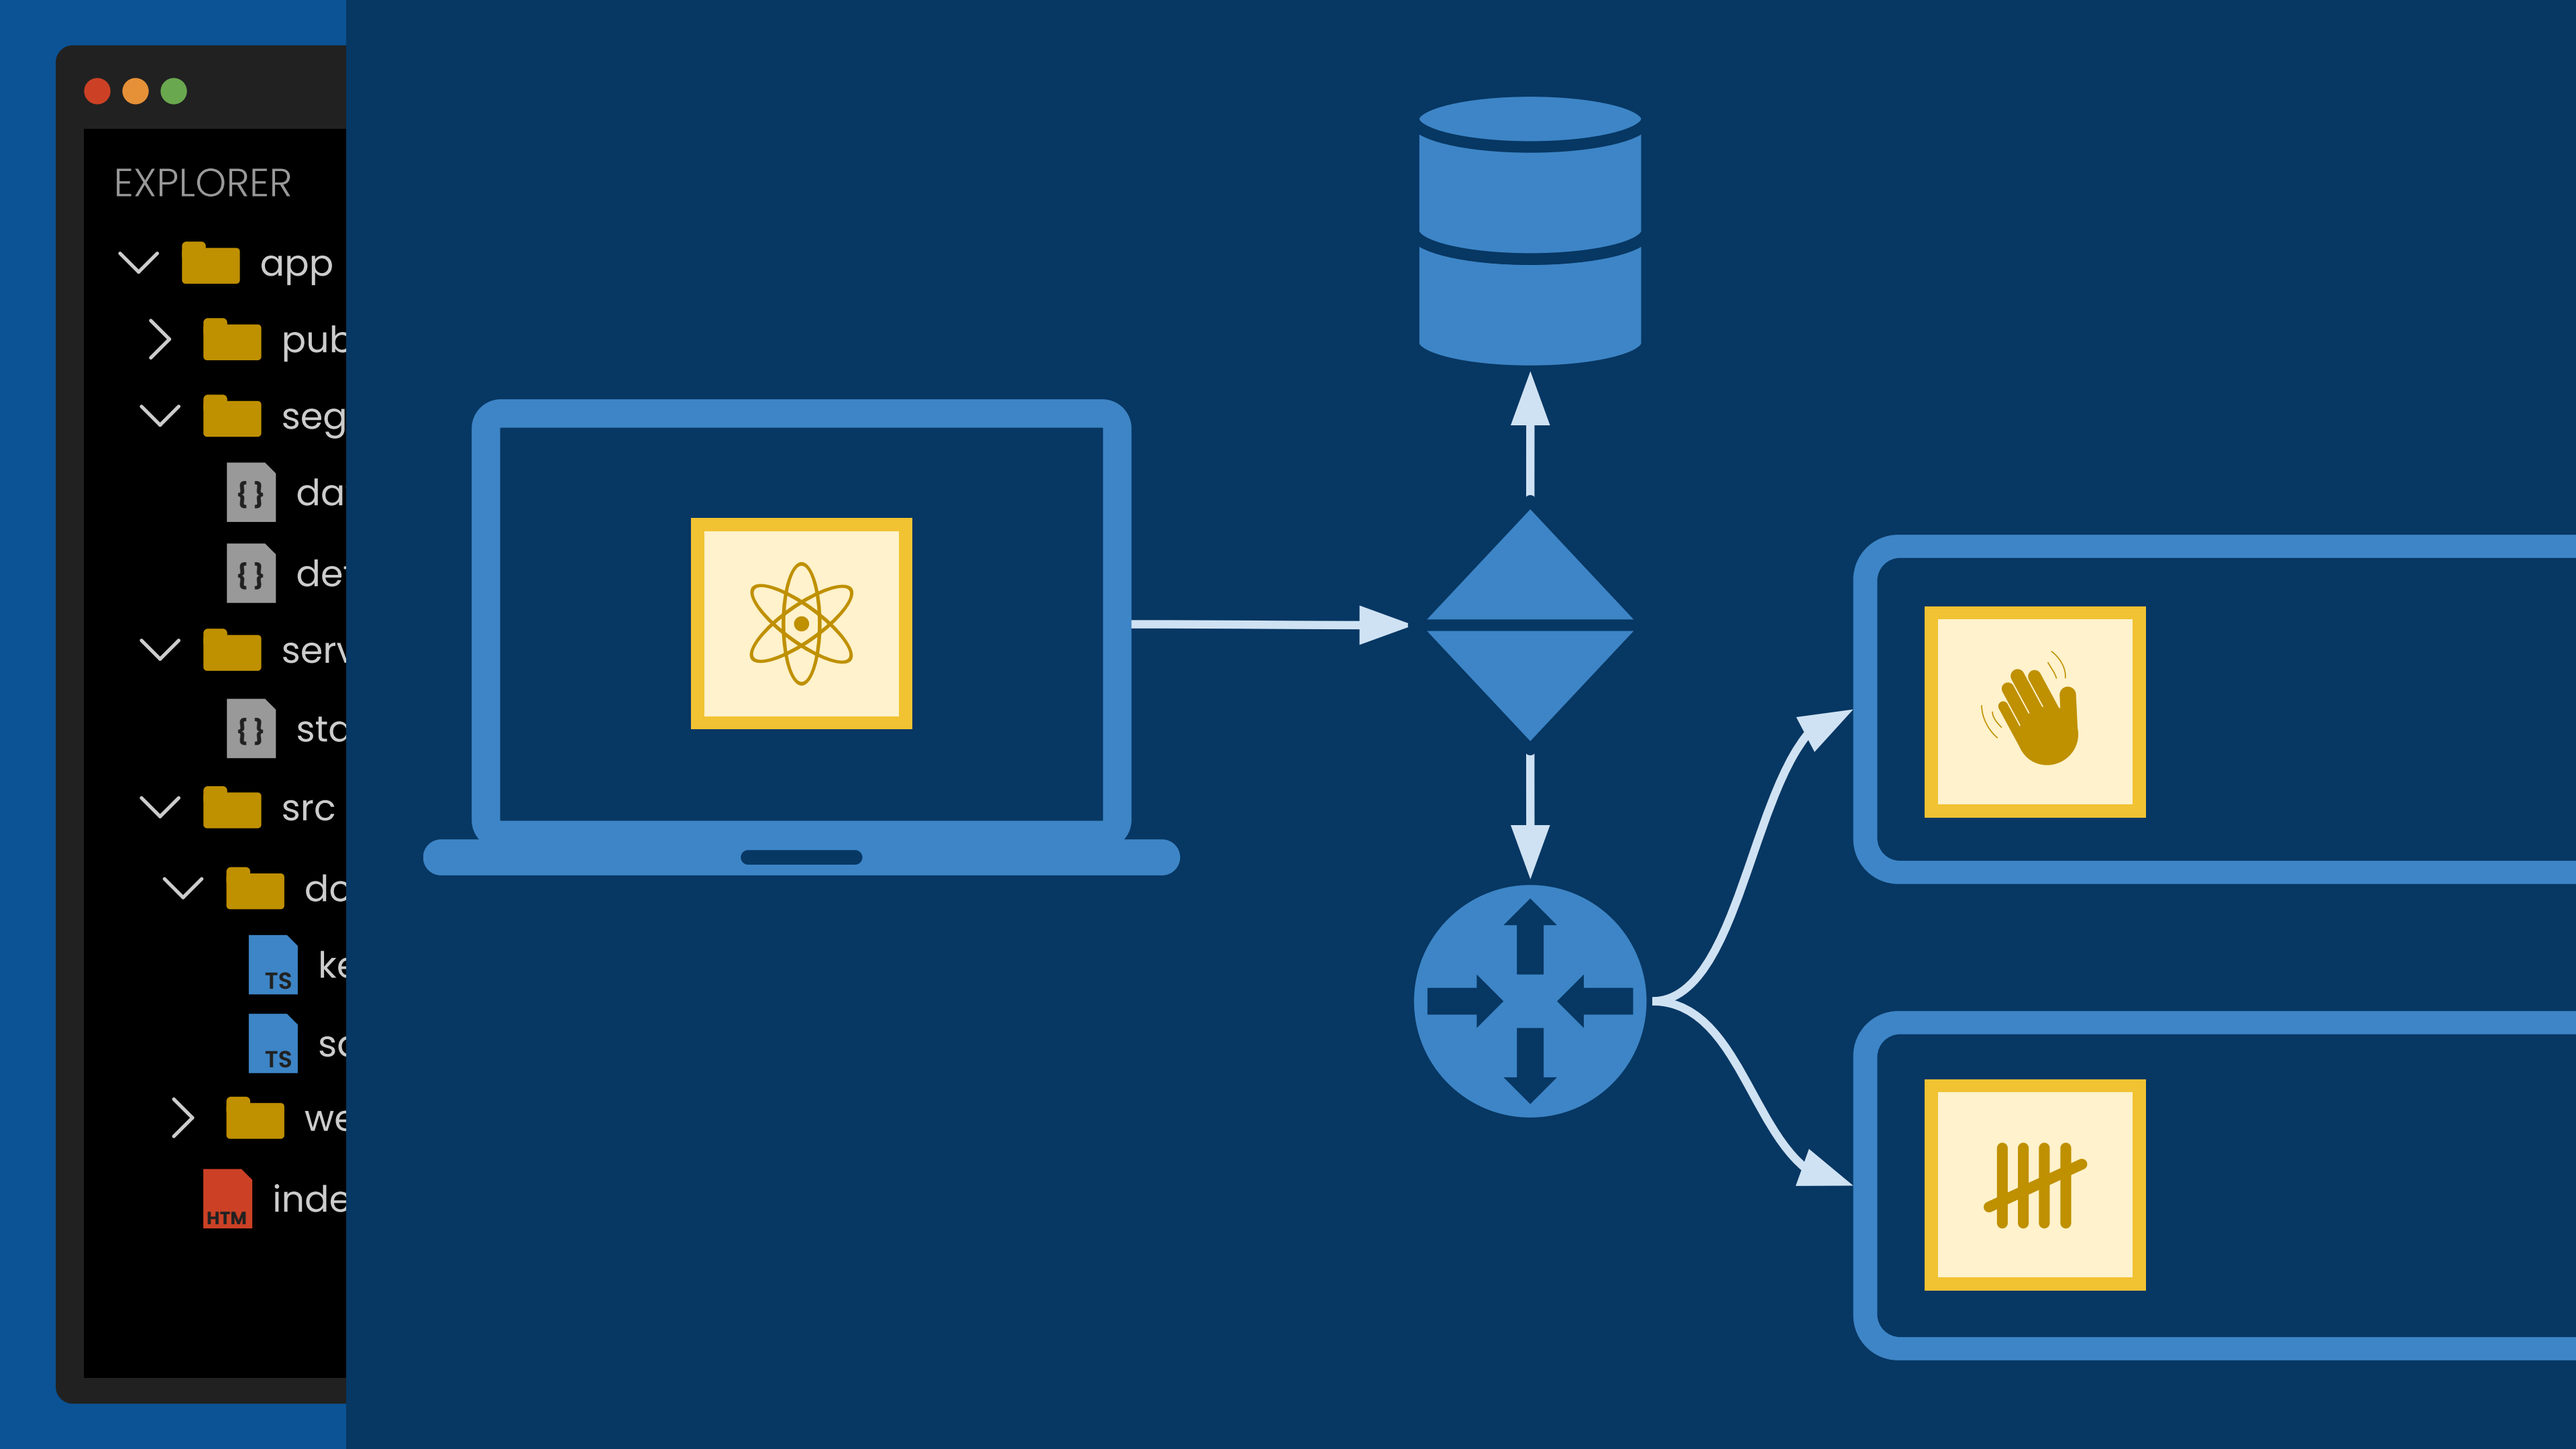
EXPLORER
app
pub
seg
da
de
serv
sto
src
do
ke
sc
we
inde
HTM
TS
TS

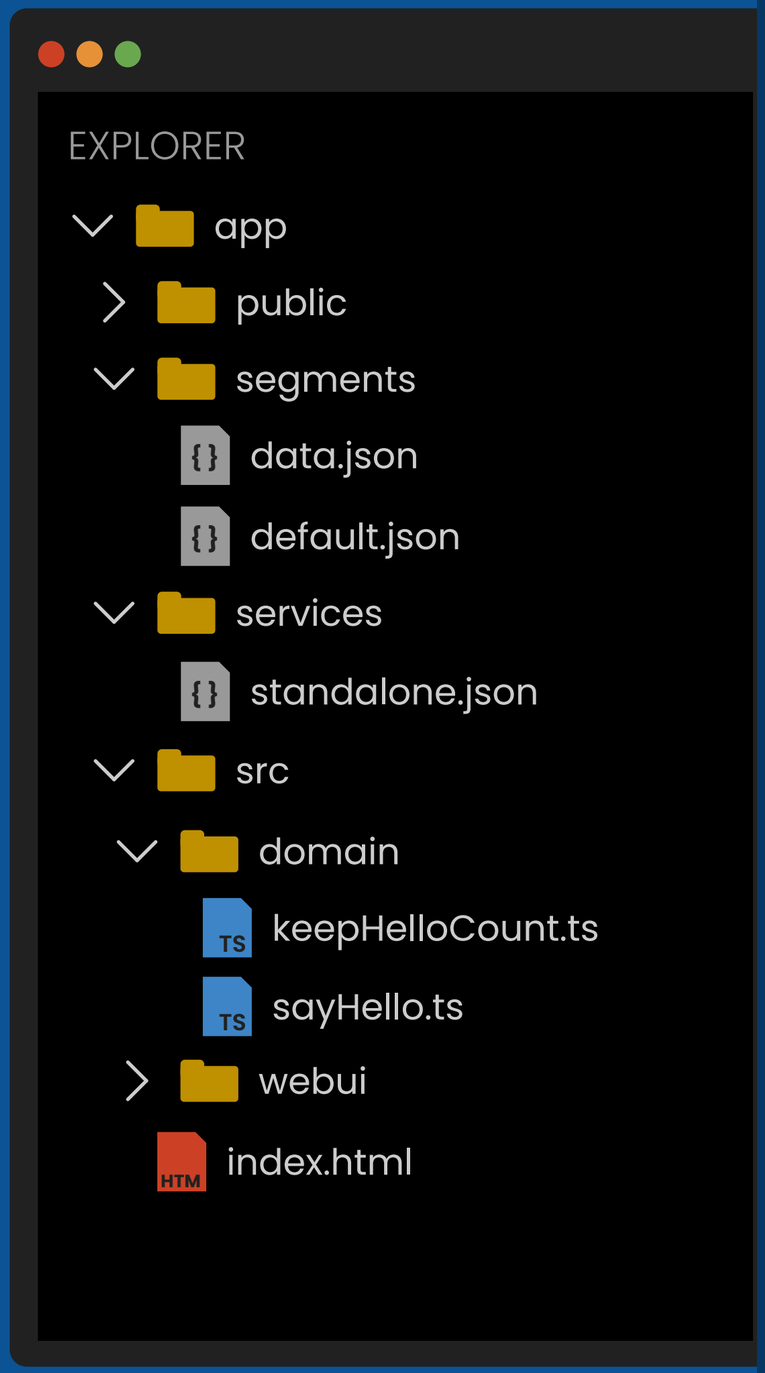
EXPLORER
app
public
segments
data.json
default.json
services
standalone.json
src
domain
keepHelloCount.ts
sayHello.ts
webui
index.html

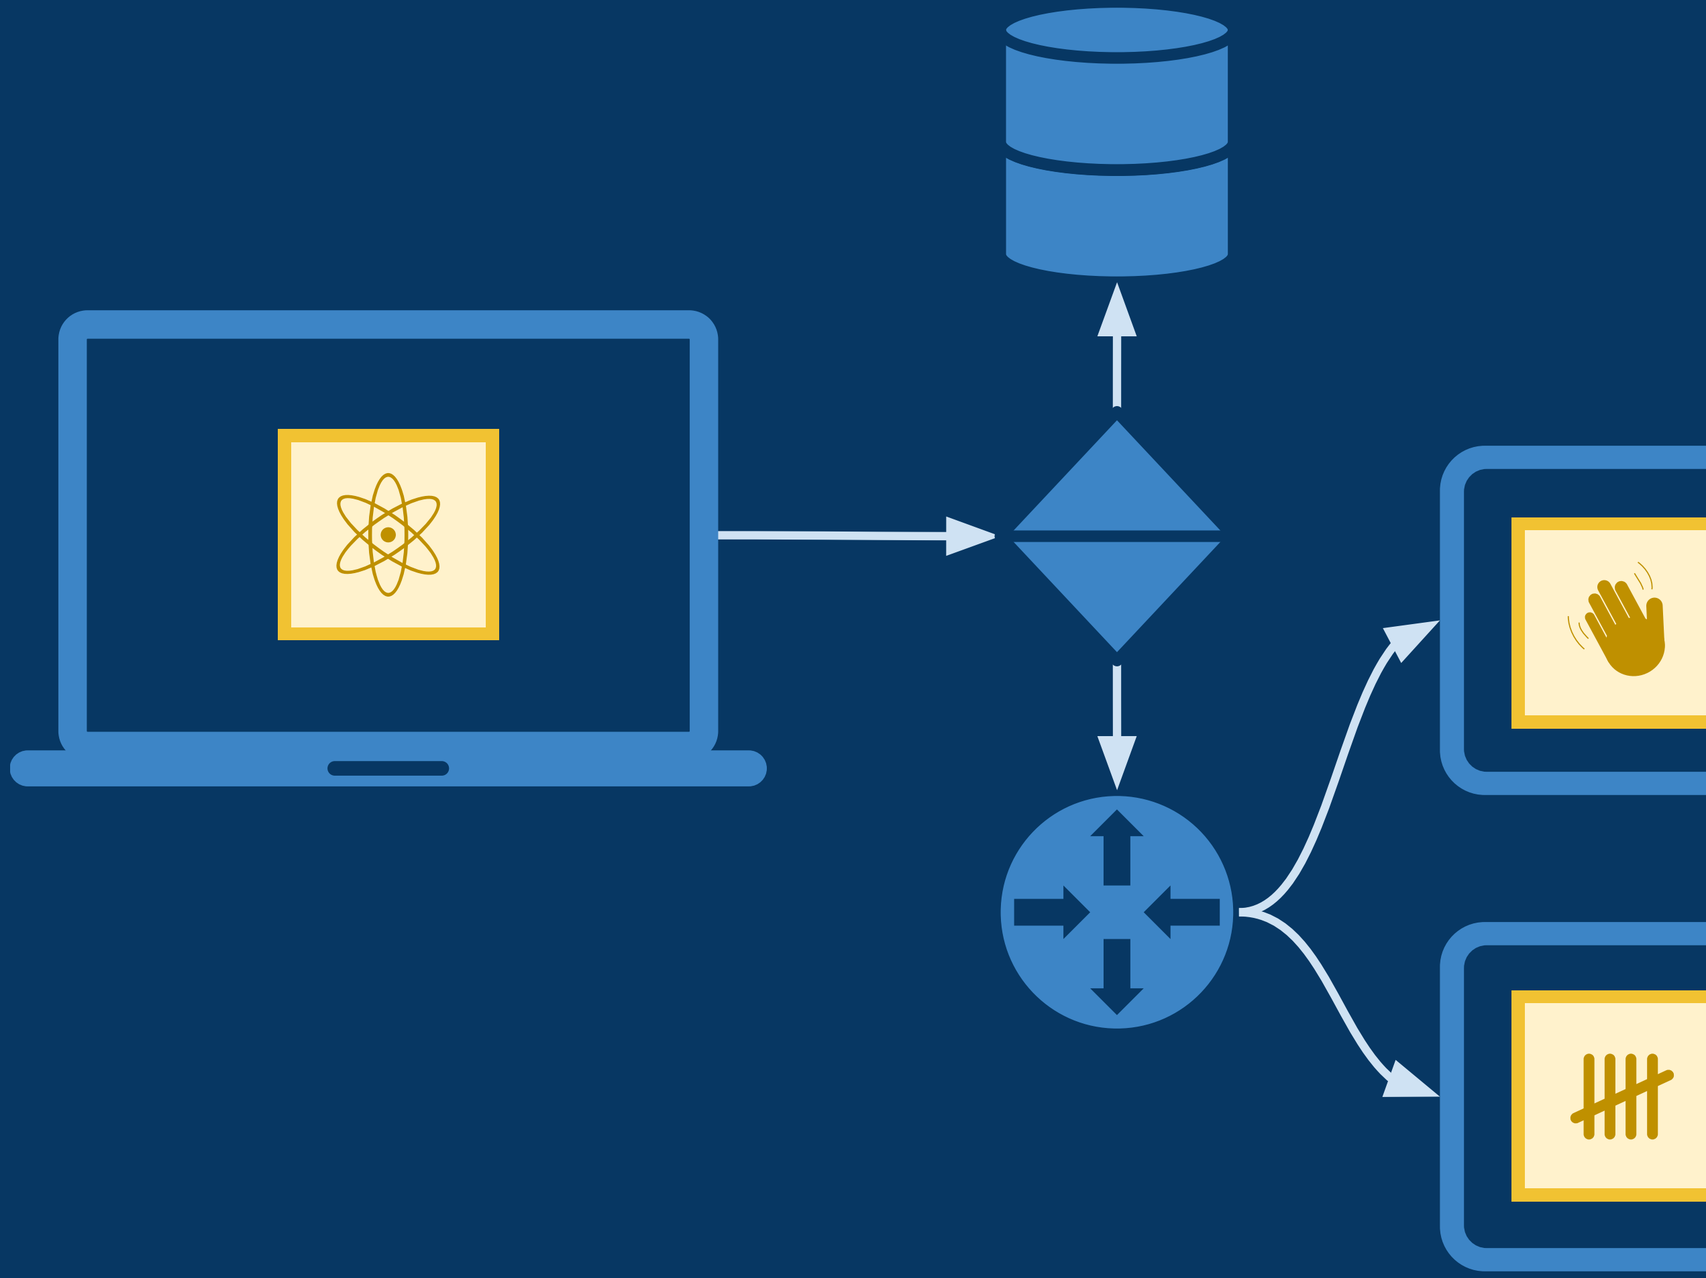

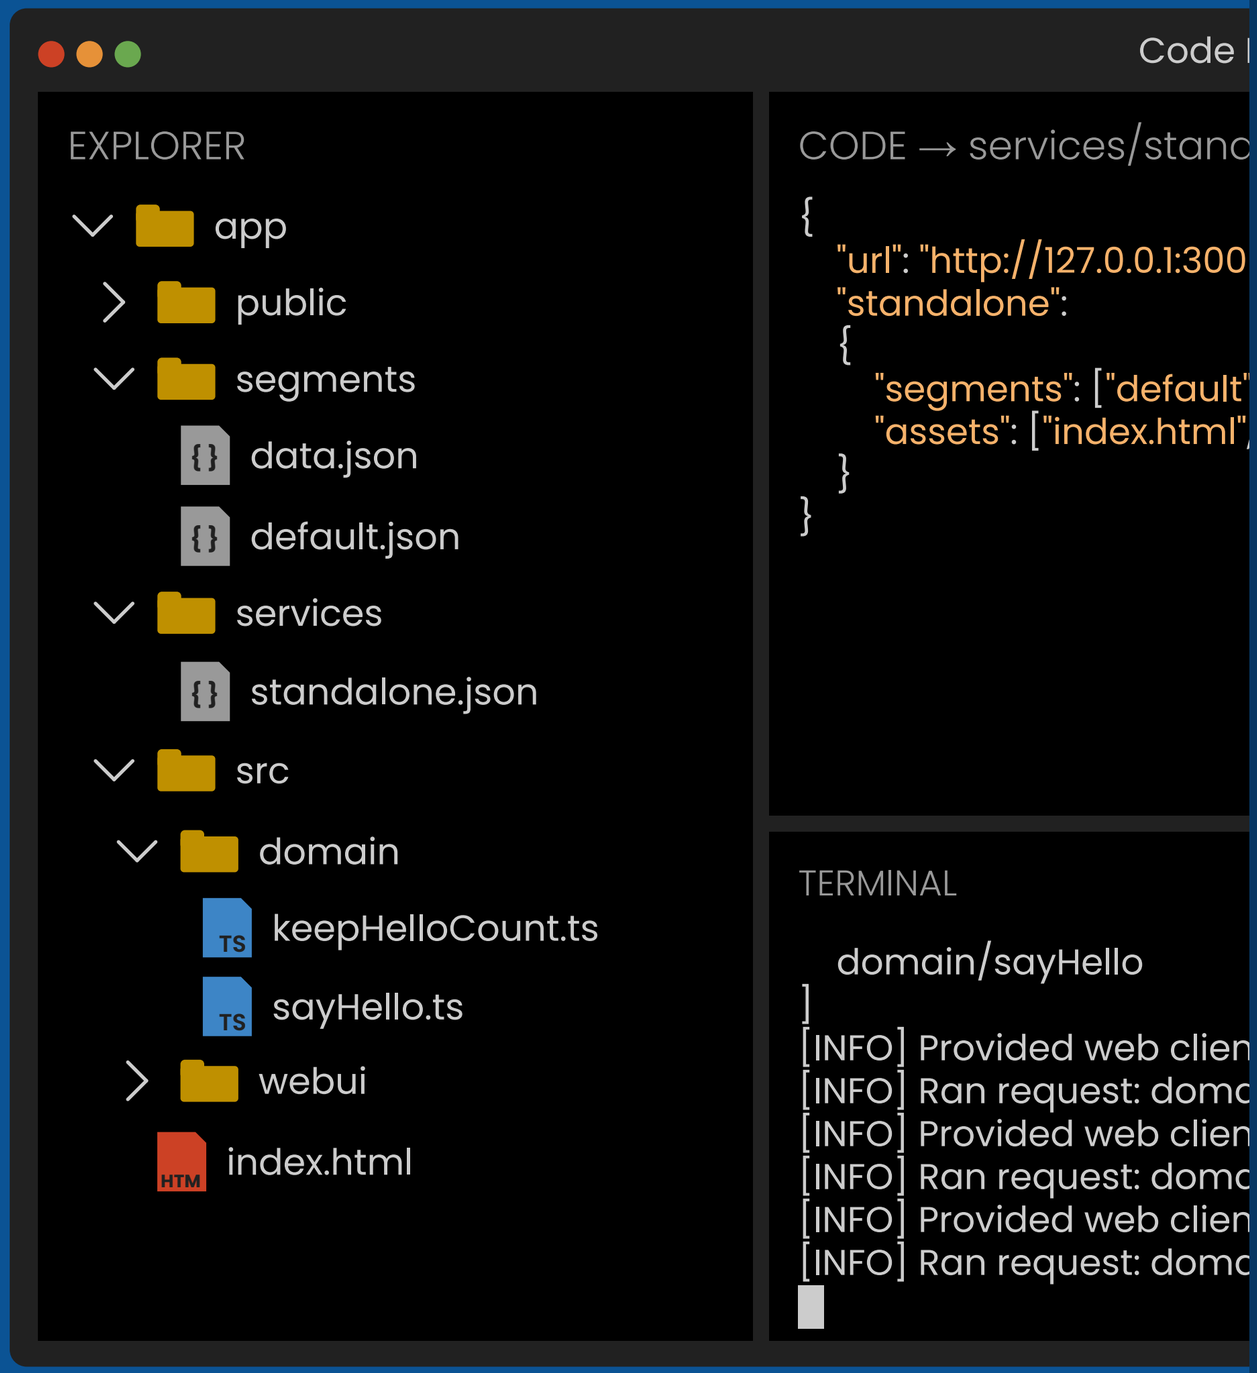
EXPLORER
app
public
segments
data.json
default.json
services
standalone.json
src
domain
keepHelloCount.ts
sayHello.ts
webui
index.html
CODE → services/stanc
{
"url": "http://127.0.0.1:300
"standalone":
{
"segments": ["default"
"assets": ["index.html"
}
}
TERMINAL
domain/sayHello
]
[INFO] Provided web clien
[INFO] Ran request: domc
[INFO] Provided web clien
[INFO] Ran request: domc
[INFO] Provided web clien
[INFO] Ran request: domc

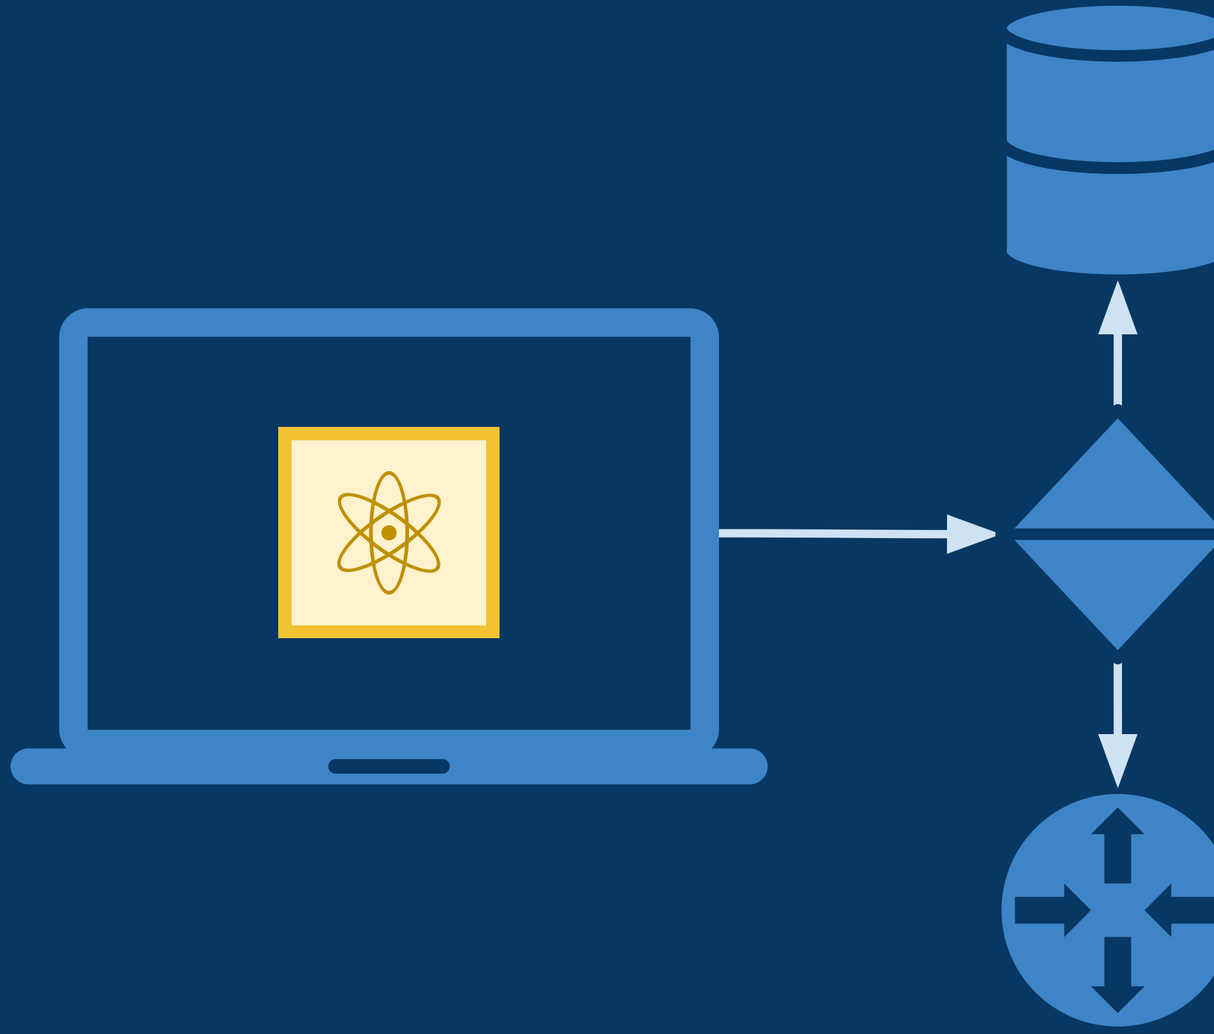

Code Editor

EXPLORER

- app
  - public
  - segments
    - data.json
    - default.json
  - services
    - standalone.json
  - src
    - domain
      - keepHelloCount.ts
      - sayHello.ts
    - webui
  - index.html

CODE → services/standalone.json

```
{
  "url": "http://127.0.0.1:3000",
  "standalone":
  {
    "segments": ["default", "data"],
    "assets": ["index.html", "vite.svg", "assets/**/*"]
  }
}
```

TERMINAL

```
  domain/sayHello
]
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
```

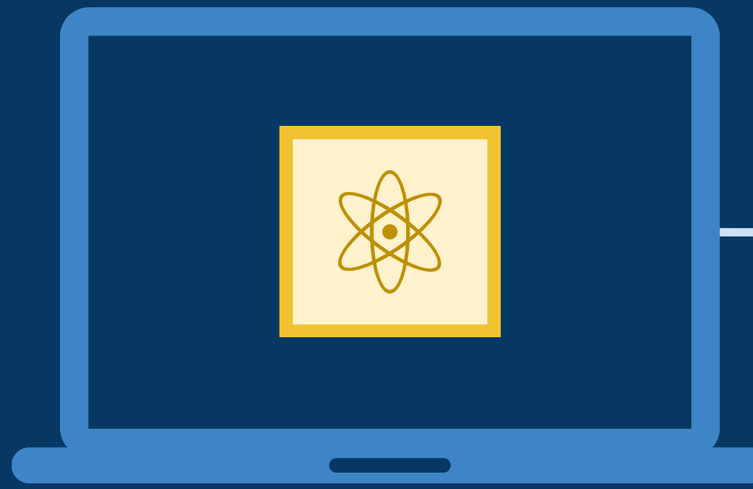

Code Editor

EXPLORER

- app
  - public
  - segments
    - data.json
    - default.json
  - services
    - standalone.json
  - src
    - domain
      - keepHelloCount.ts
      - sayHello.ts
    - webui
  - index.html

CODE → services/standalone.json

```
{
  "url": "http://127.0.0.1:3000",
  "standalone":
  {
    "segments": ["default", "data"],
    "assets": ["index.html", "vite.svg", "assets/**/*"]
  }
}
```

TERMINAL

```
  domain/sayHello
]
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
```

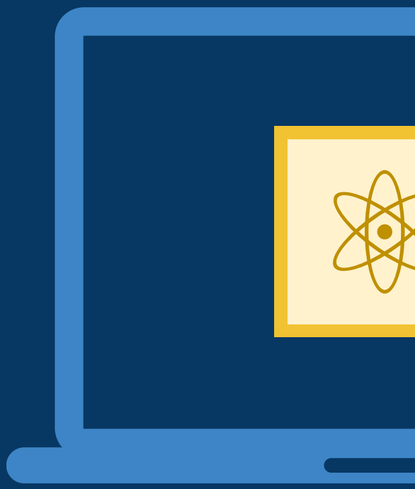

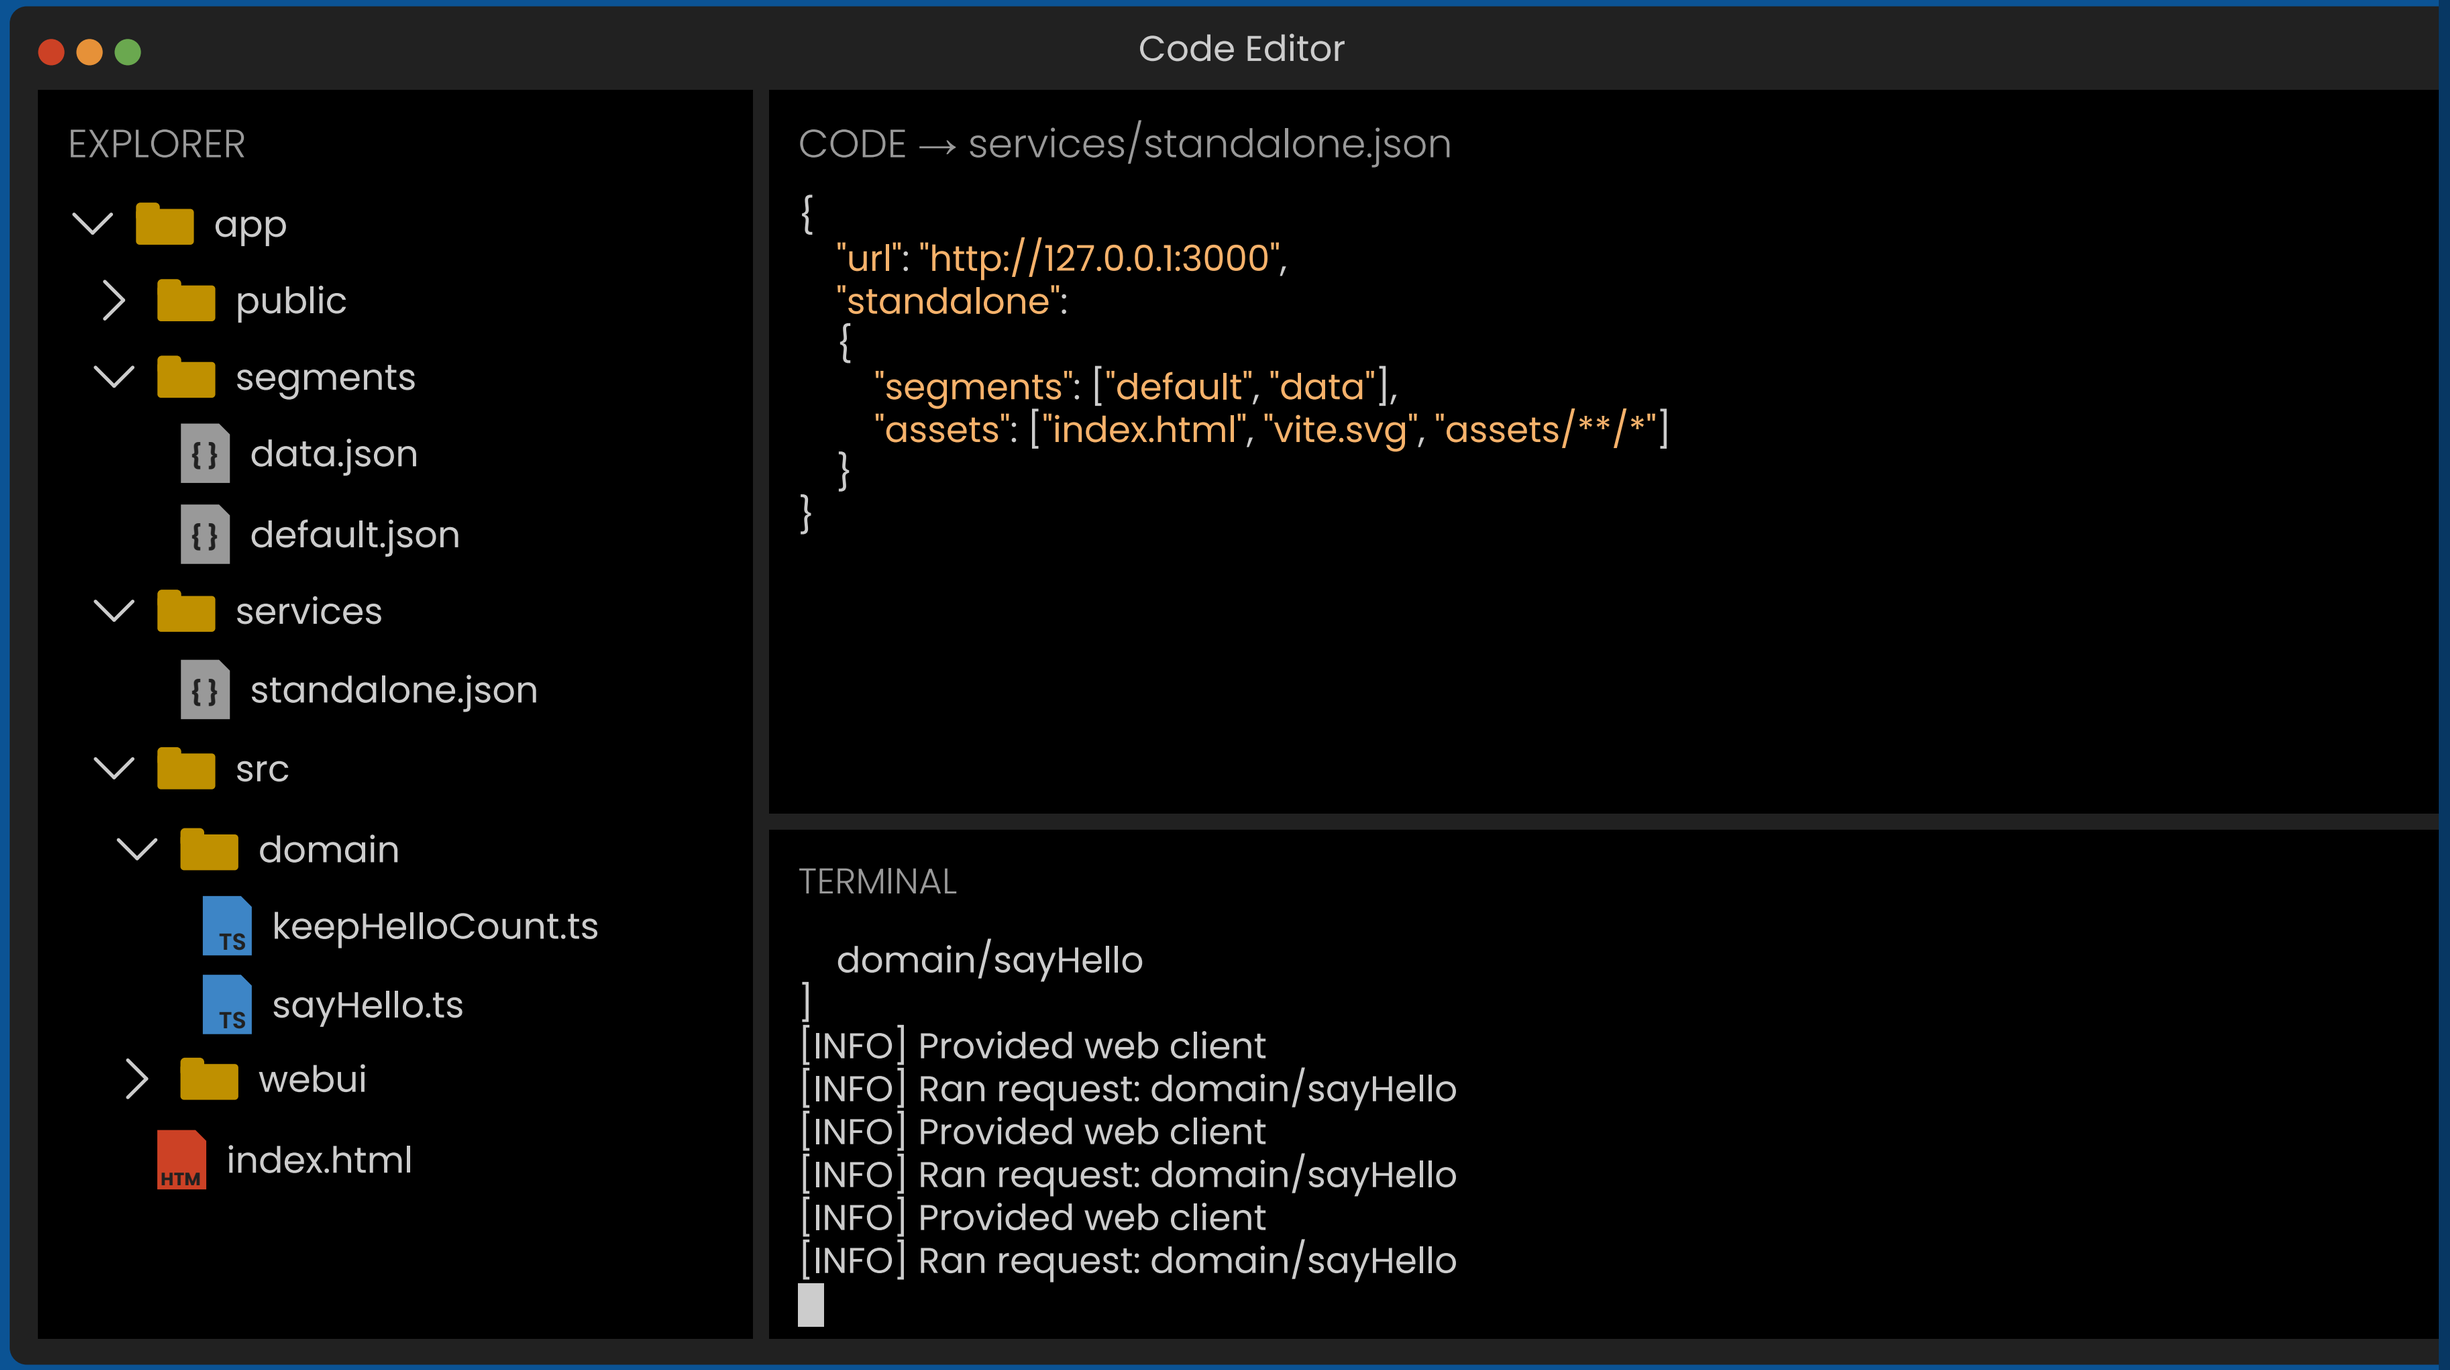
Code Editor
EXPLORER
app
public
segments
data.json
default.json
services
standalone.json
src
domain
keepHelloCount.ts
sayHello.ts
webui
index.html
CODE → services/standalone.json
{
"url": "http://127.0.0.1:3000",
"standalone":
{
"segments": ["default", "data"],
"assets": ["index.html", "vite.svg", "assets/**/*"]
}
}
TERMINAL
domain/sayHello
]
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
[INFO] Provided web client
[INFO] Ran request: domain/sayHello

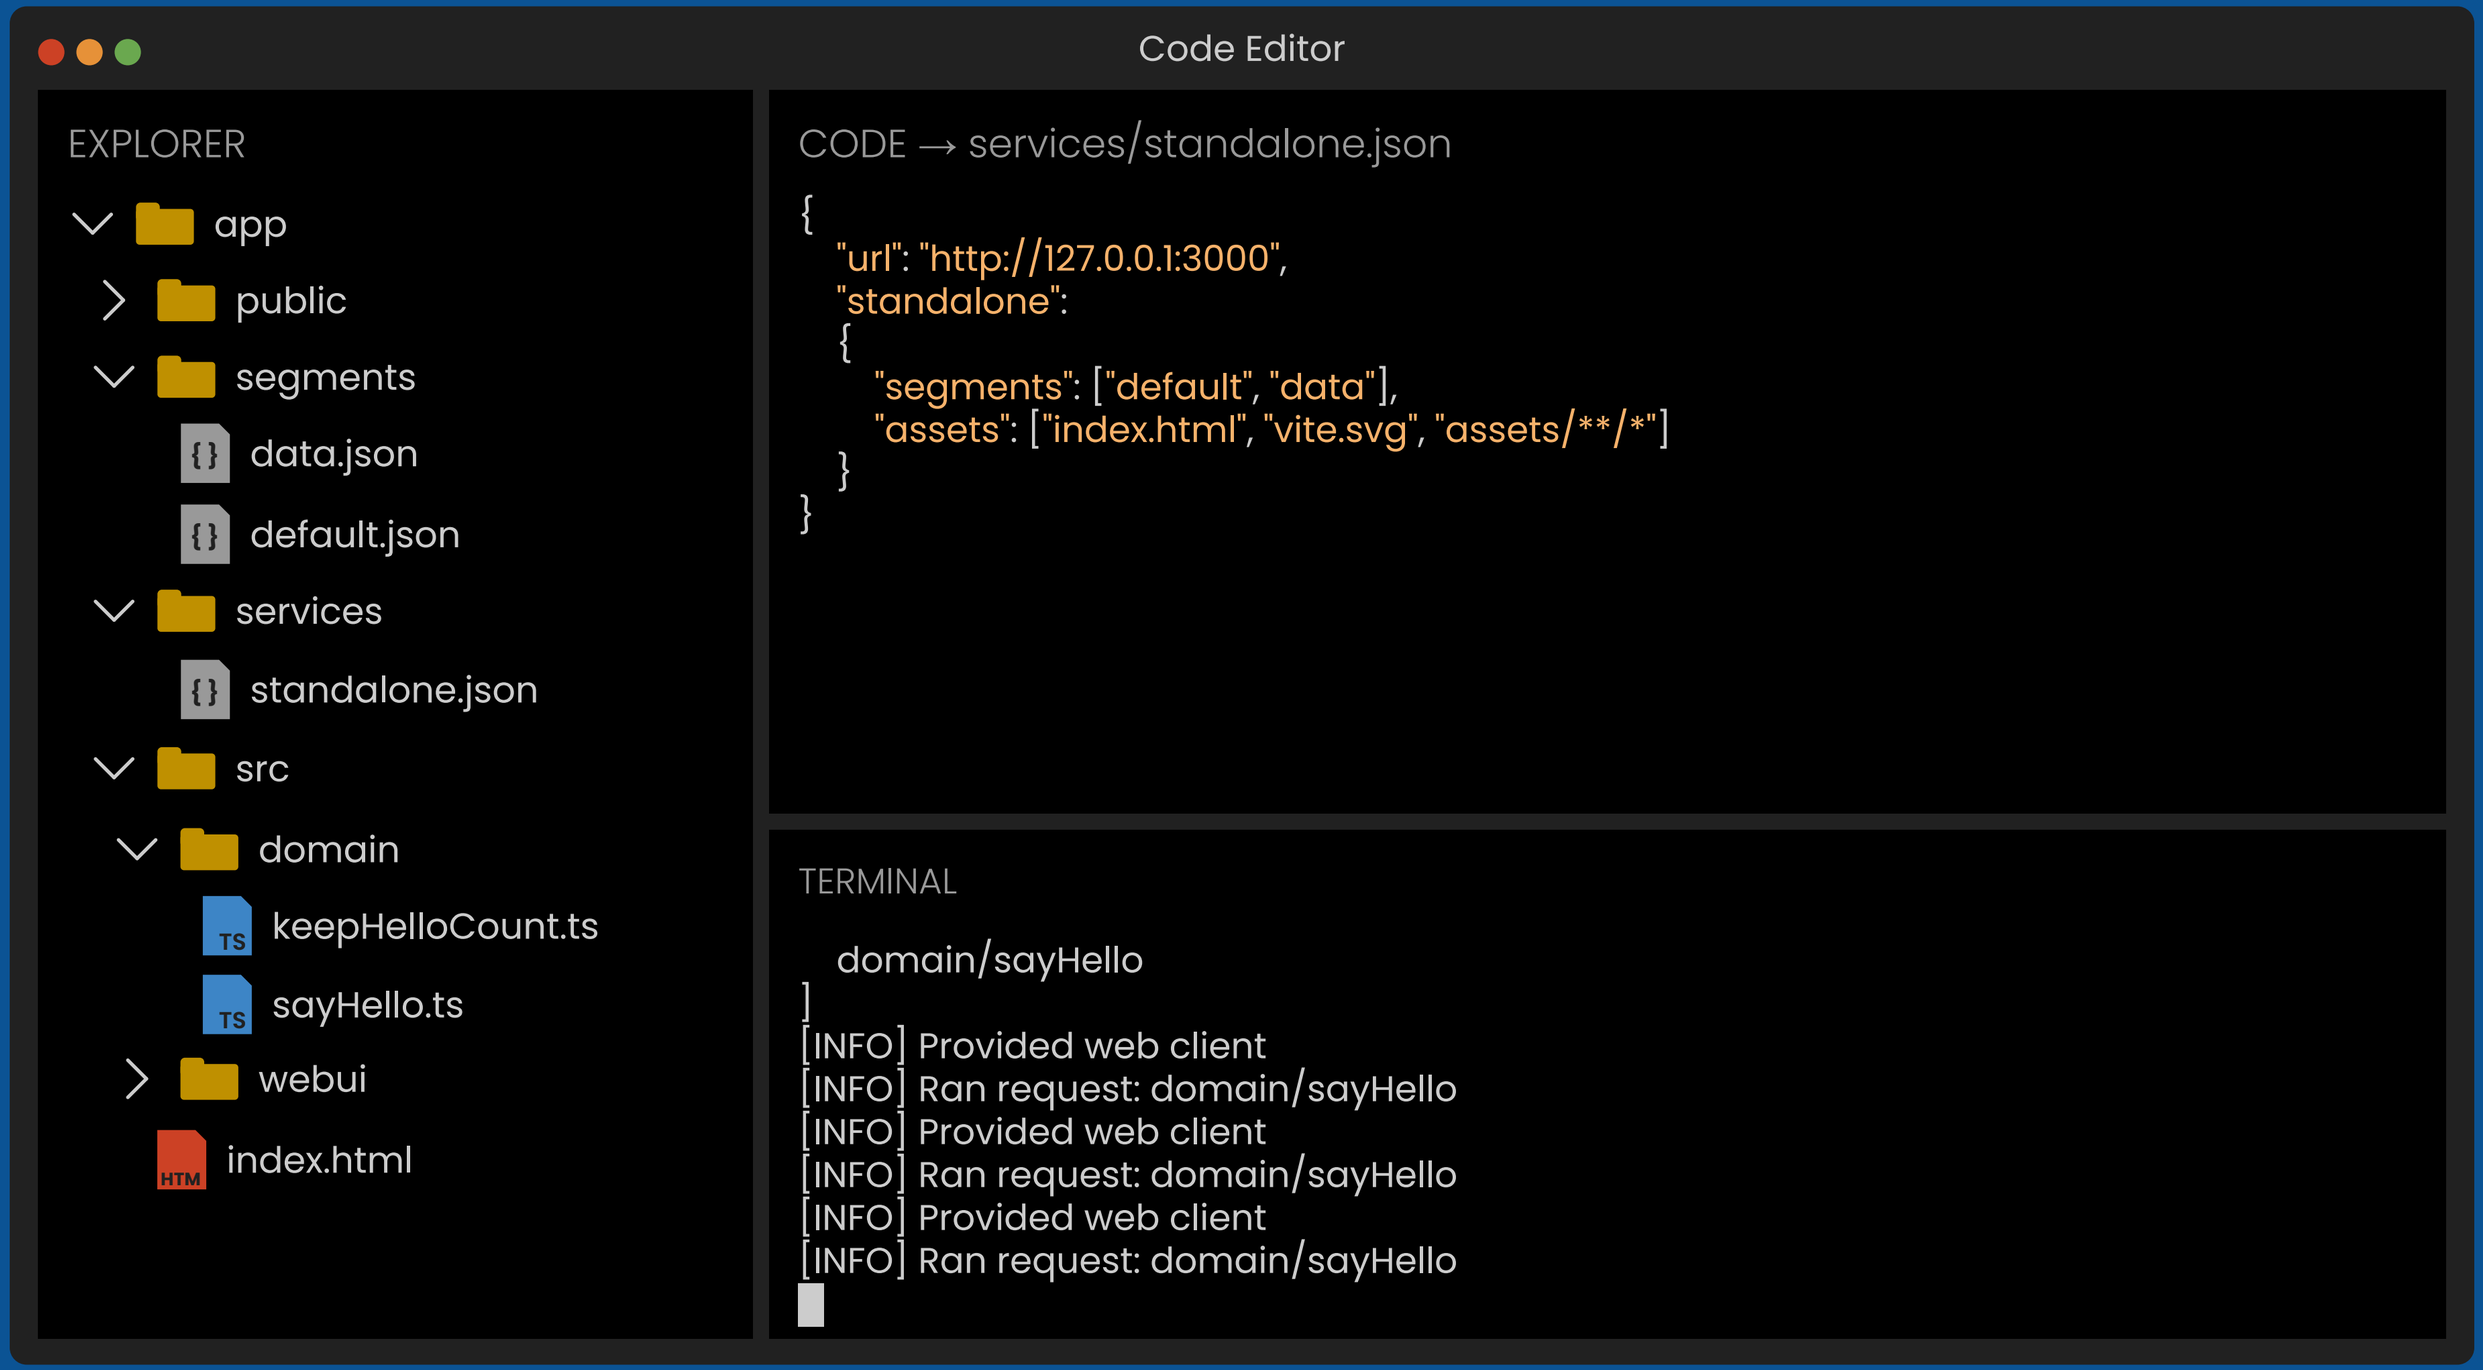
Code Editor
EXPLORER
app
public
segments
data.json
default.json
services
standalone.json
src
domain
keepHelloCount.ts
sayHello.ts
webui
index.html
CODE → services/standalone.json
{
"url": "http://127.0.0.1:3000",
"standalone":
{
"segments": ["default", "data"],
"assets": ["index.html", "vite.svg", "assets/**/*"]
}
}
TERMINAL
domain/sayHello
]
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
[INFO] Provided web client
[INFO] Ran request: domain/sayHello

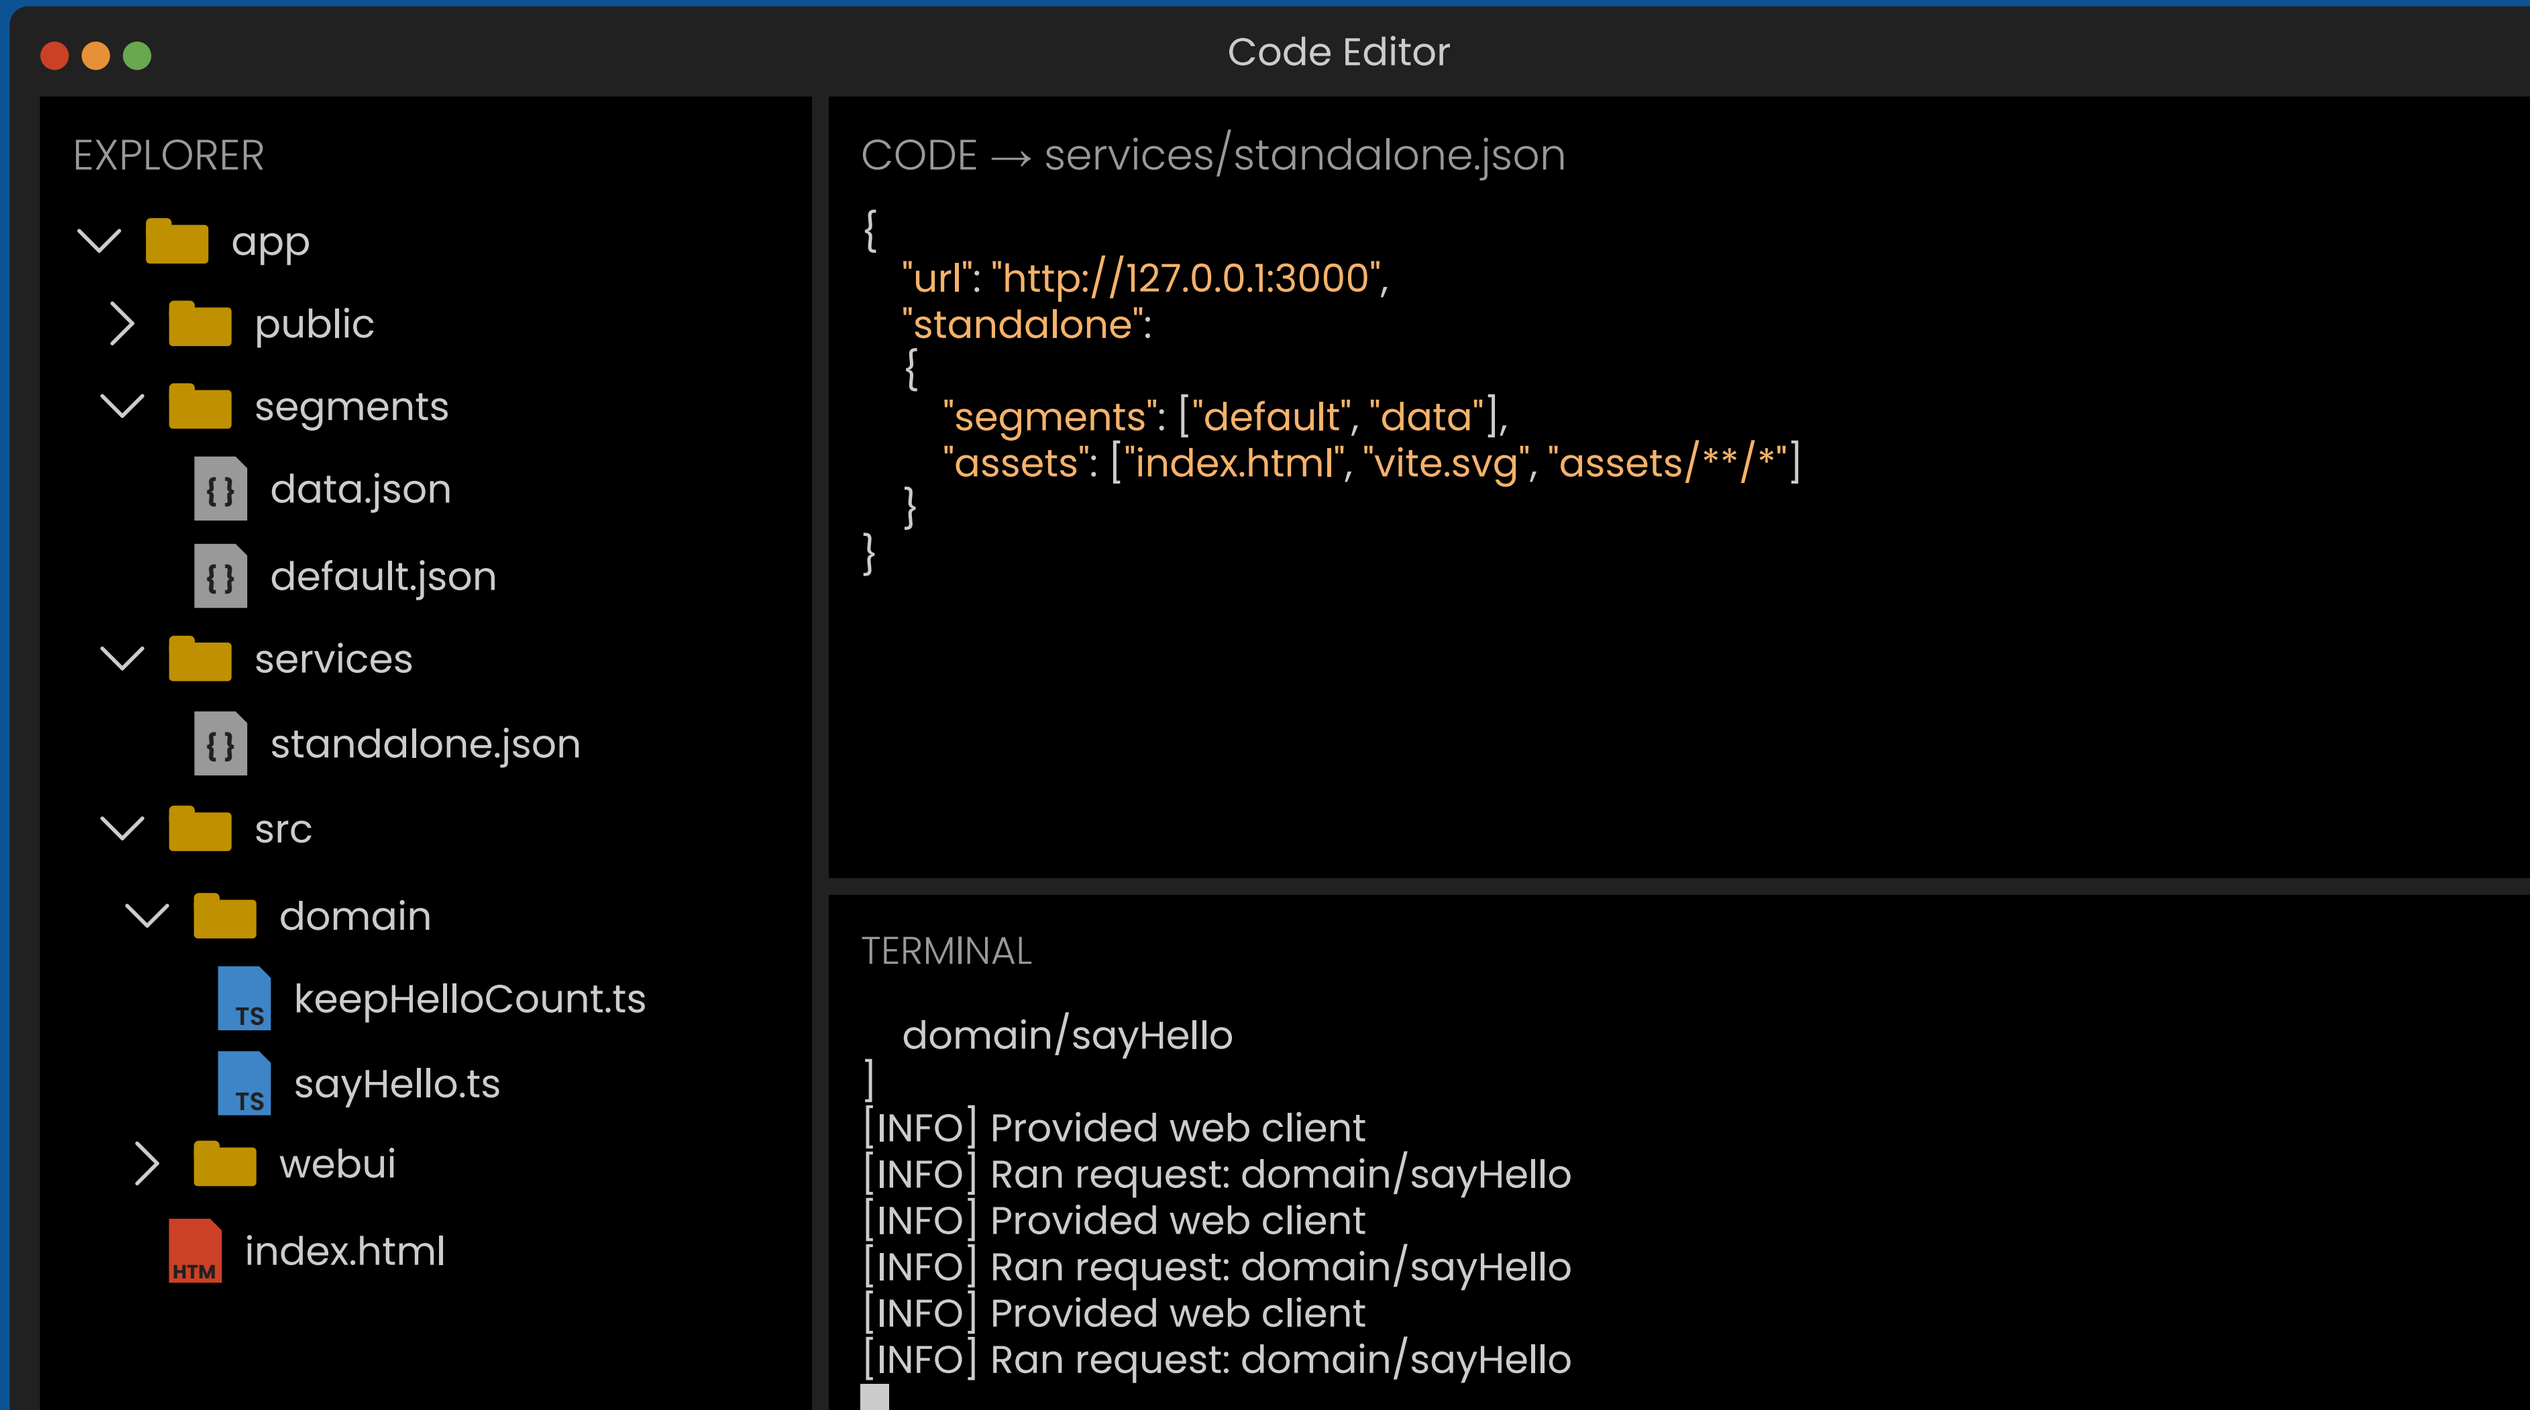
Code Editor
EXPLORER
app
public
segments
data.json
default.json
services
standalone.json
src
domain
keepHelloCount.ts
sayHello.ts
webui
index.html
CODE → services/standalone.json
{
"url": "http://127.0.0.1:3000",
"standalone":
{
"segments": ["default", "data"],
"assets": ["index.html", "vite.svg", "assets/**/*"]
}
}
TERMINAL
domain/sayHello
]
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
[INFO] Provided web client
[INFO] Ran request: domain/sayHello

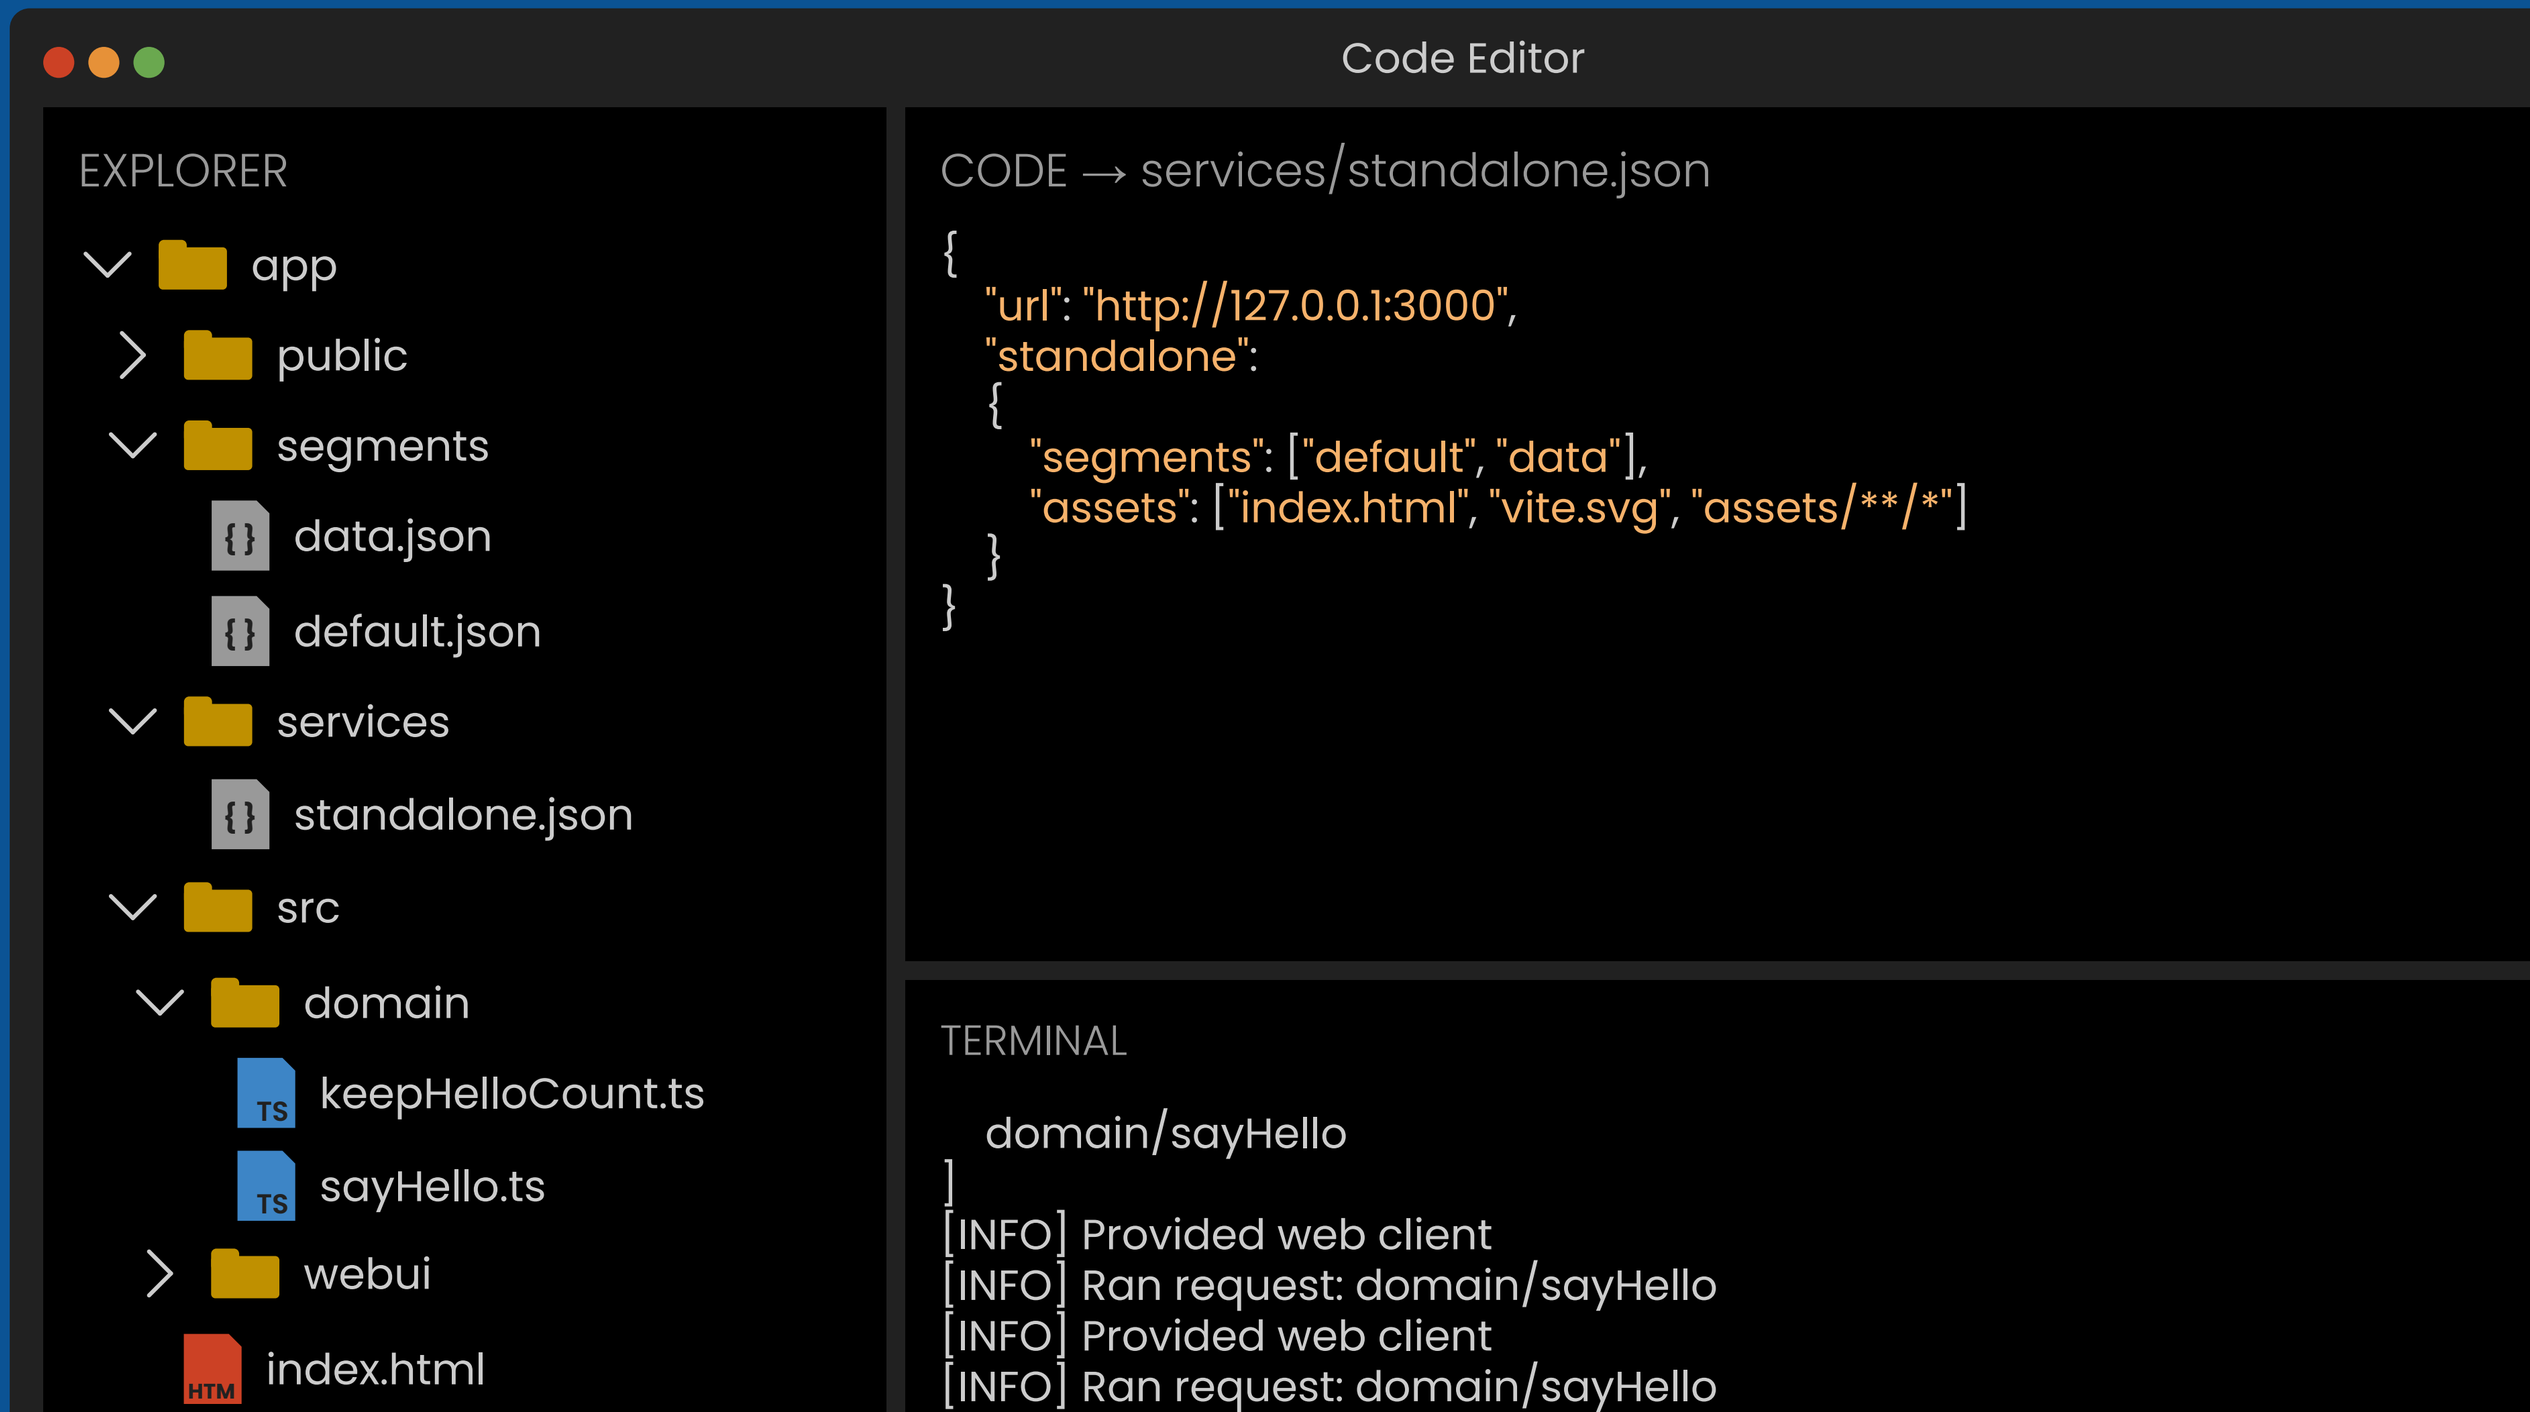
Code Editor
EXPLORER
app
public
segments
data.json
default.json
services
standalone.json
src
domain
keepHelloCount.ts
sayHello.ts
webui
index.html
CODE → services/standalone.json
{
"url": "http://127.0.0.1:3000",
"standalone":
{
"segments": ["default", "data"],
"assets": ["index.html", "vite.svg", "assets/**/*"]
}
}
TERMINAL
domain/sayHello
]
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
[INFO] Provided web client
[INFO] Ran request: domain/sayHello

Code Editor

EXPLORER

- app
  - public
  - segments
    - data.json
    - default.json
  - services
    - standalone.json
  - src
    - domain
      - keepHelloCount.ts
      - sayHello.ts
    - webui

CODE → services/standalone.json

```
{
  "url": "http://127.0.0.1:3000",
  "standalone":
  {
    "segments": ["default", "data"],
    "assets": ["index.html", "vite.svg", "assets/**/*"]
  }
}
```

TERMINAL

```
  domain/sayHello
]
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
```

Code Editor

EXPLORER

- app
  - public
  - segments
    - data.json
    - default.json
  - services
    - standalone.json
  - src
    - domain
      - keepHelloCount.ts
      - sayHello.ts

CODE → services/standalone.json

```
{
  "url": "http://127.0.0.1:3000",
  "standalone":
  {
    "segments": ["default", "data"],
    "assets": ["index.html", "vite.svg", "assets/**/*"]
  }
}
```

TERMINAL

```
  domain/sayHello
]
```

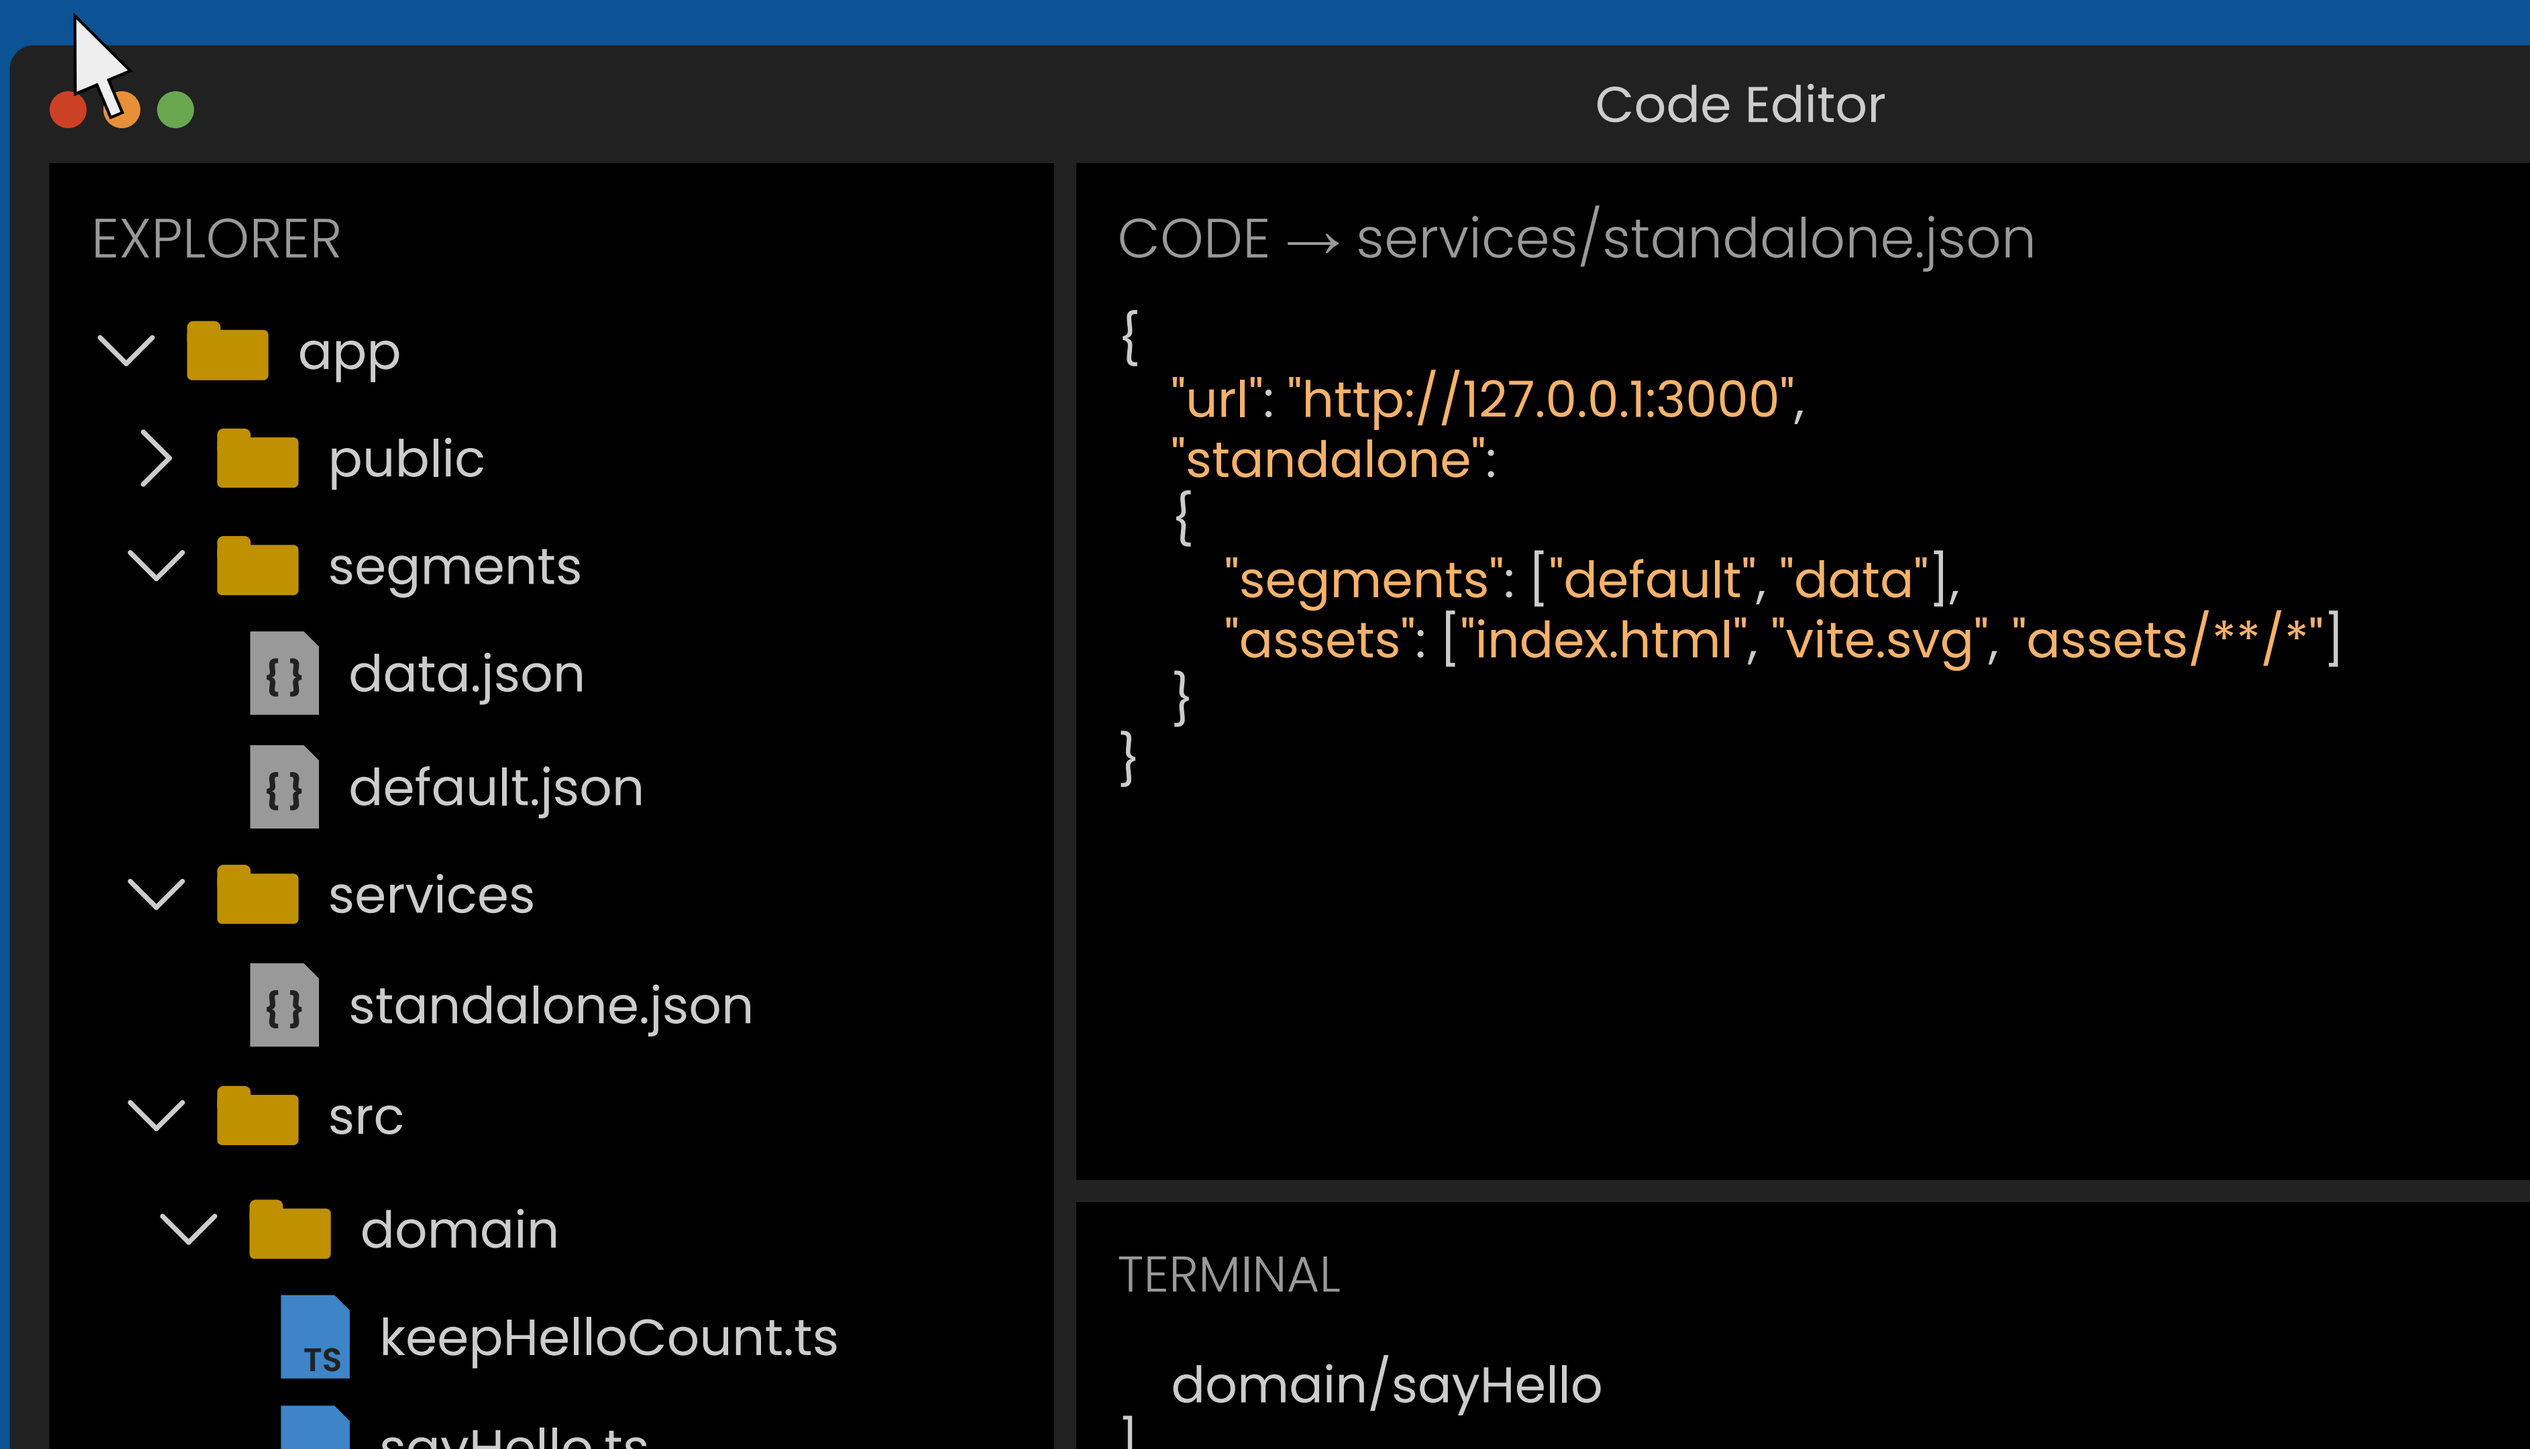
Code Editor
EXPLORER
app
public
segments
data.json
default.json
services
standalone.json
src
domain
keepHelloCount.ts
CODE → services/standalone.json
{
"url": "http://127.0.0.1:3000",
"standalone":
{
"segments": ["default", "data"],
"assets": ["index.html", "vite.svg", "assets/**/*"]
}
}
TERMINAL
domain/sayHello

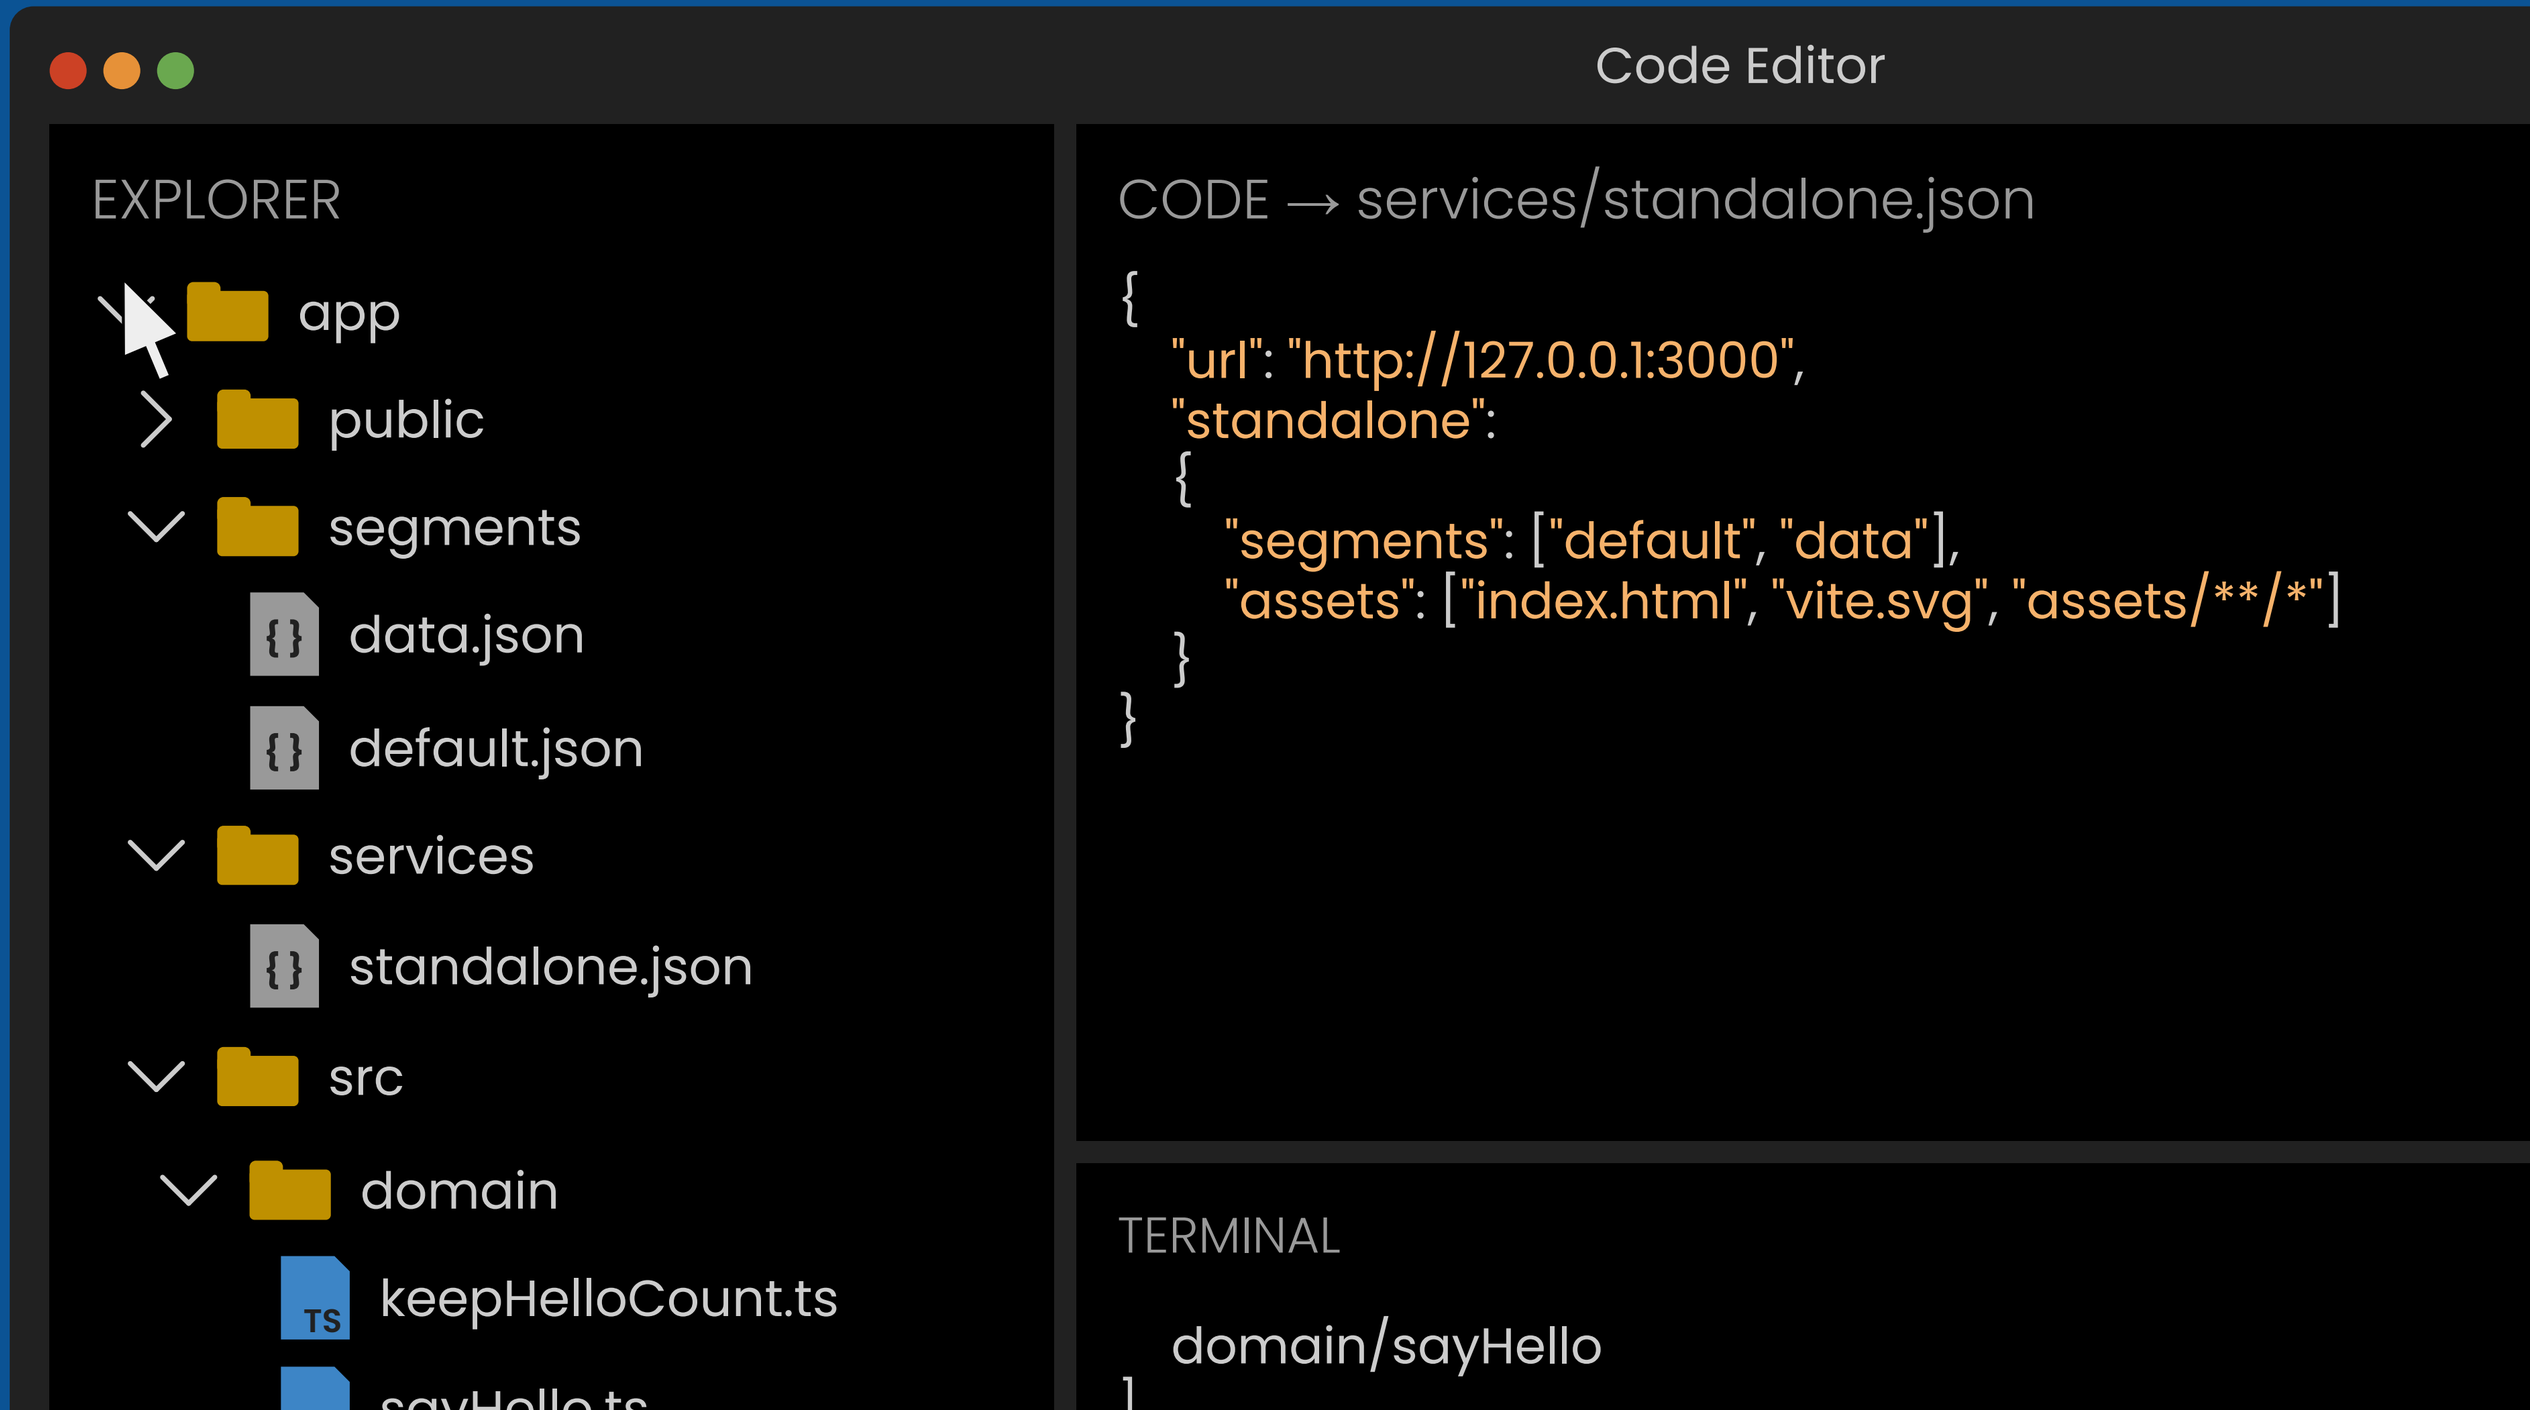
Code Editor
EXPLORER
app
public
segments
data.json
default.json
services
standalone.json
src
domain
keepHelloCount.ts
CODE → services/standalone.json
{
"url": "http://127.0.0.1:3000",
"standalone":
{
"segments": ["default", "data"],
"assets": ["index.html", "vite.svg", "assets/**/*"]
}
}
TERMINAL
domain/sayHello

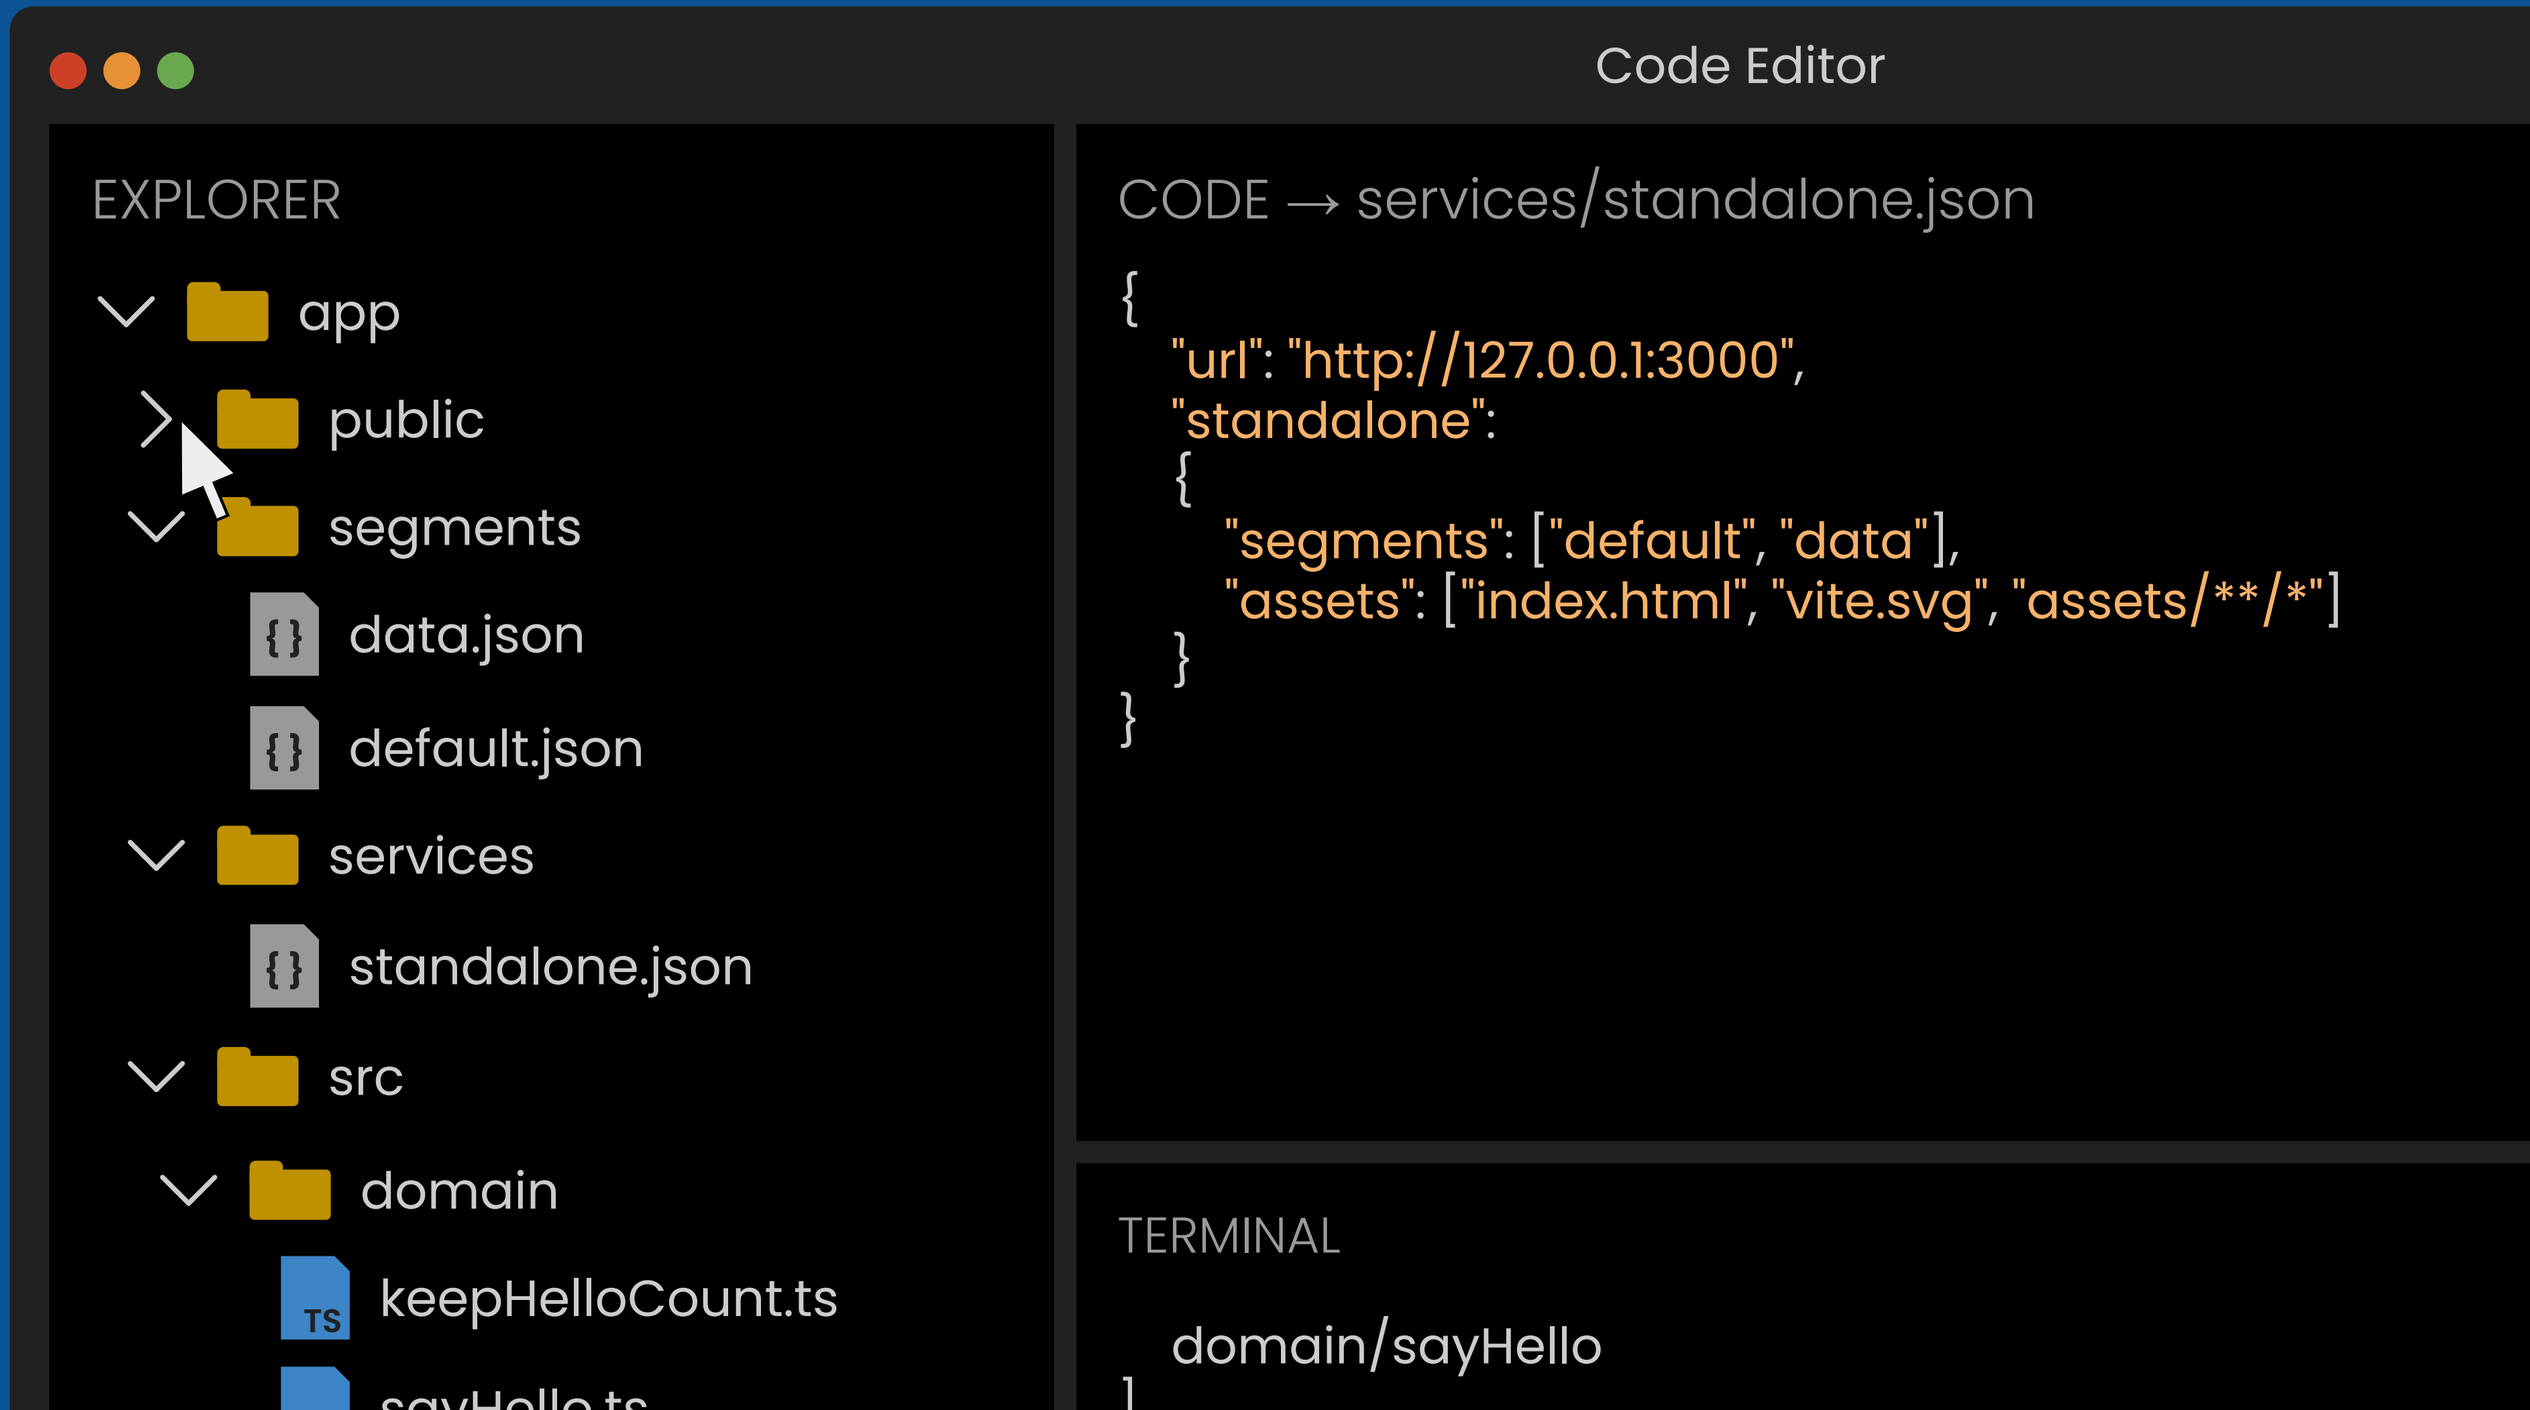
Code Editor
EXPLORER
app
public
segments
data.json
default.json
services
standalone.json
src
domain
keepHelloCount.ts
CODE → services/standalone.json
{
"url": "http://127.0.0.1:3000",
"standalone":
{
"segments": ["default", "data"],
"assets": ["index.html", "vite.svg", "assets/**/*"]
}
}
TERMINAL
domain/sayHello

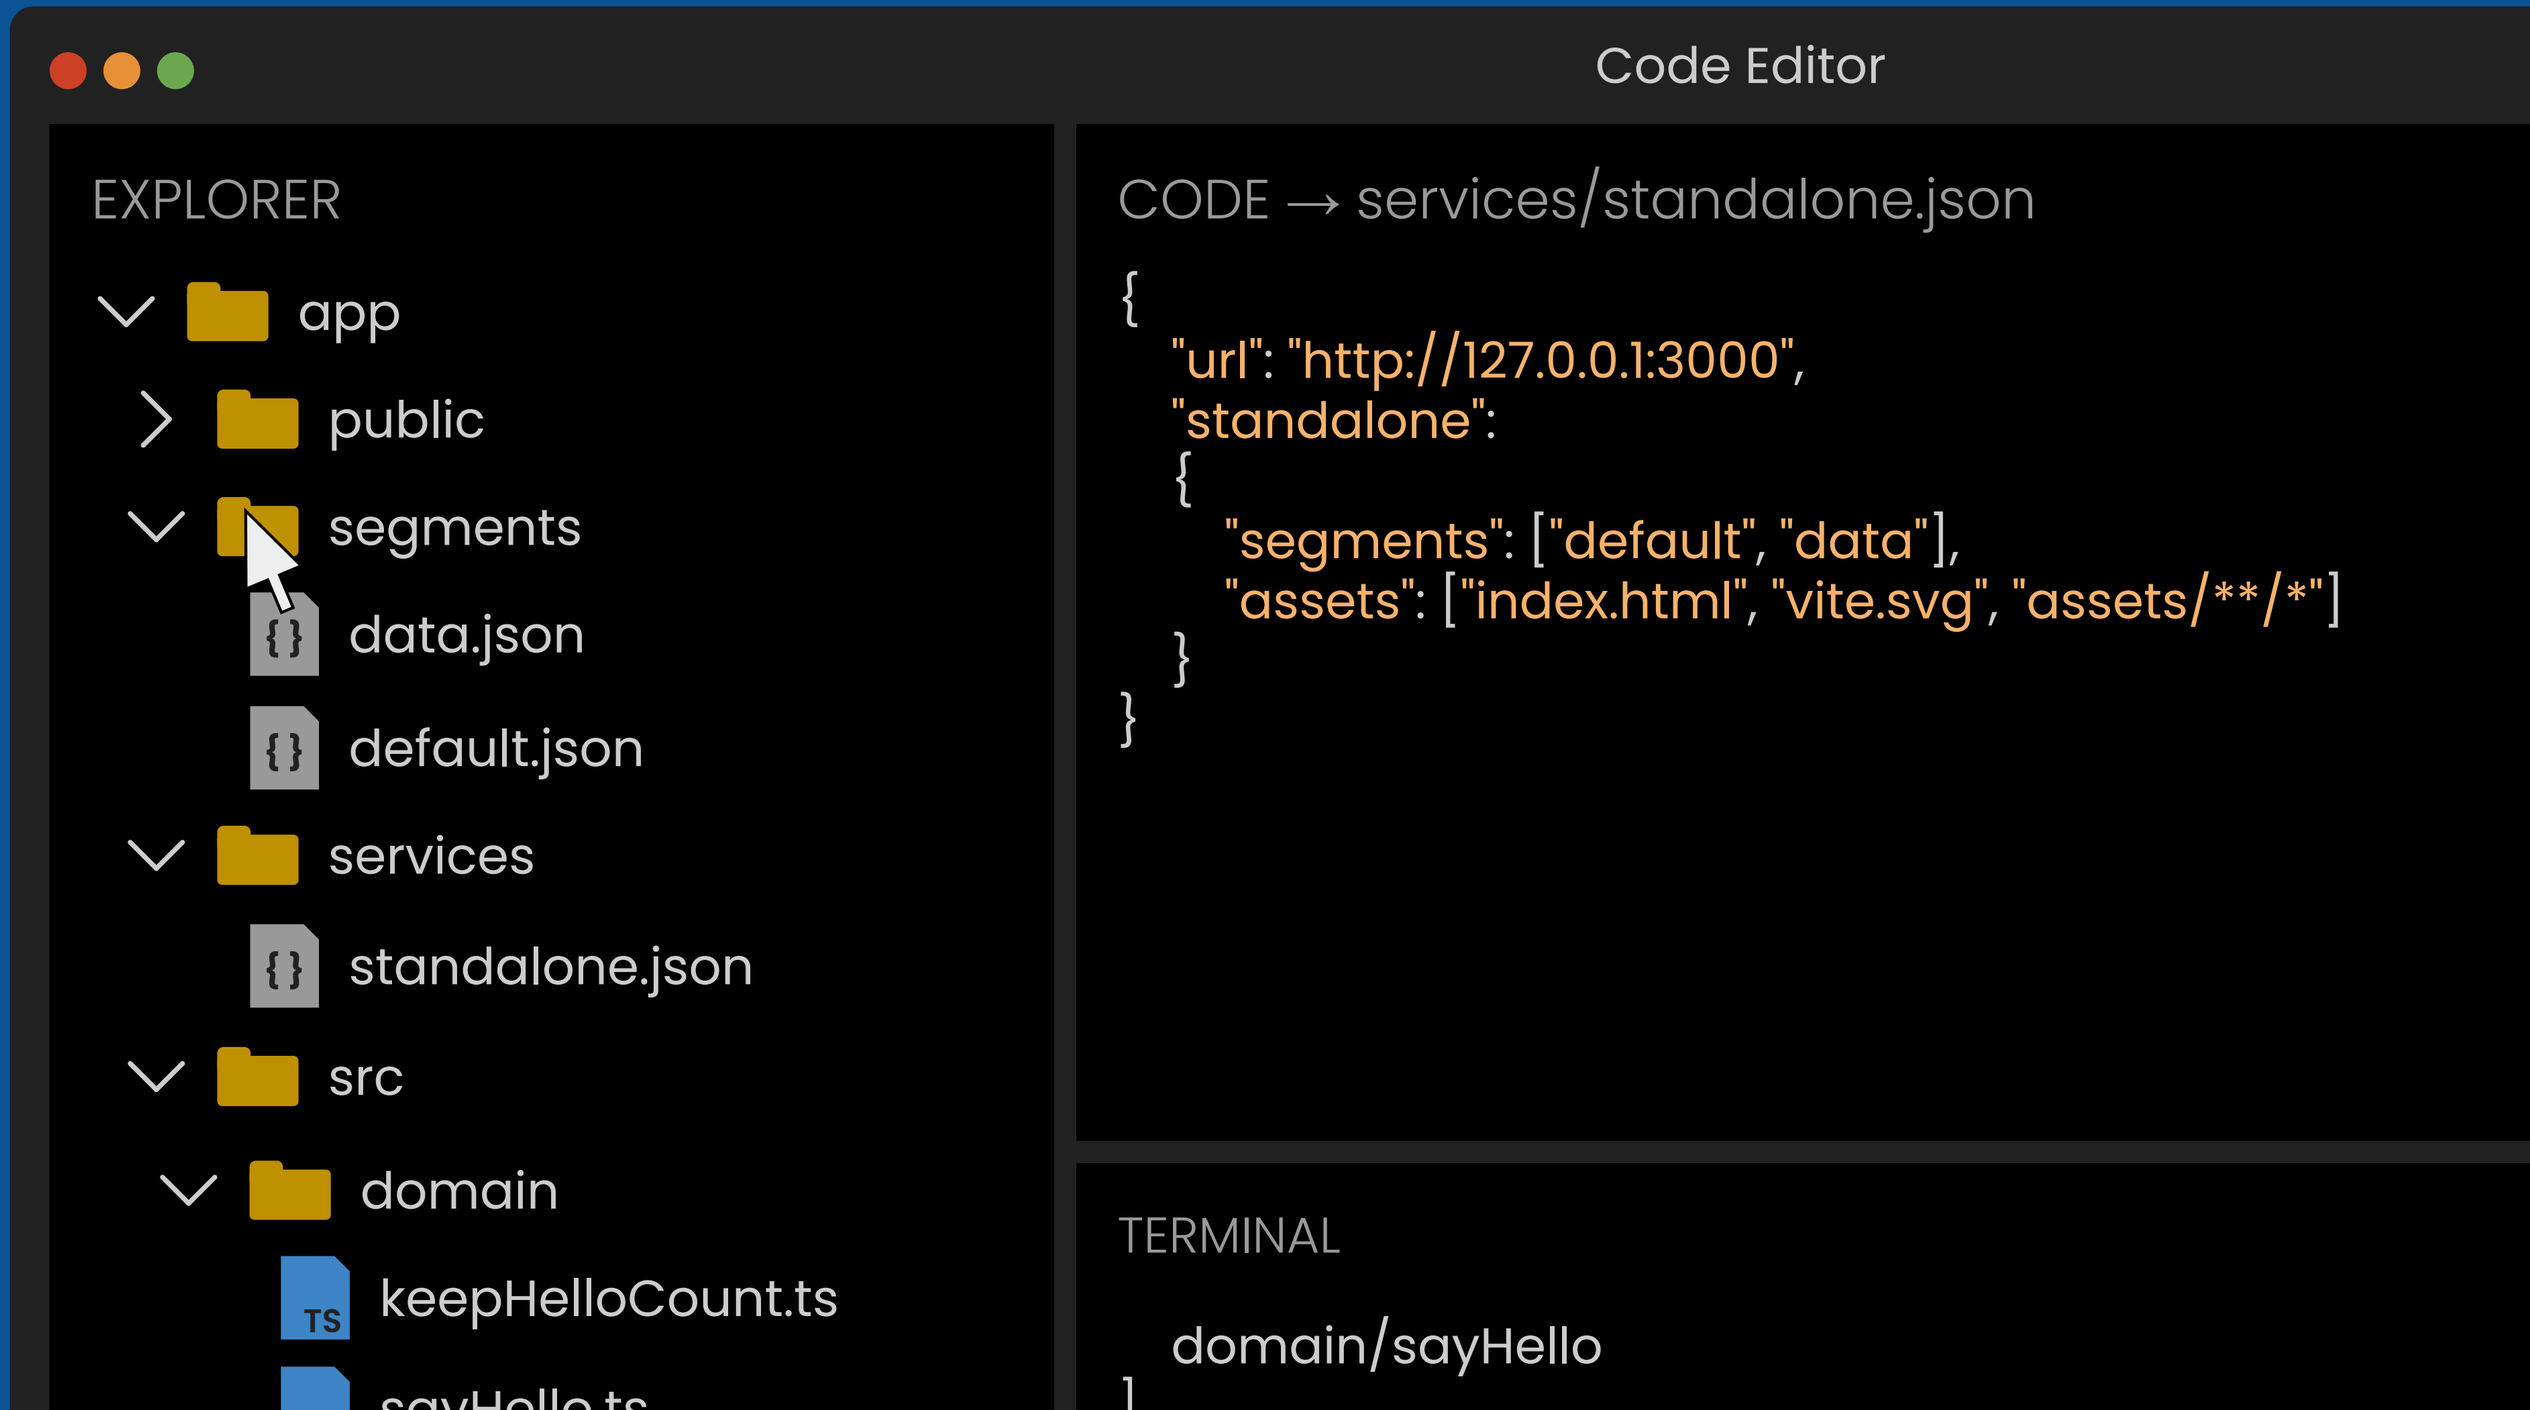
Code Editor
EXPLORER
app
public
segments
data.json
default.json
services
standalone.json
src
domain
keepHelloCount.ts
TS
CODE → services/standalone.json
{
"url": "http://127.0.0.1:3000",
"standalone":
{
"segments": ["default", "data"],
"assets": ["index.html", "vite.svg", "assets/**/*"]
}
}
TERMINAL
domain/sayHello

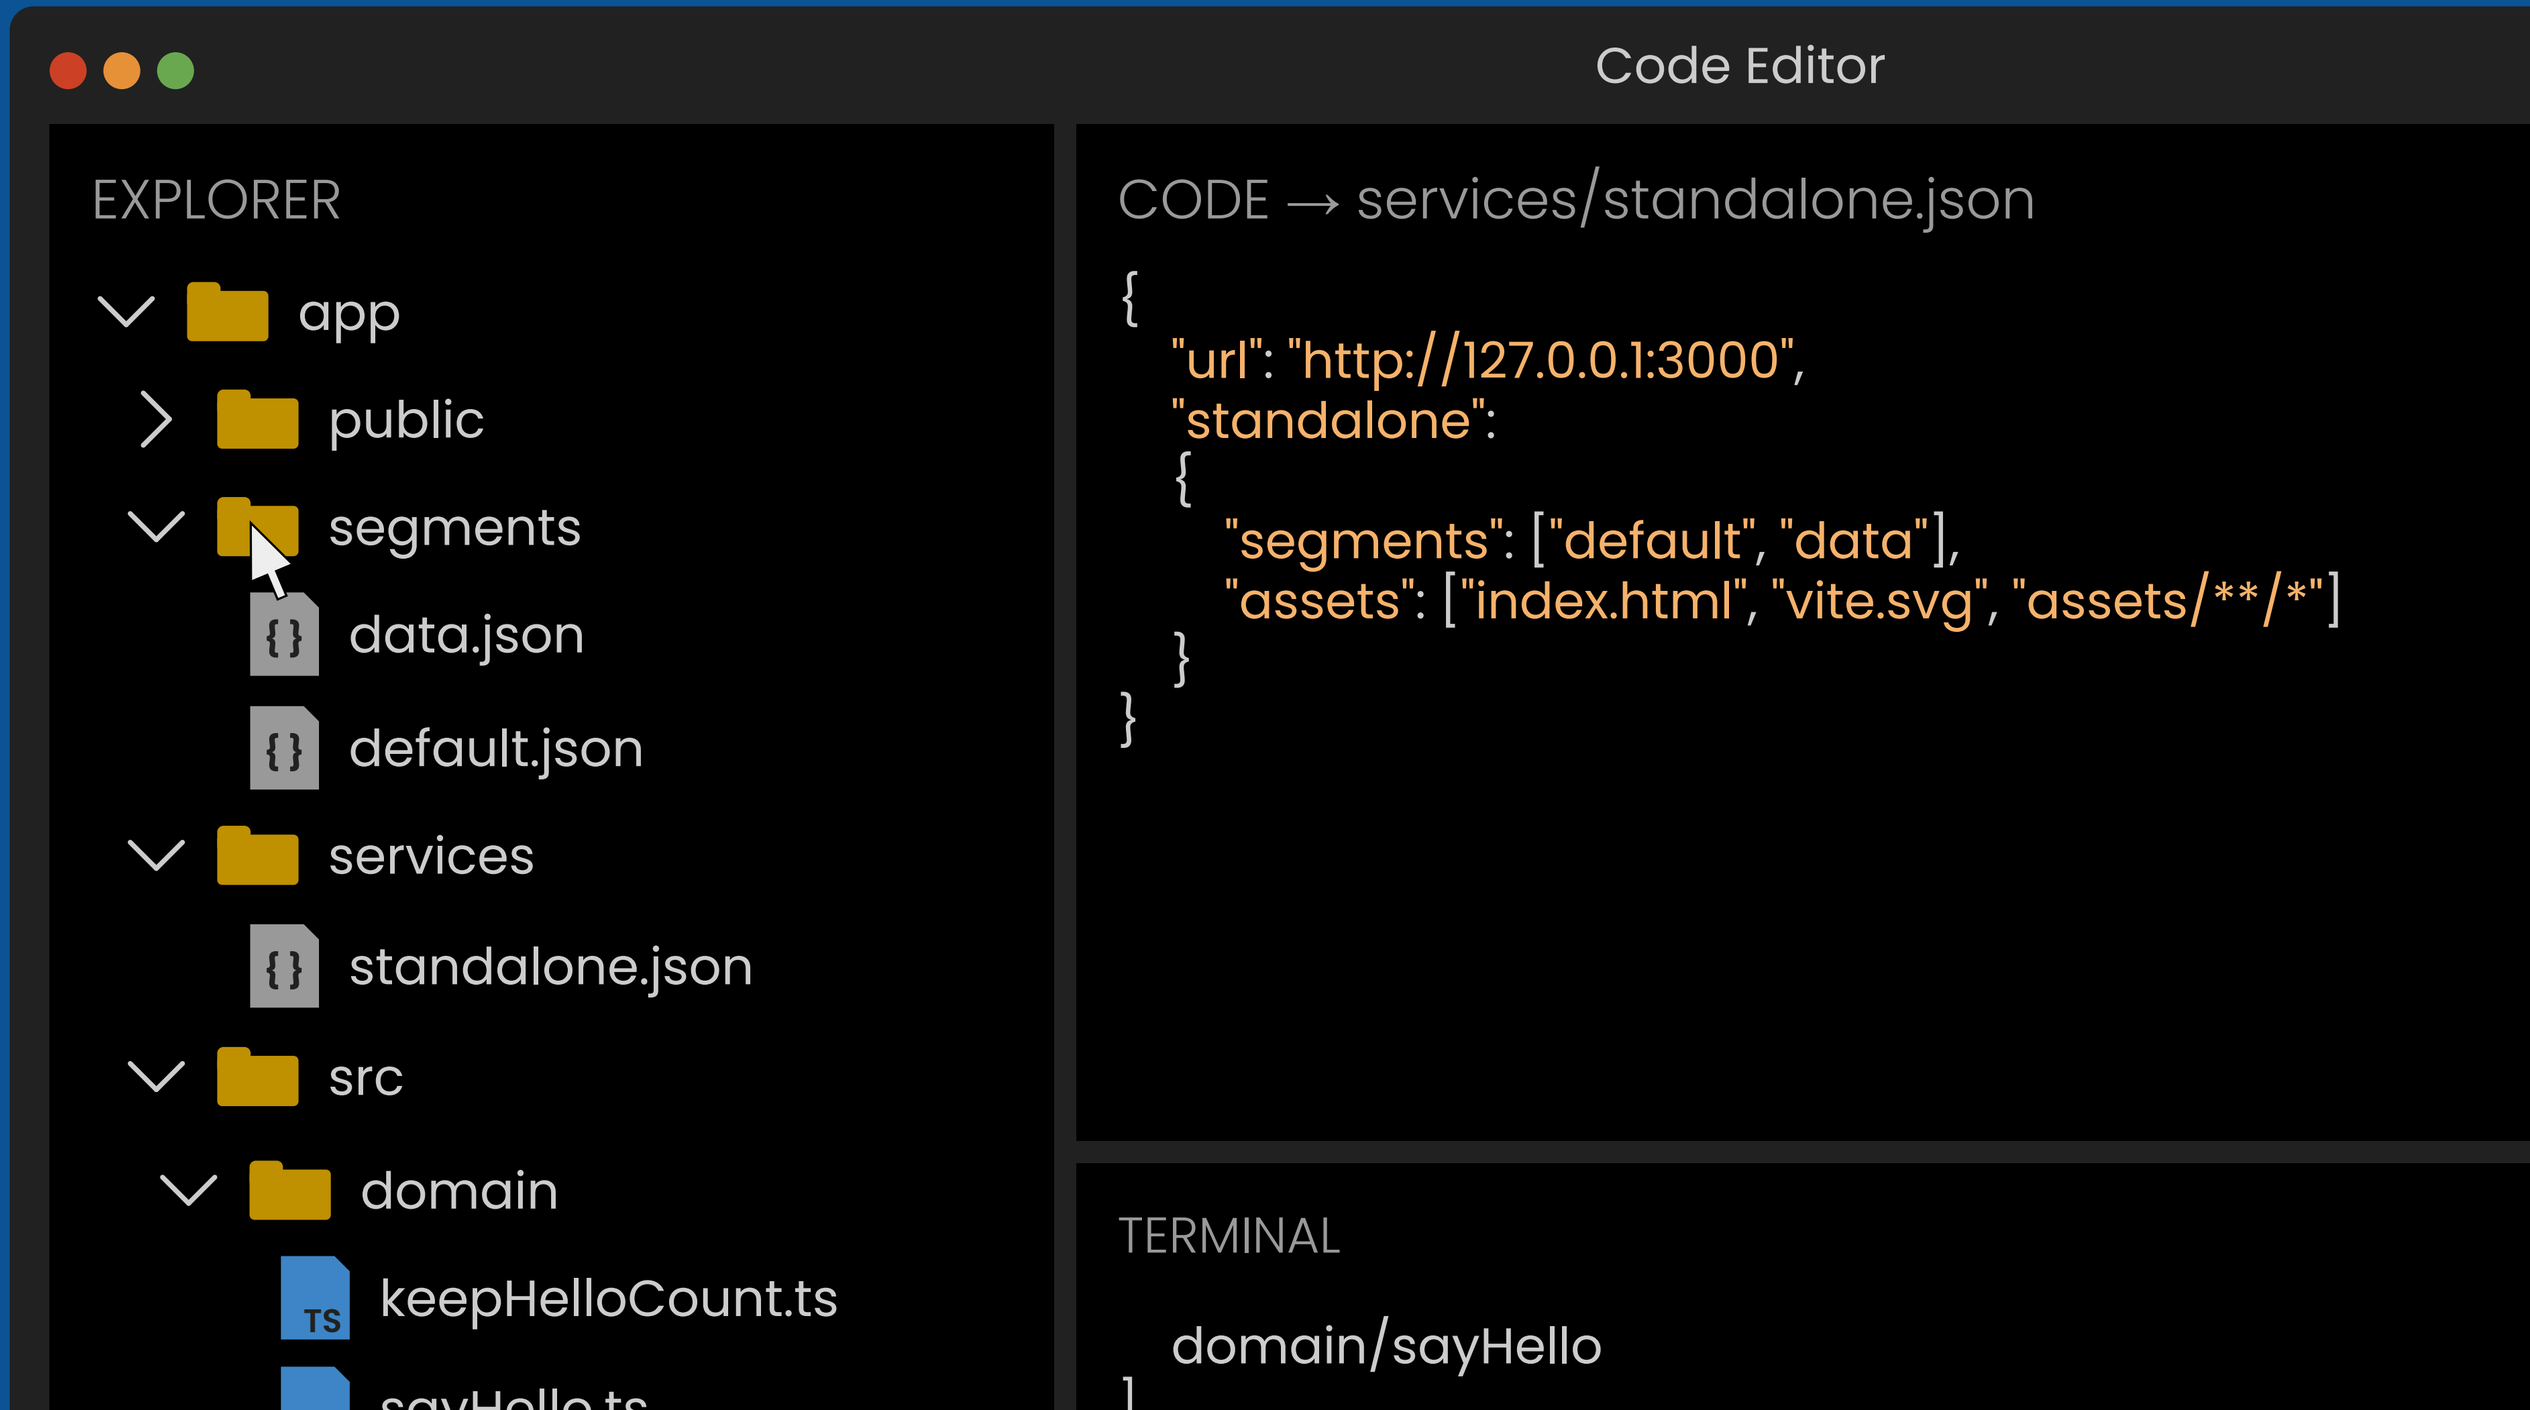
Code Editor
EXPLORER
app
public
segments
data.json
default.json
services
standalone.json
src
domain
keepHelloCount.ts
CODE → services/standalone.json
{
"url": "http://127.0.0.1:3000",
"standalone":
{
"segments": ["default", "data"],
"assets": ["index.html", "vite.svg", "assets/**/*"]
}
}
TERMINAL
domain/sayHello

Code Editor

EXPLORER

- app
  - public
  - segments
  - services
    - standalone.json
  - src
    - domain
      - keepHelloCount.ts
      - sayHello.ts
    - webui
    - index.html

CODE → services/standalone.json

```
{
  "url": "http://127.0.0.1:3000",
  "standalone":
  {
    "segments": ["default", "data"],
    "assets": ["index.html", "vite.svg", "assets/**/*"]
  }
}
```

TERMINAL

```
  domain/sayHello
]
```

Code Editor

EXPLORER

- app
  - public
  - segments
  - services
    - standalone.json
  - src
    - domain
      - keepHelloCount.ts
      - sayHello.ts
    - webui
    - index.html

CODE → services/standalone.json

```
{
  "url": "http://127.0.0.1:3000",
  "standalone":
  {
    "segments": ["default", "data"],
    "assets": ["index.html", "vite.svg", "assets/**/*"]
  }
}
```

TERMINAL

```
  domain/sayHello
]
```

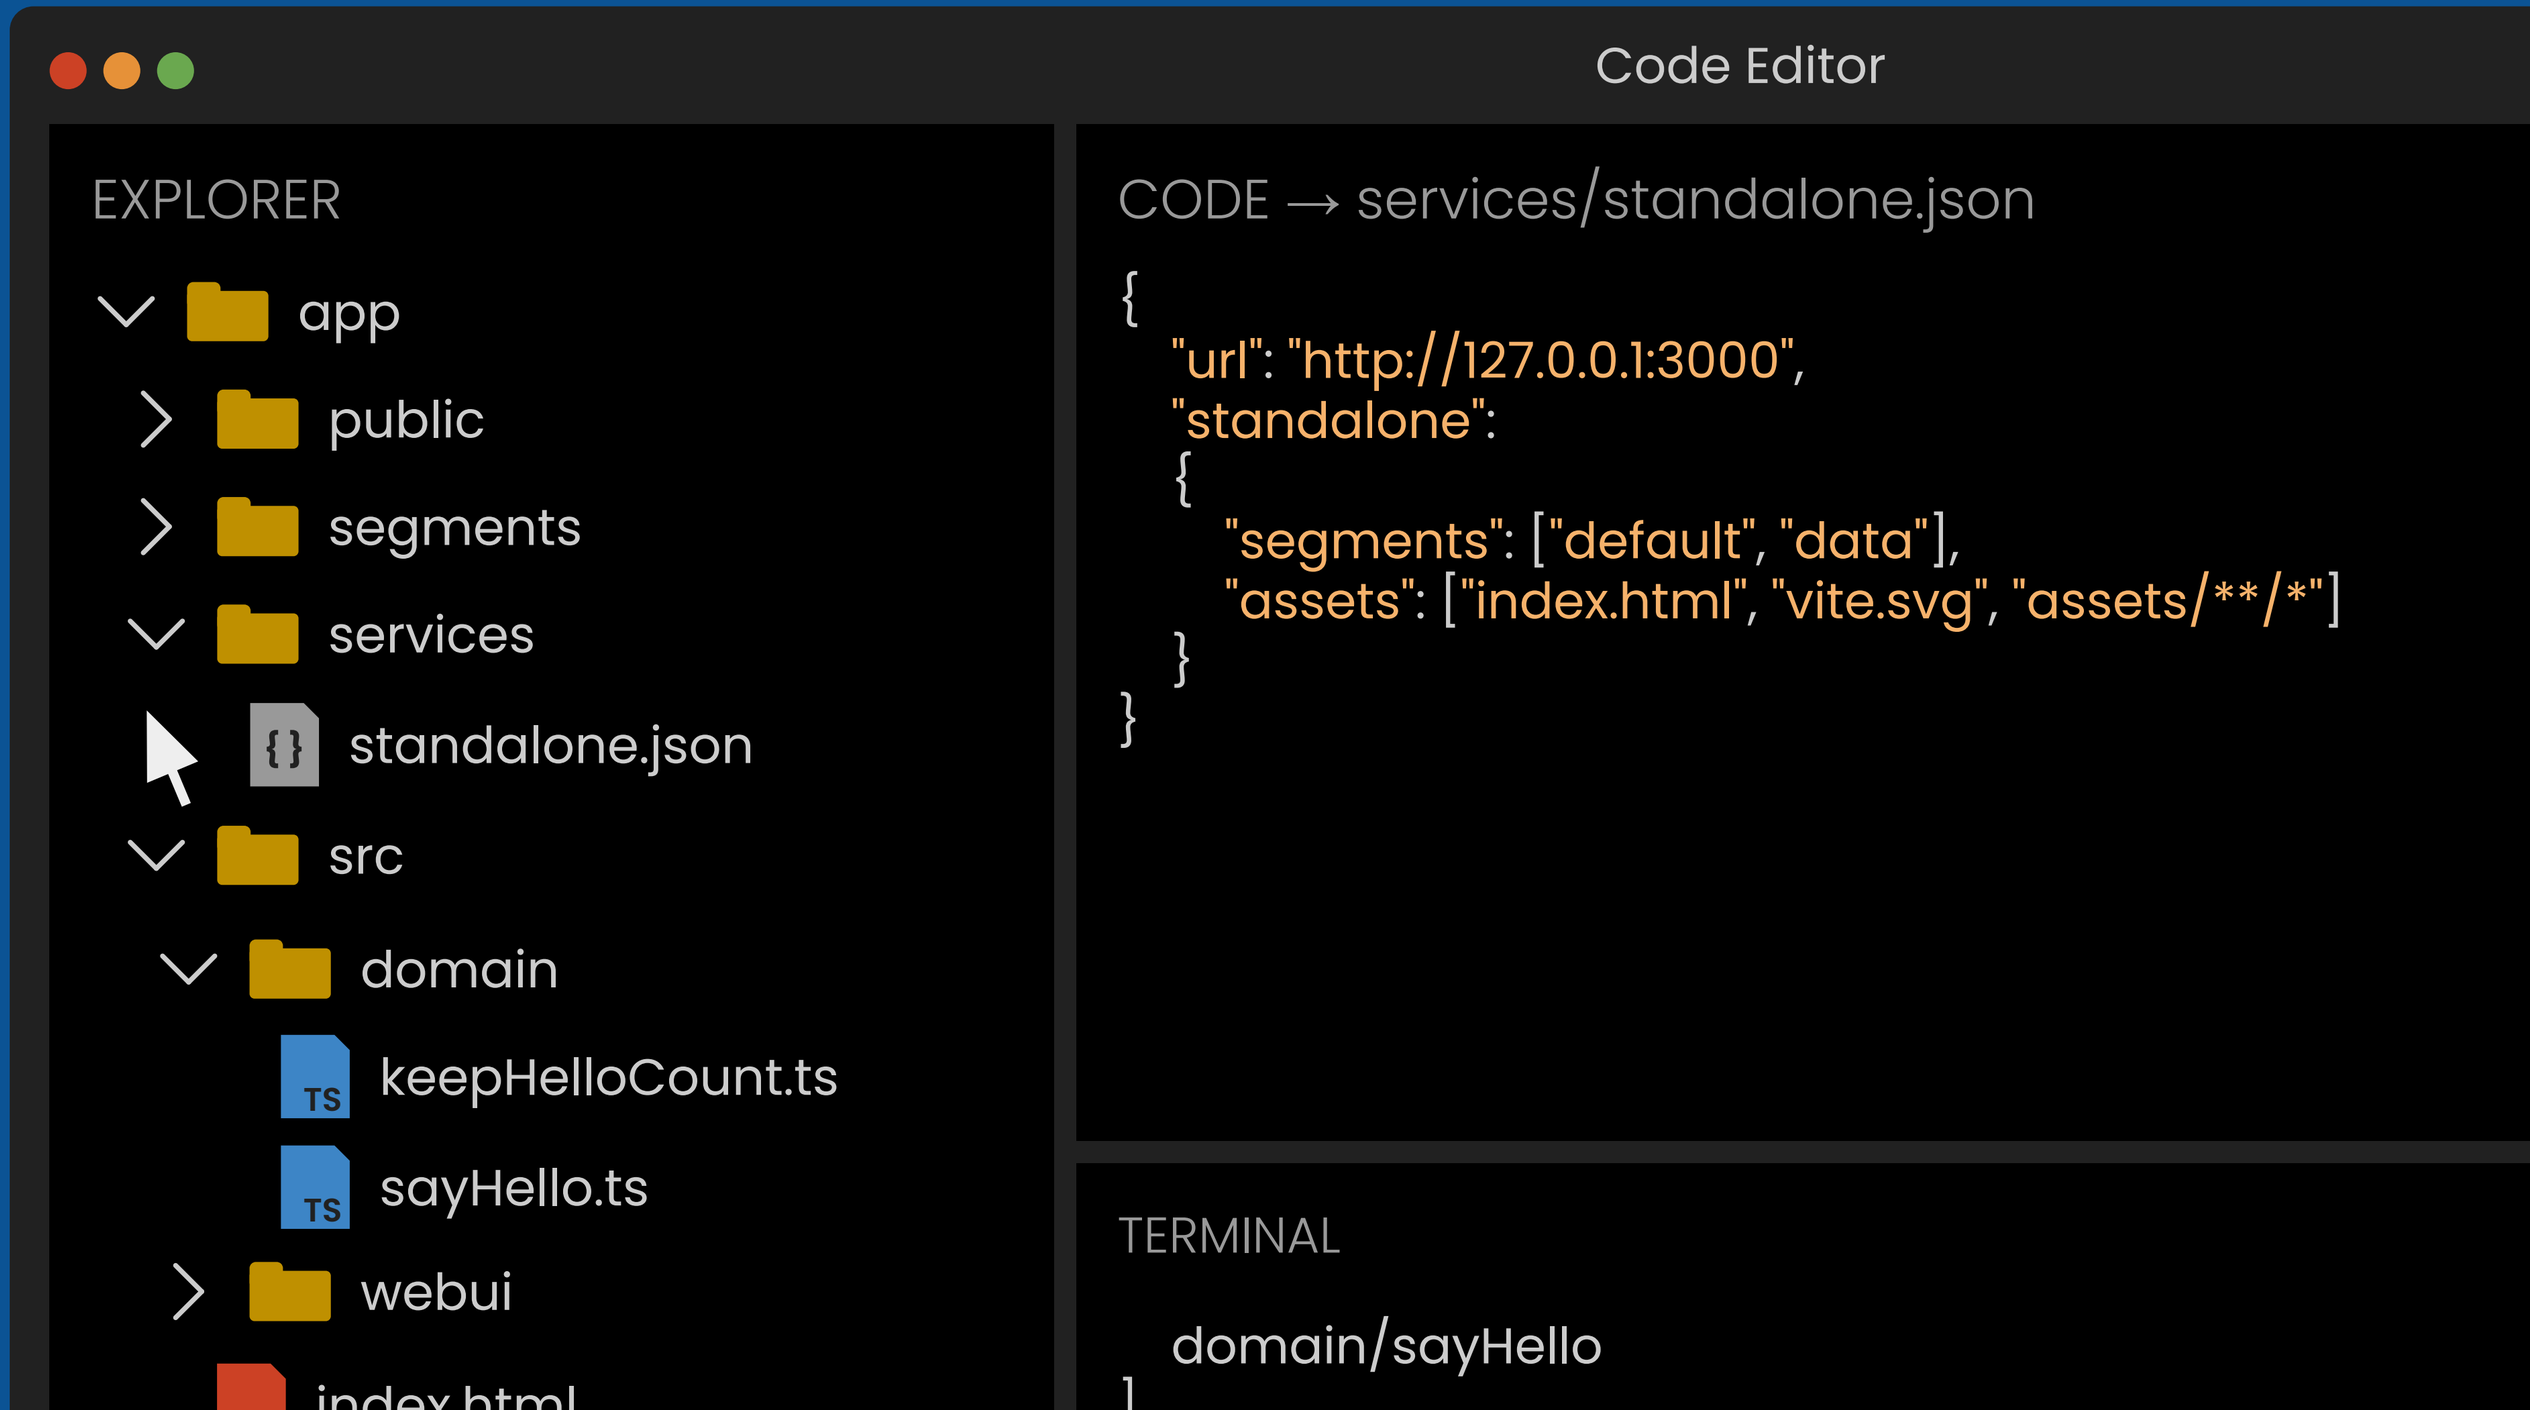
Code Editor
EXPLORER
app
public
segments
services
standalone.json
src
domain
keepHelloCount.ts
sayHello.ts
webui
index.html
CODE → services/standalone.json
{
"url": "http://127.0.0.1:3000",
"standalone":
{
"segments": ["default", "data"],
"assets": ["index.html", "vite.svg", "assets/**/*"]
}
}
TERMINAL
domain/sayHello