

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

```
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
^C
[INFO] Server stopped
app> █
```

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

```
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello  
^C  
[INFO] Server stopped  
app> npm run gateway
```

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

```
[INFO] Ran request: domain/sayHello
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
```

^C

```
[INFO] Server stopped
```

```
app> npm run gateway
```



```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL


```
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello  
^C  
[INFO] Server stopped  
app> npm run gateway
```



```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL


```
[INFO] Ran request: domain/sayHello  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello  
^C  
[INFO] Server stopped  
app> npm run gateway
```

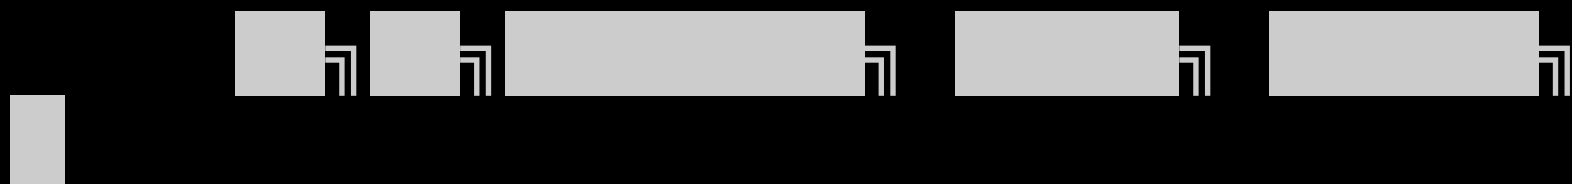

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

```
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello  
^C  
[INFO] Server stopped  
app> npm run gateway
```

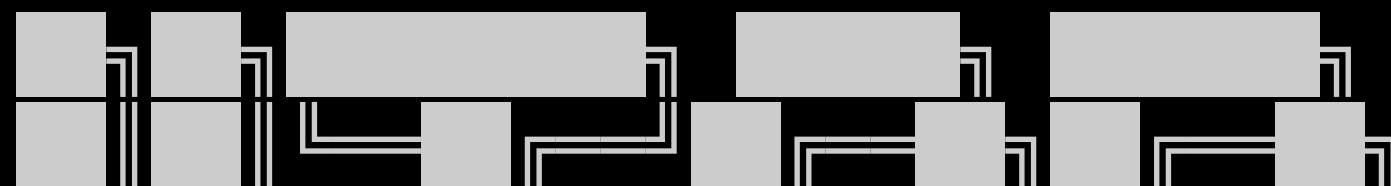

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```


TERMINAL

[INFO] Ran request: domain/sayHello

^C

[INFO] Server stopped

app> npm run gateway

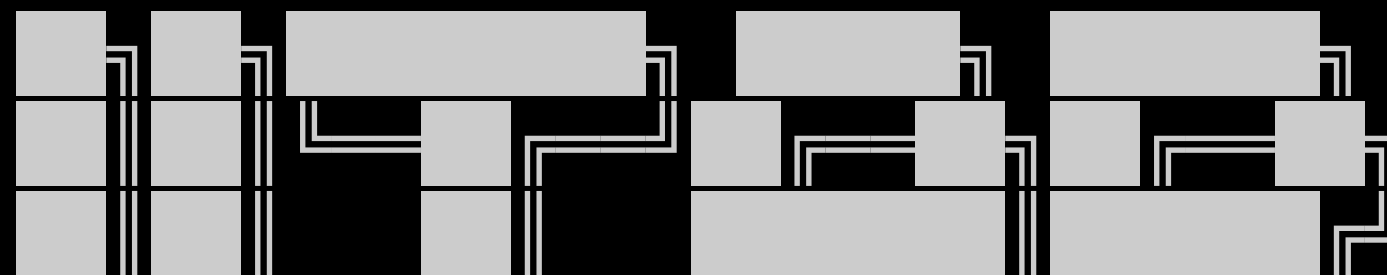



```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

^C

[INFO] Server stopped


app> npm run gateway

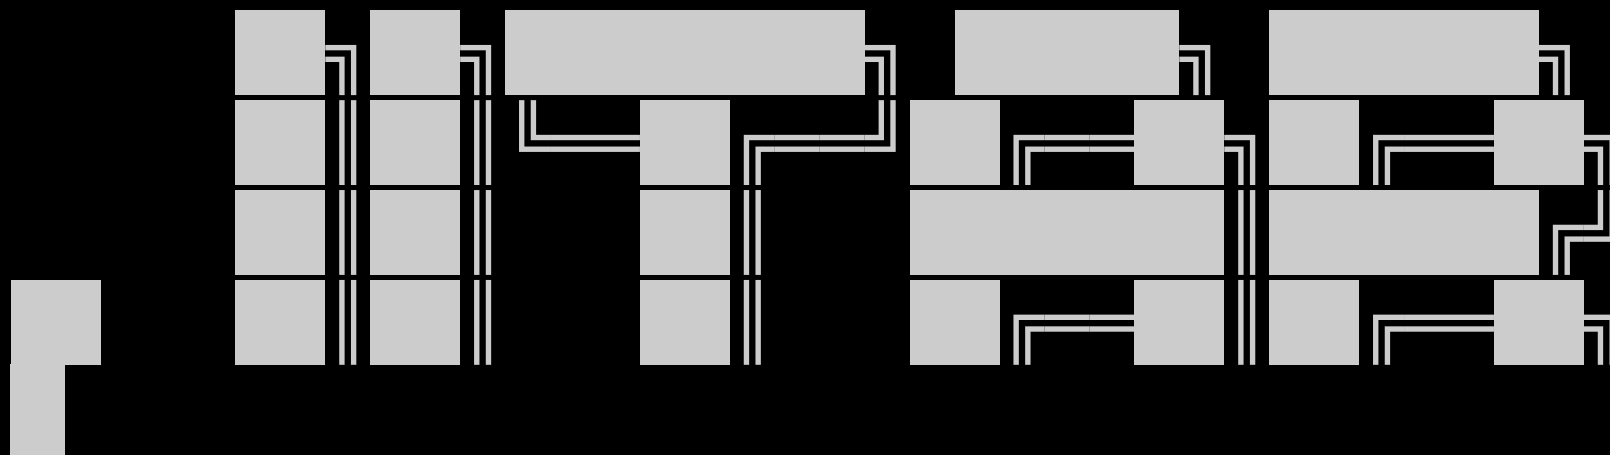


```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL


```
[INFO] Server stopped  
app> npm run gateway
```

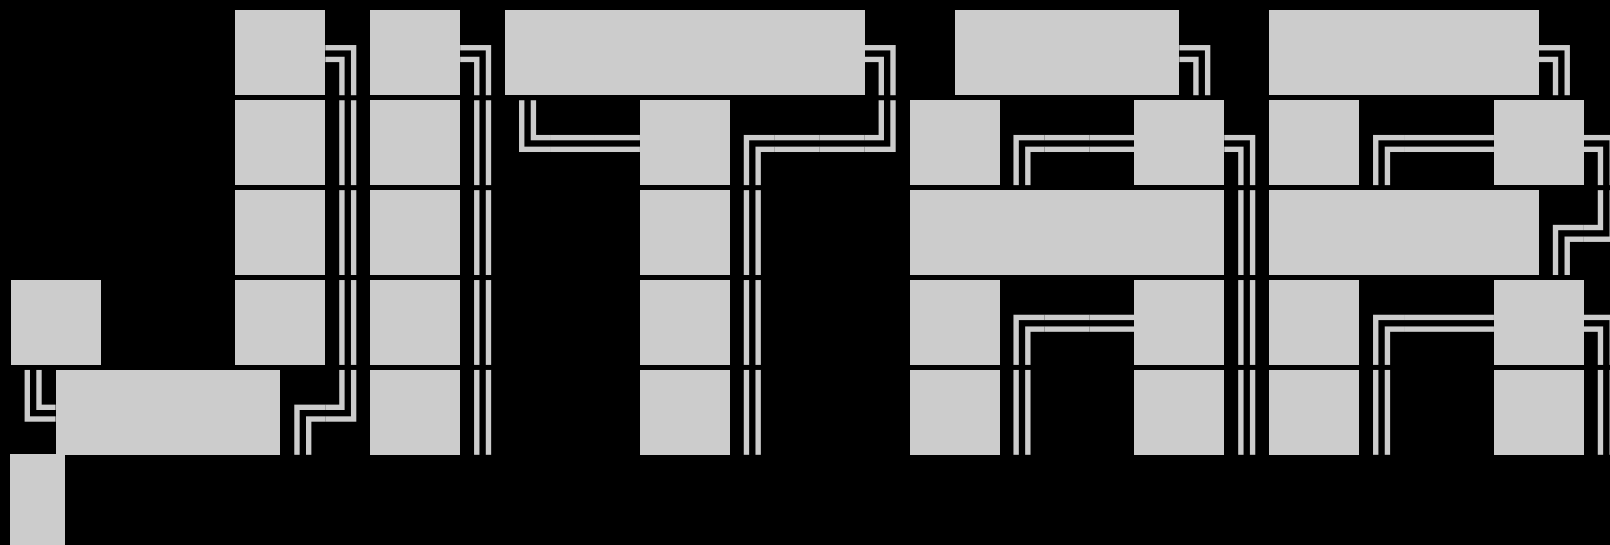

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```


TERMINAL

app> npm run gateway

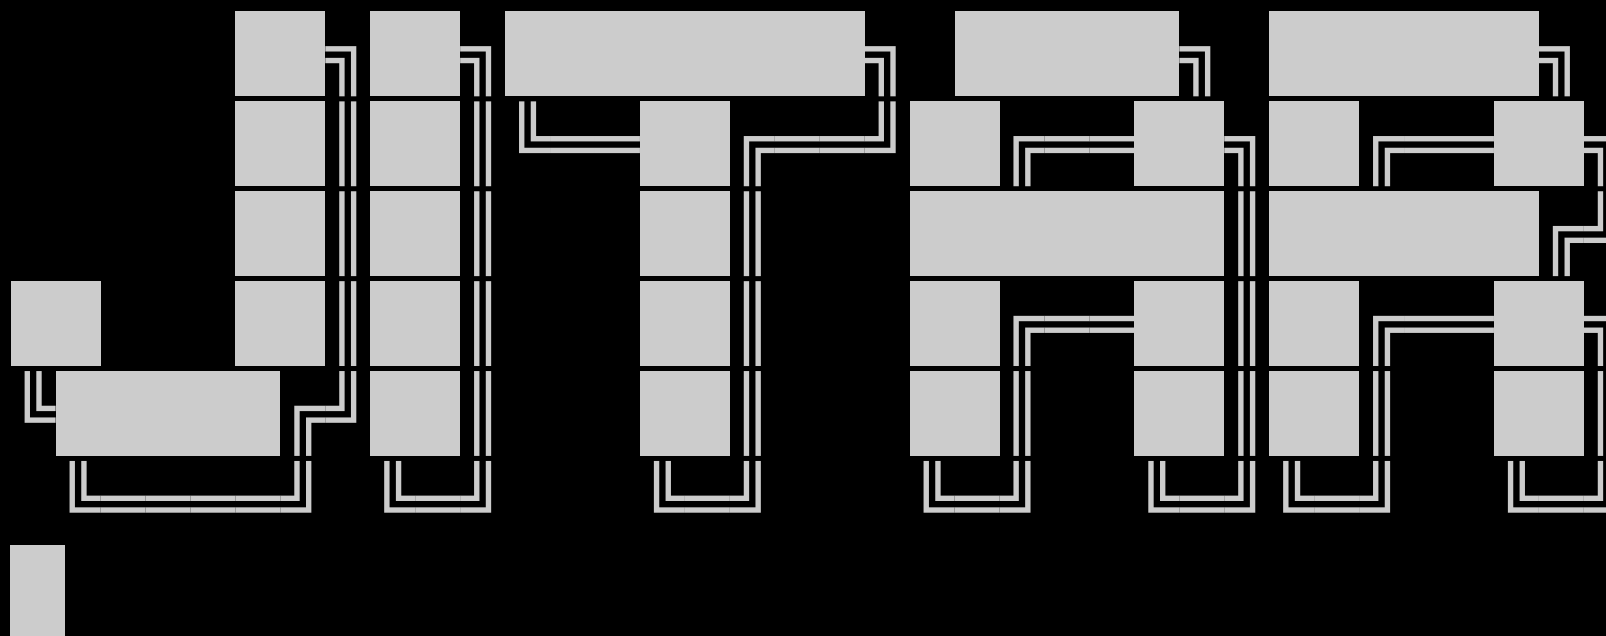

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

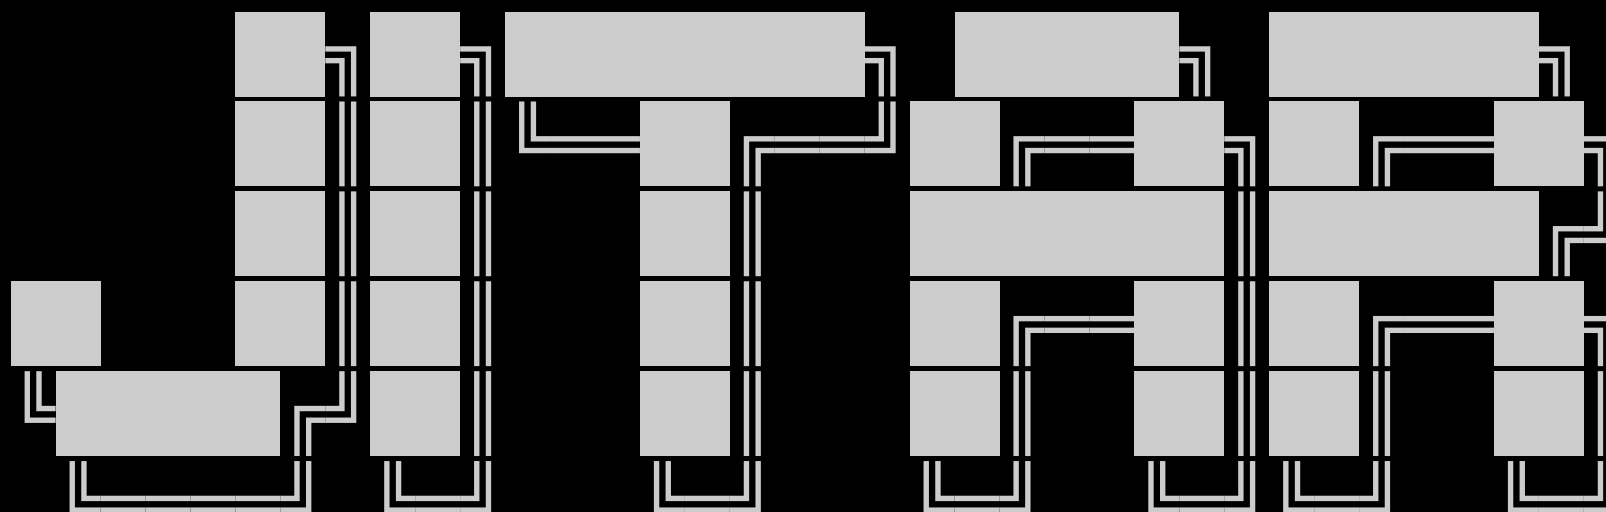


~ Distributed JavaScript Runtime ~



```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

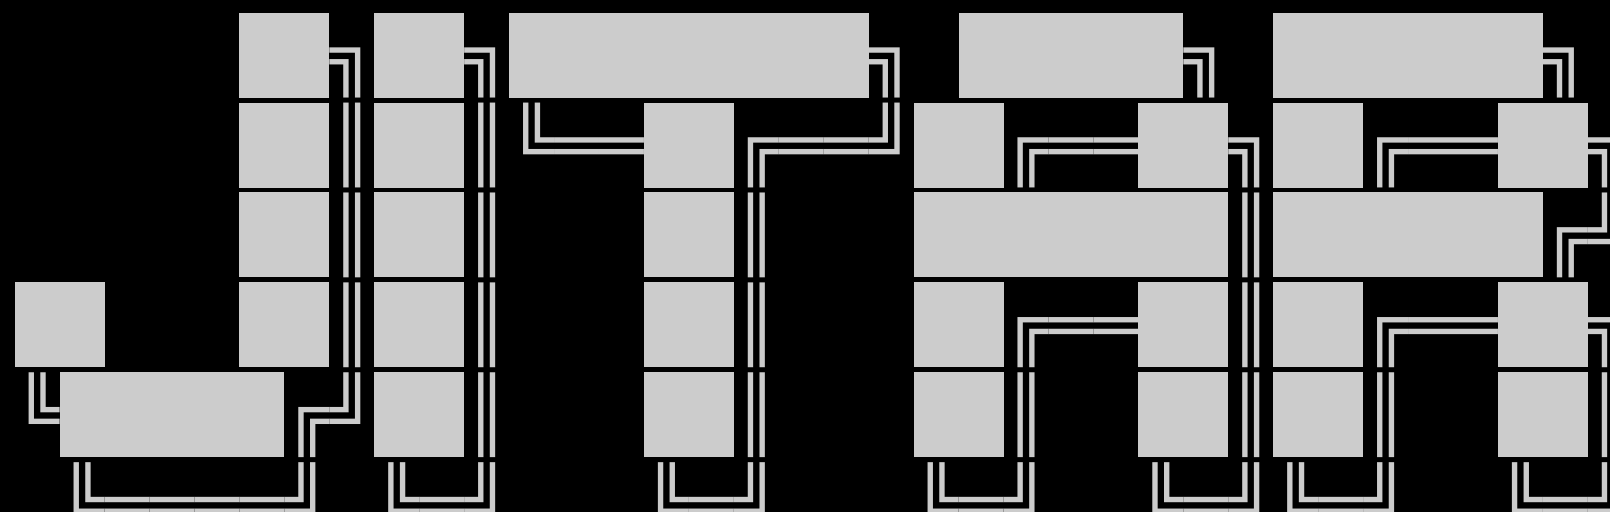


~ Distributed JavaScript Runtime ~



```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

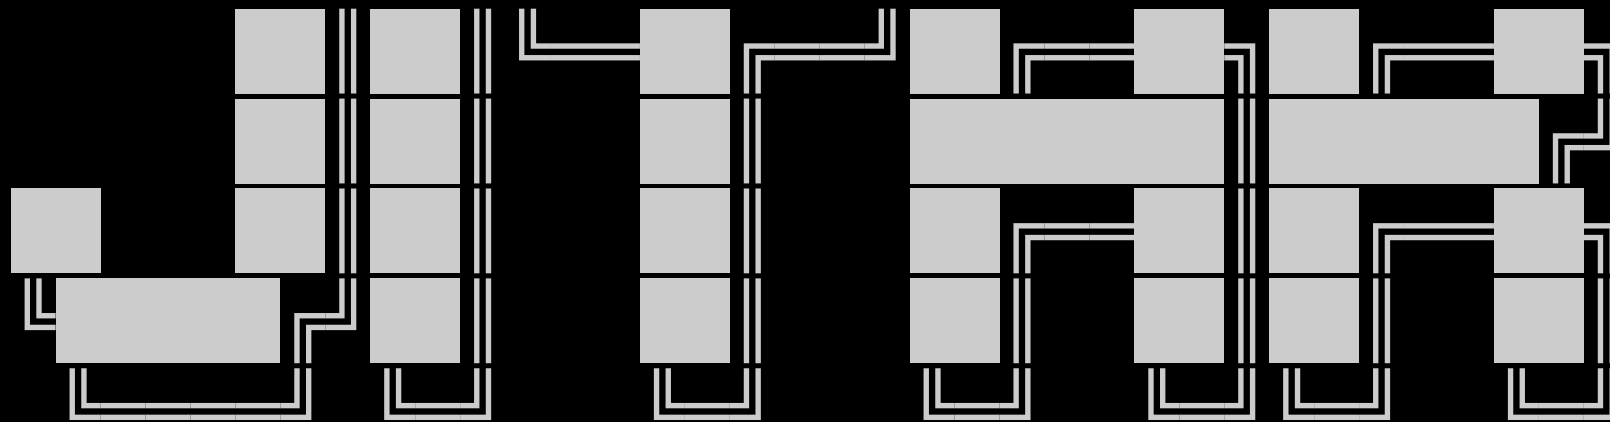

~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:3001

