

Code Editor

CODE → segments/data.json

```
{  
  "/domain/keepHelloCount": { "keepHelloCount": { "access": "protected" } }  
}
```



TERMINAL

> 

Code Editor

CODE → segments/data.json

```
{  
  "./domain/keepHelloCount": { "keepHelloCount": { "access": "protected" } }  
}
```



TERMINAL

> 

CODE → segments/data.json

```
{  
  "/domain/keepHelloCount": { "keepHelloCount": { "access": "protected" } }  
}
```



TERMINAL

> 

```
{  
  "/domain/keepHelloCount": { "keepHelloCount": { "access": "protected" } }  
}
```

TERMINAL

> 

```
}
```

TERMINAL

```
> █
```

TERMINAL

> █

TERMINAL

```
> cd app
```

TERMINAL

```
> cd app  
app> █
```


TERMINAL

> cd app

app> npm run gateway

TERMINAL

```
> cd app
```

```
app> npm run gateway
```



TERMINAL


```
> cd app  
app> npm run gateway
```



TERMINAL

```
> cd app
```


```
app> npm run gateway
```

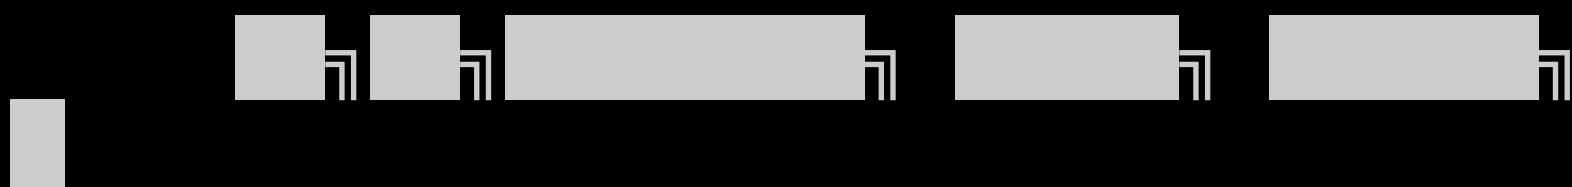

TERMINAL


```
> cd app
```

```
app> npm run gateway
```

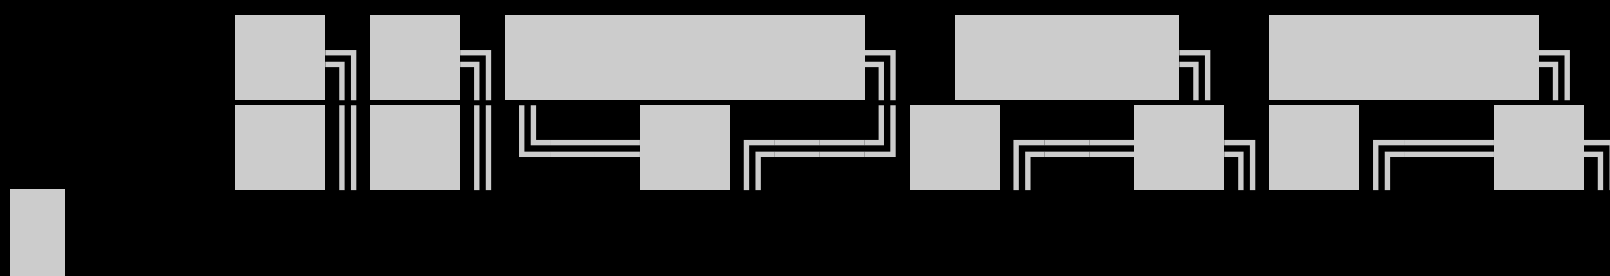


TERMINAL

```
> cd app  
app> npm run gateway
```

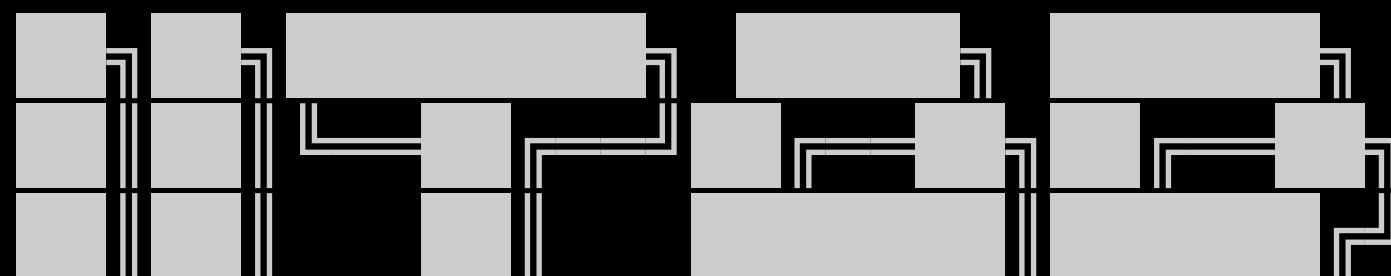


TERMINAL

```
> cd app  
app> npm run gateway
```

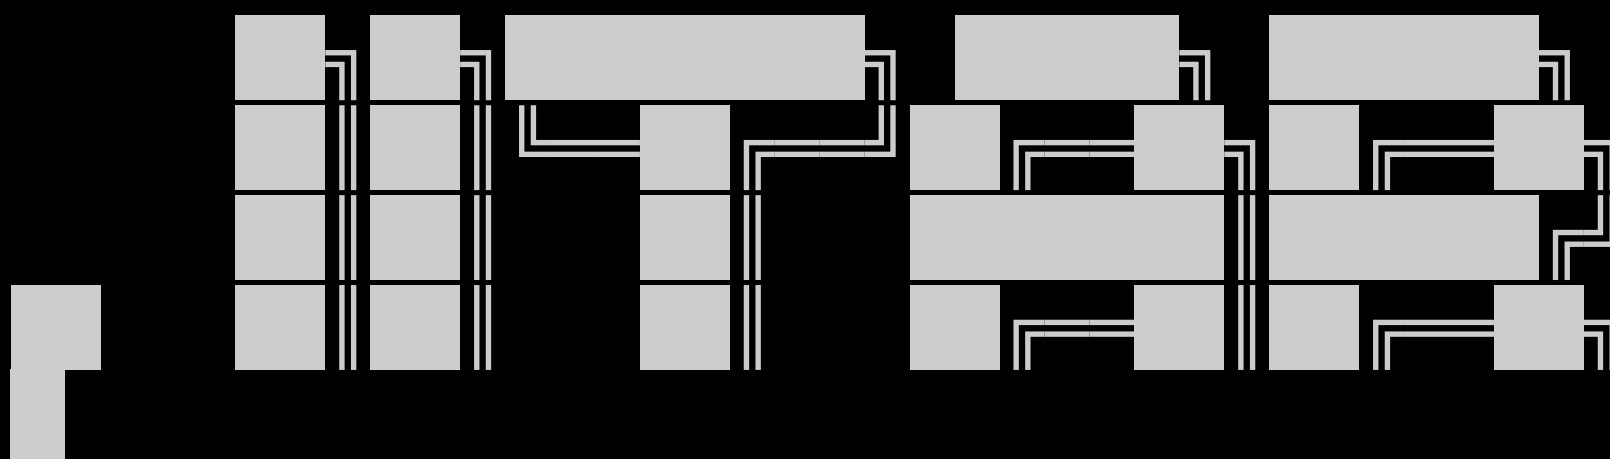


TERMINAL

```
> cd app  
app> npm run gateway
```

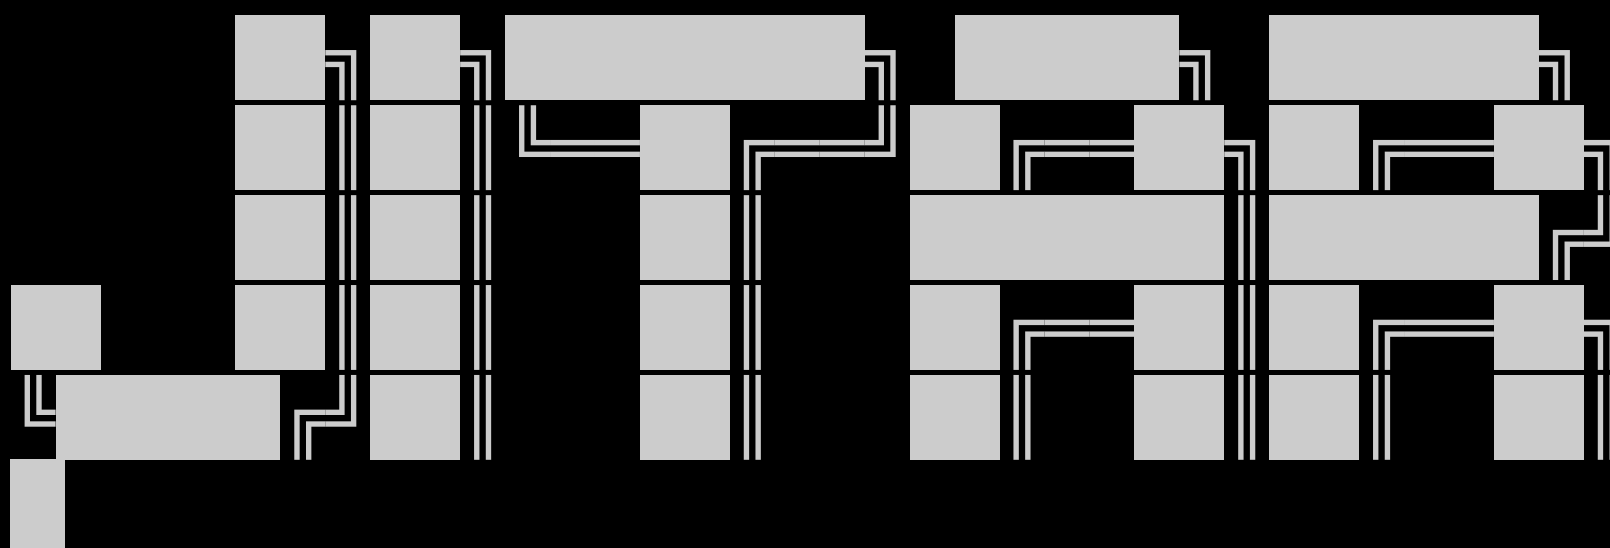


TERMINAL

app> npm run gateway

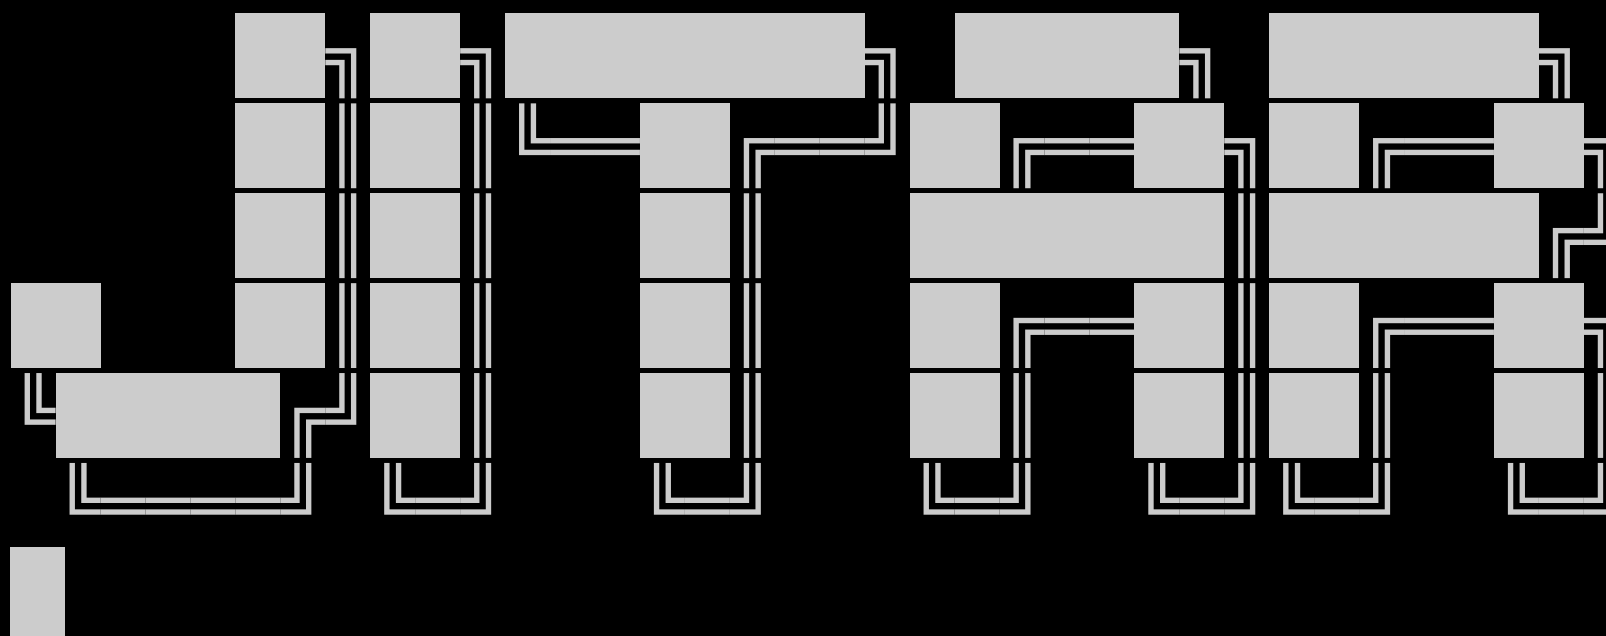


TERMINAL

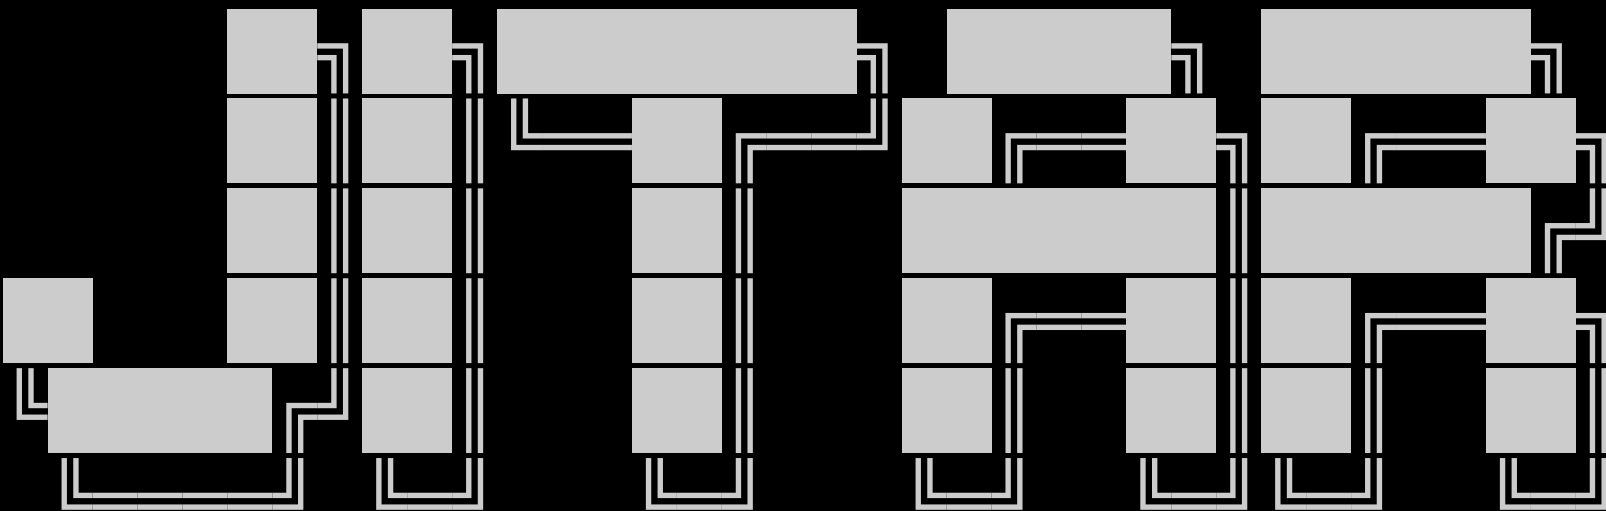

~ Distributed JavaScript Runtime ~




TERMINAL

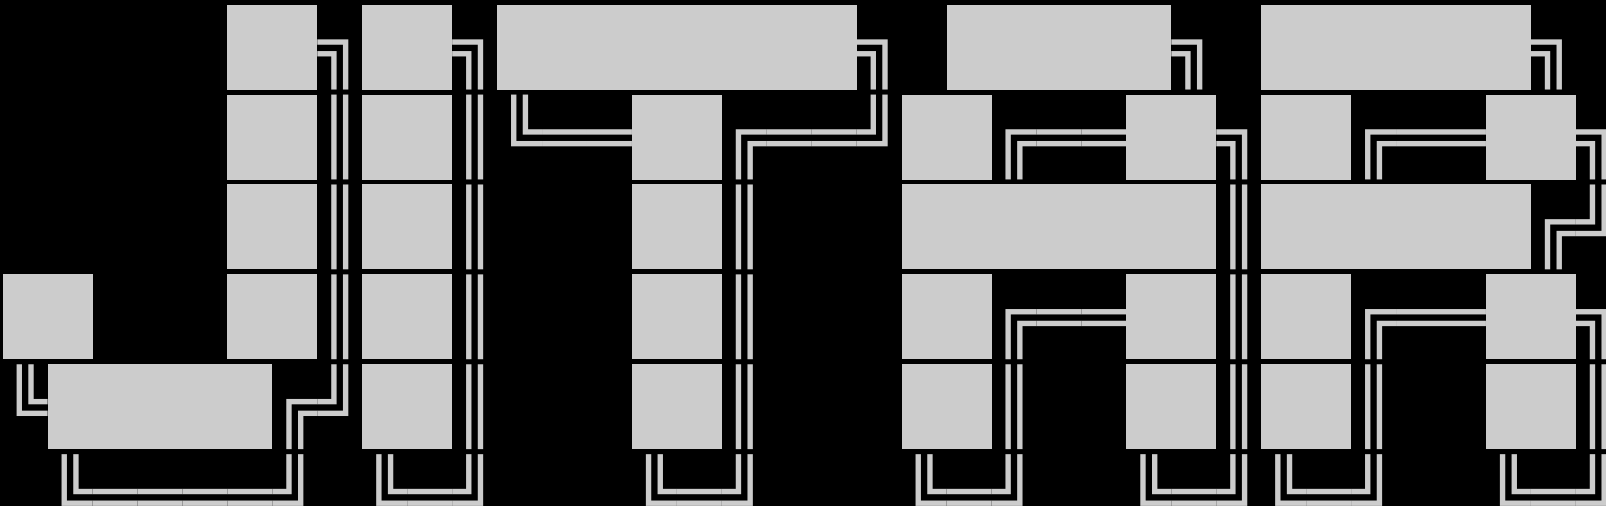

~ Distributed JavaScript Runtime ~



TERMINAL

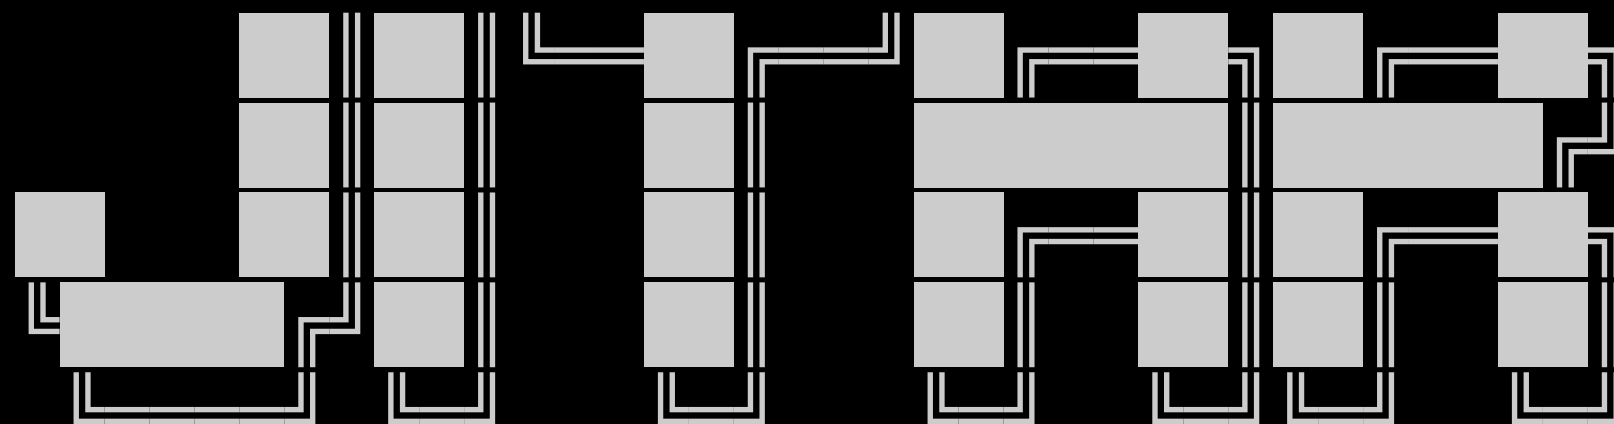


~ Distributed JavaScript Runtime ~

[INFO] Server started at <http://127.0.0.1:3001>



TERMINAL

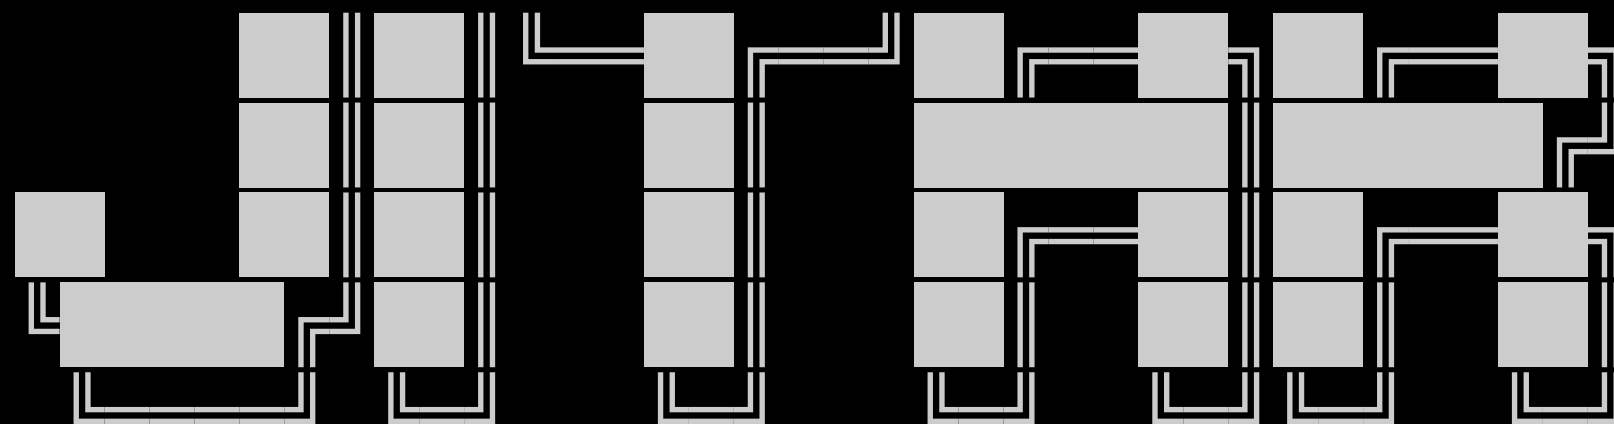

~ Distributed JavaScript Runtime ~

[INFO] Server started at <http://127.0.0.1:3001>



TERMINAL

app> █

>_ gateway

>_ terminal

TERMINAL

app> npm run default

> gateway

> terminal

TERMINAL

app> npm run default



> gateway

> default

TERMINAL

app> npm run default




> gateway

> default

TERMINAL

app> npm run default

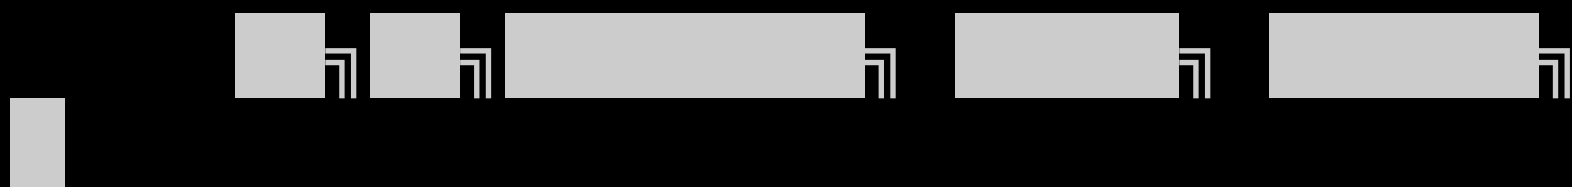


> gateway

> default

TERMINAL

app> npm run default

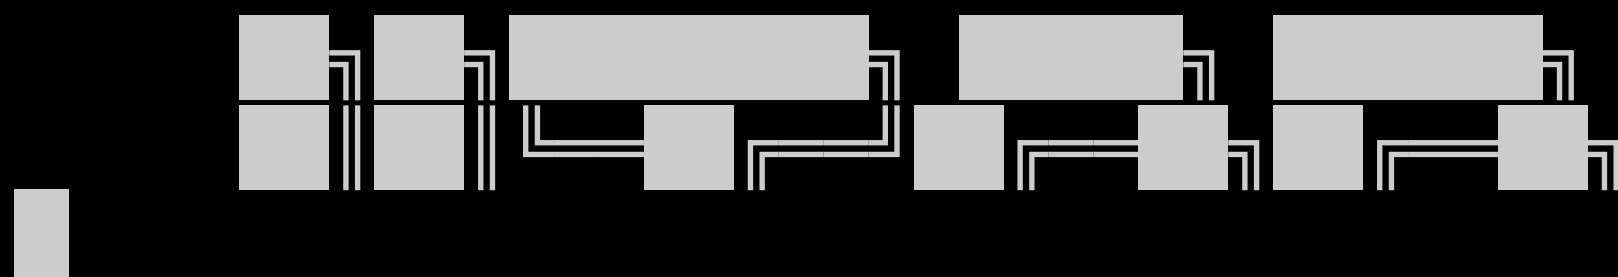


> gateway

> default

TERMINAL

app> npm run default

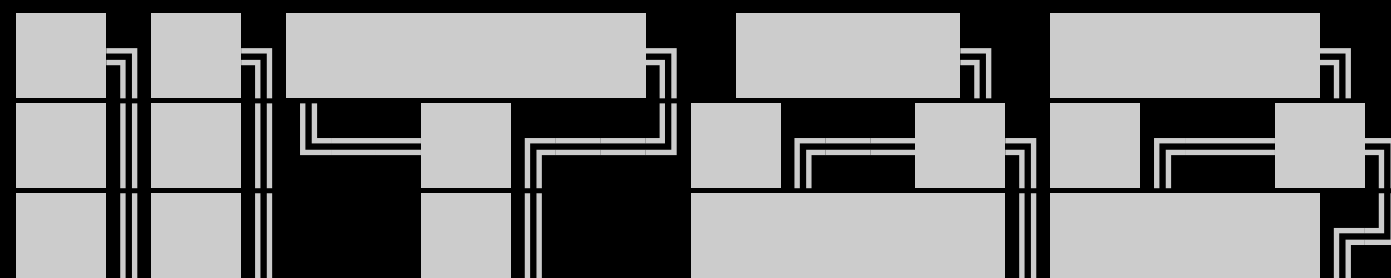


> gateway

> default

TERMINAL

app> npm run default

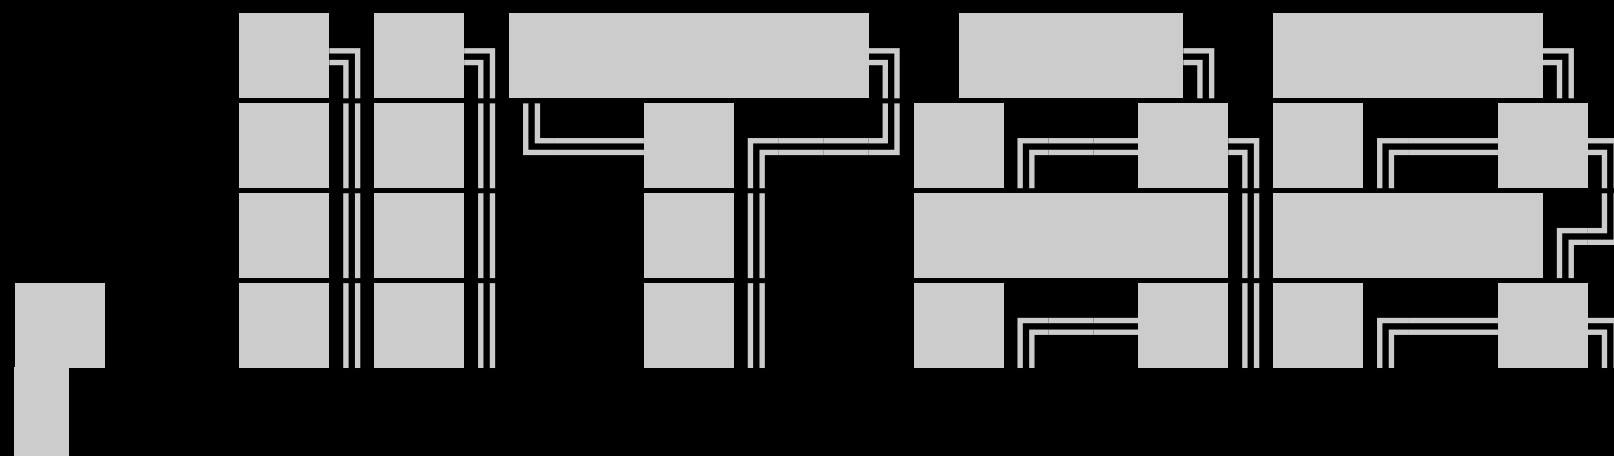


> gateway

> default

TERMINAL

app> npm run default

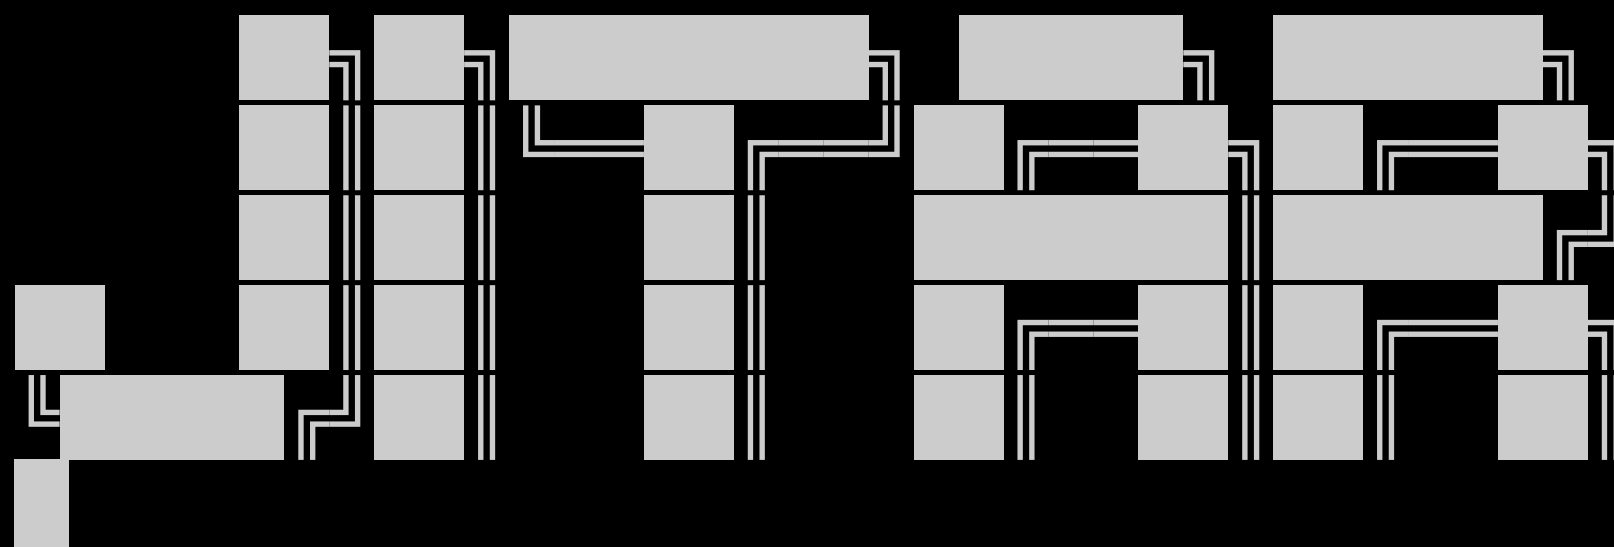


> gateway

> default

TERMINAL


app> npm run default

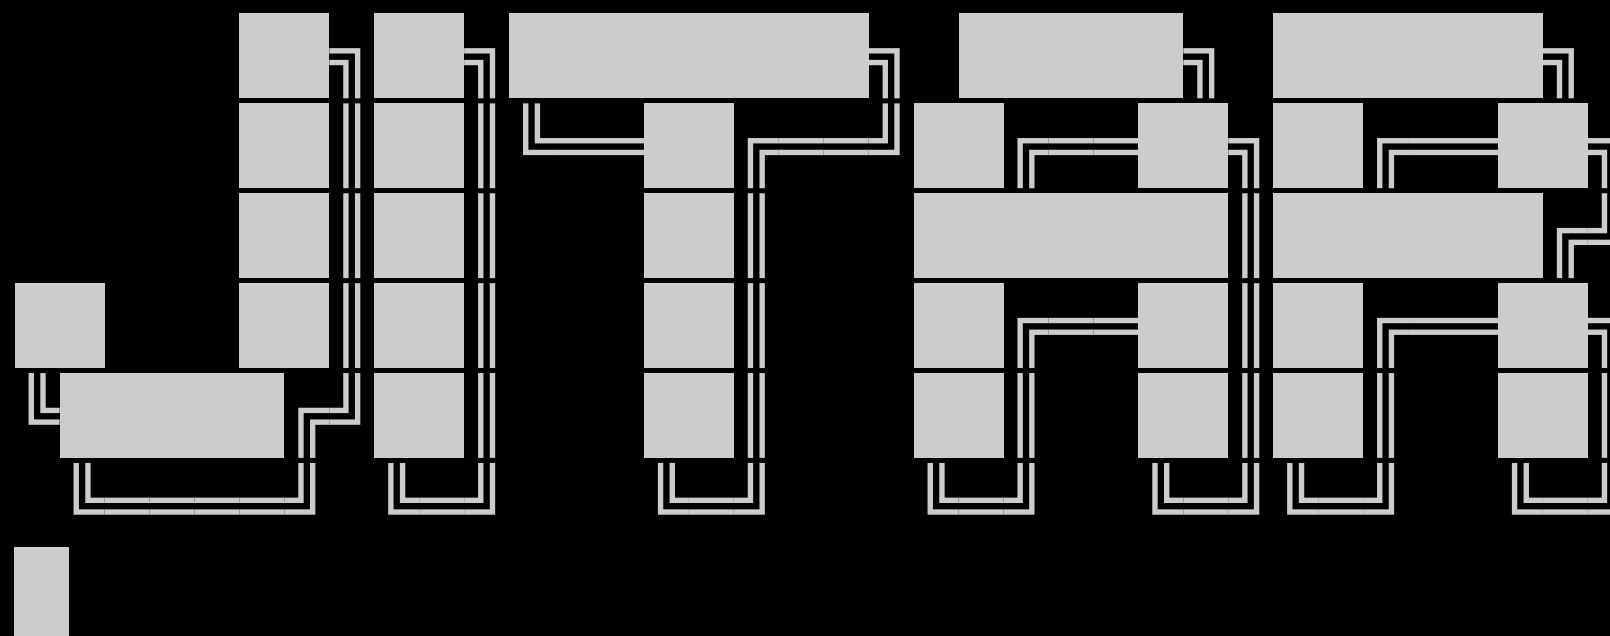

> gateway

> default

TERMINAL

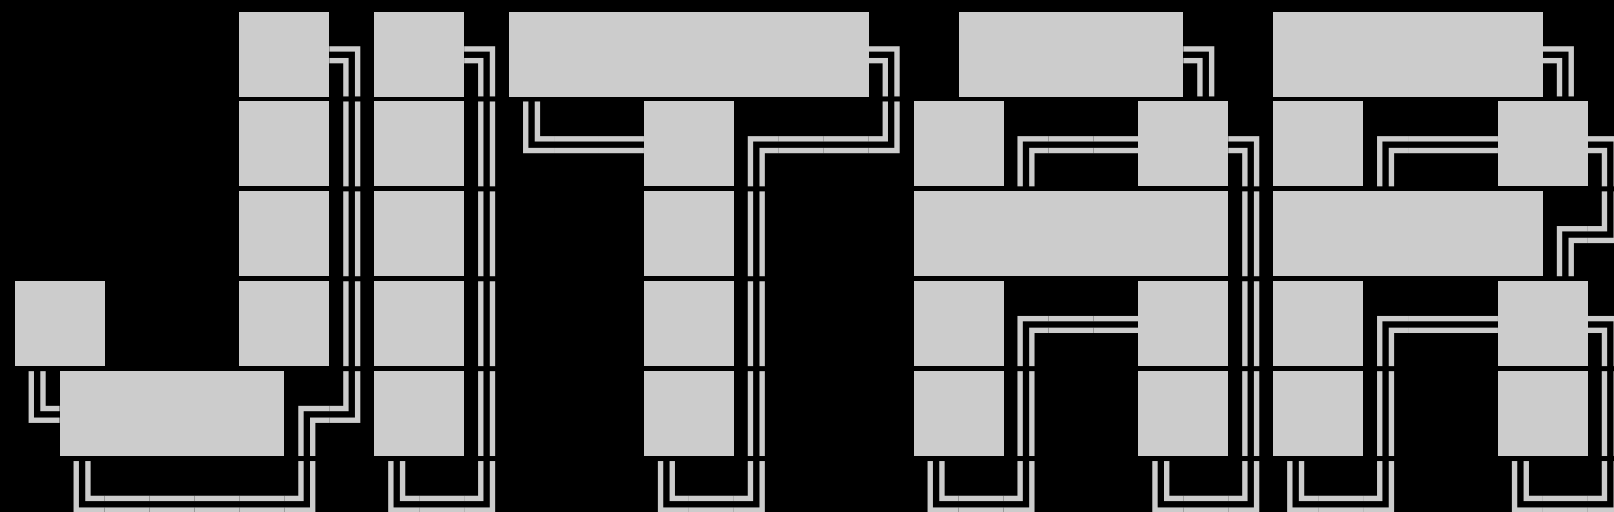


~ Distributed JavaScript Runtime ~



> gateway

> default


TERMINAL

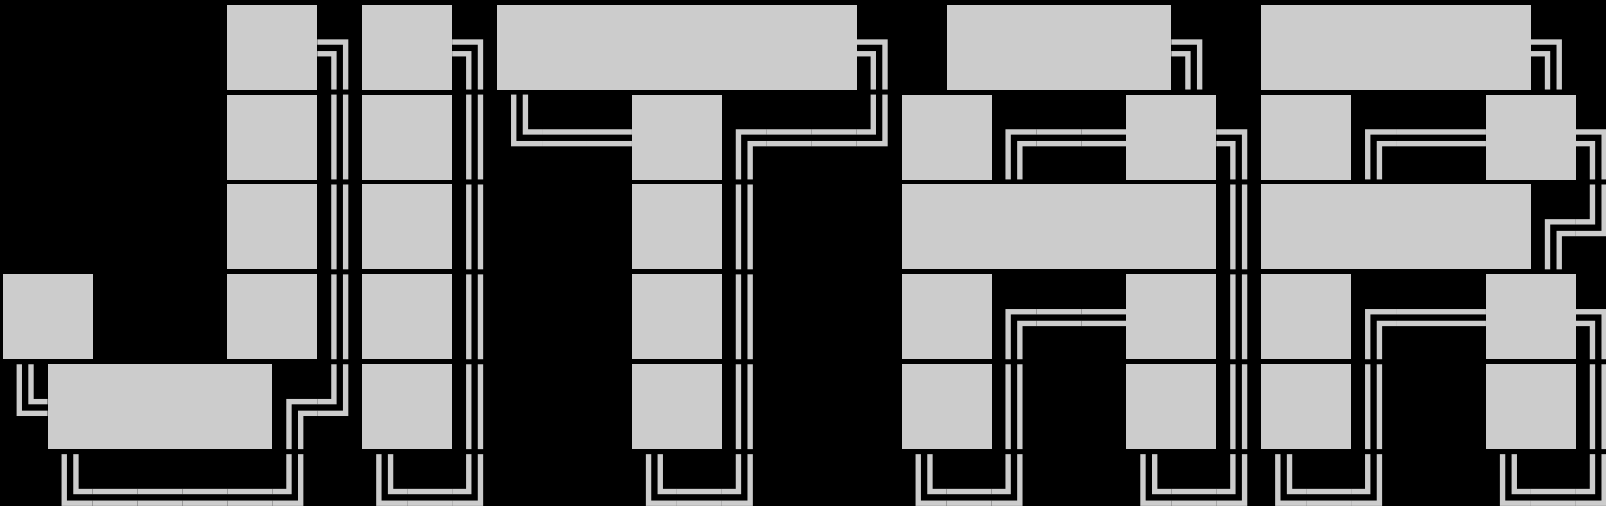

> gateway

> default

TERMINAL

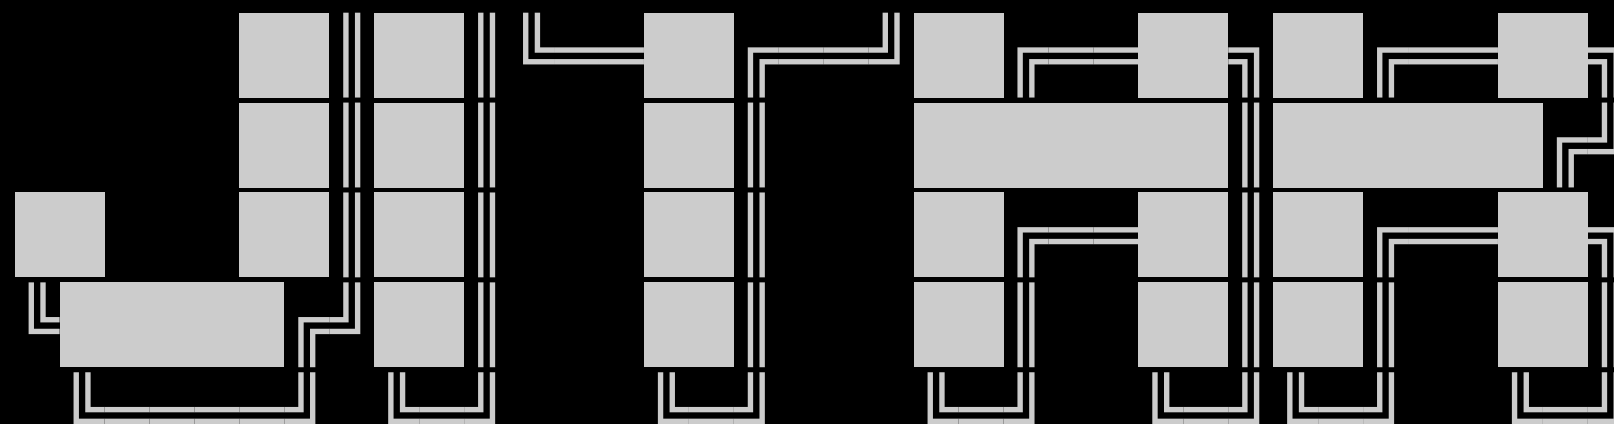


~ Distributed JavaScript Runtime ~

[INFO] Server started at <http://127.0.0.1:4002>

> gateway

> default

TERMINAL

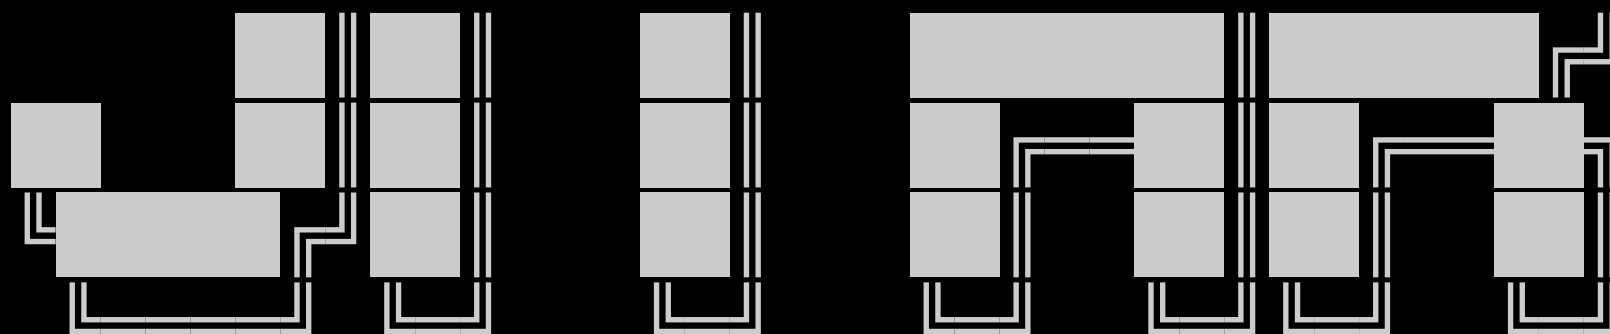

~ Distributed JavaScript Runtime ~

[INFO] Server started at <http://127.0.0.1:4002>


[INFO] RPC procedures: [



> gateway

> default

TERMINAL

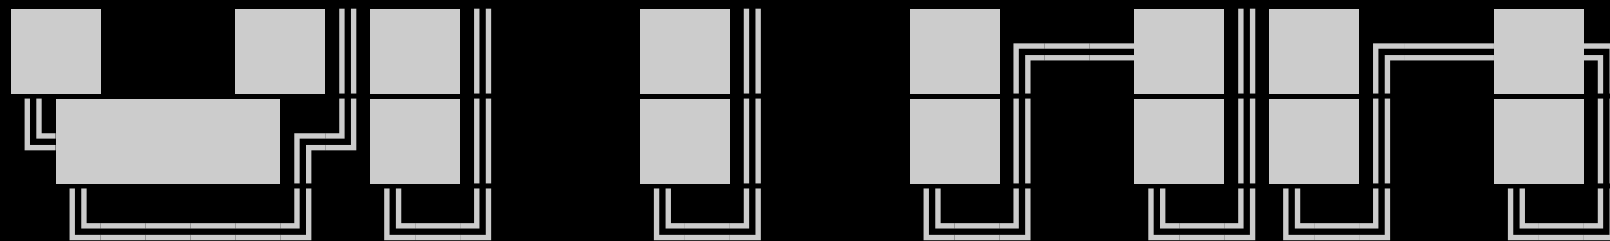

~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:4002
[INFO] RPC procedures: [
 domain/sayHello
]

> gateway

> default

TERMINAL



~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:4002

[INFO] RPC procedures: [
 domain/sayHello

]



> gateway

> default

TERMINAL

app> █

>_ gateway

>_ default

>_ terminal

TERMINAL

app> npm run data

> gateway

> default

> terminal

TERMINAL

app> npm run data



> gateway

> default

> data

TERMINAL

app> npm run data




> gateway

> default

> data

TERMINAL

app> npm run data

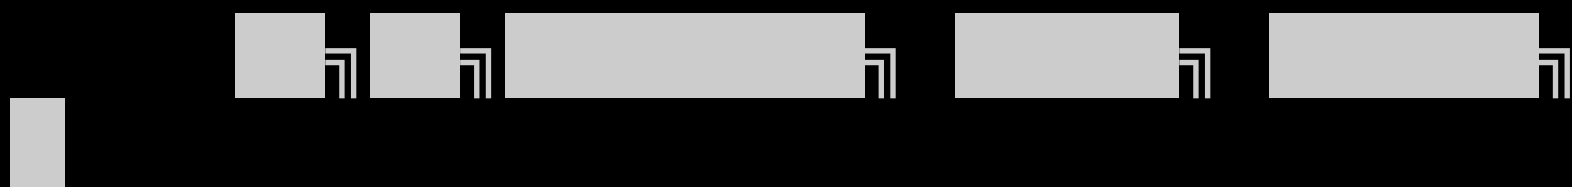


> gateway

> default

> data

TERMINAL

app> npm run data

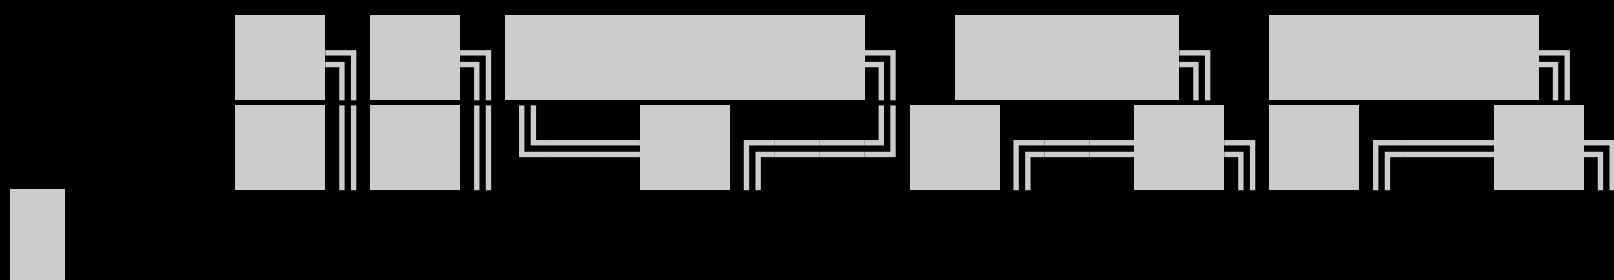


> gateway

> default

> data

TERMINAL

app> npm run data

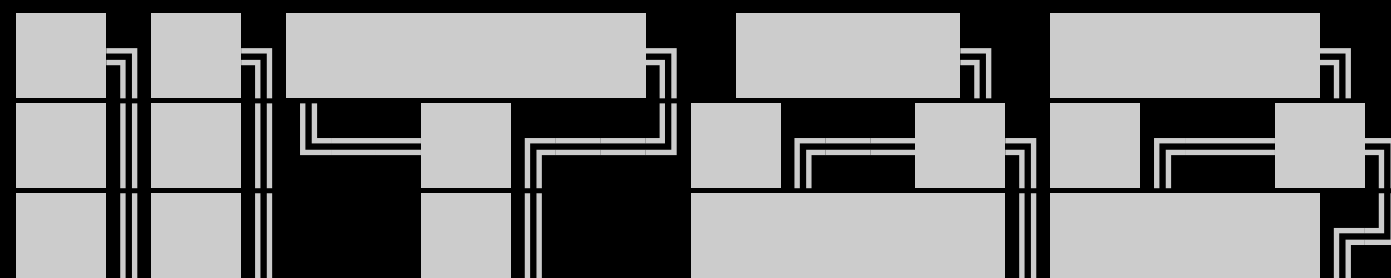


> gateway

> default

> data

TERMINAL

app> npm run data

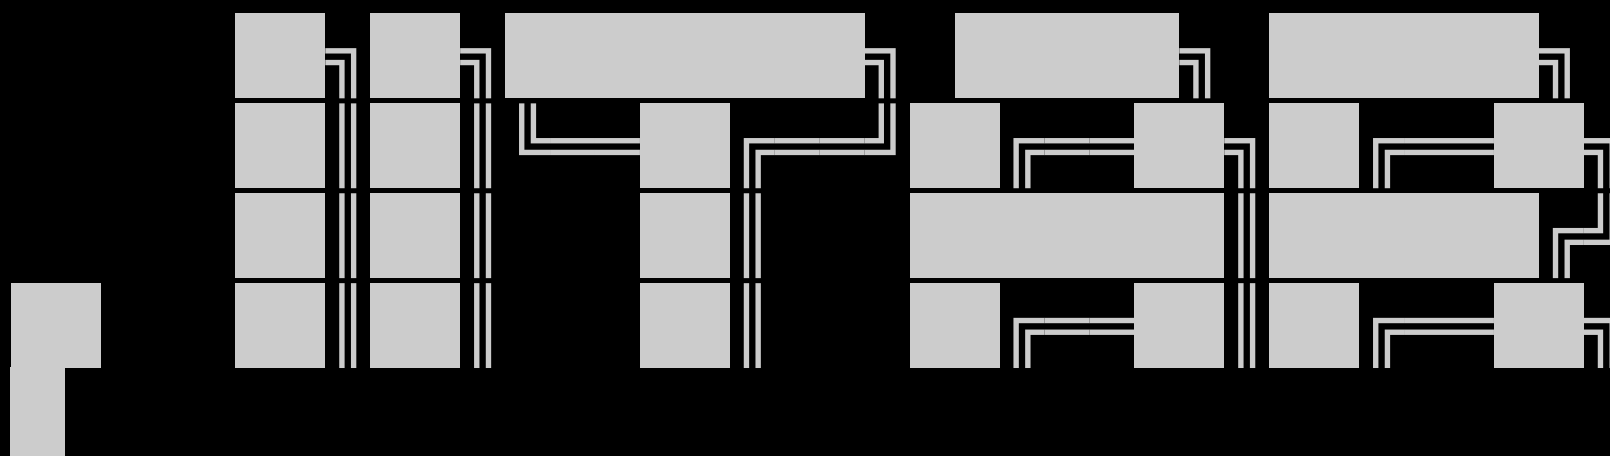


> gateway

> default

> data

TERMINAL

app> npm run data

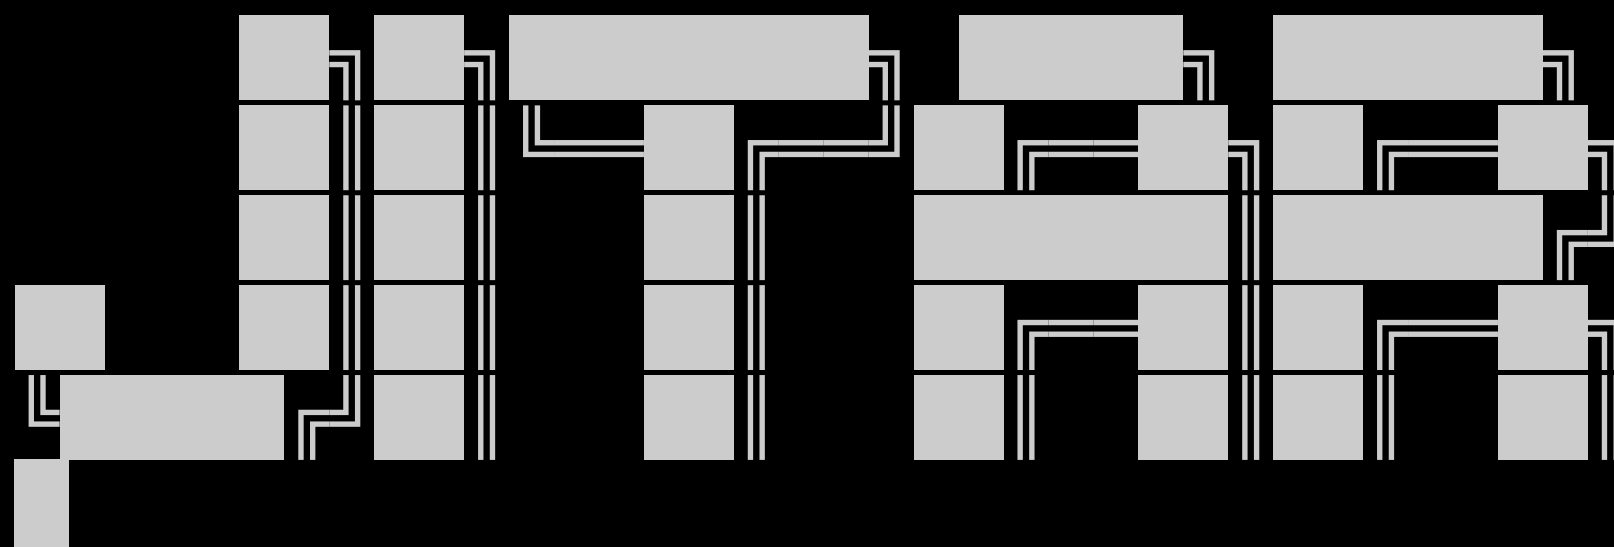


> gateway

> default

> data

TERMINAL

app> npm run data

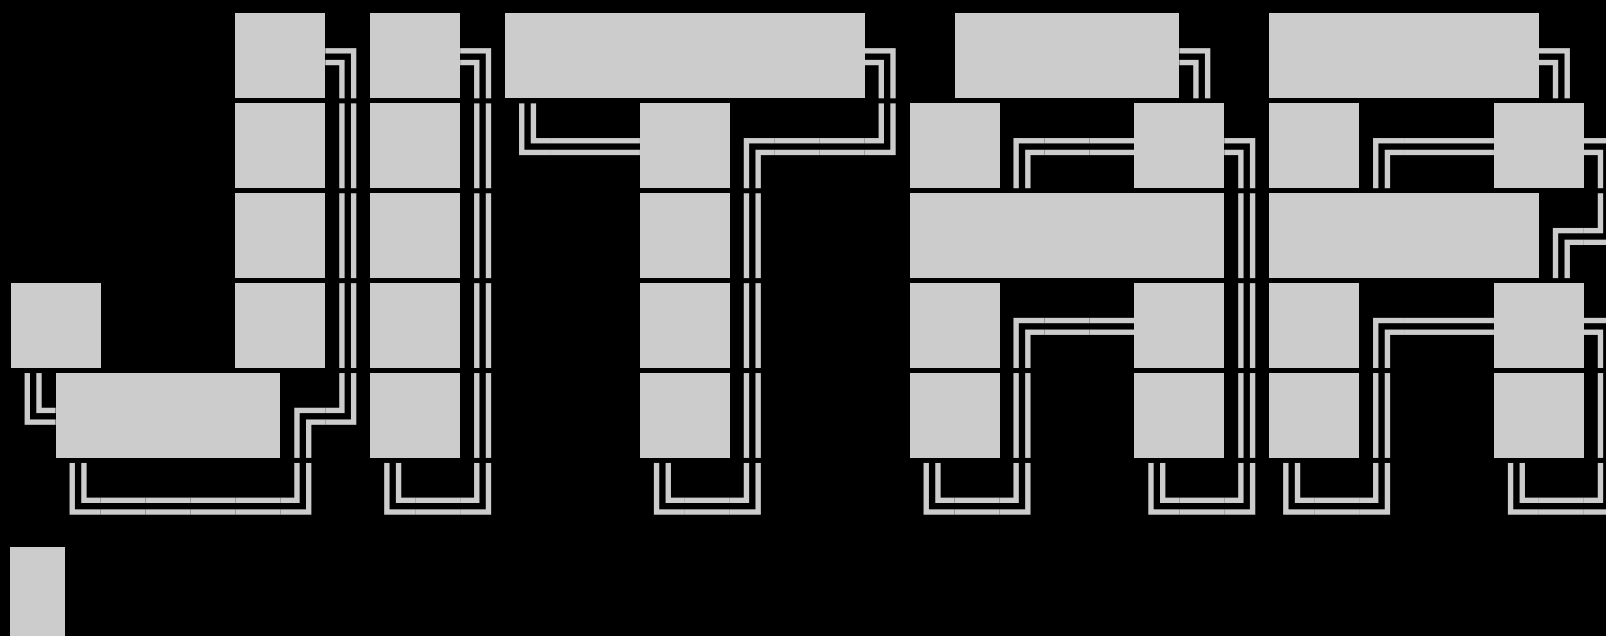


> gateway

> default

> data

TERMINAL

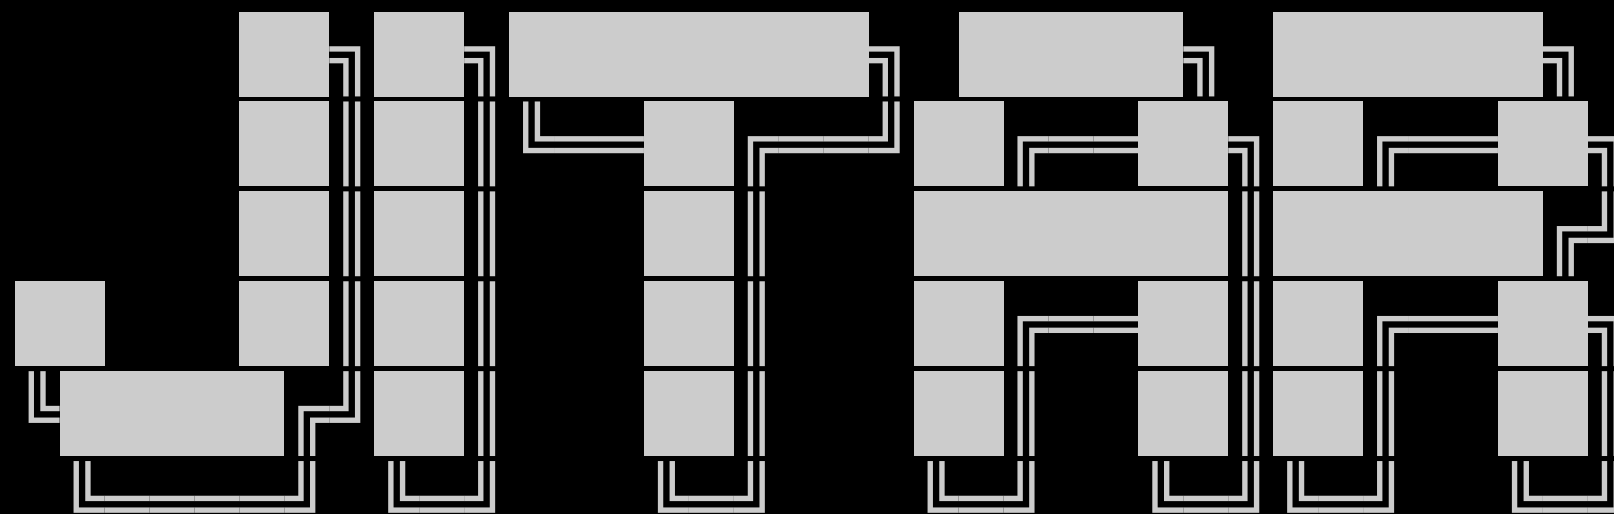

~ Distributed JavaScript Runtime ~




> gateway

> default

> data

TERMINAL

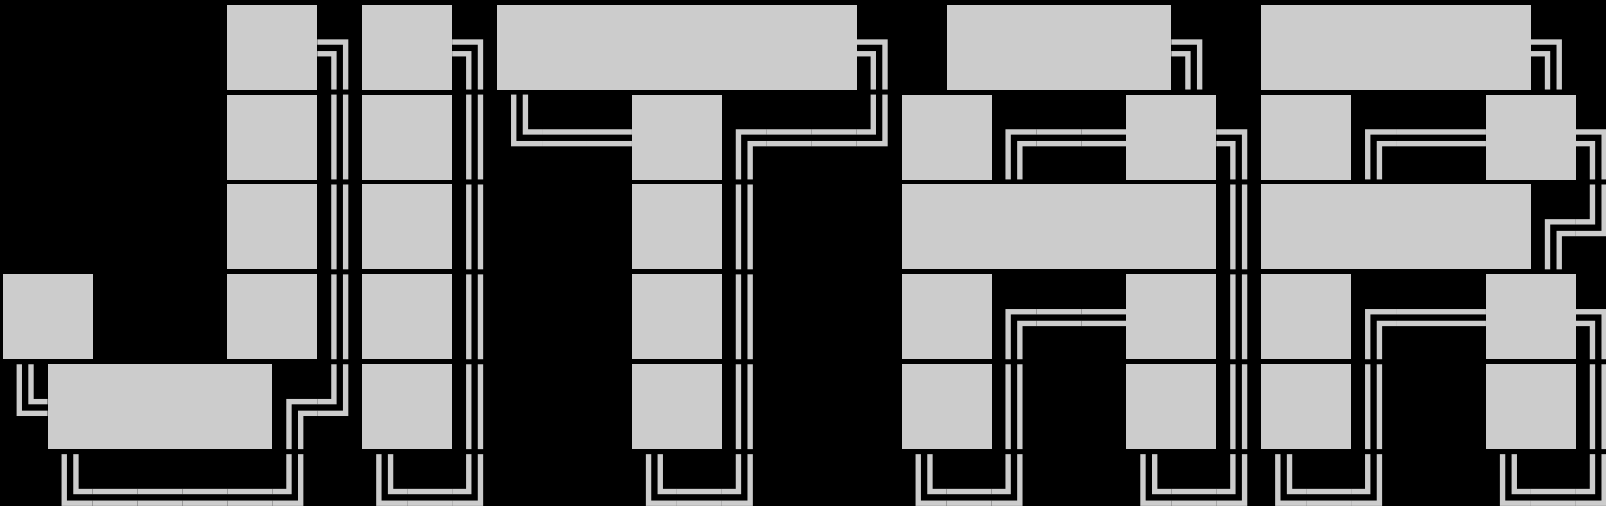


~ Distributed JavaScript Runtime ~



- > gateway
- > default
- > data

TERMINAL

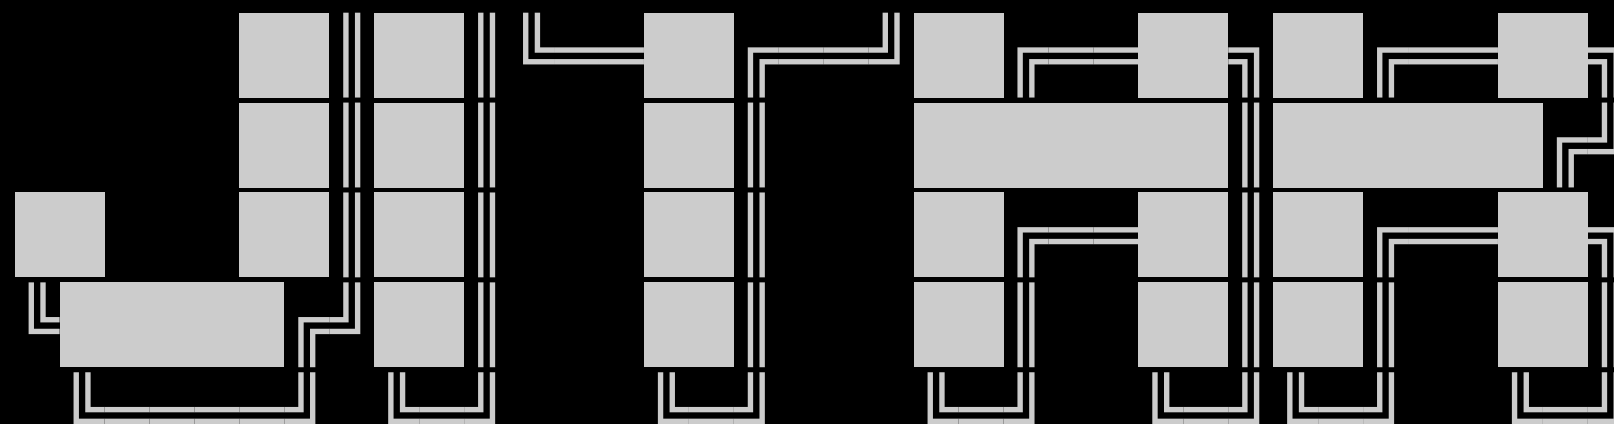

~ Distributed JavaScript Runtime ~


[INFO] Server started at <http://127.0.0.1:4001>

> gateway

> default

> data

TERMINAL

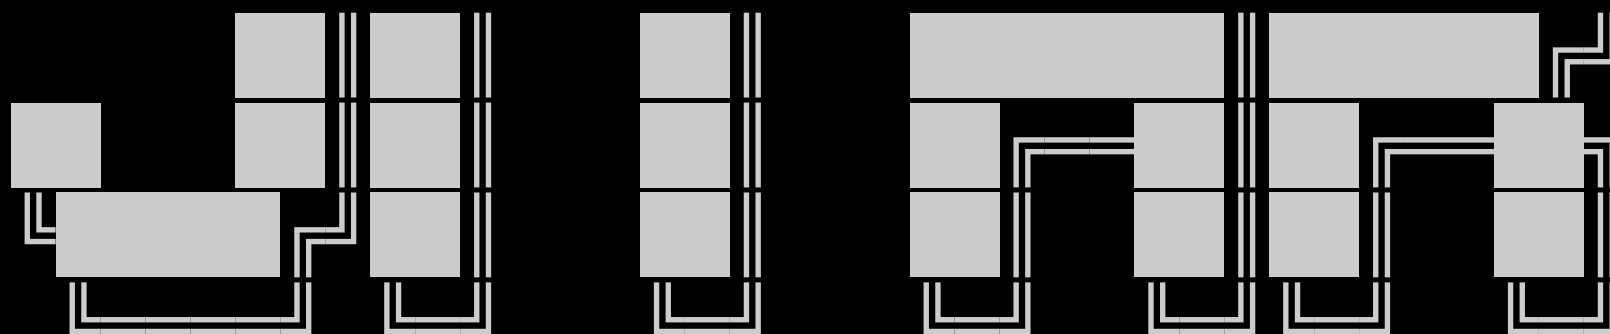

~ Distributed JavaScript Runtime ~

[INFO] Server started at <http://127.0.0.1:4001>

[INFO] RPC procedures: [




> gateway

> default

> data

TERMINAL

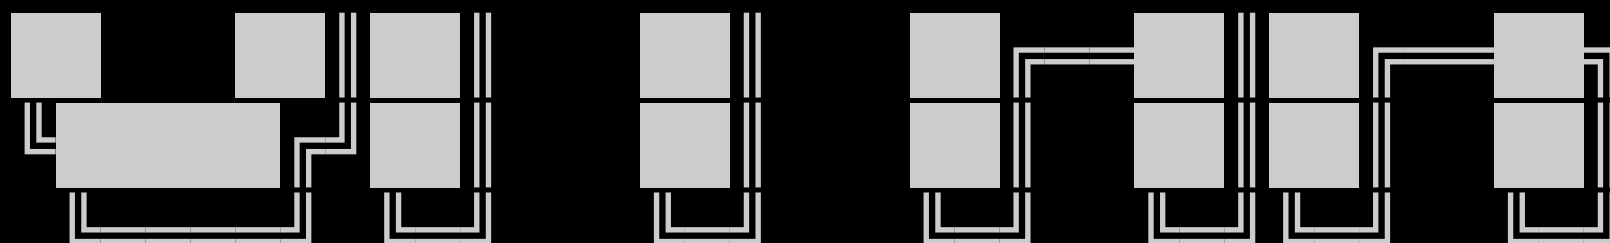

~ Distributed JavaScript Runtime ~

```
[INFO] Server started at http://127.0.0.1:4001
[INFO] RPC procedures: [
  domain/keepHelloCount
```

> gateway

> default

> data

TERMINAL



~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:4001

[INFO] RPC procedures: [
 domain/keepHelloCount

]



> gateway

> default

> data