```
CODE → services/standalone.json

{
    "url": "http://127.0.0.1:3000",
    "standalone":
    {
        "segments": ["default"],
        "assets": ["index.html", "vite.svg", "assets/**/*"]
    }
}
```

TERMINAL

~ Distributed JavaScript Runtime ~

```
CODE → services/standalone.json

{
    "url": "http://127.0.0.1:3000",
    "standalone":
    {
        "segments": ["default"],
        "assets": ["index.html", "vite.svg", "assets/**/*"]
    }
}
```

```
TERMINAL
```

~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:3000

[INFO] RPC procedures: [

```
ents
ult.json
es
dalone.json
ain
Hello.ts
ets
o.tsx
ntml
```

```
CODE → services/standalone.json
  "url": "http://127.0.0.1:3000",
  "standaloi" >"
    "segments": ["default"],
    "assets": ["index.html", "vite.svg", "assets/**/*"]
```

```
TERMINAL

~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:3000

[INFO] RPC procedures: [
    domain/sayHello
]
```

```
ORER
   app
    public
    segments
     default.json
    services
     standalone.json
    src
      domain
      sayHello.ts
      webui
       assets
      App.tsx
    index.html
```

```
CODE → services/standalone.json

{
    "url": "http://127.0.0.1:3000",
    "standalone":
    {
        "segments": ["default"],
        "assets": ["index.html", "vite.svg", "assets/**/*"]
    }
}
```

```
~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:3000
[INFO] RPC procedures: [
    domain/sayHello
]
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
```


Code Editor

EXPLORER



- > public
- ✓ segments
 - default.json
- ✓ services
 - standalone.json
- ✓ src
- ✓ domain
 - sayHello.ts
- ✓ webui
 - > assets
 - App.tsx
 - index.html

CODE → services/standalone.json { "url": "http://127.0.0.1:3000",

"standalone":

```
"segments": ["default"],
"assets": ["index.html", "vite.svg", "assets/**/*"]
```

TERMINAL

~ Distributed JavaScript Runtime ~

```
[INFO] Server started at http://127.0.0.1:3000
```

[INFO] RPC procedures: [
domain/sayHello

[INFO] Provided web client

[INFO] Ran request: domain/sayHello

```
EXPLORER
       app
        public
        segments
       default.json
        services
      standalone.json
        src
         domain
         sayHello.ts
         webui
          assets
         App.tsx
       index.html
```

```
CODE → services/standalone.json

{
    "url": "http://127.0.0.1:3000",
    "standalone":
    {
        "segments": ["default"],
        "assets": ["index.html", "vite.svg", "assets/**/*"]
    }
}
```

```
~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:3000
[INFO] RPC procedures: [
    domain/sayHello
]
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
```

```
ÉXPLORER
       app
        public
        segments
       default.json
        services
     standalone.json
        src
         domain
         sayHello.ts
         webui
          assets
         App.tsx
       index.html
```

```
CODE → services/standalone.json

{
    "url": "http://127.0.0.1:3000",
    "standalone":
    {
        "segments": ["default"],
        "assets": ["index.html", "vite.svg", "assets/**/*"]
    }
}
```

TERMINAL

```
[INFO] Server started at http://127.0.0.1:3000
```

[INFO] RPC procedures: [
domain/sayHello

~ Distributed JavaScript Runtime ~

[INFO] Provided web client [INFO] Ran request: domain/sayHello

```
EXPLORER
       app
        public
        segments
       default.json
        services
      standalone.json
        src
         domain
         sayHello.ts
         webui
          assets
         App.tsx
       index.html
```

```
CODE --> services/standalone.json

{
    "url": "http://127.0.0.1:3000",
    "standalone":
    {
        "segments": ["default"],
        "assets": ["index.html", "vite.svg", "assets/**/*"]
    }
}
```

TERMINAL


```
[INFO] Server started at http://127.0.0.1:3000
```

```
[INFO] Server started at http://127.0.0.1:3000
[INFO] RPC procedures: [
domain/sayHello
```

[INFO] Provided web client [INFO] Ran request: domain/sayHello

~ Distributed JavaScript Runtime ~



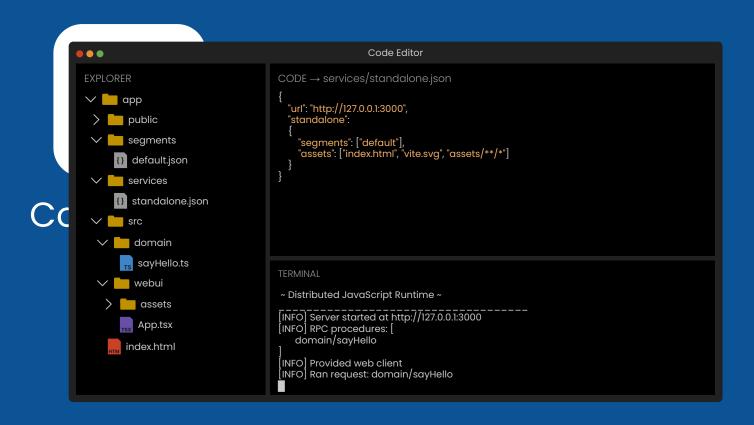


























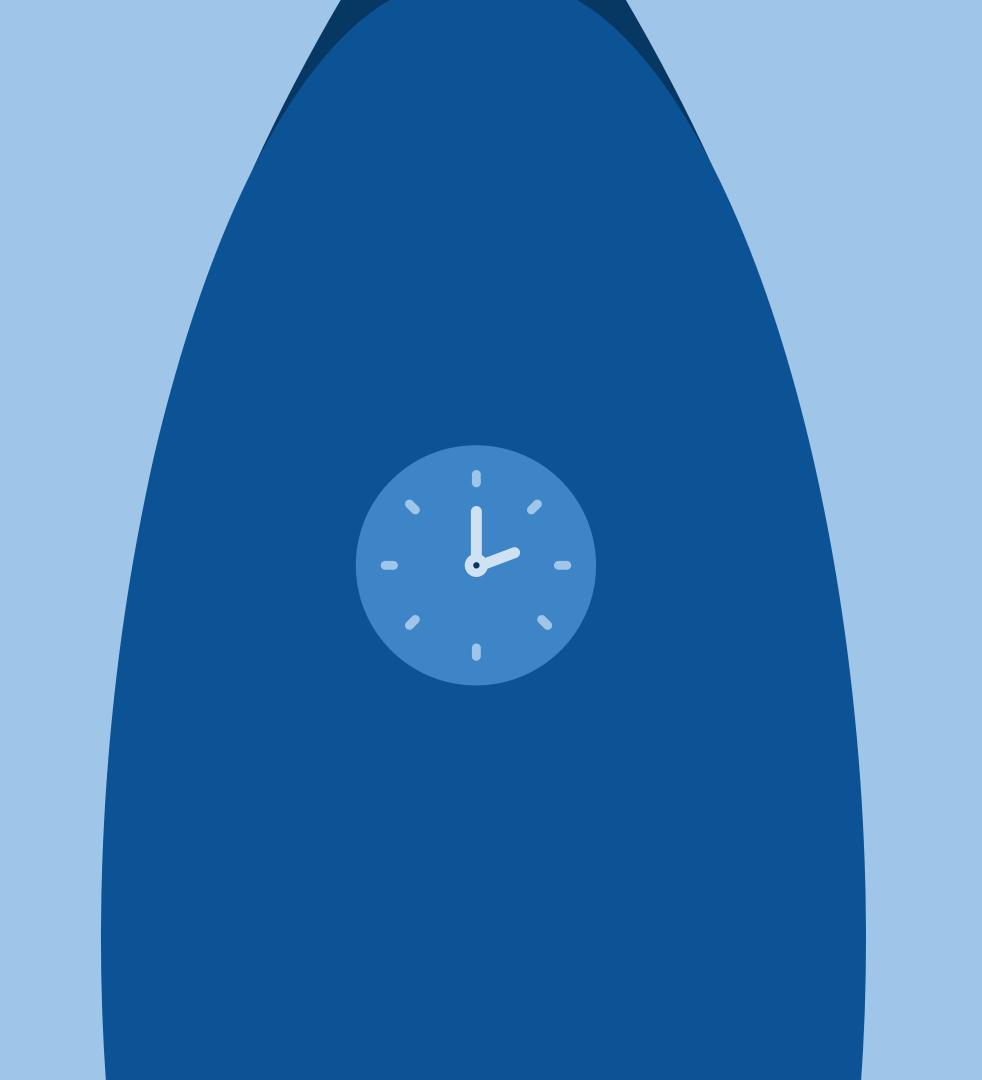


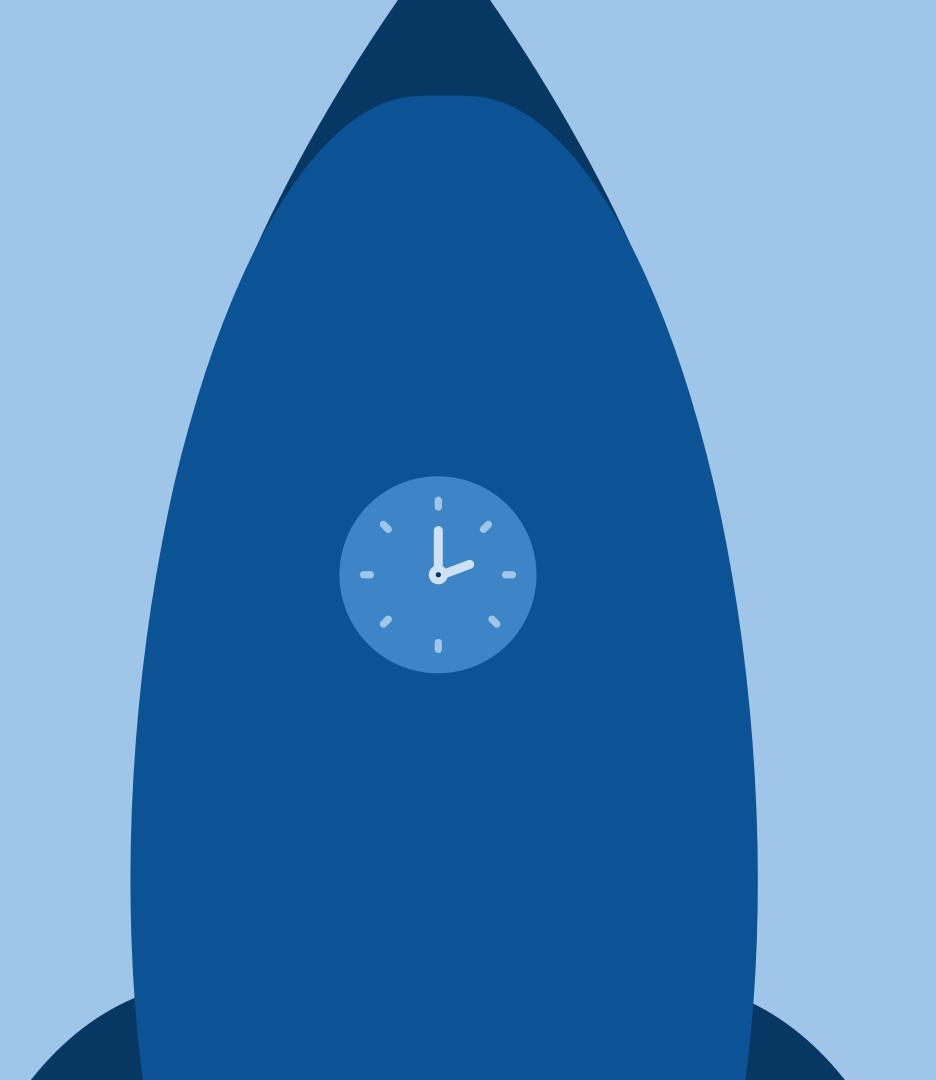


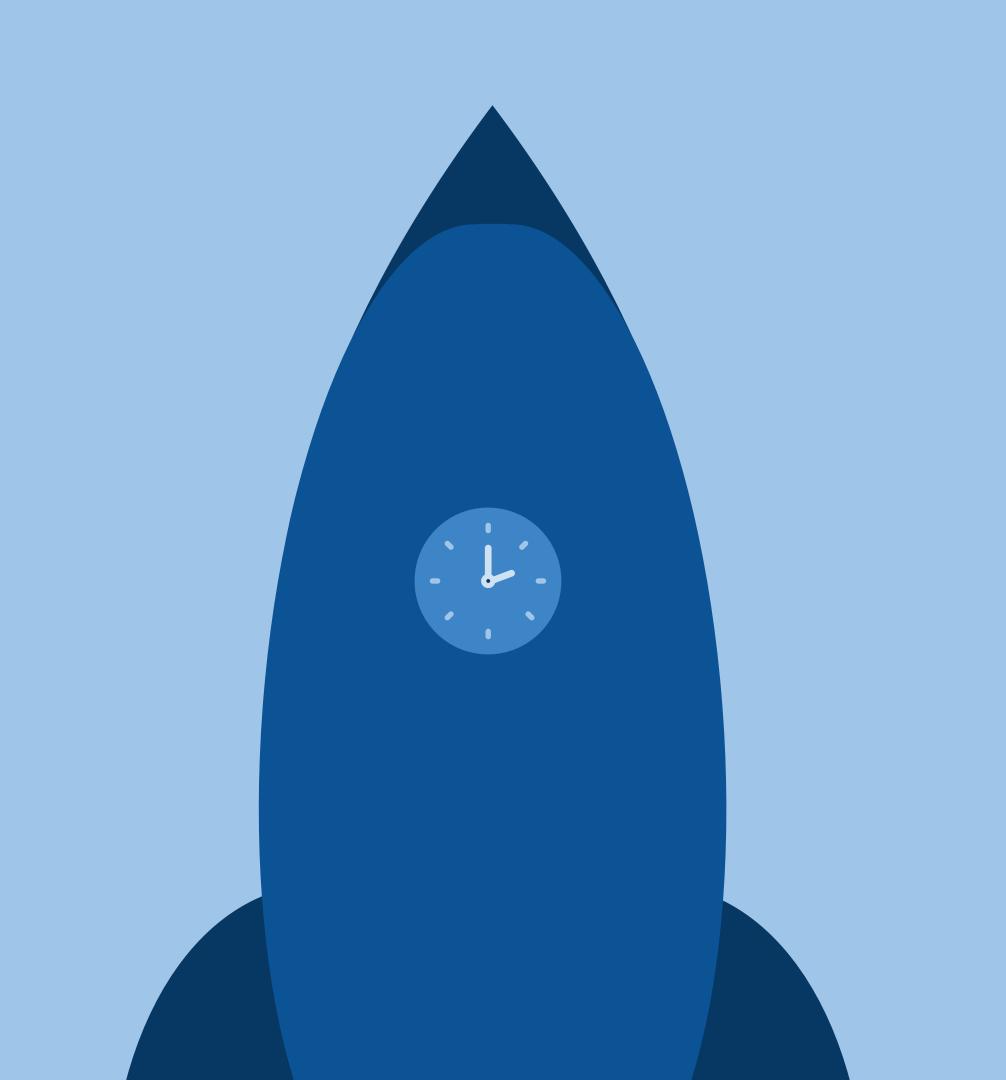


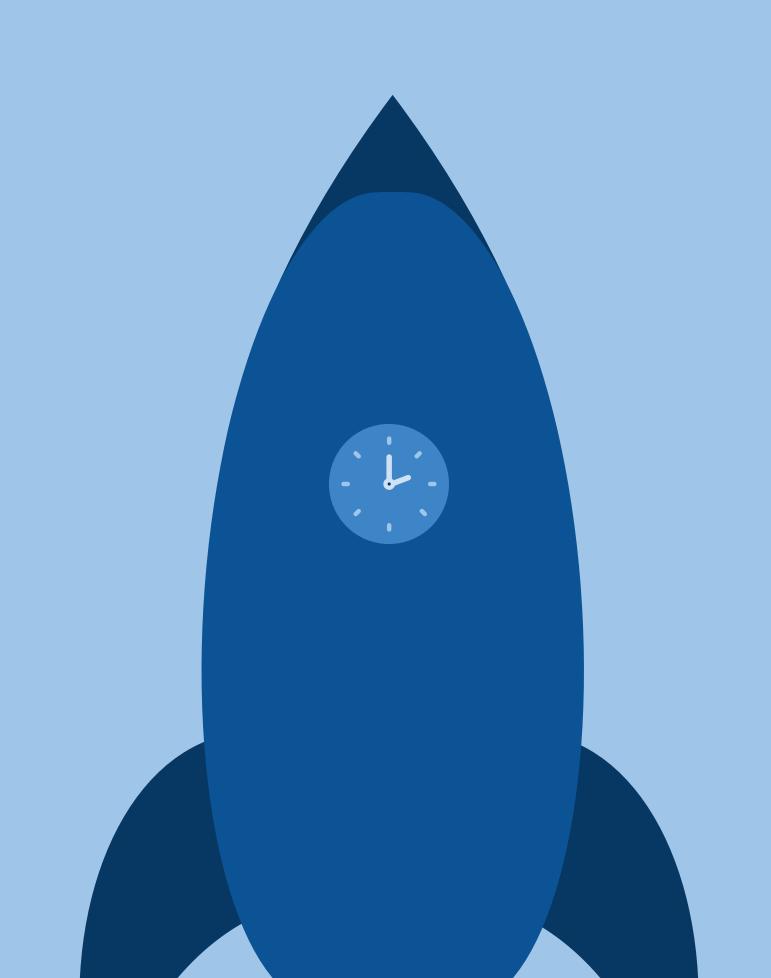


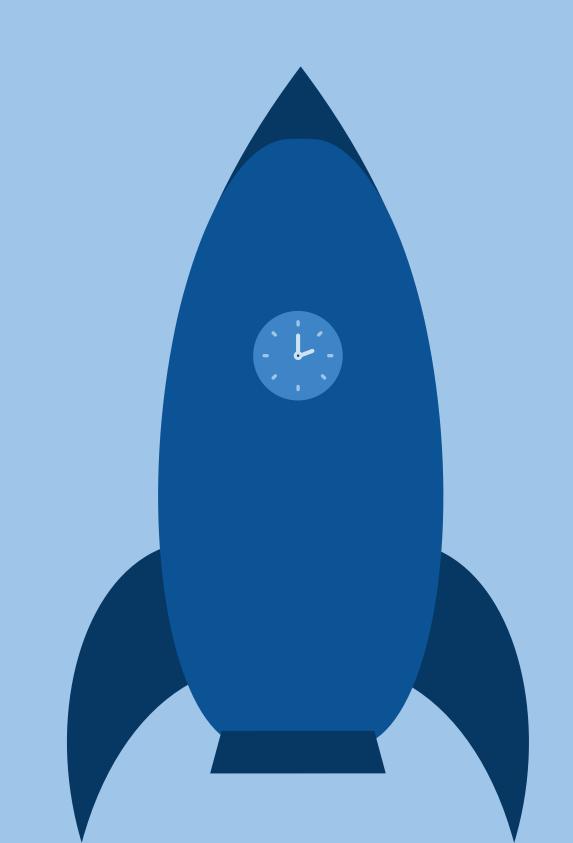


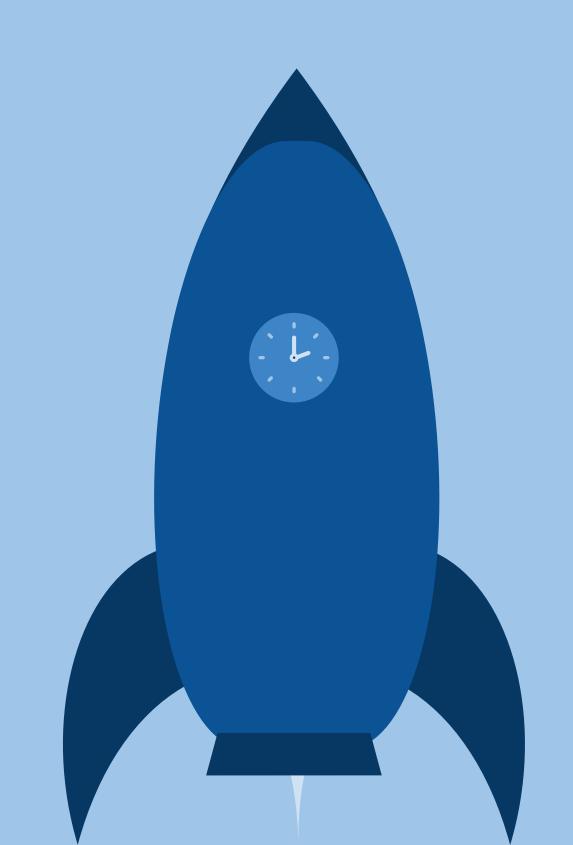


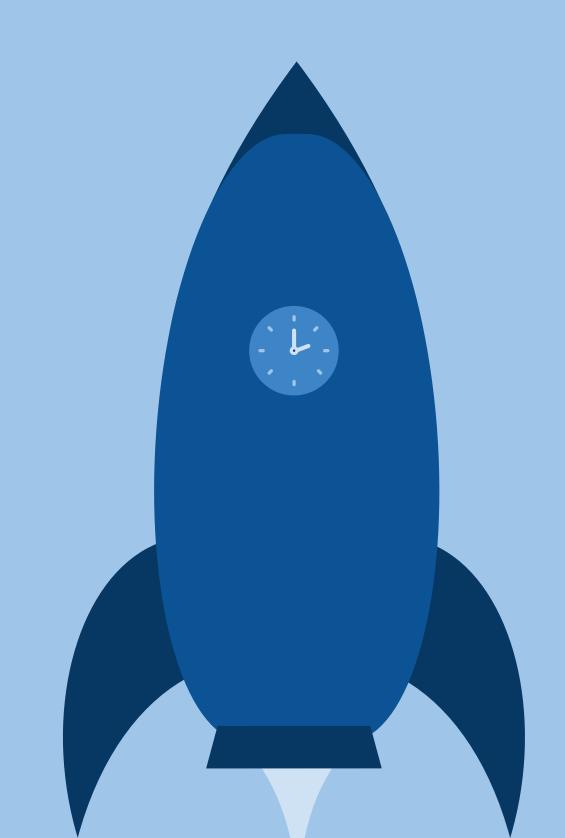


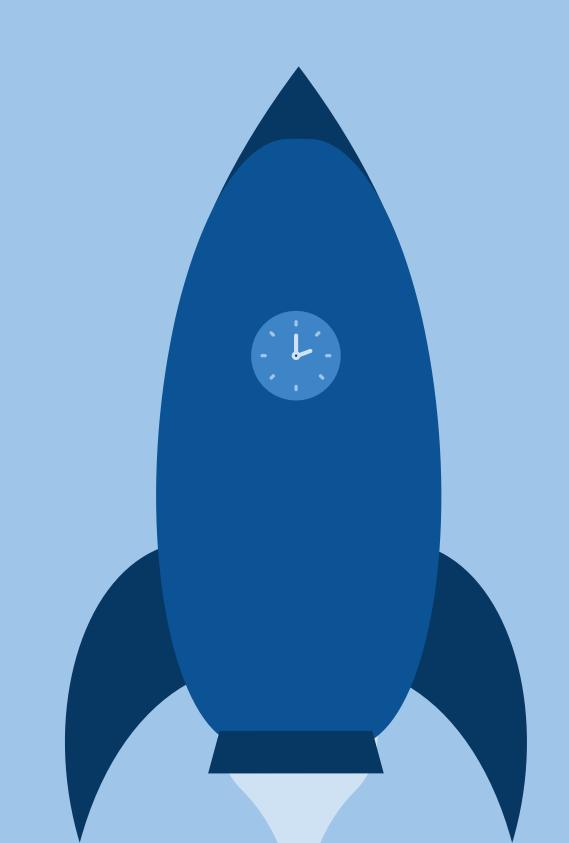


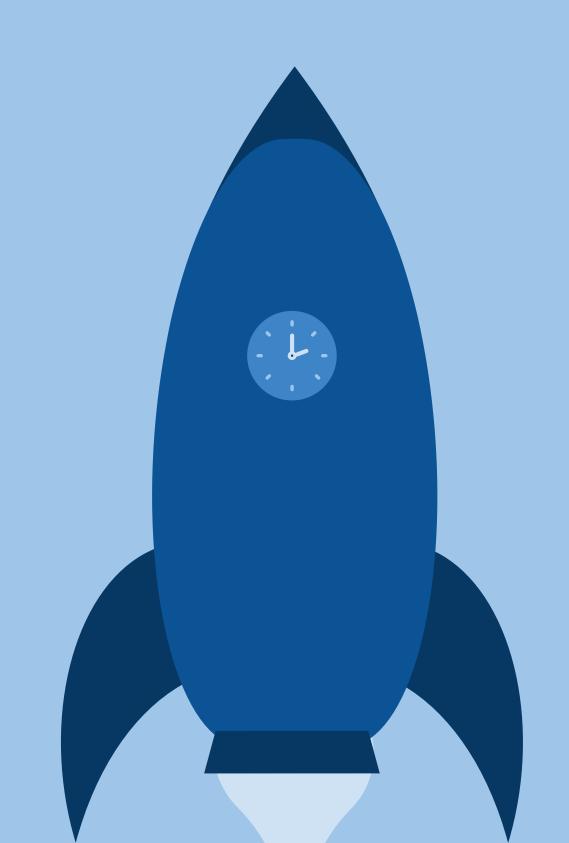

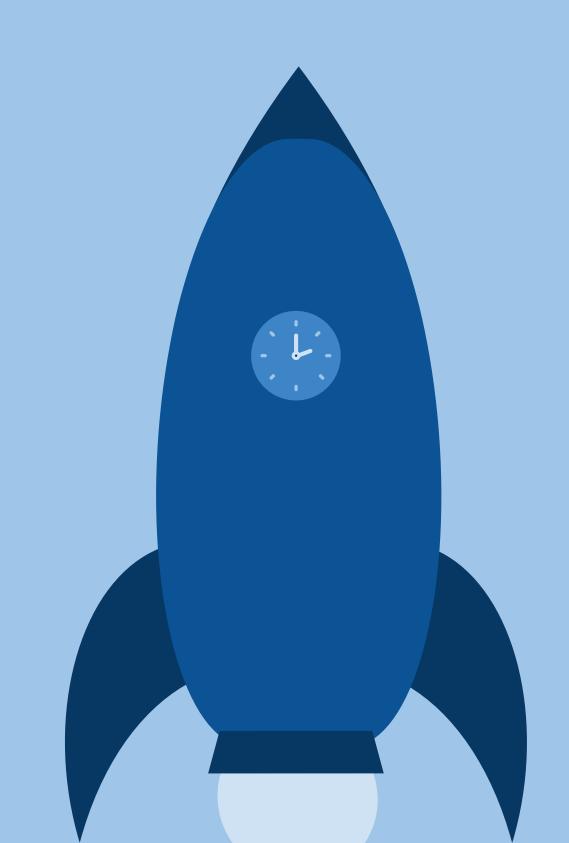

































EV

Every

Everythi

R

Everything you

Dist

Everything you need any time

Distrib Runtin

Everything you need to at any time, c

Distribute Runtime

Everything you need to scale at any time, at any

VICMI

Distributed Runtime for

Everything you need to scale full at any time, at any pla

JILAI

Distributed Runtime for Js Ts



















































Everything you need to scale full-stack apps, at any place.

jitar



Everything you need to scale full-stack apps, at any place.

jitar.





Everything you need to scale full-stack apps, at any time, at any place.

jitar.d





Everything you need to scale full-stack apps, at any place.

jitar.de





Everything you need to scale full-stack apps, at any place.

jitar.dev





Everything you need to scale full-stack apps, at any place.

jitar.dev

