


```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

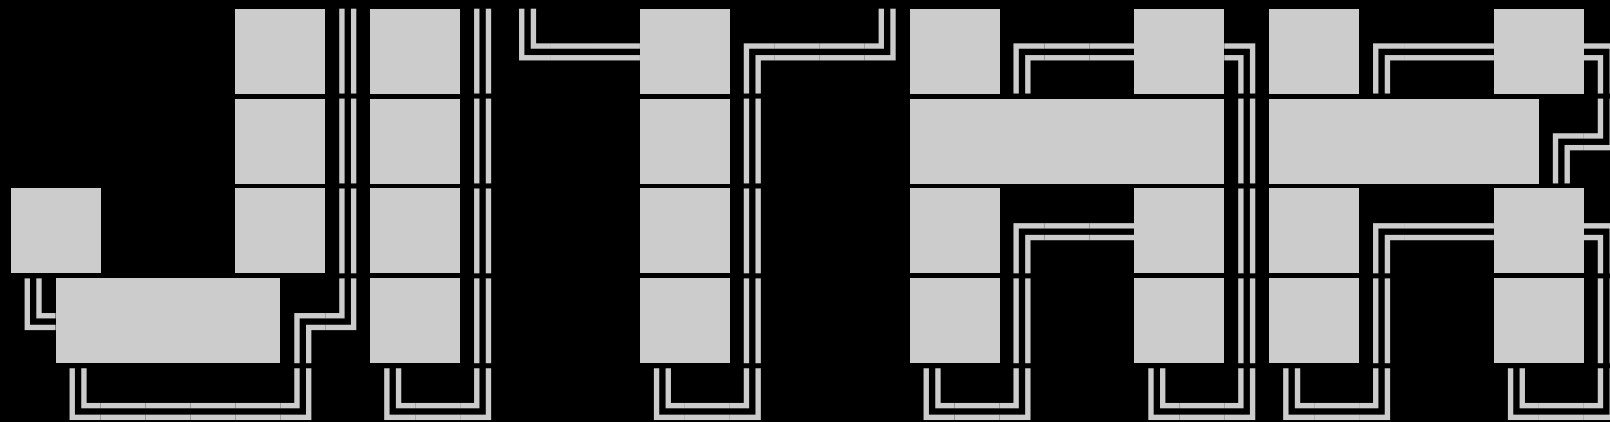

~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:3001



```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

app> █

>_ gateway

>_ terminal

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

```
app> npm run repository
```

> gateway

> terminal

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

```
app> npm run repository
```



> gateway

> repository

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

app> npm run repository




> gateway

> repository

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

app> npm run repository

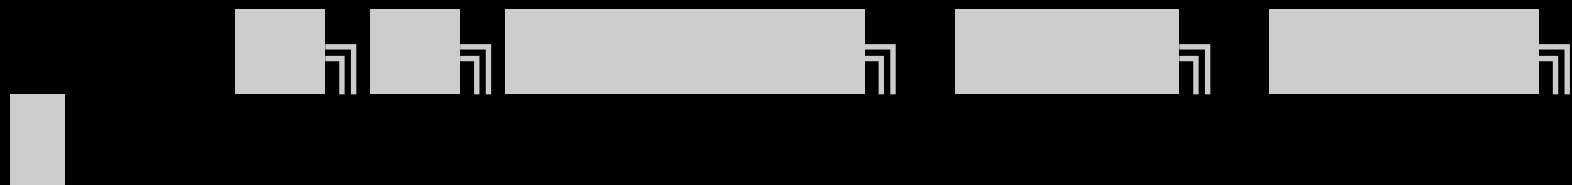


> gateway

> repository

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

app> npm run repository

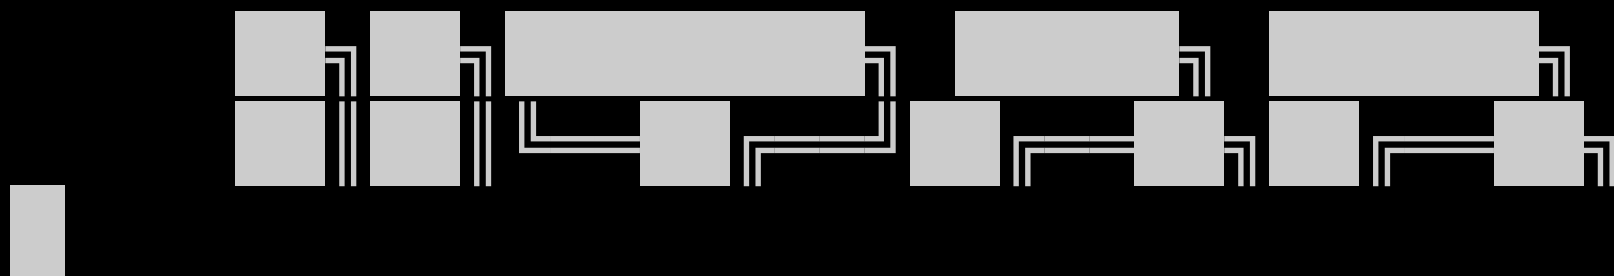


> gateway

> repository

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

app> npm run repository

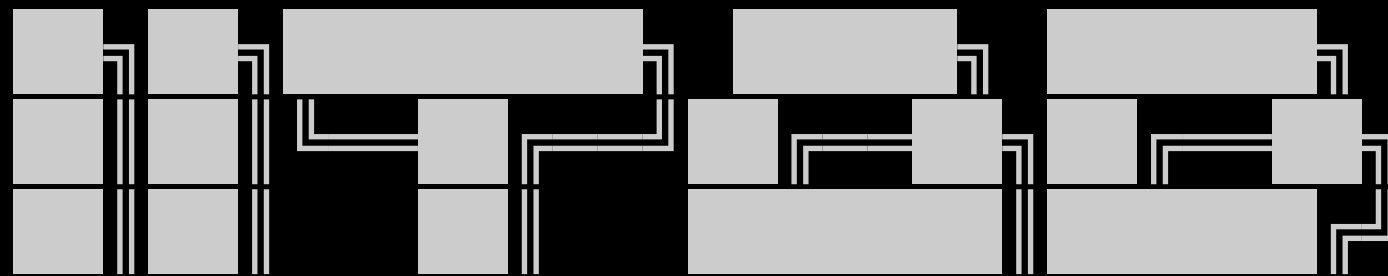


> gateway

> repository


```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

app> npm run repository

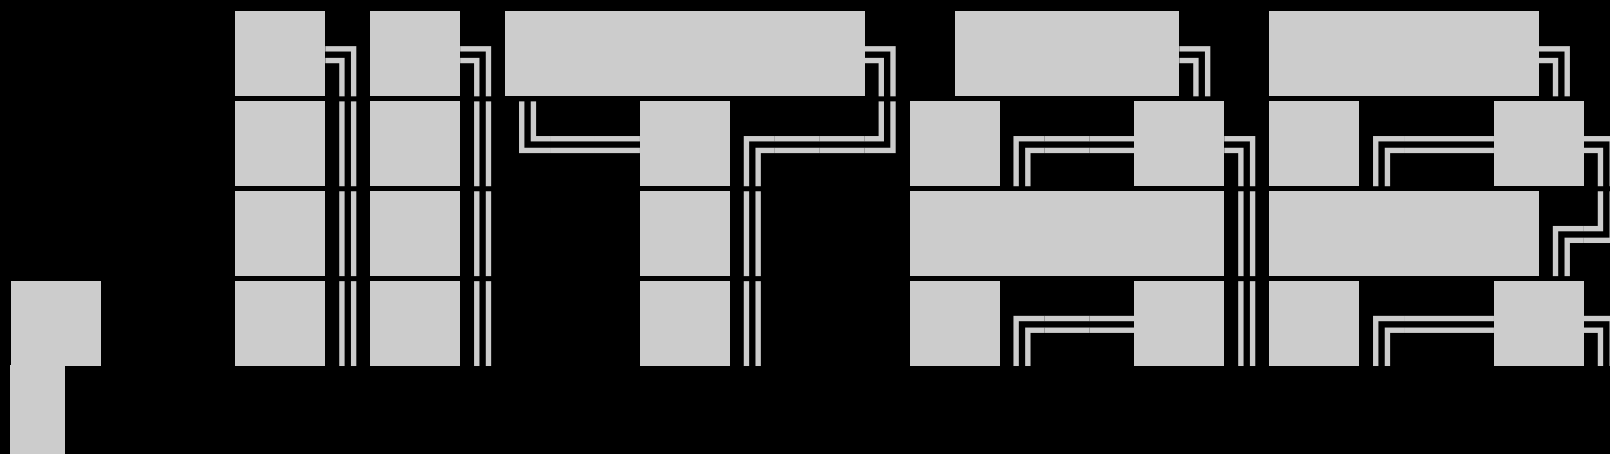


> gateway

> repository

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

app> npm run repository

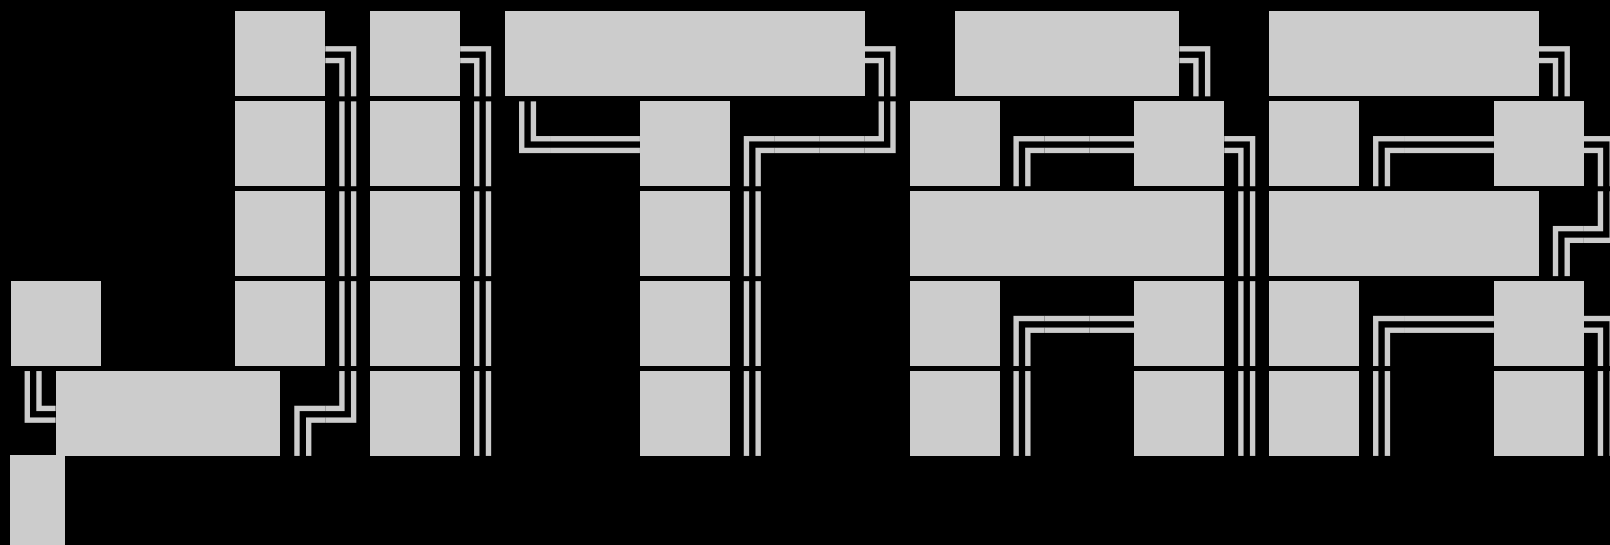


> gateway

> repository

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

app> npm run repository

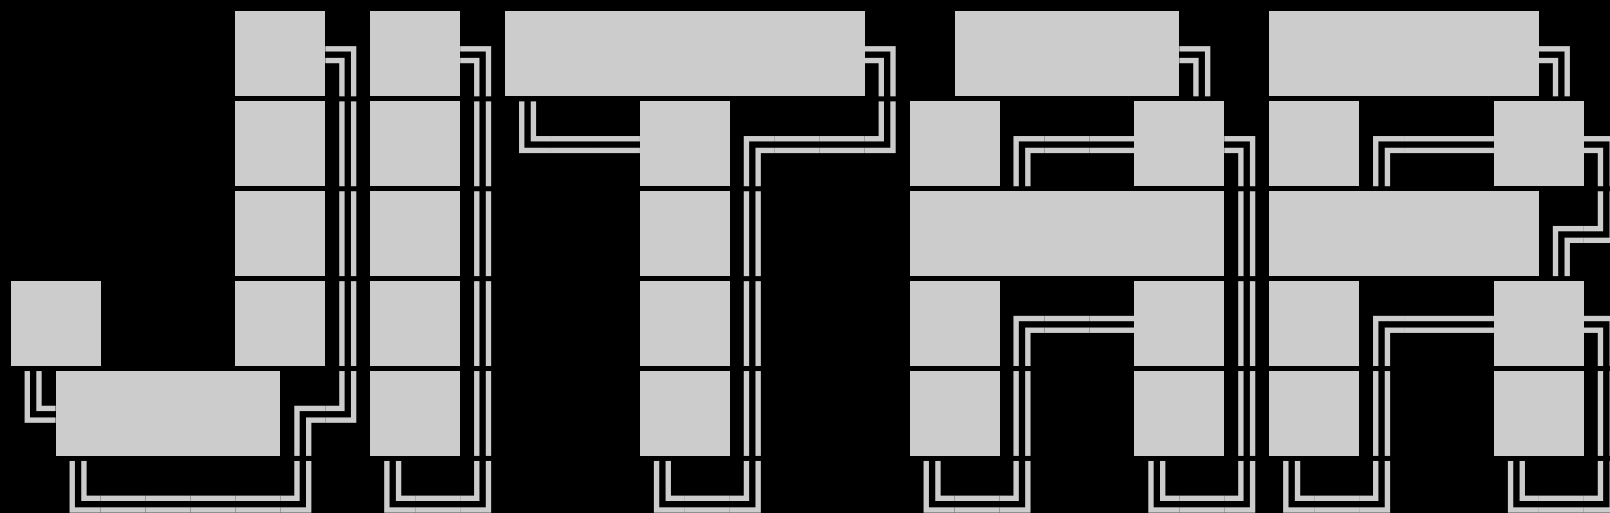


> gateway

> repository

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

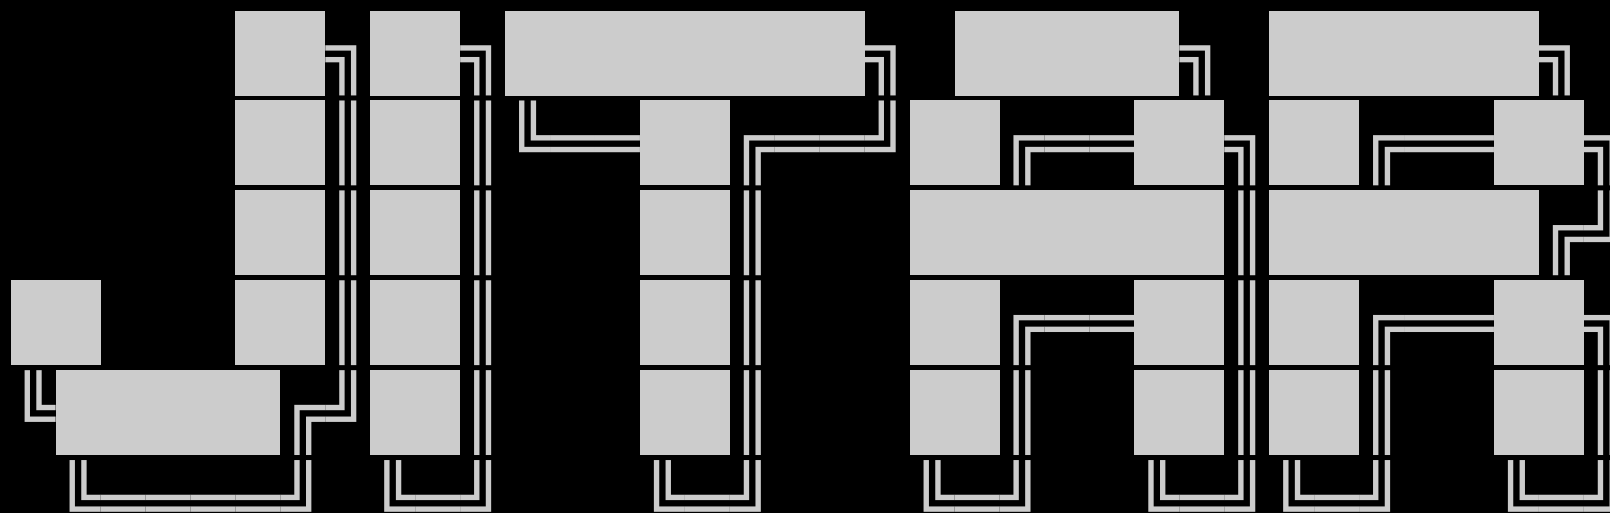

~ Distributed JavaScript Runtime ~




> gateway

> repository

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

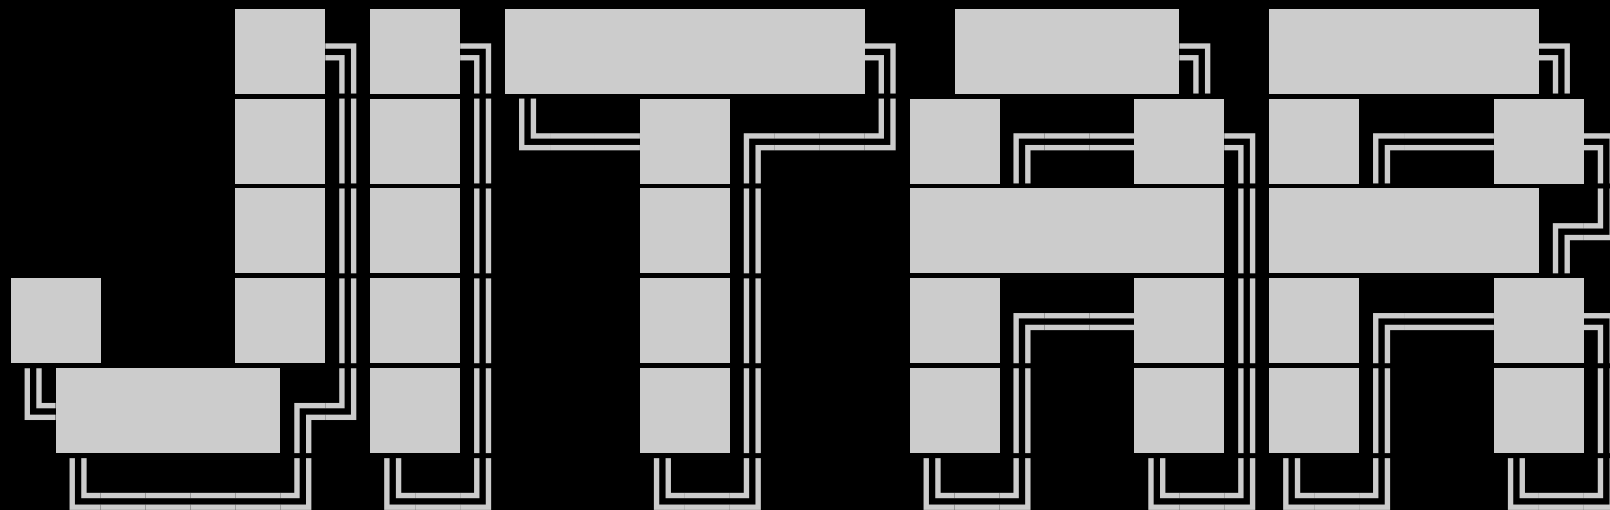

~ Distributed JavaScript Runtime ~




> gateway

> repository

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

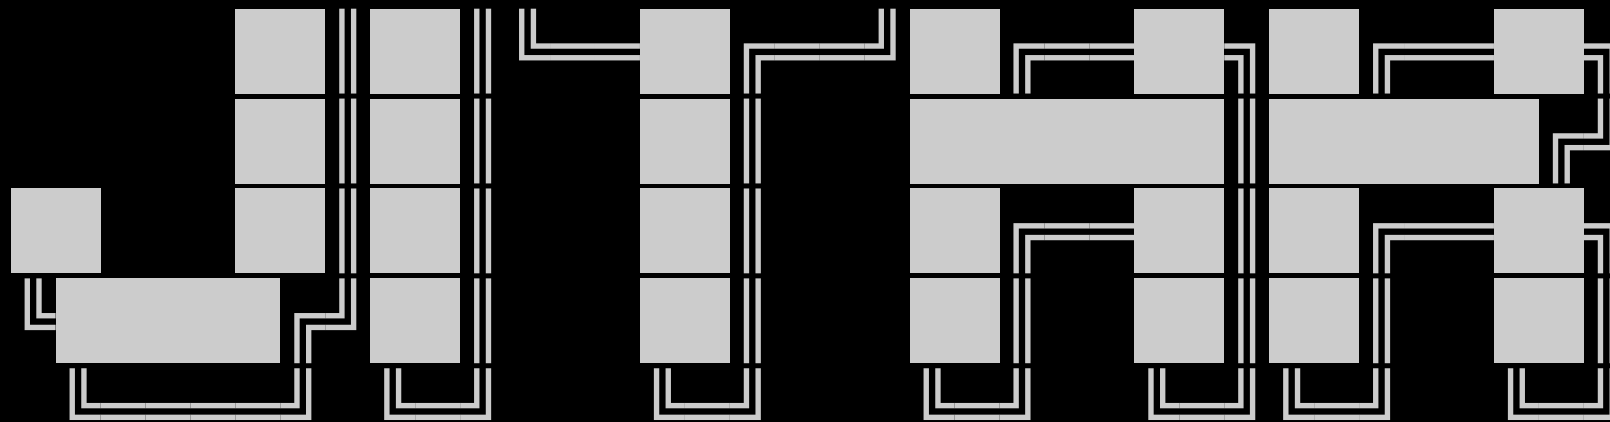

~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:3002
█

> gateway

> repository