


```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

# TERMINAL

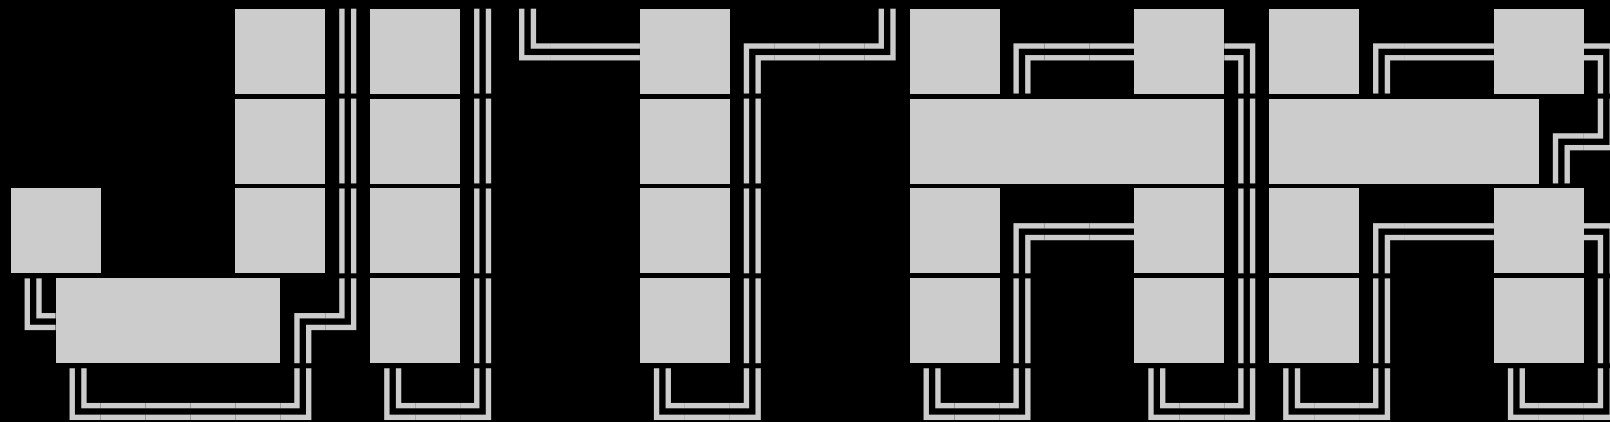

# ~ Distributed JavaScript Runtime ~

```
[INFO] Server started at http://127.0.0.1:3002
```

 gateway

## >\_ repository

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

app> █

>\_ gateway

>\_ repository

>\_ terminal

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

app> npm run proxy

> gateway

> repository

> terminal

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

```
app> npm run proxy
```



```
> gateway
```

```
> repository
```

```
> proxy
```

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

app> npm run proxy



> gateway


> repository

> proxy

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

app> npm run proxy

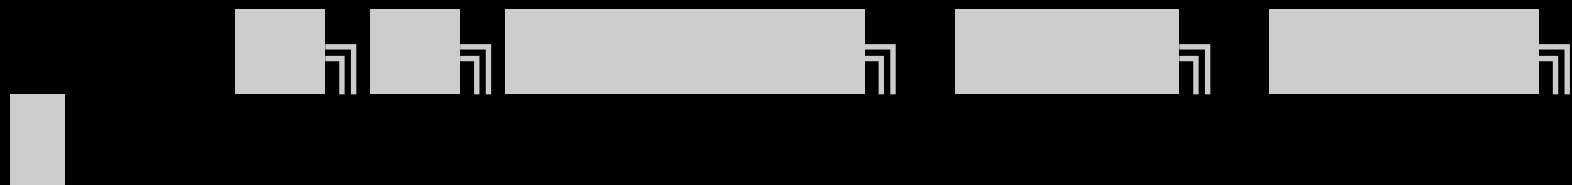

> gateway


> repository

> proxy

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

# TERMINAL

```
app> npm run proxy
```

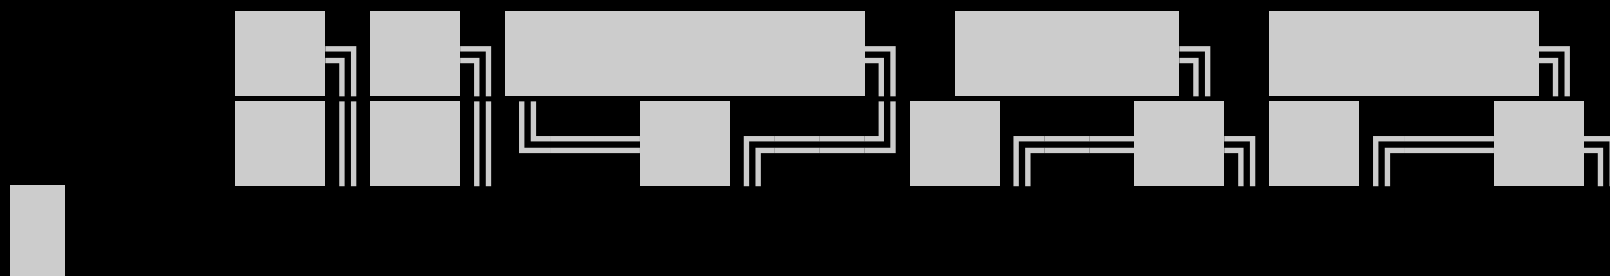

 gateway


```
> repository
```



```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

app> npm run proxy

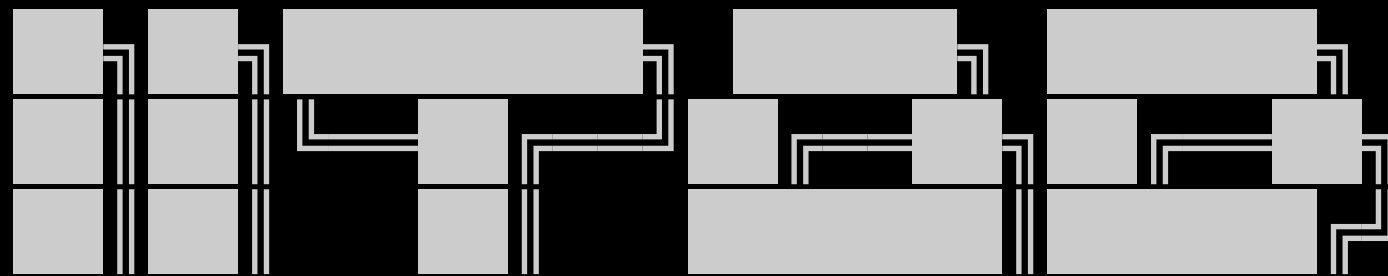


```
> gateway  
> repository  
> proxy
```



```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

app> npm run proxy

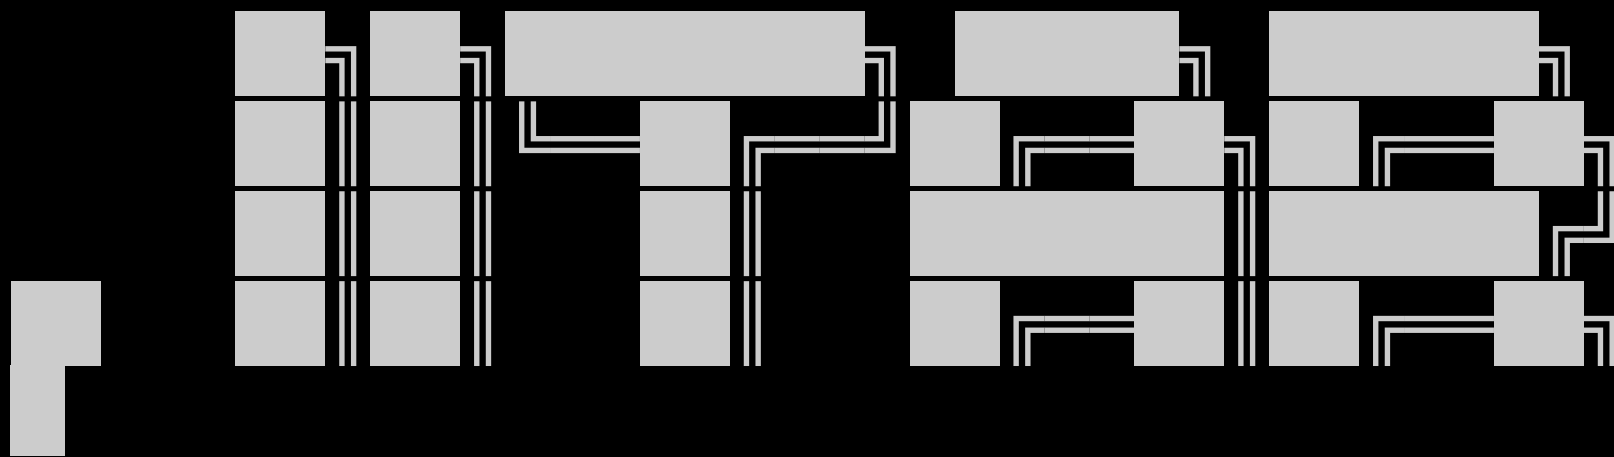


```
> gateway
> repository
> proxy
```

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

app> npm run proxy

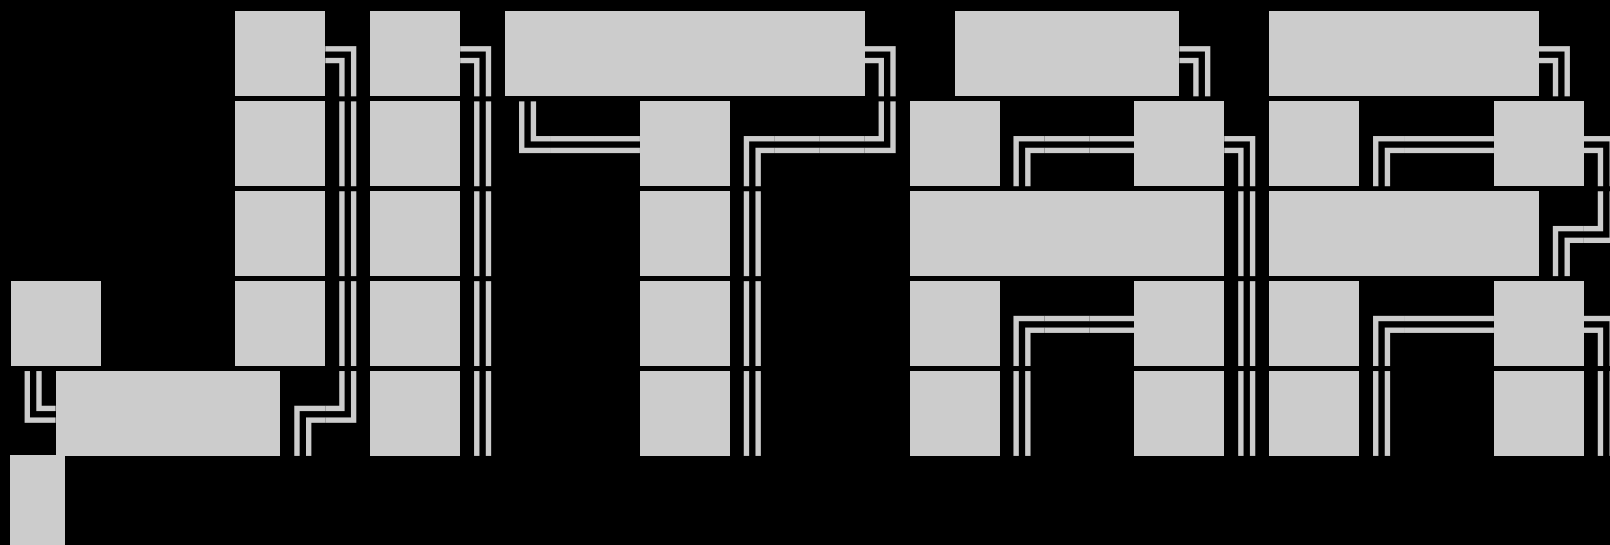

> gateway


> repository

> proxy

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL


app> npm run proxy

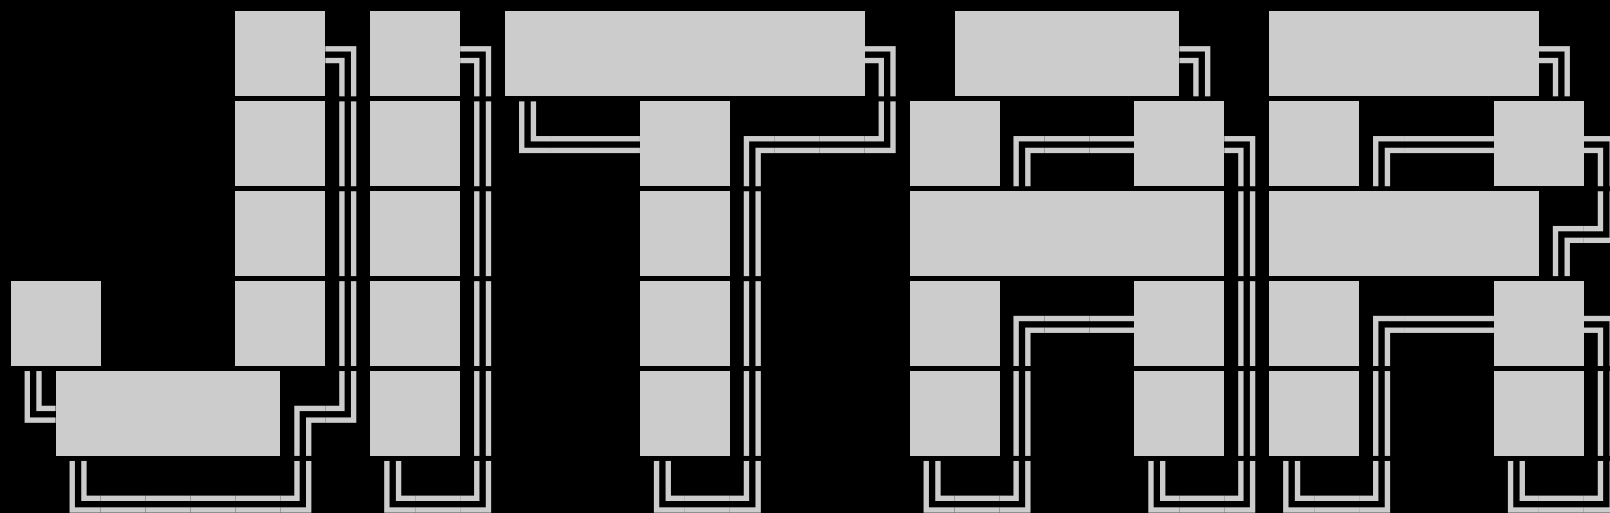

```
> gateway  
> repository  
> proxy
```

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

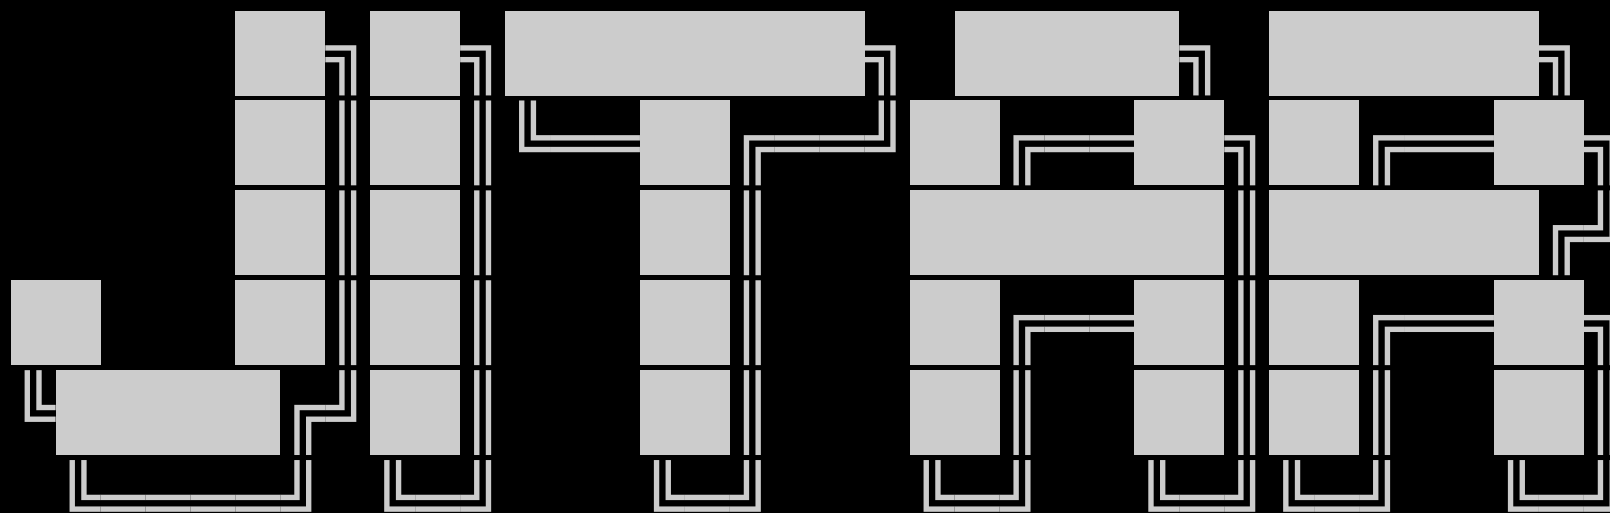


~ Distributed JavaScript Runtime ~



```
> gateway  
> repository  
> proxy
```

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

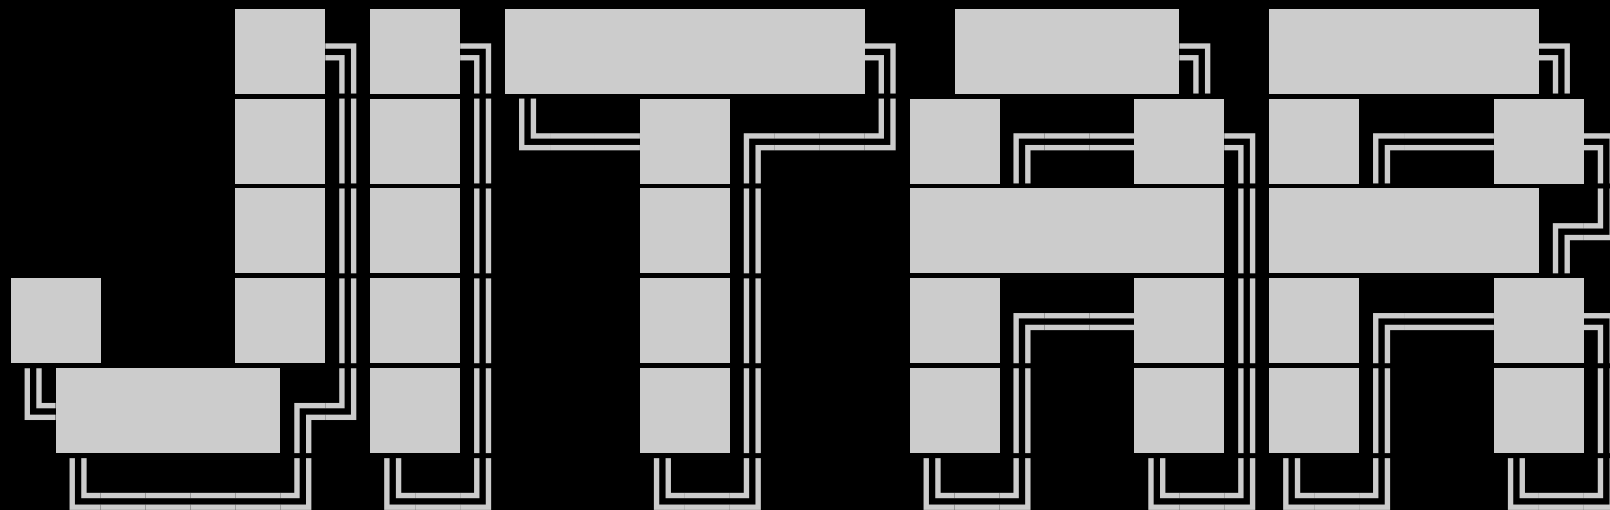


~ Distributed JavaScript Runtime ~



```
> gateway  
> repository  
> proxy
```

```
"dev": "vite",  
"build": "npm run build-domain && npm run build-webui",  
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",  
"build-webui": "vite build",  
"standalone": "jitar start --service=services/standalone.json",  
"data": "jitar start --service=services/data-worker.json",  
"default": "jitar start --service=services/default-worker.json",  
"gateway": "jitar start --service=services/gateway.json",  
"repository": "jitar start --service=services/repository.json",  
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

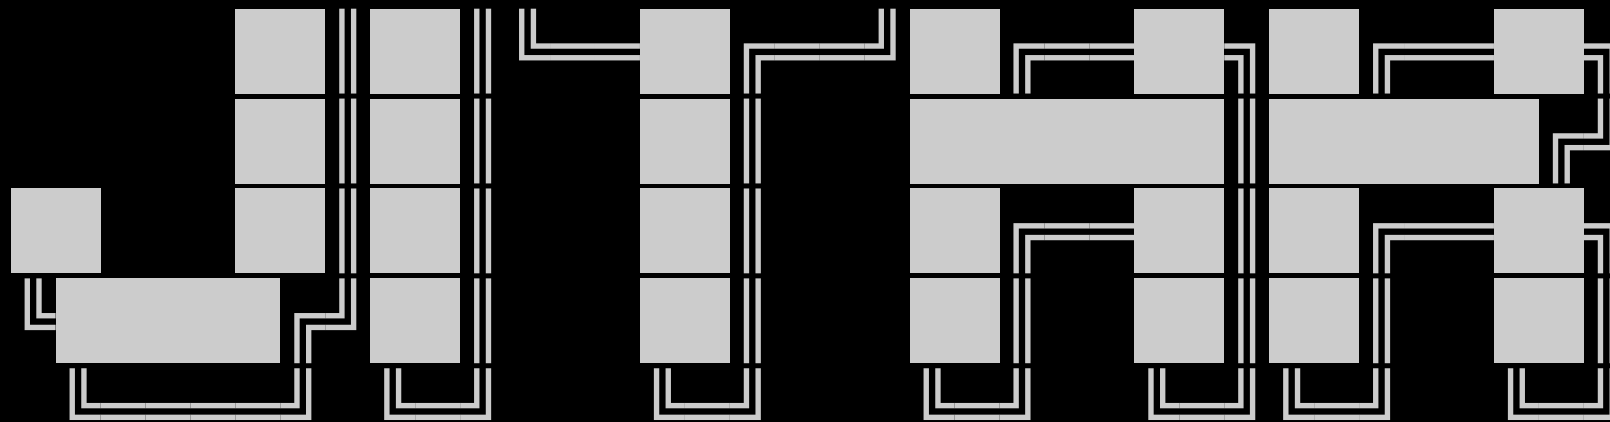

~ Distributed JavaScript Runtime ~

-----  
[INFO] Server started at http://127.0.0.1:3000  
█

```
> gateway  
> repository  
> proxy
```