





http://127.0.0.1:3000



Hello, Vite + React + Jitar 1!

build",

```
> gateway  
> repository  
> proxy  
> data  
> default
```

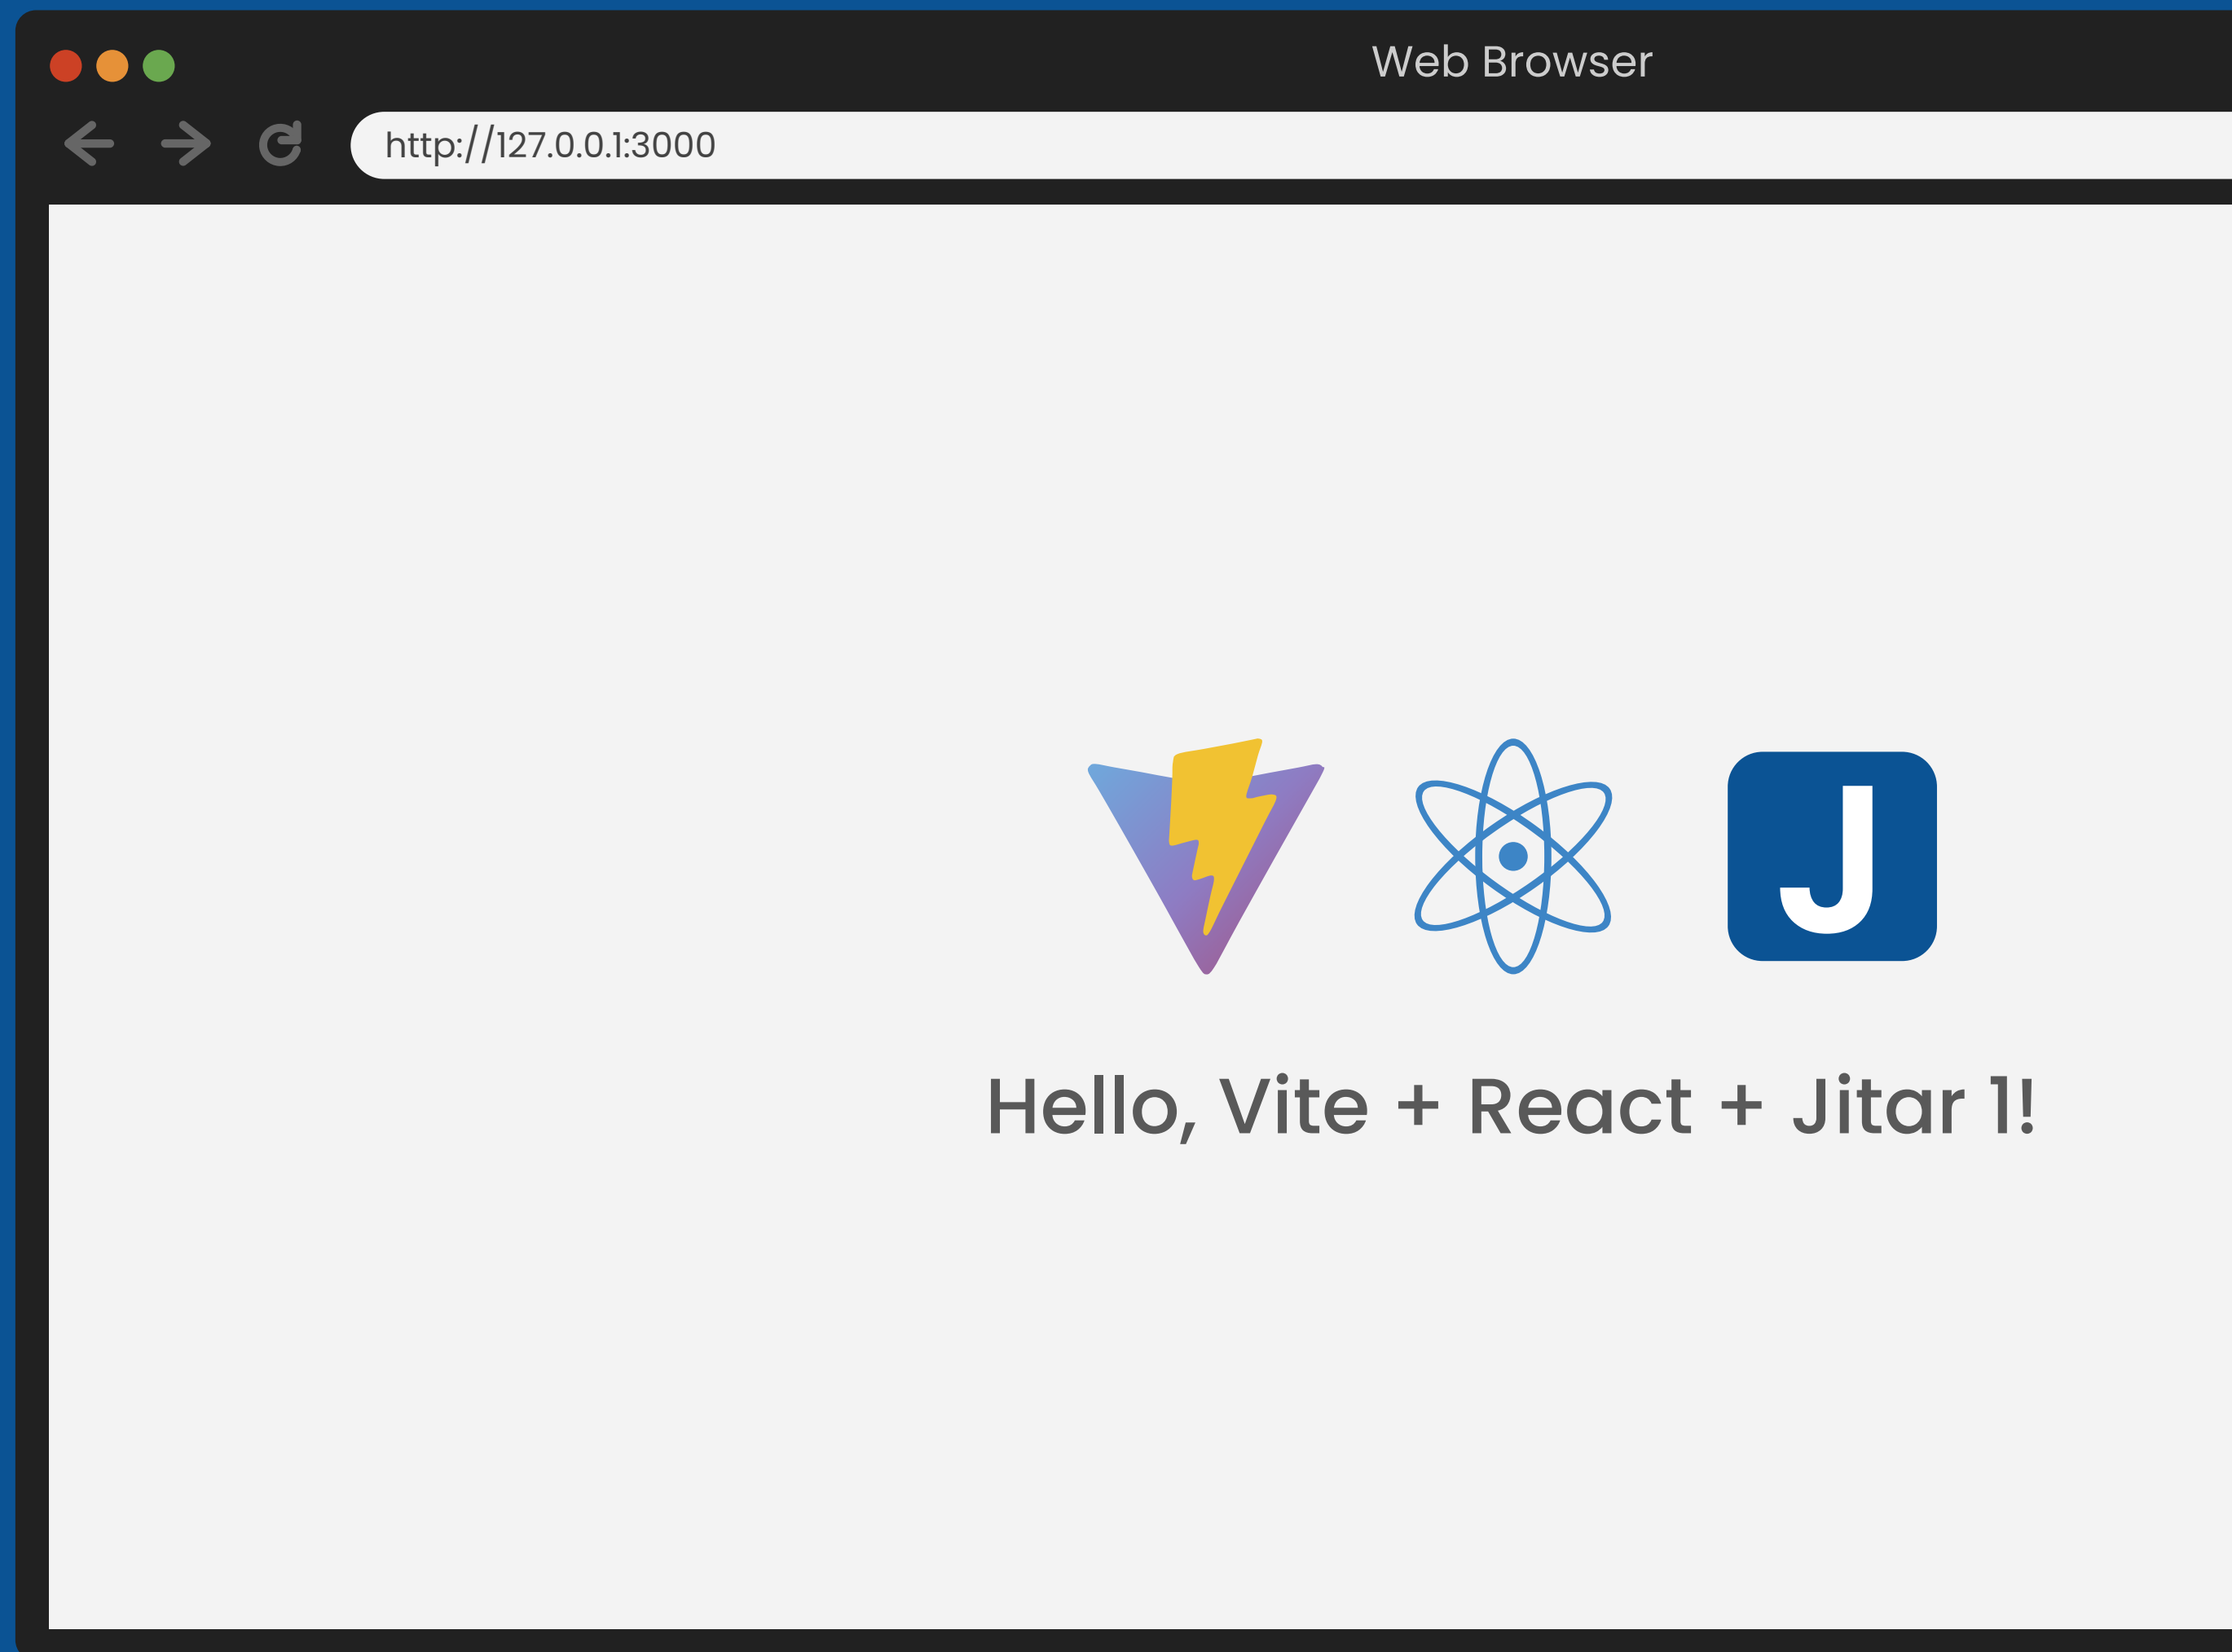

```
...d-webui",  
...uild.json && jitar build",
```

```
...dalone.json",  
...er.json",  
...worker.json",  
...ay.json",  
...itory.json",  
...
```


```
>_ gateway  
>_ repository  
>_ proxy  
>_ data  
>_ default
```



Web Browser



http://127.0.0.1:3000



Hello, Vite + React -

```
npm run build-webui",  
-p tsconfig.build.json && jitar build",
```

```
services/standalone.json",  
es/data-worker.json",  
ices/default-worker.json",  
rvice/gateway.json",  
services/repository.json",  
es/proxy.json"
```



-----  
4002

```
> gateway  
> repository  
> proxy  
> data  
> default
```



http://127.0.0.1:3000



Hello, Vite


```
-domain && npm run build-webui",  
if dist && tsc -p tsconfig.build.json && jitar build",  
ild",  
rt --service=services/standalone.json",  
rvice=services/data-worker.json",  
service=services/default-worker.json",  
--service=services/gateway.json",  
--service=services/repository.json",  
ervice=services/proxy.json"
```

# untime ~

tp://127.0.0.1:4002

# in/sayHello

```
>_ gateway
>_ repository
>_ proxy
>_ data
>_ default
```

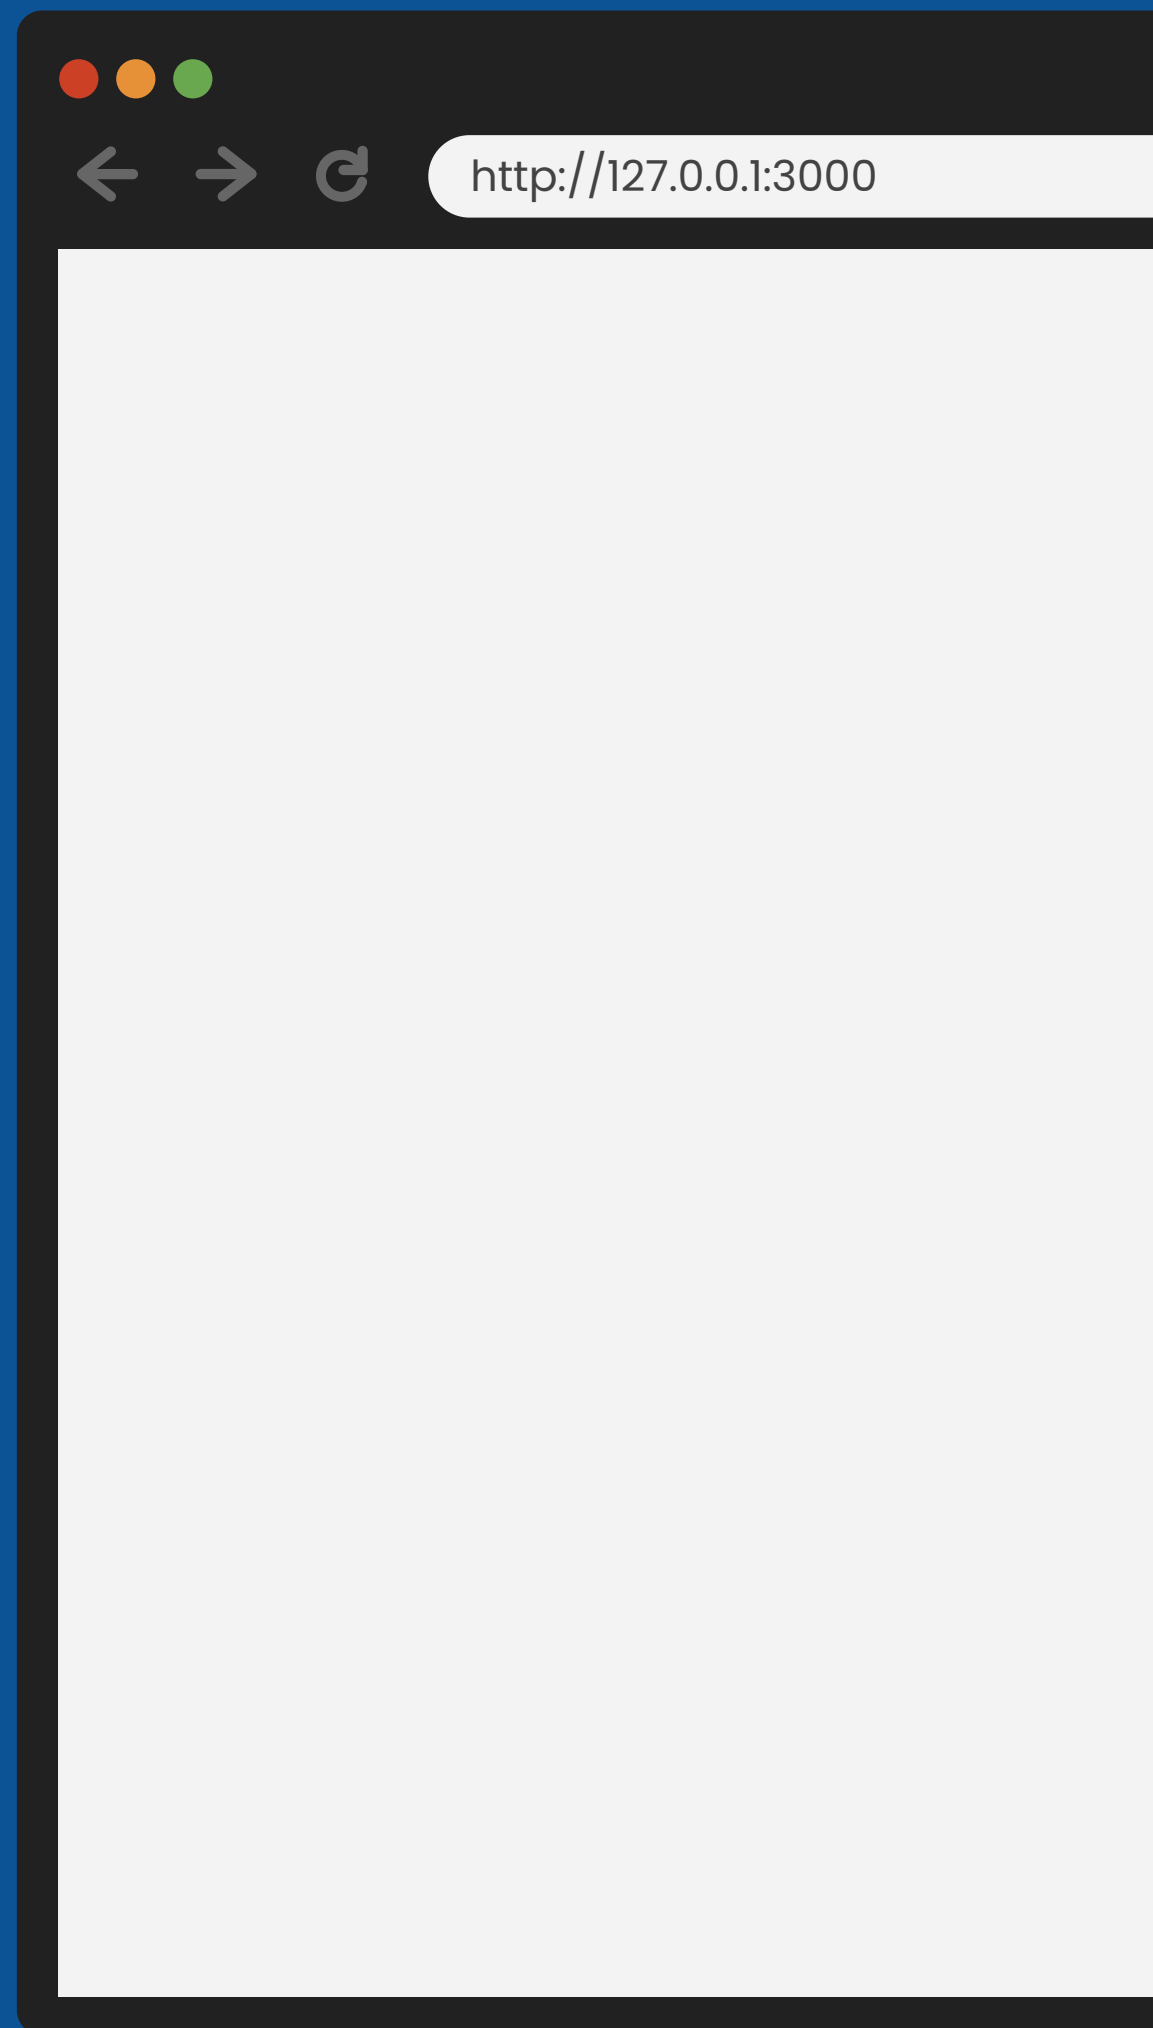

```
run build-domain && npm run build-webui",
  "n": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
  "v": "vite build",
  "j": "jitar start --service=services/standalone.json",
  "d": "jitar start --service=services/data-worker.json",
  "w": "jitar start --service=services/default-worker.json",
  "g": "jitar start --service=services/gateway.json",
  "r": "jitar start --service=services/repository.json",
  "p": "jitar start --service=services/proxy.json"
```

# JavaScript Runtime ~


ted at <http://127.0.0.1:4002>

## cedures: [

110

# st: domain/sayHello

```
>_ gateway
>_ repository
>_ proxy
>_ data
>_ default
```

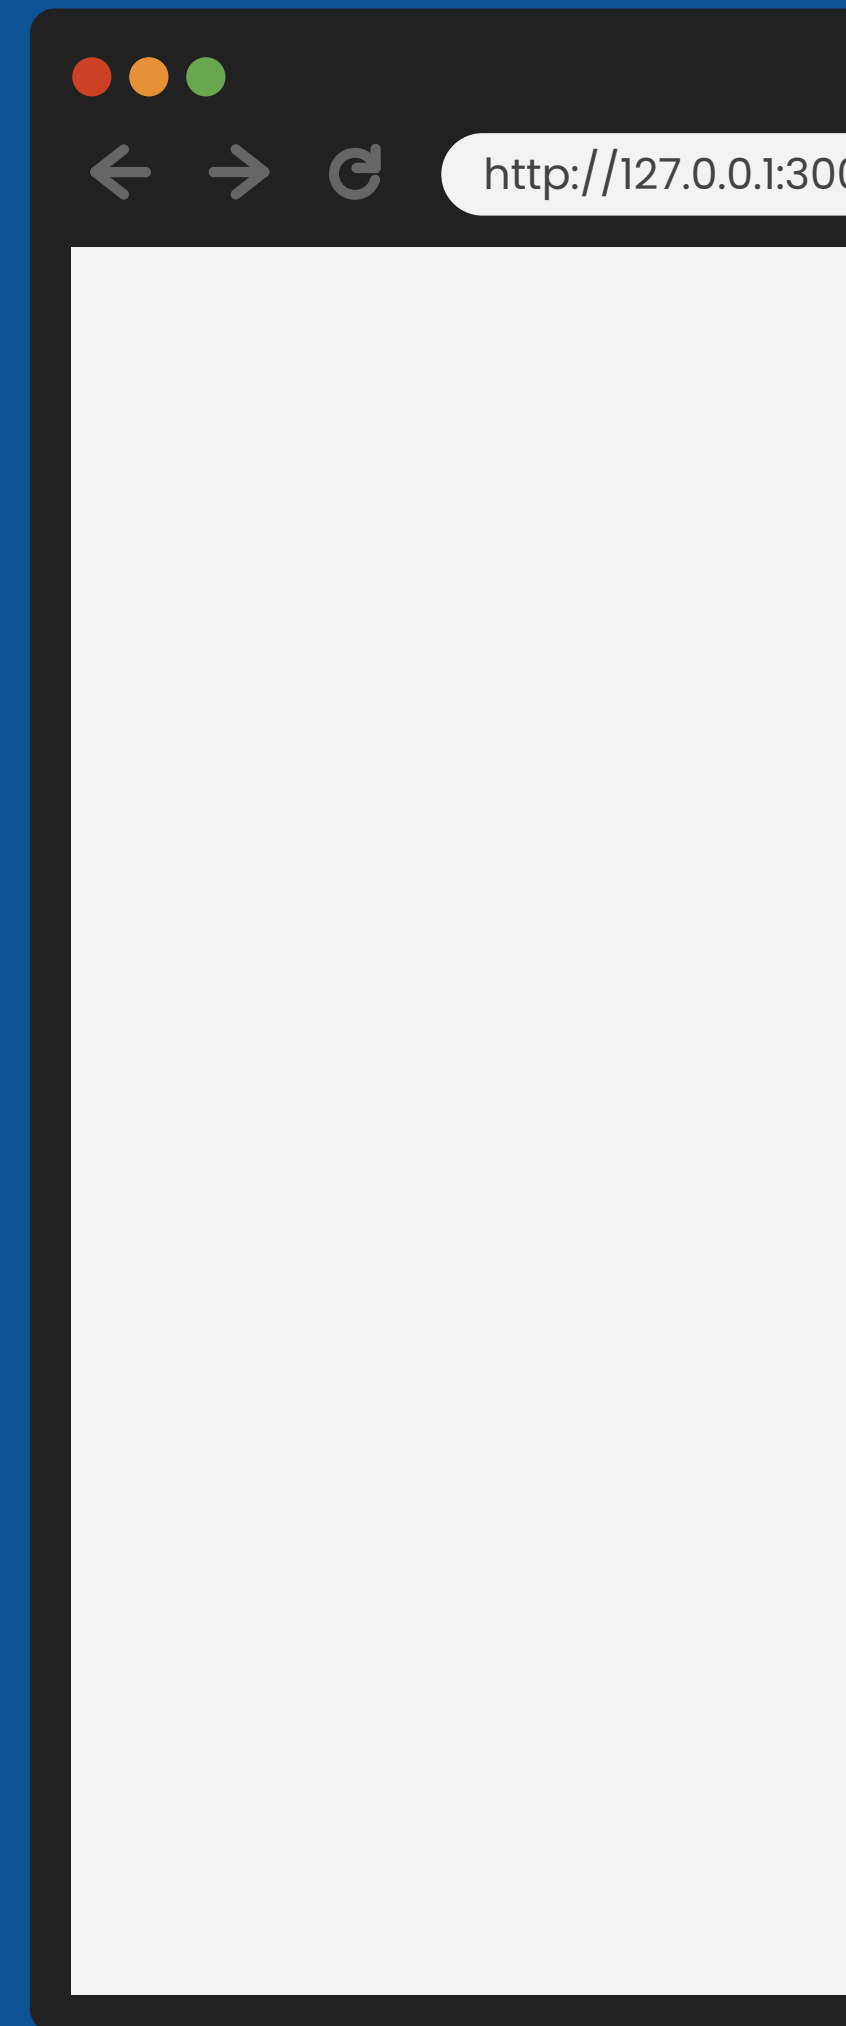

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

TERMINAL

=====

Distributed JavaScript Runtime ~

[FO] Server started at http://127.0.0.1:4002

[FO] RPC procedures: [  
domain/sayHello

[FO] Ran request: domain/sayHello

- >\_ gateway
- >\_ repository
- >\_ proxy
- >\_ data
- >\_ default

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

# TERMINAL

```

~ Distributed JavaScript Runtime ~
-----
[INFO] Server started at http://127.0.0.1:4002
[INFO] RPC procedures: [
    domain/sayHello
]
[INFO] Ran request: domain/sayHello

```

```
>_ gateway
>_ repository
>_ proxy
>_ data
>_ default
```



```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

# TERMINAL

# ~ Distributed JavaScript Runtime ~

```
[INFO] Server started at http://127.0.0.1:4002
```

```
[INFO] RPC procedures: [
    domain/sayHello
```

```
[INFO] Ran request: domain/sayHello
```

**> gateway**

```
>_ repository
```

 proxy

```
> data
```

**>\_ default**

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

# TERMINAL

```

~ Distributed JavaScript Runtime ~
-----
[INFO] Server started at http://127.0.0.1:4002
[INFO] RPC procedures: [
    domain/sayHello
]
[INFO] Ran request: domain/sayHello

```

```
>_ gateway
>_ repository
>_ proxy
>_ data
>_ default
```

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

# TERMINAL

```

~ Distributed JavaScript Runtime ~
-----
[INFO] Server started at http://127.0.0.1:4002
[INFO] RPC procedures: [
    domain/sayHello
]
[INFO] Ran request: domain/sayHello

```

```
>_ gateway
>_ repository
>_ proxy
>_ data
>_ default
```

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

# TERMINAL

```

~ Distributed JavaScript Runtime ~
-----
[INFO] Server started at http://127.0.0.1:4002
[INFO] RPC procedures: [
    domain/sayHello
]
[INFO] Ran request: domain/sayHello

```

```
>_ gateway
>_ repository
>_ proxy
>_ data
>_ default
```

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

# TERMINAL

The figure consists of seven sub-diagrams arranged horizontally, showing the progression of a geometric construction. Each diagram is built on a grid of small squares. The first diagram is a single square. The second diagram adds lines to form a 2D rectangle. The third diagram adds lines to form a 3D box. The fourth diagram adds more lines to form a more complex structure. The fifth diagram adds more lines to form a more complex structure. The sixth diagram adds more lines to form a more complex structure. The seventh diagram adds more lines to form a more complex structure.

# ~ Distributed JavaScript Runtime ~

```
[INFO] Server started at http://127.0.0.1:4002
```

```
[INFO] RPC procedures: [
    domain/sayHello
```

```
[INFO] Ran request: domain/sayHello
```

```
>_ gateway
>_ repository
>_ proxy
>_ data
>_ default
```

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

# TERMINAL

```

~ Distributed JavaScript Runtime ~
-----
[INFO] Server started at http://127.0.0.1:4002
[INFO] RPC procedures: [
    domain/sayHello
]
[INFO] Ran request: domain/sayHello

```

```
>_ gateway
>_ repository
>_ proxy
>_ data
>_ default
```

```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

# TERMINAL

# ~ Distributed JavaScript Runtime ~

```
[INFO] Server started at http://127.0.0.1:4002
```

```
[INFO] RPC procedures: [
  domain/sayHello
```

```
[INFO] Ran request: domain/sayHello
```

```
>_ gateway
>_ repository
>_ proxy
>_ data
>_ default
```



```
"dev": "vite",
"build": "npm run build-domain && npm run build-webui",
"build-domain": "rimraf dist && tsc -p tsconfig.build.json && jitar build",
"build-webui": "vite build",
"standalone": "jitar start --service=services/standalone.json",
"data": "jitar start --service=services/data-worker.json",
"default": "jitar start --service=services/default-worker.json",
"gateway": "jitar start --service=services/gateway.json",
"repository": "jitar start --service=services/repository.json",
"proxy": "jitar start --service=services/proxy.json"
```

# TERMINAL

```

~ Distributed JavaScript Runtime ~
-----
[INFO] Server started at http://127.0.0.1:4001
[INFO] RPC procedures: [
    domain/keepHelloCount
]
[INFO] Ran request: domain/keepHelloCount

```

```
>_ gateway
>_ repository
>_ proxy
>_ data
>_ default
```