
# TERMINAL ~ Distributed JavaScript Runtime ~ [INFO] Server started at http://127.0.0.1:3000 [INFO] RPC procedures: [ domain/sayHello [INFO] Provided web client [INFO] Ran request: domain/sayHello



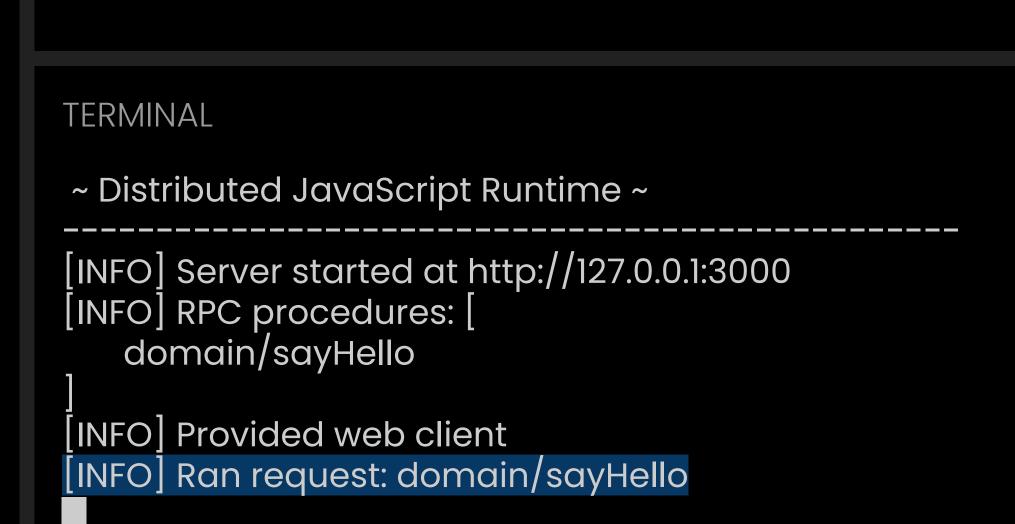

## ~ Distributed JavaScript Runtime ~ [INFO] Server started at http://127.0.0.1:3000 [INFO] RPC procedures: [ domain/sayHello ] [INFO] Provided web client [INFO] Ran request: domain/sayHello

LORER

app

## CODE


### TERMINAL

```
~ Distributed JavaScript Runtime ~
```

[INFO] Server started at http://127.0.0.1:3000 [INFO] RPC procedures: [ domain/sayHello

[INFO] Provided web client

[INFO] Ran request: domain/sayHello

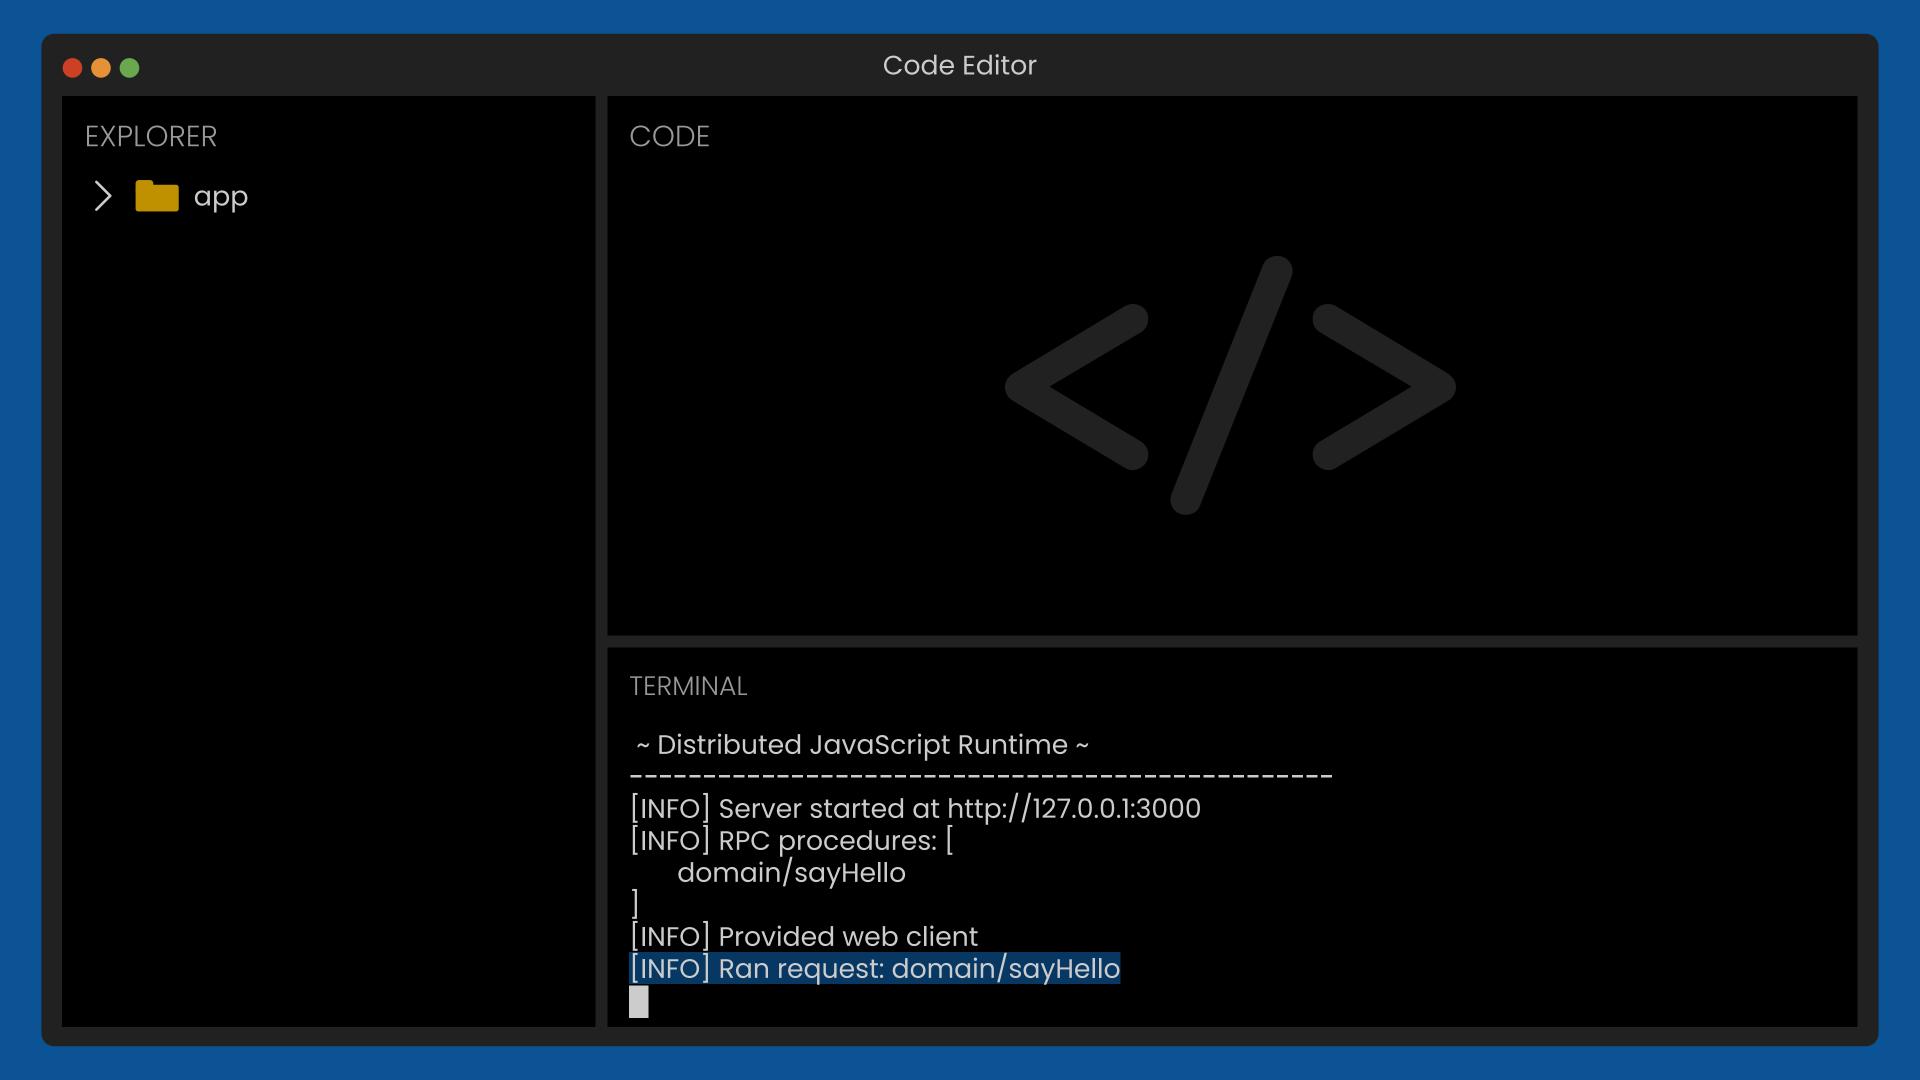

## TERMINAL ~ Distributed JavaScript Runtime ~ [INFO] Server started at http://127.0.0.1:3000 [INFO] RPC procedures: [ domain/sayHello [INFO] Provided web client [INFO] Ran request: domain/sayHello



## Code Editor

## **EXPLORER**



## CODE



## **TERMINAL**

