Code Editor

EXPLORER

- app
  - public
  - segments
  - services
    - data-worker.json
    - default-worker.json
    - gateway.json
    - proxy.json
    - repository.json
    - standalone.json

CODE → services/standalone.json

```
{
  "url": "http://127.0.0.1:3000",
  "standalone":
  {
    "segments": ["default", "data"],
    "assets": ["index.html", "vite.svg", "assets/**/*"]
  }
}
```

TERMINAL

```
  domain/sayHello
]
```

Code Editor

EXPLORER

- app
  - public
  - segments
  - services
    - data-worker.json
    - default-worker.json
    - gateway.json
    - proxy.json
    - repository.json
    - standalone.json

CODE → services/standalone.json

```
{
  "url": "http://127.0.0.1:3000",
  "standalone":
  {
    "segments": ["default", "data"],
    "assets": ["index.html", "vite.svg", "assets/**/*"]
  }
}
```

TERMINAL

```
  domain/sayHello
]
```

Code Editor

EXPLORER

- app
  - public
  - segments
  - services
    - data-worker.json
    - default-worker.json
    - gateway.json
    - proxy.json
    - repository.json
    - standalone.json

CODE → services/standalone.json

```
{
  "url": "http://127.0.0.1:3000",
  "standalone":
  {
    "segments": ["default", "data"],
    "assets": ["index.html", "vite.svg", "assets/**/*"]
  }
}
```

TERMINAL

```
  domain/sayHello
]
```

Code Editor

EXPLORER

- app
  - public
  - segments
  - services
    - data-worker.json
    - default-worker.json
    - gateway.json
    - proxy.json
    - repository.json
    - standalone.json

CODE → services/standalone.json

```
{
  "url": "http://127.0.0.1:3000",
  "standalone":
  {
    "segments": ["default", "data"],
    "assets": ["index.html", "vite.svg", "assets/**/*"]
  }
}
```

TERMINAL

```
  domain/sayHello
]
```

Code Editor

EXPLORER

- app
  - public
  - segments
  - services
    - data-worker.json
    - default-worker.json
    - gateway.json
    - proxy.json
    - repository.json
    - standalone.json

CODE → services/standalone.json

```
{
  "url": "http://127.0.0.1:3000",
  "standalone":
  {
    "segments": ["default", "data"],
    "assets": ["index.html", "vite.svg", "assets/**/*"]
  }
}
```

TERMINAL

```
  domain/sayHello
]
```

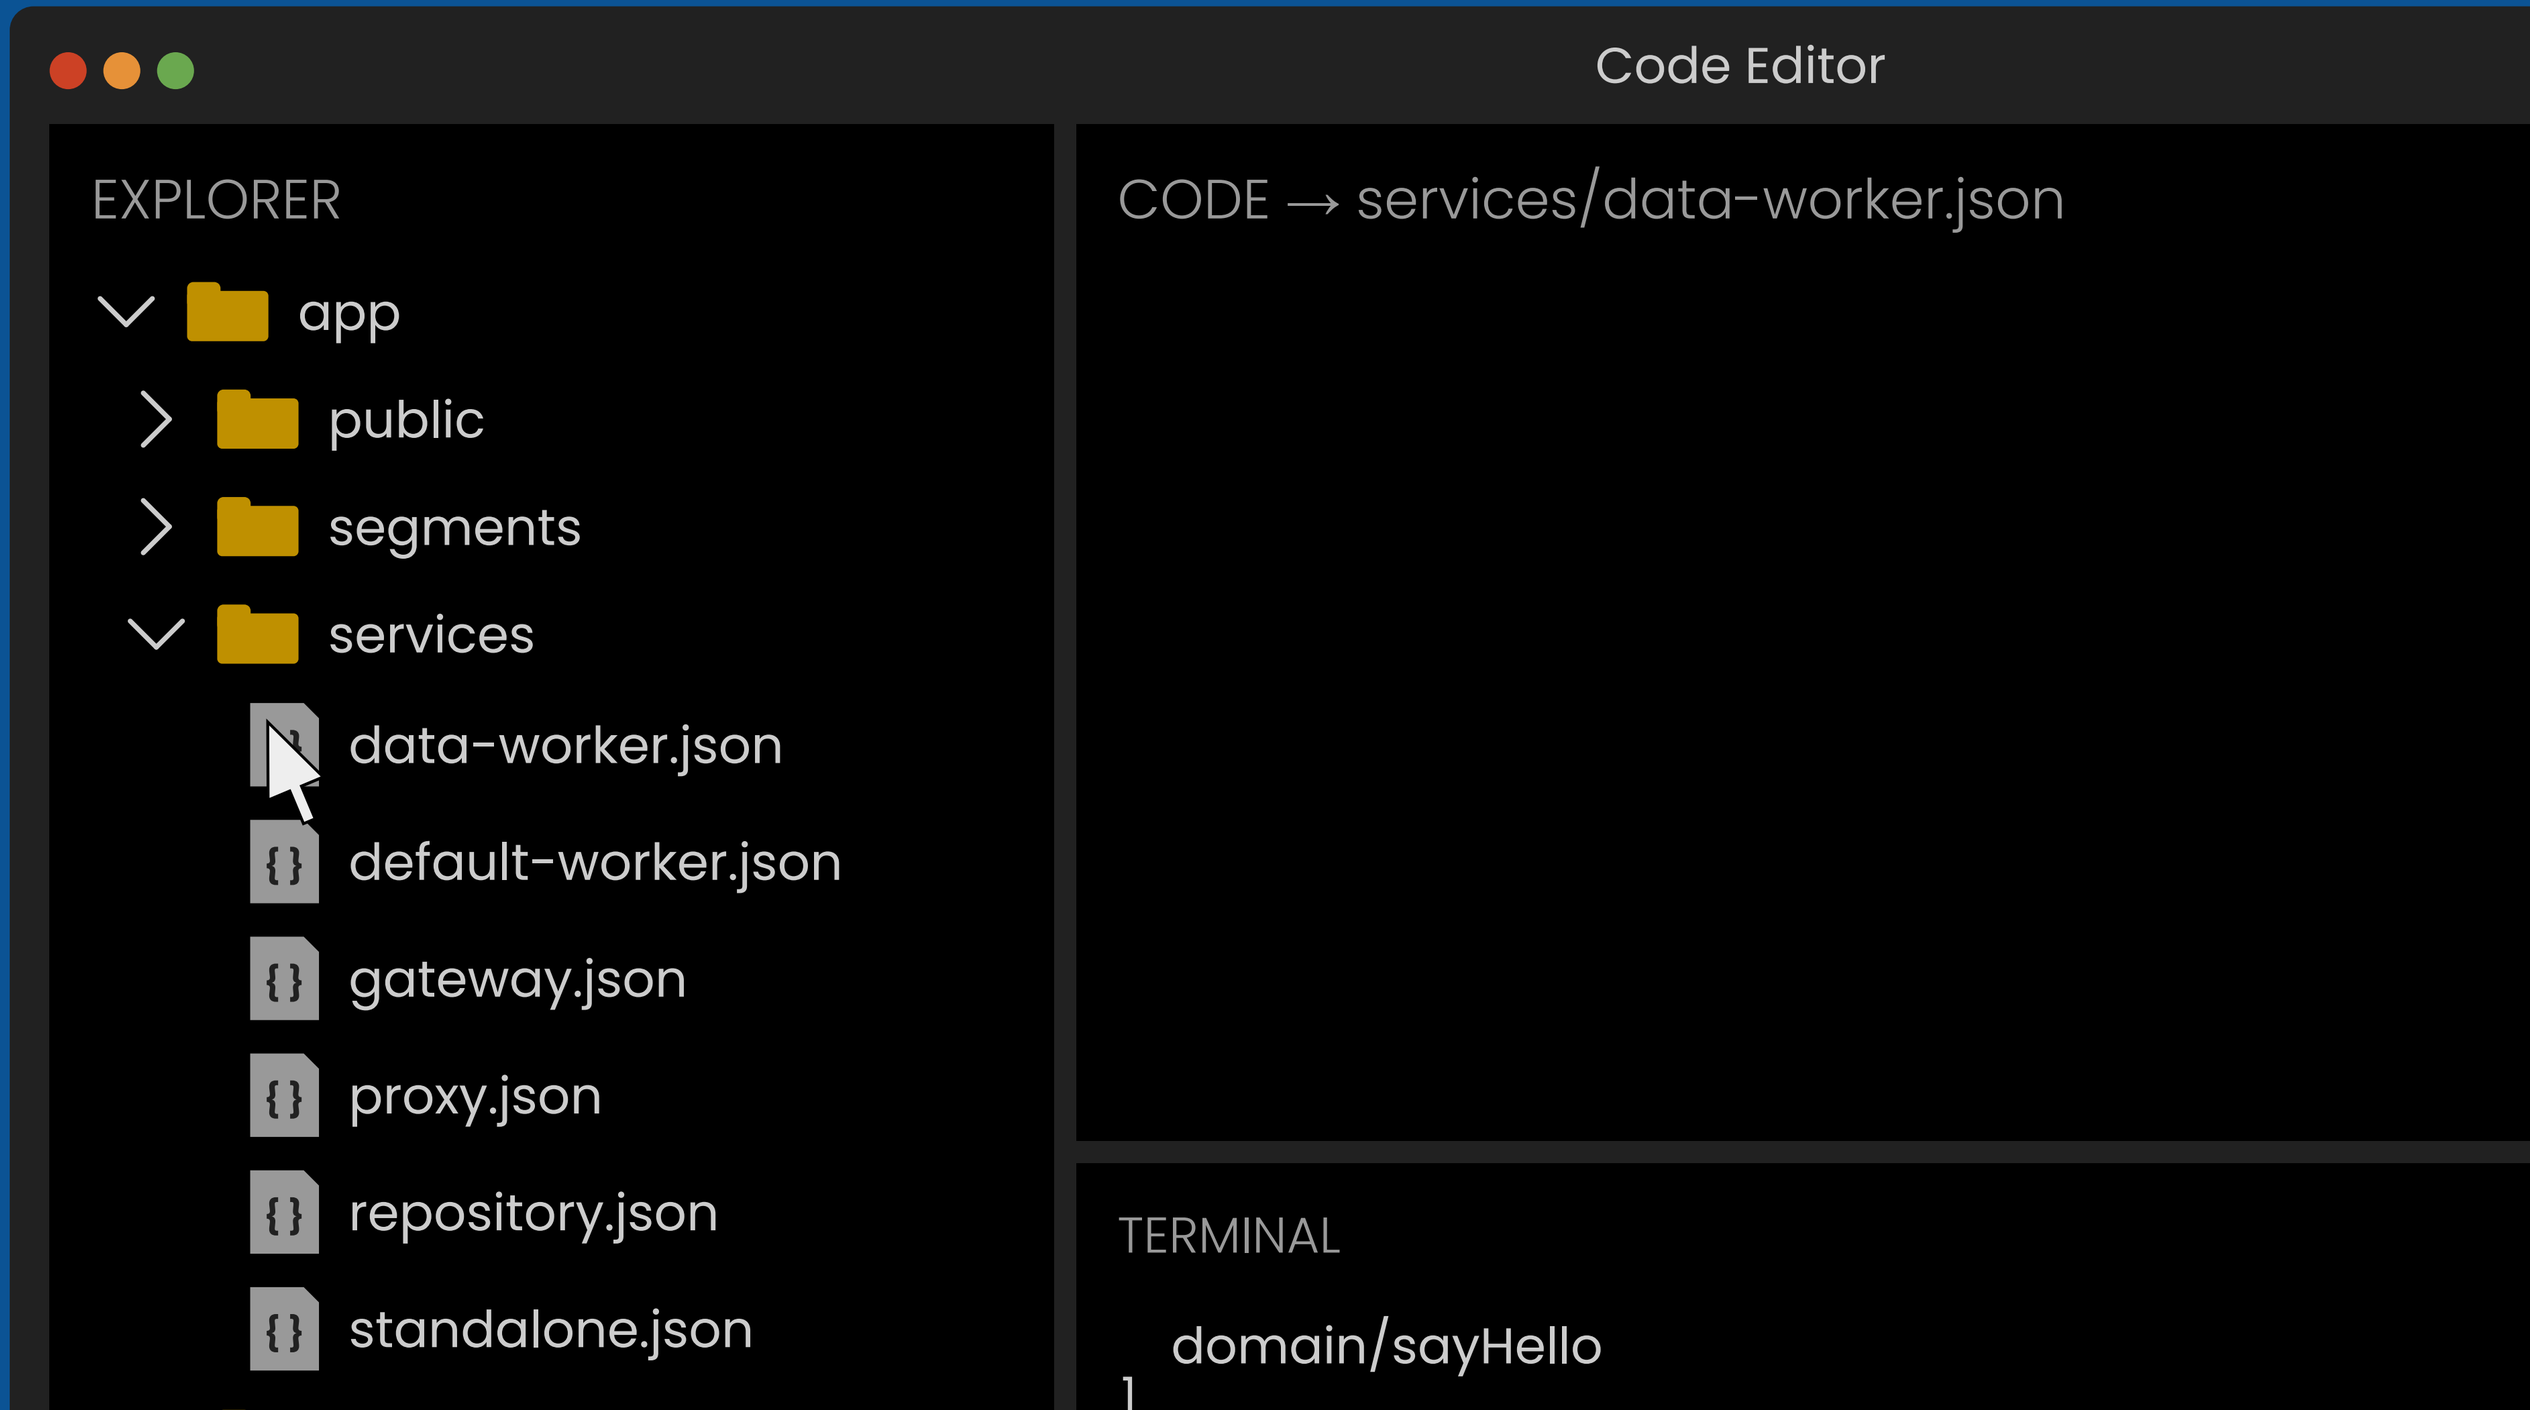
Code Editor
EXPLORER
app
public
segments
services
data-worker.json
default-worker.json
gateway.json
proxy.json
repository.json
standalone.json
CODE → services/data-worker.json
TERMINAL
domain/sayHello

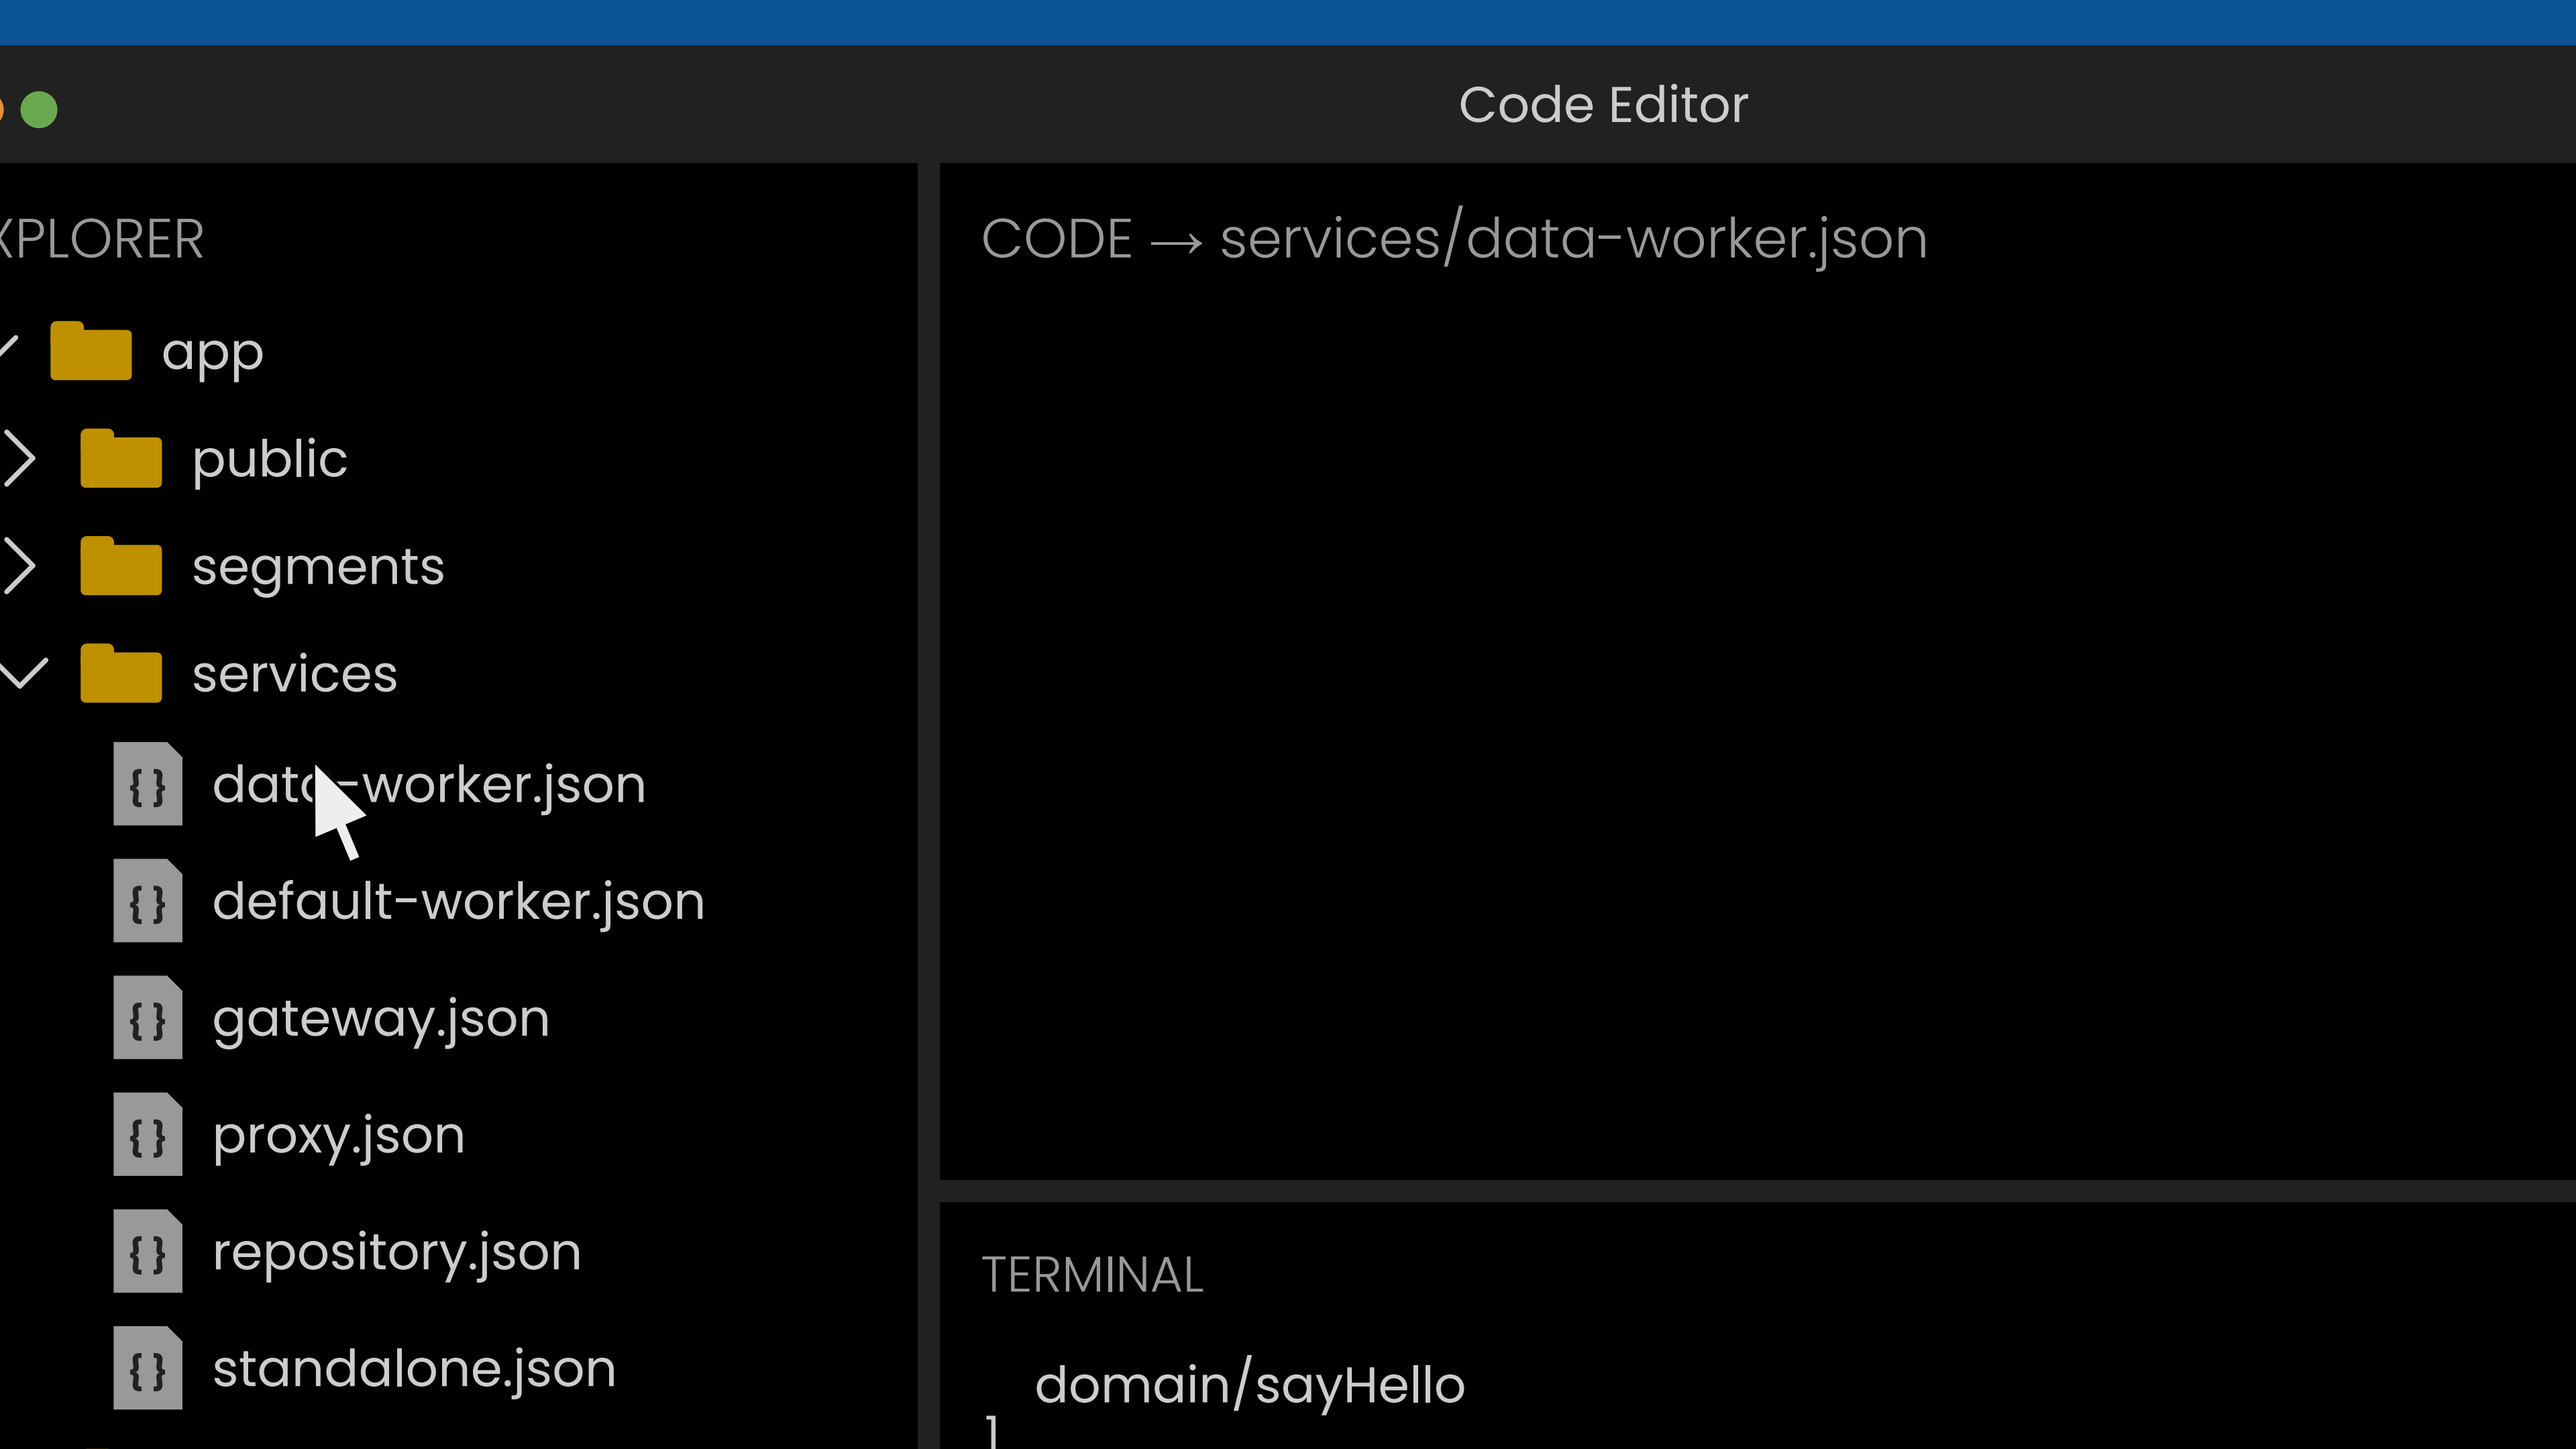
Code Editor
XPLORER
app
public
segments
services
data-worker.json
default-worker.json
gateway.json
proxy.json
repository.json
standalone.json
CODE → services/data-worker.json
TERMINAL
domain/sayHello

Code Editor

R

pp

public

segments

services

data-worker.json

default-worker.json

gateway.json

proxy.json

repository.json

standalone.json

CODE → services/data-worker.json

TERMINAL

domain/sayHello

Code Editor

nts

s

worker.json

t-worker.json

ay.json

son

ory.json

lone.json

CODE → services/data-worker.json

TERMINAL

domain/sayHello
]

Code Editor

CODE → services/data-worker.json

on

r.json

on

TERMINAL

domain/sayHello
]

Code Editor

CODE → services/data-worker.json

TERMINAL

```
    domain/sayHello
]
```

Code Editor

CODE → services/data-worker.json

```
{
   "url": "http://127.0.0.1:4001",
   "worker":
   {
      "segments": ["data"]
   }
}
```

TERMINAL

```
   domain/sayHello
]
```

Code Editor

CODE → services/data-worker.json

```
{
   "url": "http://127.0.0.1:4001",
   "worker":
   {
      "segments": ["data"]
   }
}
```

TERMINAL

```
   domain/sayHello
]
```

Code Editor

CODE → services/data-worker.json

```
{
    "url": "http://127.0.0.1:4001",
    "worker":
    {
        egments": ["data"]
    }
}
```

TERMINAL

```
    domain/sayHello
]
```

Code Editor

CODE → services/data-worker.json

```
{
    "url": "http://127.0.0.1:4001",
    "worker":
    {
        "segments": ["data"]
    }
}
```

TERMINAL

```
    domain/sayHello
]
```

Code Editor

CODE → services/data-worker.json

```
{
    "url": "http://127.0.0.1:4001",
    "worker":
    {
        "segments": ["data"]
    }
}
```

TERMINAL

```
    domain/sayHello
]
```

Code Editor

CODE → services/data-worker.json

```
{
   "url": "http://127.0.0.1:4001",
   "worker":
    {
       "segments": ["data"]
    }
}
```

TERMINAL

```
   domain/sayHello
]
```

Code Editor

CODE → services/data-worker.json

```
{
   "url": "http://127.0.0.1:4001",
   "worker":
   {
      "segments": ["data"]
   }
}
```

TERMINAL

```
   domain/sayHello
]
```

Code Editor

CODE → services/data-worker.json

```
{
   "url": "http://127.0.0.1:4001",
   "worker"
   {
      "segments": ["data"]
   }
}
```

TERMINAL

```
   domain/sayHello
]
```

Code Editor

CODE → services/data-worker.json

```
{
   "url": "http://127.0.0.1:4001",
   "worker"
   {
      "segments": ["data"]
   }
}
```

TERMINAL

```
   domain/sayHello
]
```

Code Editor

CODE → services/data-worker.json

```
{
    "url": "http://127.0.0.1:4001",
    "worker":
    {
        "segments": ["data"]
    }
}
```

TERMINAL

```
    domain/sayHello
]
```

Code Editor

CODE → services/data-worker.json

```
{
   "url": "http://127.0.0.1:4001",
   "worker":
   {
      "segments": ["data"]
   }
}
```

TERMINAL

```
   domain/sayHello
]
```

Code Editor

CODE → services/data-worker.json

```
{
    "url": "http://127.0.0.1:4001",
    "worker":
    {
        "segments": ["data"]
    }
}
```

TERMINAL

```
    domain/sayHello
]
```

Code Editor

CODE → services/data-worker.json

```
{
    "url": "http://127.0.0.1:4001",
    "worker":
    {
        "segments": ["data"]
    }
}
```

TERMINAL

```
    domain/sayHello
]
```

Code Editor

CODE → services/data-worker.json

```
{
   "url": "http://127.0.0.1:4001",
   "worker":
   {
      "segments": ["data"]
   }
}
```

TERMINAL

```
   domain/sayHello
]
```

Code Editor

CODE → services/data-worker.json

```
{
    "url": "http://127.0.0.1:4001",
    "worker":
    {
        "segments": ["data"]
    }
}
```

TERMINAL

```
    domain/sayHello
]
```

Code Editor

CODE → services/data-worker.json

```
{
    "url": "http://127.0.0.1:4001",
    "worker":
    {
        "segments": ["data"]
    }
}
```

TERMINAL

```
    domain/sayHello
]
```