


The screenshot shows a dark-themed code editor interface with the following sections:

- EXPLORER**: Shows the project structure:
  - app
  - public
  - segments
    - data.json
    - default.json
  - services
    - standalone.json
  - src
  - domain
    - keepHelloCount.ts
    - sayHello.ts
  - webui
  - index.html
  - package.json
- CODE**: Shows the configuration for a standalone service:

```
CODE → services/standalone.json
{
  "url": "http://127.0.0.1:3001",
  "standalone": {
    "segments": ["default"],
    "assets": ["index.html"]
  }
}
```
- TERMINAL**: Shows the output of running a command in the domain directory:

```
domain/sayHello
]
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
[INFO] Provided web client
[INFO] Ran request: domain/sayHello
```

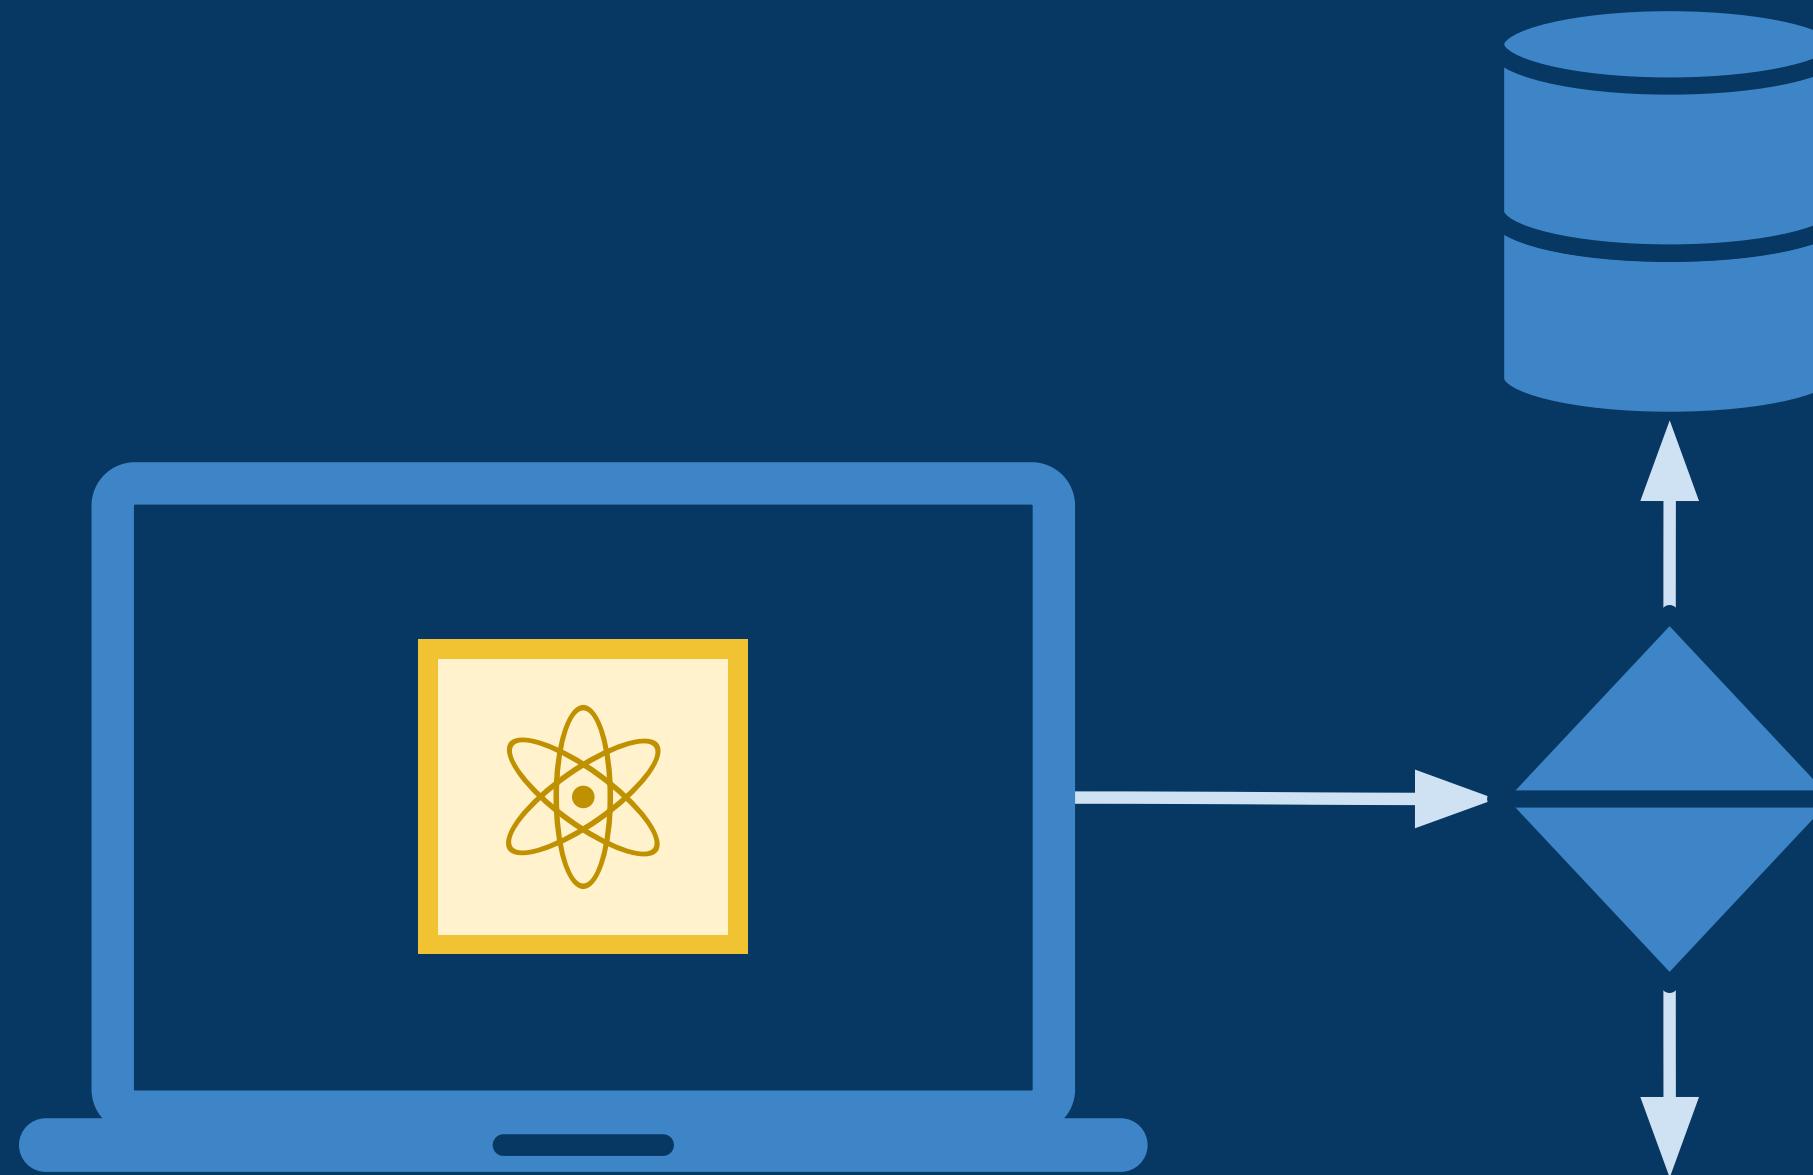



## Code Editor

### EXPLORER


- ✓ app
- > public
- ✓ segments
  - data.json
  - default.json
- ✓ services
  - standalone.json
- ✓ src
  - ✓ domain
    - keepHelloCount.ts
    - sayHello.ts
- > webui
  - index.html
  - package.json

### CODE → services/standalone.json

```
{  
  "url": "http://127.0.0.1:3000",  
  "standalone":  
  {  
    "segments": ["default", "data"],  
    "assets": ["index.html", "vite.svg", "assets/**/*"]  
  }  
}
```

### TERMINAL

```
domain/sayHello  
]  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello
```

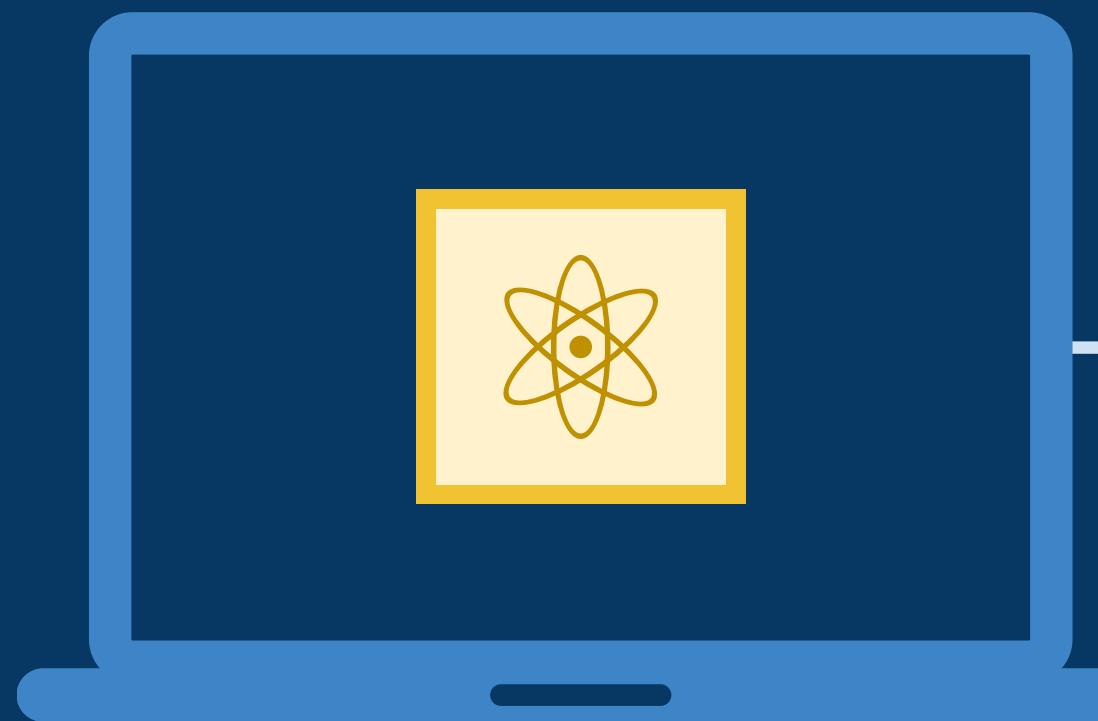

## Code Editor

CODE → services/standalone.json


```
{  
  "url": "http://127.0.0.1:3000",  
  "standalone":  
  {  
    "segments": ["default", "data"],  
    "assets": ["index.html", "vite.svg", "assets/**/*"]  
  }  
}
```

## EXPLORER

- ✓  app
- >  public
- ✓  segments
  -  data.json
  -  default.json
- ✓  services
  -  standalone.json
- ✓  src
  - ✓  domain
    -  keepHelloCount.ts
    -  sayHello.ts
- >  webui
  -  index.html
-  package.json

## TERMINAL

```
domain/sayHello  
]  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello
```





## Code Editor

## EXPLORER

- ✓ app
- > public
- ✓ segments
  - data.json
  - default.json
- ✓ services
  - standalone.json
- ✓ src
  - ✓ domain
    - keepHelloCount.ts
    - sayHello.ts
- > webui
  - index.html
  - package.json

CODE → services/standalone.json

```
{  
  "url": "http://127.0.0.1:3000",  
  "standalone":  
  {  
    "segments": ["default", "data"],  
    "assets": ["index.html", "vite.svg", "assets/**/*"]  
  }  
}
```

## TERMINAL

```
domain/sayHello  
]  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello
```

## Code Editor

CODE → services/standalone.json

```
{  
  "url": "http://127.0.0.1:3000",  
  "standalone":  
  {  
    "segments": ["default", "data"],  
    "assets": ["index.html", "vite.svg", "assets/**/*"]  
  }  
}
```

## EXPLORER

- ✓  app
- >  public
- ✓  segments
  -  data.json
  -  default.json
- ✓  services
  -  standalone.json
- ✓  src
  - ✓  domain
    -  keepHelloCount.ts
    -  sayHello.ts
- >  webui
  -  index.html
-  package.json

## TERMINAL

```
domain/sayHello  
]  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello
```



## Code Editor

CODE → services/standalone.json

```
{  
  "url": "http://127.0.0.1:3000",  
  "standalone":  
  {  
    "segments": ["default", "data"],  
    "assets": ["index.html", "vite.svg", "assets/**/*"]  
  }  
}
```

## EXPLORER

- ✓ app
- > public
- ✓ segments
  - data.json
  - default.json
- ✓ services
  - standalone.json
- ✓ src
- ✓ domain
  - keepHelloCount.ts
  - sayHello.ts
- > webui
  - index.html
- package.json

## TERMINAL

```
domain/sayHello  
]  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello
```



## Code Editor

### EXPLORER

- ✓ app
- > public
- ✓ segments
  - data.json
  - default.json
- ✓ services
  - standalone.json
- ✓ src
- ✓ domain
  - keepHelloCount.ts
  - sayHello.ts
- > webui
- index.html

### CODE → services/standalone.json

```
{  
  "url": "http://127.0.0.1:3000",  
  "standalone":  
  {  
    "segments": ["default", "data"],  
    "assets": ["index.html", "vite.svg", "assets/**/*"]  
  }  
}
```

### TERMINAL

```
domain/sayHello  
]  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello
```



## Code Editor

CODE → services/standalone.json

```
{  
  "url": "http://127.0.0.1:3000",  
  "standalone":  
  {  
    "segments": ["default", "data"],  
    "assets": ["index.html", "vite.svg", "assets/**/*"]  
  }  
}
```

## EXPLORER

- ✓ app
- > public
- ✓ segments
  - data.json
  - default.json
- ✓ services
  - standalone.json
- ✓ src
- ✓ domain
  - keepHelloCount.ts
  - sayHello.ts
- > webui

## TERMINAL

```
domain/sayHello  
]  
[INFO] Provided web client  
[INFO] Ran request: domain/sayHello
```



## Code Editor

### EXPLORER

- ✓ app
- > public
- ✓ segments
  - data.json
  - default.json
- ✓ services
  - standalone.json
- ✓ src
- ✓ domain
  - keepHelloCount.ts
  - sayHello.ts

CODE → services/standalone.json

```
{  
  "url": "http://127.0.0.1:3000",  
  "standalone":  
  {  
    "segments": ["default", "data"],  
    "assets": ["index.html", "vite.svg", "assets/**/*"]  
  }  
}
```

### TERMINAL

domain/sayHello



## Code Editor

### EXPLORER

- ✓ app
- > public
- ✓ segments
  - data.json
  - default.json
- ✓ services
  - standalone.json
- ✓ src
- ✓ domain
  - keepHelloCount.ts
  - sayHello.ts

CODE → services/standalone.json

```
{  
  "url": "http://127.0.0.1:3000",  
  "standalone":  
  {  
    "segments": ["default", "data"],  
    "assets": ["index.html", "vite.svg", "assets/**/*"]  
  }  
}
```


### TERMINAL

domain/sayHello



## Code Editor

### EXPLORER

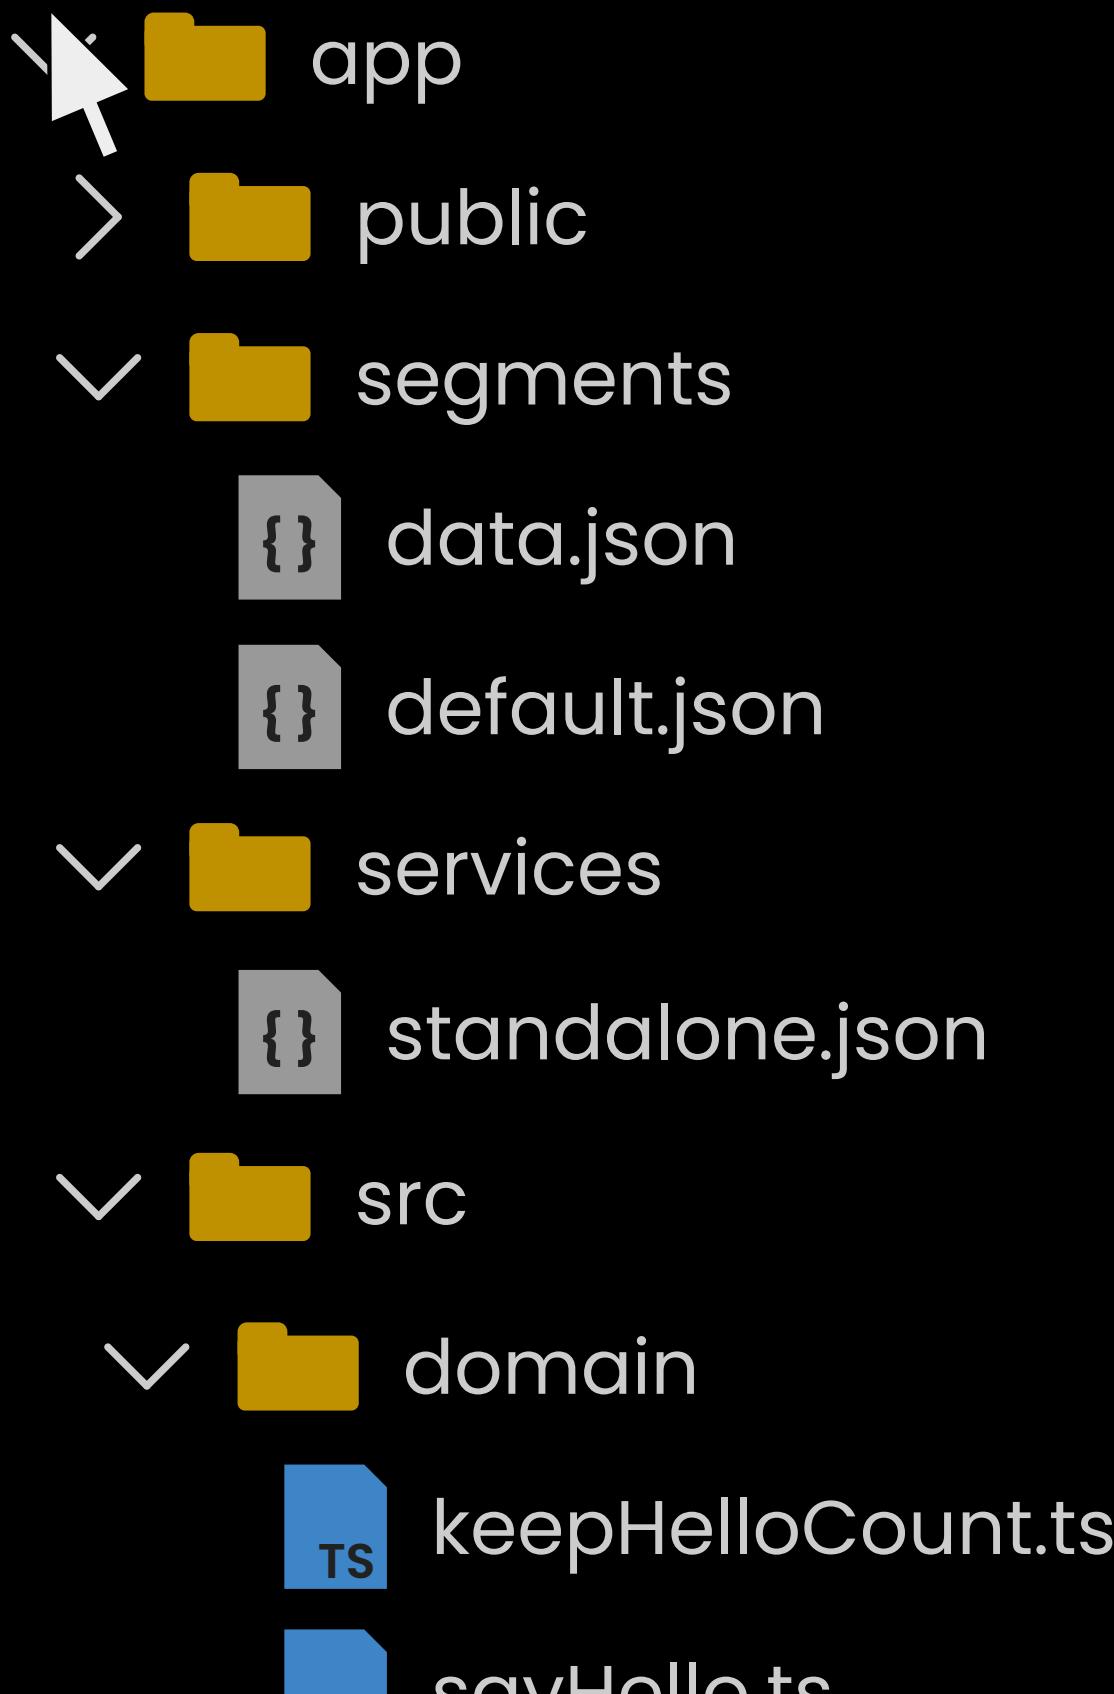

CODE → services/standalone.json

```
{  
  "url": "http://127.0.0.1:3000",  
  "standalone":  
  {  
    "segments": ["default", "data"],  
    "assets": ["index.html", "vite.svg", "assets/**/*"]  
  }  
}
```


### TERMINAL

domain/sayHello



## Code Editor

### EXPLORER

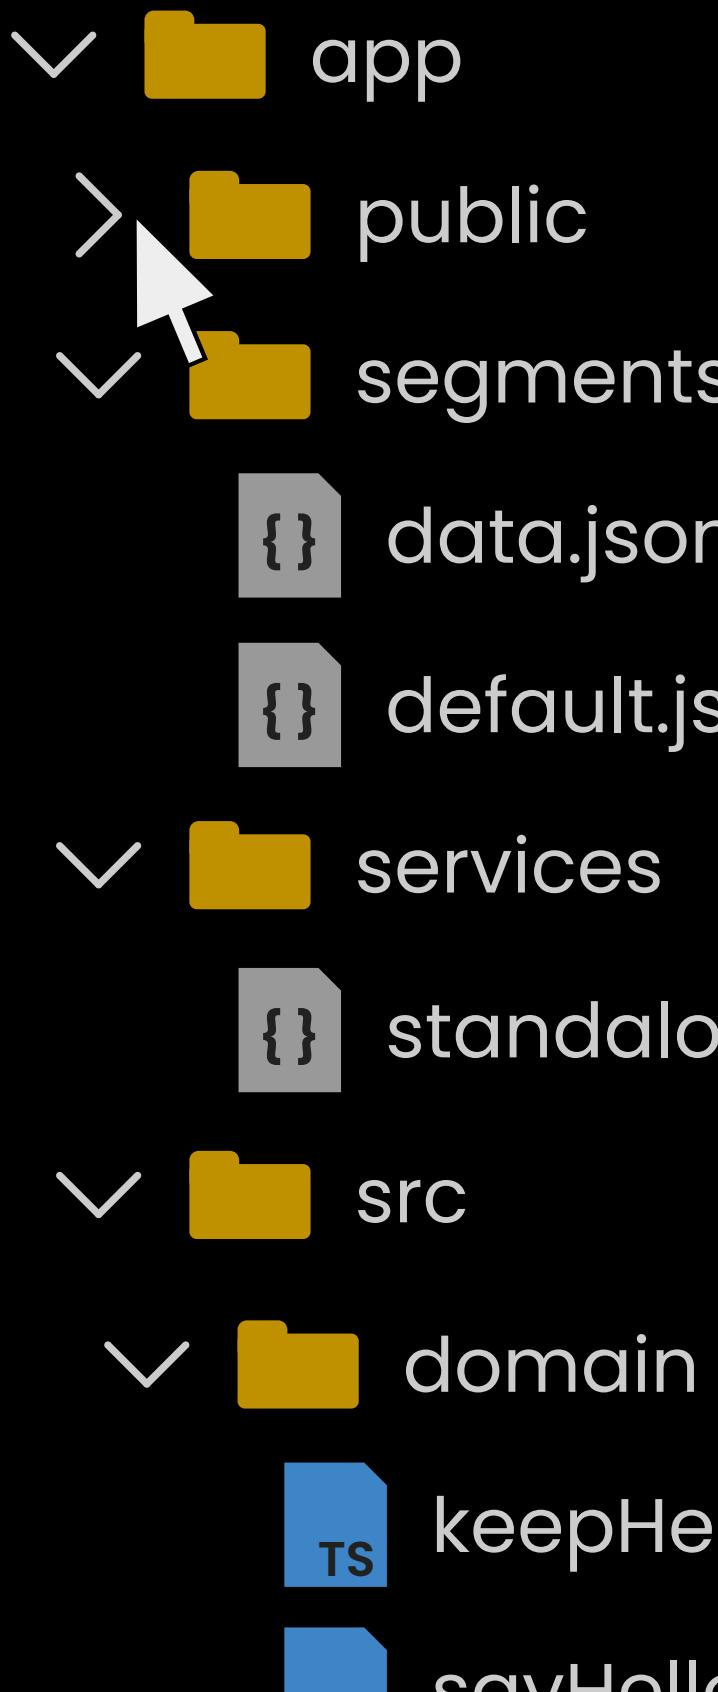

CODE → services/standalone.json

```
{  
  "url": "http://127.0.0.1:3000",  
  "standalone":  
  {  
    "segments": ["default", "data"],  
    "assets": ["index.html", "vite.svg", "assets/**/*"]  
  }  
}
```

### TERMINAL

domain/sayHello



## Code Editor

### EXPLORER

- ✓ app
- > public
- ✓ segments
  - ▶ data.json
  - ▶ default.json
- ✓ services
  - ▶ standalone.json
- ✓ src
- ✓ domain
  - ▶ keepHelloCount.ts
  - ▶ sayHello.ts

CODE → services/standalone.json

```
{  
  "url": "http://127.0.0.1:3000",  
  "standalone":  
  {  
    "segments": ["default", "data"],  
    "assets": ["index.html", "vite.svg", "assets/**/*"]  
  }  
}
```

### TERMINAL

domain/sayHello



## Code Editor

### EXPLORER

- ✓ app
- > public
- ✓ segments
  - data.json
  - default.json
- ✓ services
  - standalone.json
- ✓ src
- ✓ domain
  - keepHelloCount.ts
  - sayHello.ts

CODE → services/standalone.json

```
{  
  "url": "http://127.0.0.1:3000",  
  "standalone":  
  {  
    "segments": ["default", "data"],  
    "assets": ["index.html", "vite.svg", "assets/**/*"]  
  }  
}
```

### TERMINAL

domain/sayHello



## Code Editor

### EXPLORER

- ✓ app
- > public
- > segments
- ✓ services
- standalone.json
- ✓ src
- ✓ domain
  - keepHelloCount.ts
  - sayHello.ts
- > webui
- index.html

CODE → services/standalone.json

```
{  
  "url": "http://127.0.0.1:3000",  
  "standalone":  
  {  
    "segments": ["default", "data"],  
    "assets": ["index.html", "vite.svg", "assets/**/*"]  
  }  
}
```

### TERMINAL

domain/sayHello



## EXPLORER

- ✓ app
- > public
- > segments
- ✓ services
  - ✓ standalone.json
- ✓ src
- ✓ domain
  - keepHelloCount.ts
  - sayHello.ts
- > webui
- index.html

CODE → services/standalone.json

```
{  
  "url": "http://127.0.0.1:3000",  
  "standalone":  
  {  
    "segments": ["default", "data"],  
    "assets": ["index.html", "vite.svg", "assets/**/*"]  
  }  
}
```

## TERMINAL

domain/sayHello



## EXPLORER

- ✓ app
- > public
- > segments
- ✓ services
  - standalone.json
  - ✓ src
    - ✓ domain
      - keepHelloCount.ts
      - sayHello.ts
- > webui
- index.html

CODE → services/standalone.json

```
{  
  "url": "http://127.0.0.1:3000",  
  "standalone":  
  {  
    "segments": ["default", "data"],  
    "assets": ["index.html", "vite.svg", "assets/**/*"]  
  }  
}
```

## TERMINAL

domain/sayHello