


Hello, Richard 1!



http://127.0.0.1:3000



Hello, Richard !

```
> gateway
> default
> data
> repository
> proxy
```


```
> gateway
> default
> data
> repository
> proxy
```




Web Browser



http://127.0.0.1:3000



Hello, Richard

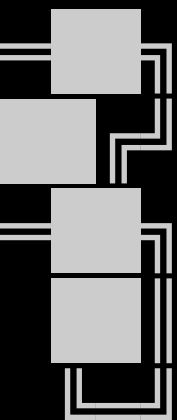

3000

- >_ gateway
- >_ default
- >_ data
- >_ repository
- >_ proxy




http://127.0.0.1:3000



He

0.0.1:3001",
7.0.0.1:3002",

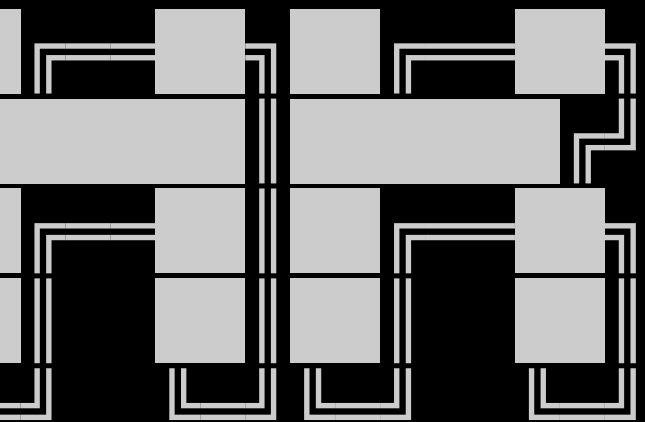

untime ~


tp://127.0.0.1:3000

- > gateway
- > default
- > data
- > repository
- > proxy



http://127.0.0.1:3000

http://127.0.0.1:3001",
http://127.0.0.1:3002",

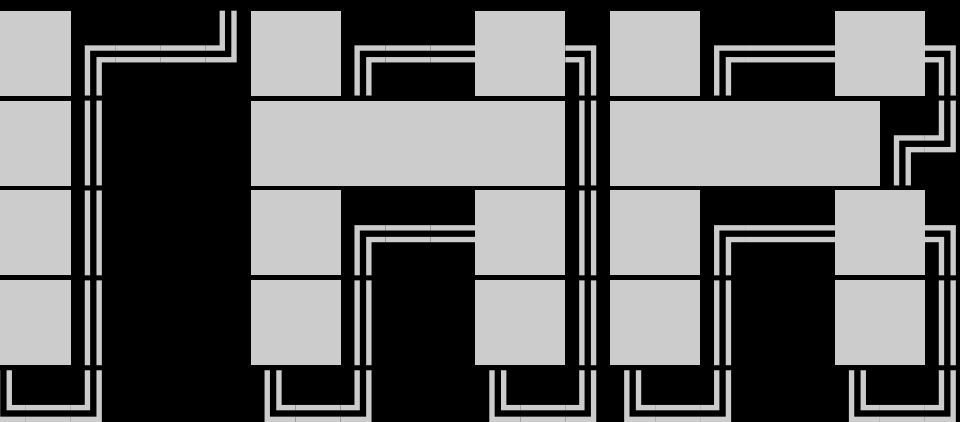

aScript Runtime ~

ted at http://127.0.0.1:3000


- > gateway
- > default
- > data
- > repository
- > proxy



http://127.0.0.1:3000

```
"gateway": "http://127.0.0.1:3001",  
"repository": "http://127.0.0.1:3002",
```

TERMINAL

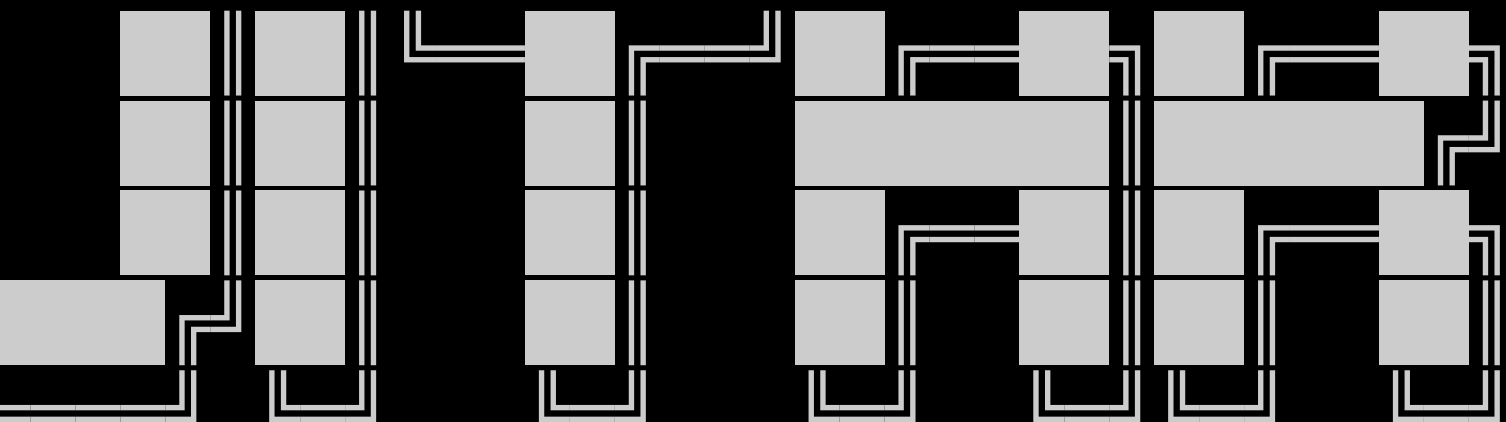


Distributed JavaScript Runtime ~

[FO] Server started at http://127.0.0.1:3000

```
>_ gateway  
>_ default  
>_ data  
>_ repository  
>_ proxy
```

```
{  
  "gateway": "http://127.0.0.1:3001",  
  "repository": "http://127.0.0.1:3002",  
}
```

TERMINAL

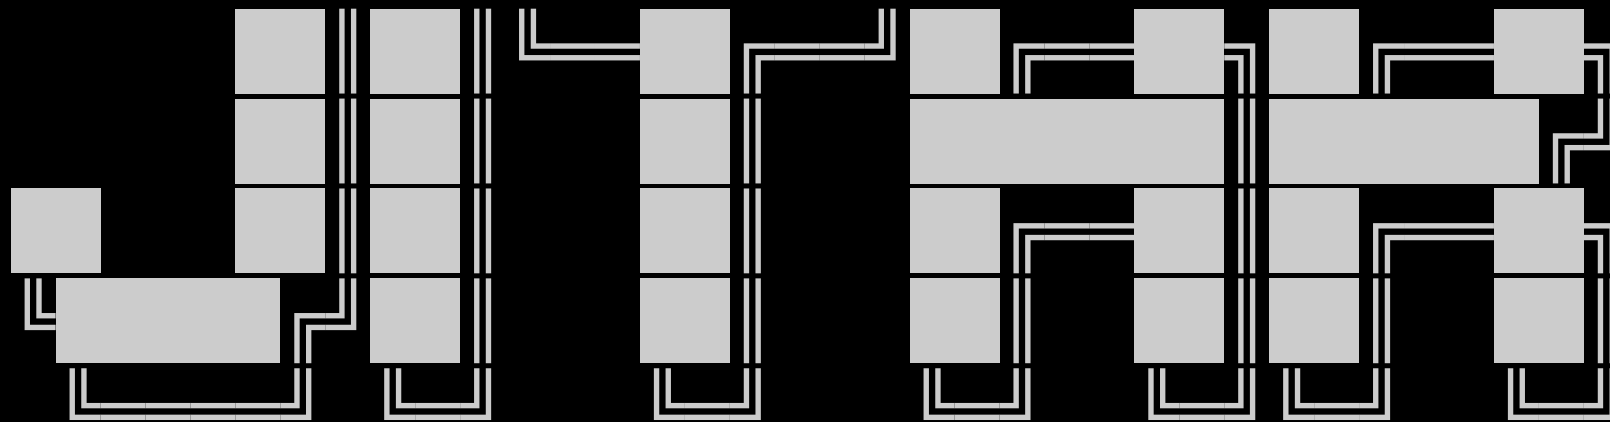

~ Distributed JavaScript Runtime ~


[INFO] Server started at http://127.0.0.1:3000
█

```
> gateway  
> default  
> data  
> repository  
> proxy
```



```
    "url": "http://127.0.0.1:3000",  
    "middleware": [ "./middleware/serverAuth" ],  
    "proxy":  
    {  
      "gateway": "http://127.0.0.1:3001",  
      "repository": "http://127.0.0.1:3002",  
    }  
  }  
}
```

TERMINAL

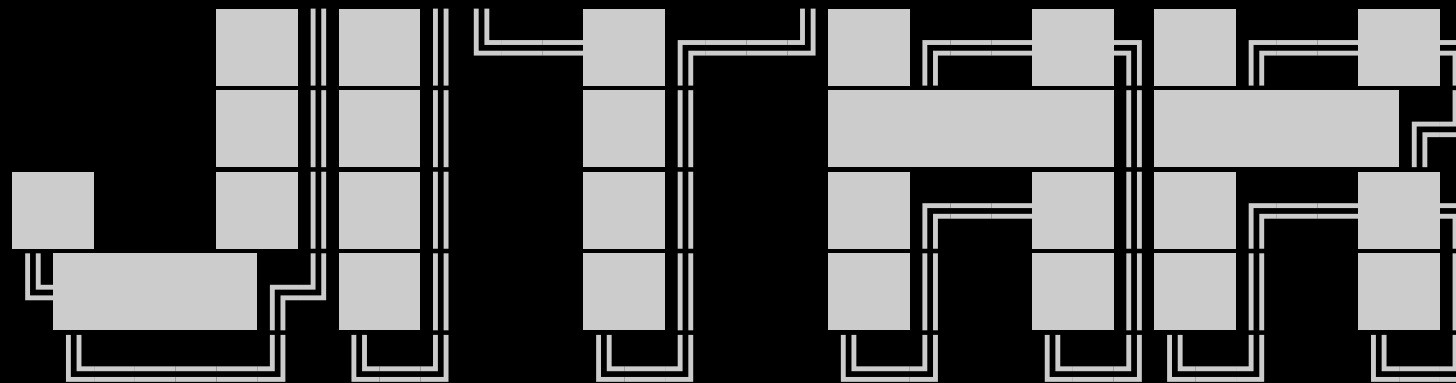

~ Distributed JavaScript Runtime ~


[INFO] Server started at http://127.0.0.1:3000

> gateway
> default
> data
> repository
> proxy

c
ents
es
-worker.json
ult-worker.json
way.json
y.json
sitory.json
dalone.json
ain
pHelloCount.ts
Hello.ts

```
{  
  "url": "http://127.0.0.1:3000",  
  "middleware": [ "./middleware/serverAuth" ],  
  "proxy":  
    {  
      "gateway": "http://127.0.0.1:3001",  
      "repository": "http://127.0.0.1:3002",  
    }  
}
```

TERMINAL

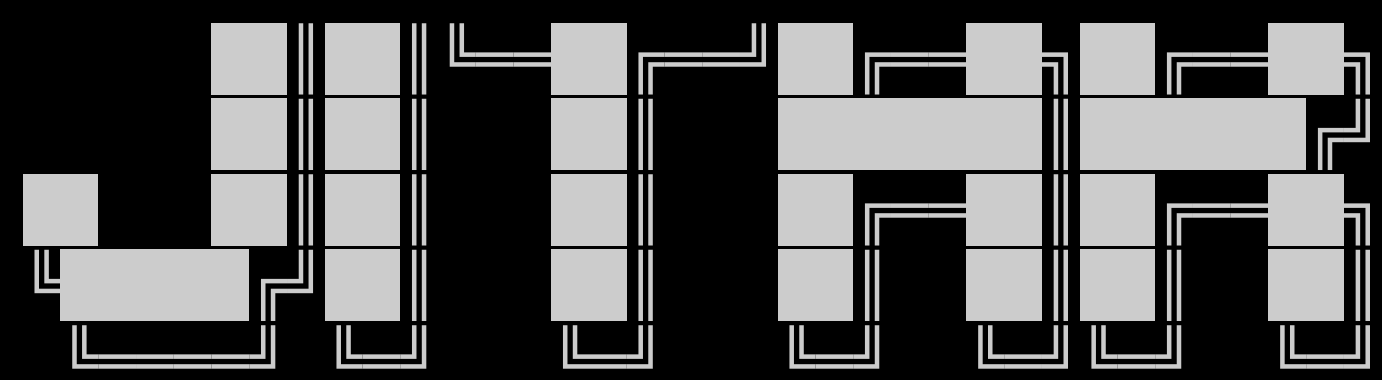

~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:3000

- > gateway
- > default
- > data
- > repository
- > proxy


EXPLORER

- app
 - public
 - segments
 - services
 - data-worker.json
 - default-worker.json
 - gateway.json
 - proxy.json
 - repository.json
 - standalone.json
 - src
 - domain
 - keepHelloCount.ts
 - sayHello.ts

CODE → services/proxy.json

```
{
  "url": "http://127.0.0.1:3000",
  "middleware": [ "./middleware/serverAuth" ],
  "proxy": {
    "gateway": "http://127.0.0.1:3001",
    "repository": "http://127.0.0.1:3002",
  }
}
```

TERMINAL

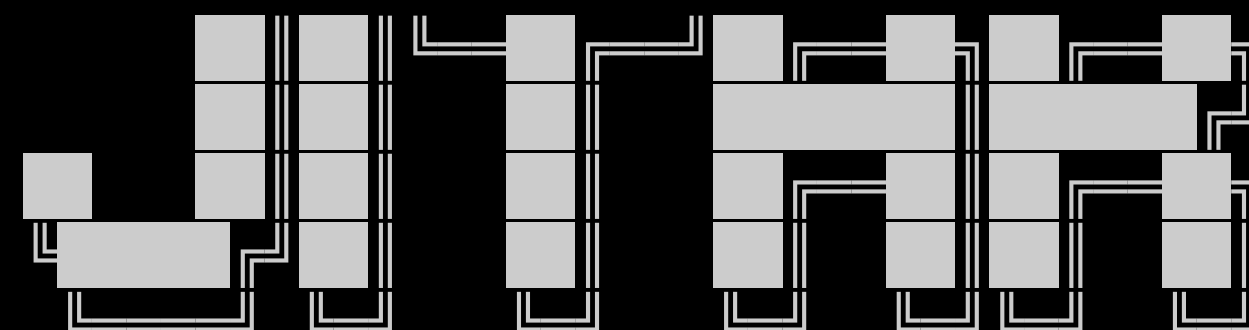

~ Distributed JavaScript Runtime ~











[INFO] Server started at http://127.0.0.1:3000

- > gateway
- > default
- > data
- > repository
- > proxy



Code Editor


EXPLORER

- ✓  app
 - >  public
 - >  segments
 - ✓  services
 -  data-worker.json
 -  default-worker.json
 -  gateway.json
 -  proxy.json
 -  repository.json
 -  standalone.json
- ✓  src
- ✓  domain
 -  keepHelloCount.ts
 -  sayHello.ts

CODE → services/proxy.json

```
{
  "url": "http://127.0.0.1:3000",
  "middleware": [ "./middleware/serverAuth" ],
  "proxy": {
    "gateway": "http://127.0.0.1:3001",
    "repository": "http://127.0.0.1:3002",
  }
}
```

TERMINAL

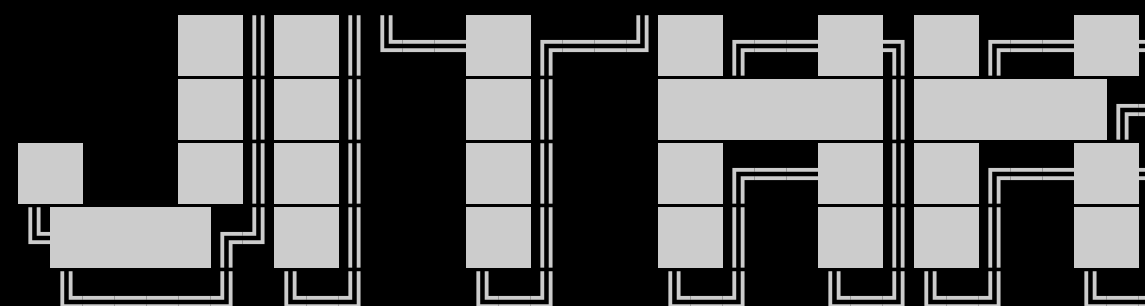

~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:3000

- > gateway
- > default
- > data
- > repository
- > proxy



Code Editor


EXPLORER

- ✓ app
 - > public
 - > segments
 - ✓ services
 - data-worker.json
 - default-worker.json
 - gateway.json
 - proxy.json
 - repository.json
 - standalone.json
- ✓ src
- ✓ domain
 - TS keepHelloCount.ts
 - TS sayHello.ts

CODE → services/proxy.json

```
{
  "url": "http://127.0.0.1:3000",
  "middleware": [ "./middleware/serverAuth" ],
  "proxy": {
    "gateway": "http://127.0.0.1:3001",
    "repository": "http://127.0.0.1:3002",
  }
}
```

TERMINAL

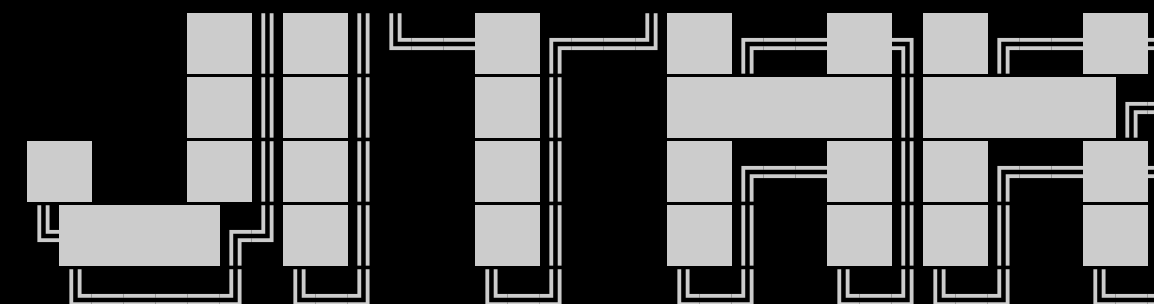

~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:3000

- > gateway
- > default
- > data
- > repository
- > proxy

Code Editor

EXPLORER

✓

app

>

public

>

segments

✓

services

data-worker.json

default-worker.json

gateway.json

proxy.json

repository.json

standalone.json

✓

src

✓

domain

TS

keepHelloCount.ts


TS

sayHello.ts

CODE → services/proxy.json

```
{
  "url": "http://127.0.0.1:3000",
  "middleware": [ "./middleware/serverAuth" ],
  "proxy": {
    "gateway": "http://127.0.0.1:3001",
    "repository": "http://127.0.0.1:3002",
  }
}
```

TERMINAL

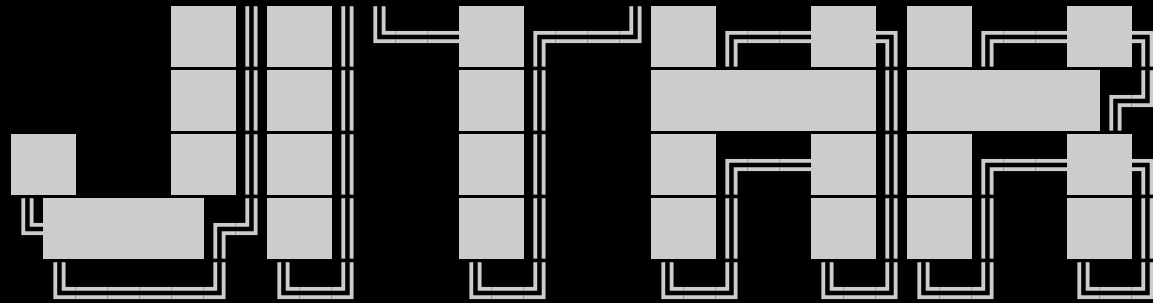

~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:3000

> gateway

> default

> data

> repository

> proxy



Code Editor


EXPLORER

- app
 - public
 - segments
 - services
 - data-worker.json
 - default-worker.json
 - gateway.json
 - proxy.json
 - repository.json
 - standalone.json
- src
- domain
 - keepHelloCount.ts
 - sayHello.ts

CODE → services/proxy.json

```
{
  "url": "http://127.0.0.1:3000",
  "middleware": [ "./middleware/serverAuth" ],
  "proxy": {
    "gateway": "http://127.0.0.1:3001",
    "repository": "http://127.0.0.1:3002",
  }
}
```

TERMINAL

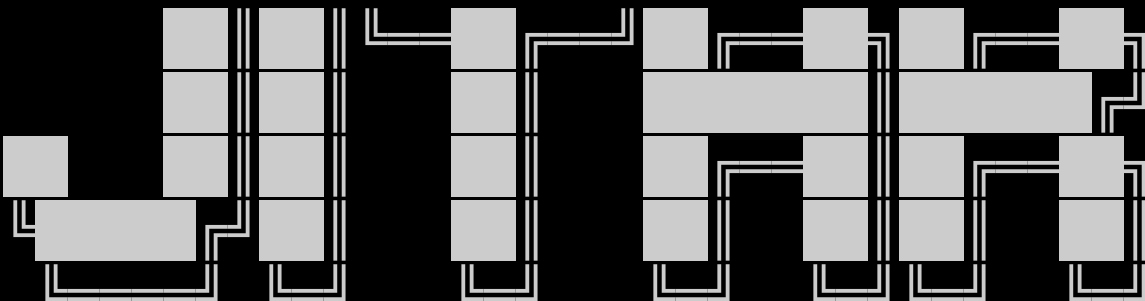

~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:3000

- > gateway
- > default
- > data
- > repository
- > proxy

Code Editor


EXPLORER

- ✓ app
 - > public
 - > segments
 - ✓ services
 - data-worker.json
 - default-worker.json
 - gateway.json
 - proxy.json
 - repository.json
 - standalone.json
- ✓ src
- ✓ domain
 - TS keepHelloCount.ts
 - TS sayHello.ts

CODE → services/proxy.json

```
{
  "url": "http://127.0.0.1:3000",
  "middleware": [ "./middleware/serverAuth" ],
  "proxy": {
    "gateway": "http://127.0.0.1:3001",
    "repository": "http://127.0.0.1:3002",
  }
}
```

TERMINAL

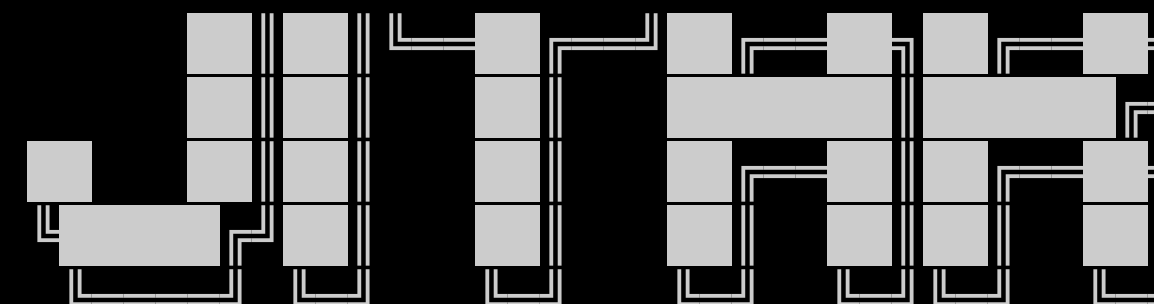

~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:3000

- > gateway
- > default
- > data
- > repository
- > proxy

Code Editor


EXPLORER

- ✓ app
 - > public
 - > segments
 - ✓ services
 - data-worker.json
 - default-worker.json
 - gateway.json
 - proxy.json
 - repository.json
 - standalone.json
 - ✓ src
 - ✓ domain
 - TS keepHelloCount.ts
 - TS sayHello.ts

CODE → services/proxy.json

```
{
  "url": "http://127.0.0.1:3000",
  "middleware": [ "./middleware/serverAuth" ],
  "proxy": {
    "gateway": "http://127.0.0.1:3001",
    "repository": "http://127.0.0.1:3002",
  }
}
```

TERMINAL

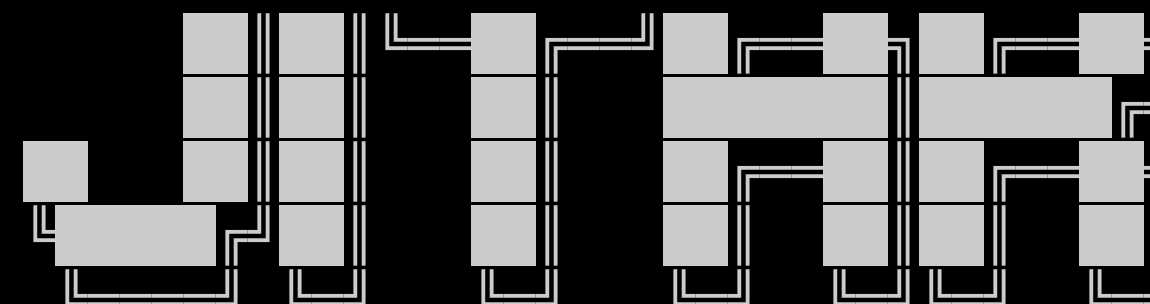

~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:3000

- > gateway
- > default
- > data
- > repository
- > proxy

Code Editor


EXPLORER

- ✓ app
 - > public
 - > segments
 - ✓ services
 - data-worker.json
 - default-worker.json
 - gateway.json
 - proxy.json
 - repository.json
 - standalone.json
 - ✓ src
 - ✓ domain
 - TS keepHelloCount.ts
 - TS sayHello.ts

CODE → services/proxy.json

```
{
  "url": "http://127.0.0.1:3000",
  "middleware": [ "./middleware/serverAuth" ],
  "proxy": {
    "gateway": "http://127.0.0.1:3001",
    "repository": "http://127.0.0.1:3002",
  }
}
```

TERMINAL

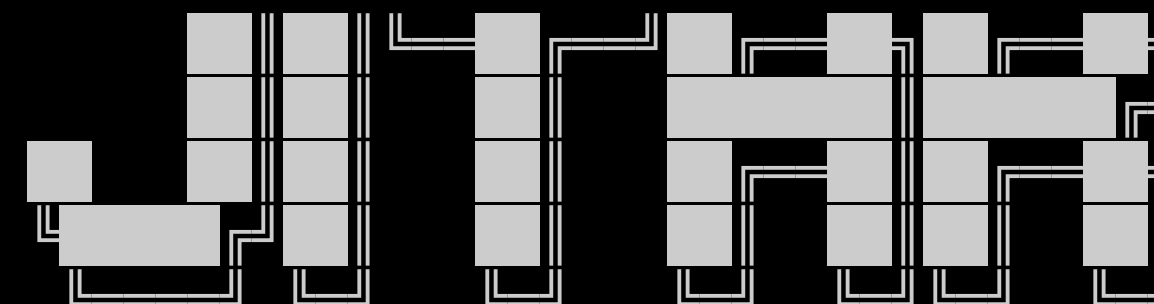

~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:3000

- > gateway
- > default
- > data
- > repository
- > proxy

Code Editor

EXPLORER

app

public

segments

services

data-worker.json

default-worker.json

gateway.json

proxy.json

repository.json

standalone.json

src

domain


keepHelloCount.ts

sayHello.ts

CODE → services/proxy.json

```
{  "url": "http://127.0.0.1:3000",  "middleware": [ ".middleware/serverAuth" ],  "proxy":    {    "gateway": "http://127.0.0.1:3001",    "repository": "http://127.0.0.1:3002",    }  }
```

TERMINAL

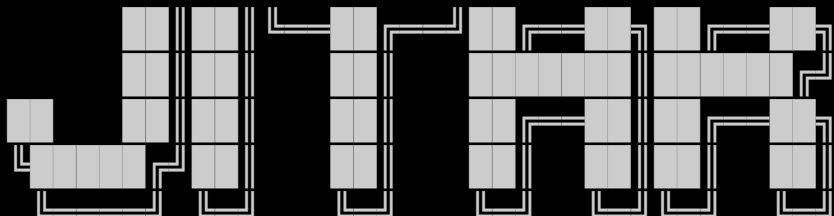

~ Distributed JavaScript Runtime ~

[INFO] Server started at http://127.0.0.1:3000


gateway

default

data

repository

proxy

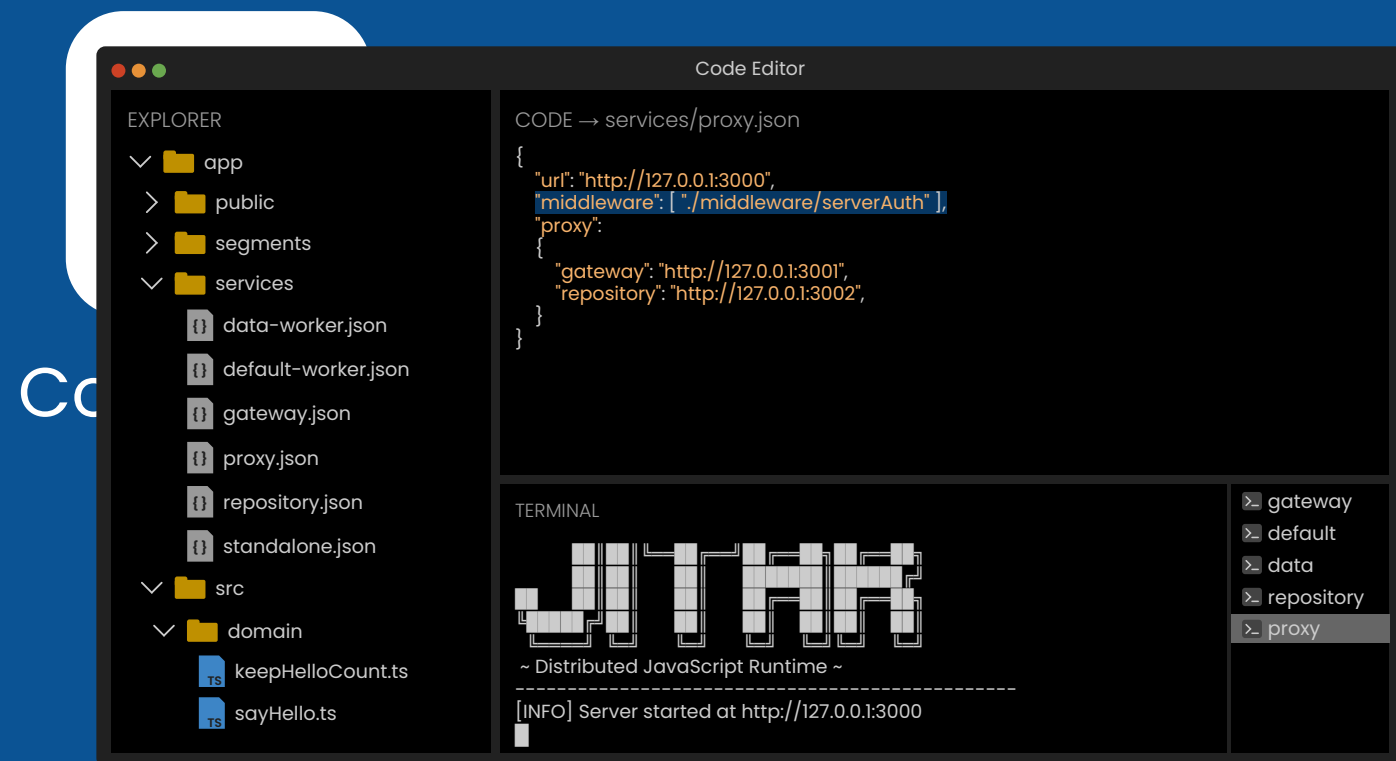



Code Editor

