
SLIDING MECHANISM DEPICTED IN TCP

Suppose the TCP sender has 10 data segments to transmit, and the window size is 4 segments, therefore we will see the mechanism as below



Segments 1–4 may be sent immediately, segments 5–10 must wait until the window proceed.

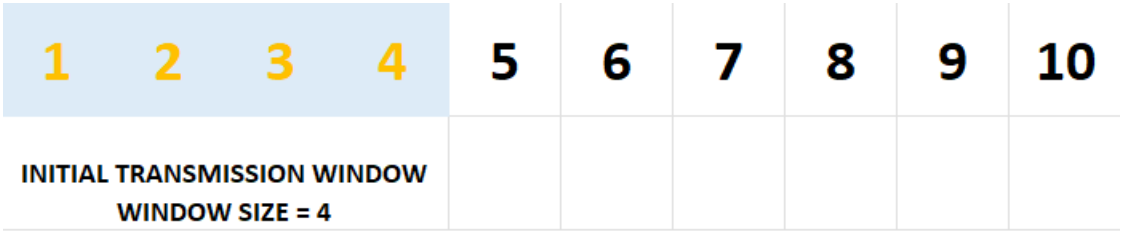

Segments 1–2 are acknowledged, allowing the sender to transmit segments 5–6.

After the receiver acknowledges segments 1 and 2, the window slides forward by two segments. So, the process proceeds as depicted in the sequence shown above.