



HOW-TO · QUICK START

CondaScope

From sign-in to a pinned software catalog in about five minutes — browse everything AWS Deadline Cloud offers your farm, then generate the queue environment that locks it in.

What you need

- **Windows 10 or 11**

CondaScope is a single **CondaScope.exe** — no install. It uses the WebView2 runtime already on current Windows.

- **An AWS sign-in**

The AWS CLI (`aws configure` / `aws sso login`) or the Deadline Cloud monitor. CondaScope never asks for or stores credentials.

- **Farm ID & Queue ID**

A Deadline Cloud farm with a queue on a service-managed fleet — the standard SMF setup.

- **Five minutes**

Settings once, then it's two clicks to a full catalog. The first fetch on a cold fleet is the only slow step.

READ-ONLY CondaScope never changes your farm. It reads the software catalog, and queue environments are **generate-only** — it writes the file and shows the AWS command, and you run that command yourself.

STEPS 1-2

Sign in and connect


1 · Sign in to AWS

In a terminal, sign in with whichever you normally use — CondaScope picks up the session automatically:

```
aws sso login --profile <your-profile> # or: deadline auth login
```

2 · Point CondaScope at your farm

- 1 Double-click **CondaScope.exe**. On a first run it opens on **Settings**.
- 2 Enter your **Region**, **Farm ID**, and **Queue ID** (leave AWS profile blank for your default). Keep Data source on **Auto**.
- 3 Click **Test connection**, then **Save** — CondaScope remembers this, so you only do it once.

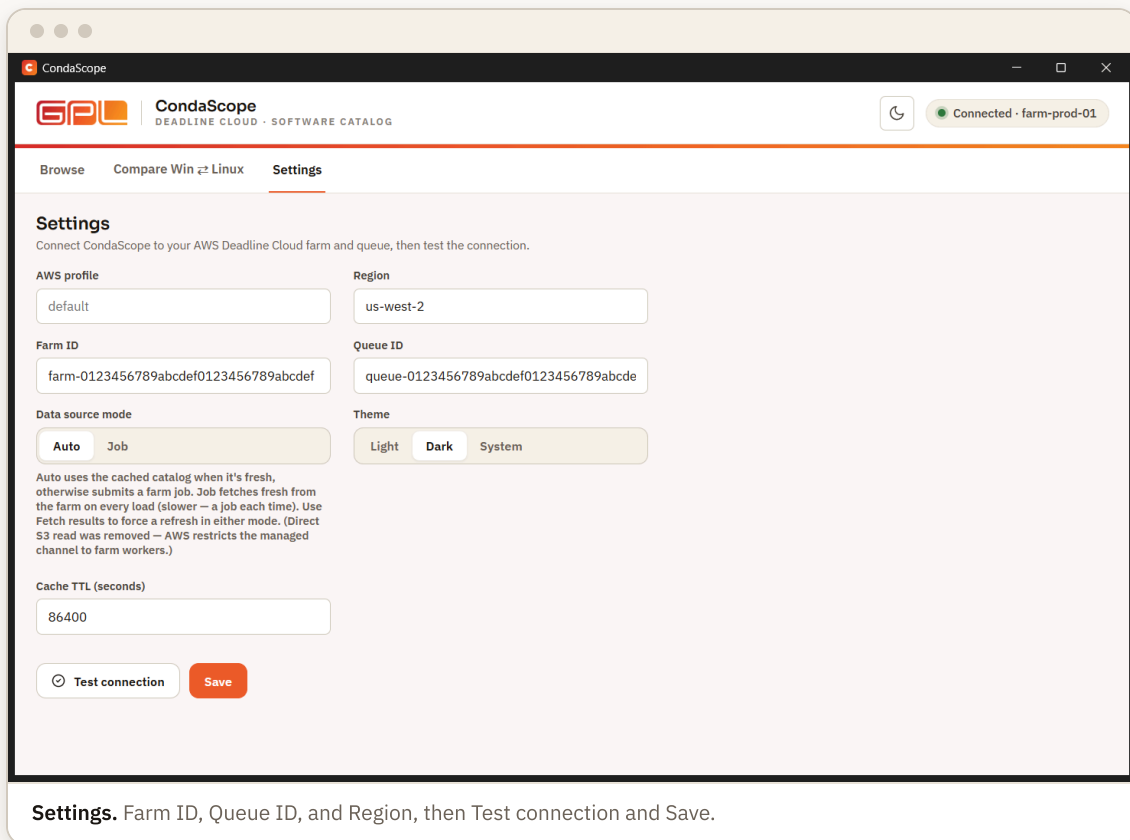


STEPS 3-4

Browse the catalog, pin your versions

3 · Browse

Open **Browse**. CondaScope fetches the catalog (a cold fleet can take a few minutes the first time) and lists every package with its exact version. Toggle **Windows / Linux**, search, and switch on **Apps only** to hide adaptors and dependencies.

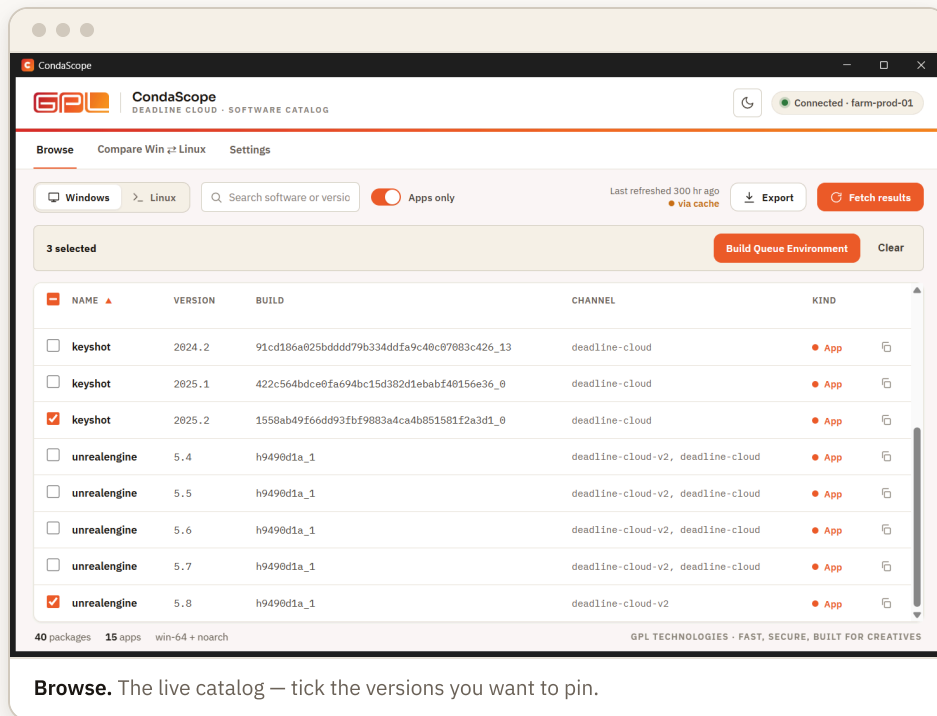

Browse. The live catalog — tick the versions you want to pin.


4 · Pin versions and update your farm

- 1 Tick the packages you want, then click **Build Queue Environment**.
- 2 Set each pin — **Off** pins the minor line (`cinema4d=2026.1.*`), **Exact** pins one version. Adjust Channels, Priority, and the name if needed.
- 3 **Save .yaml** (or .json), or **Copy** the preview — then run the generated command yourself:

```
aws deadline create-queue-environment --farm-id <FARM_ID> --queue-id <QUEUE_ID> \
  --priority 50 --template-type YAML --template file://conda_queue_env.yaml
```

REFERENCE

The builder, and quick fixes

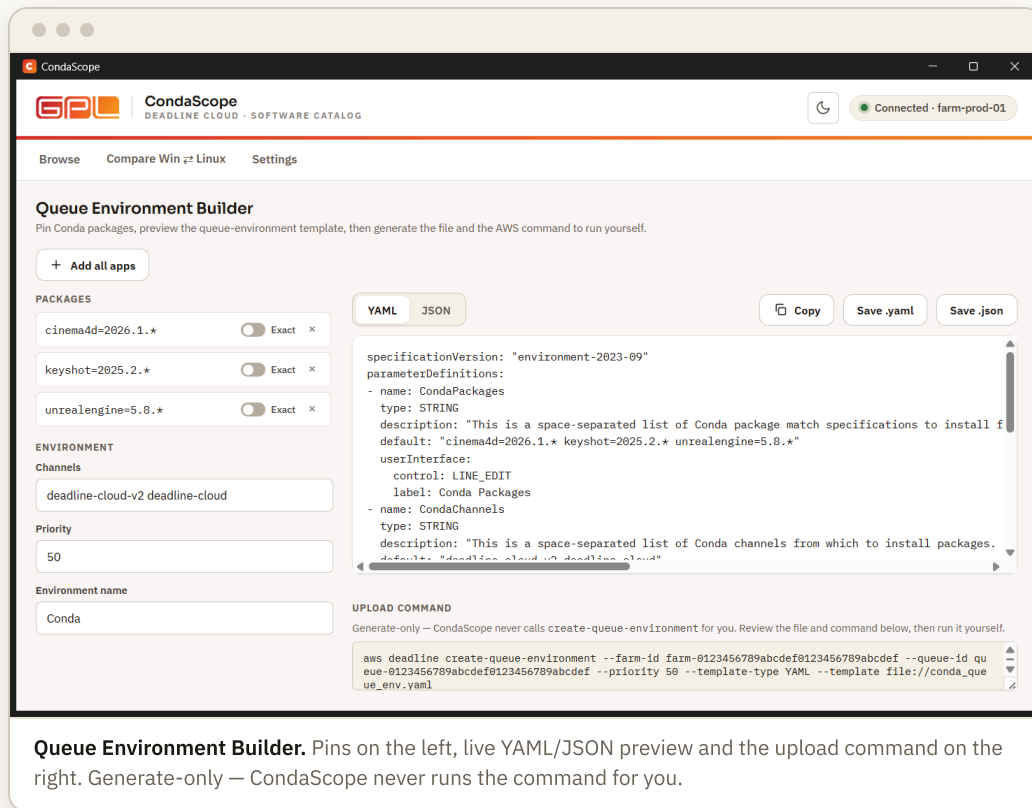

If something doesn't look right

Q The first fetch is taking minutes.

That's normal on a cold service-managed fleet — CondaScope reads the catalog by running a short job on your farm, and the workers have to start first. Results are cached for a day afterwards.

Q Fetch says the farm doesn't exist.

Farms are region-specific. Set Region in Settings to the region that owns the farm — confirm with `aws deadline list-farms --region <region>`.

Q It says I'm not signed in.

Your session expired. Re-run `aws sso login` (or `deadline auth login`), then click **Fetch results**.

Q Where are the logs?

`%LOCALAPPDATA%\GPLRecipeReporter\condascope.log` — include it when reporting an issue.