EXPERIMENT X

Step 1: Set up your HTML file to hold your canvas.

Entry.html Script.js

Inventory_Management_System > Entry.html > html

```html
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<title>Inventory Management Visualization</title>
<style>
body {
font-family: Arial, sans-serif;
text-align: center;
margin: 50px;
}
canvas {
margin: 20px auto;
}

</style>
</head>
<body>
<h1>Inventory Management System</h1>
<canvas id="pieChart" width="400" height="400"></canvas>
<canvas id="barChart" width="400" height="400"></canvas>
<script src="https://cdn.jsdelivr.net/npm/chart.js"></script>
<script src="script.js"></script>
</body>
</html>
```

Step 2: Create the JavaScript File for Charts and create a JavaScript file (script.js) to handle the data visualization logic.

Entry.html | Script.js

Inventory_Management_System > Script.js > barChart > options > scales

```javascript
const inventoryData = {
labels: ['Electronics', 'Clothing', 'Home Appliances', 'Books', 'Toys'],
datasets: [
{label: 'Items in Stock', data: [200, 150, 100, 80, 50], backgroundColor: ['#FF6384', '#36A2EB', '#FFCE56','#4BC0C0','#9966FF'],}]};

// Creating the Pie Chart
const ctxPie = document.getElementById('pieChart').getContext('2d');
const pieChart = new Chart(ctxPie, { type: 'pie', data: inventoryData, options: {responsive: true, title: {display: true, text: 'Inventory Distribution'}}});

// Creating the Bar Chart
const ctxBar = document.getElementById('barChart').getContext('2d');
const barChart = new Chart(ctxBar, {type: 'bar', data: inventoryData, options: {responsive: true, title: {display: true,text: 'Items in Stock by Category'},
scales: {
yAxes: [{
ticks: {
beginAtZero: true
}
}]
}
}
});
```

Output:-
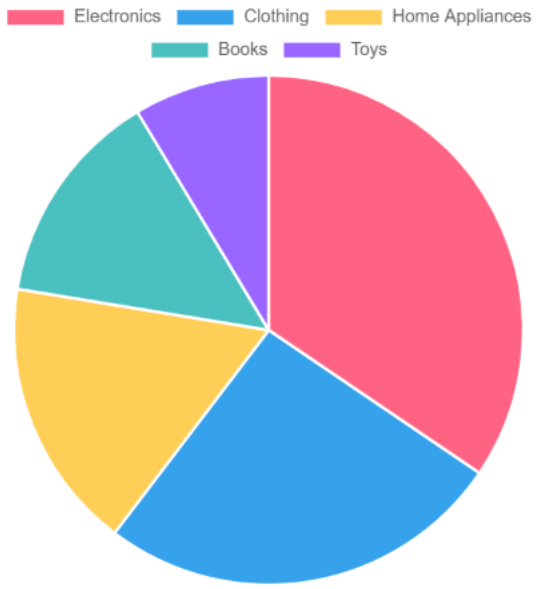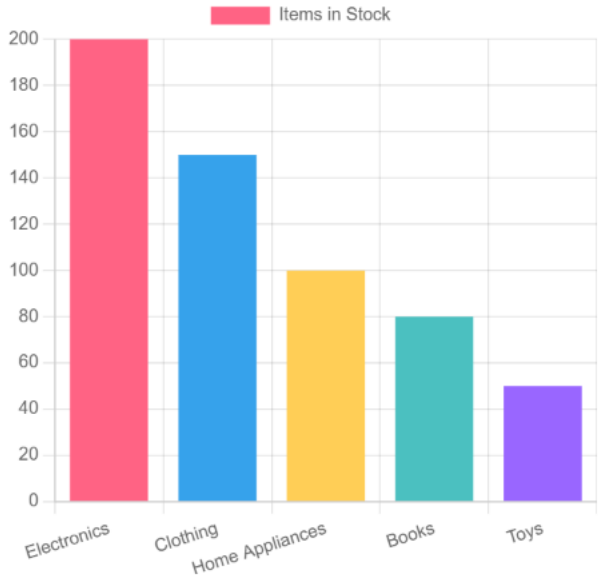
Inventory Management System