


QUERIES FOR DB:

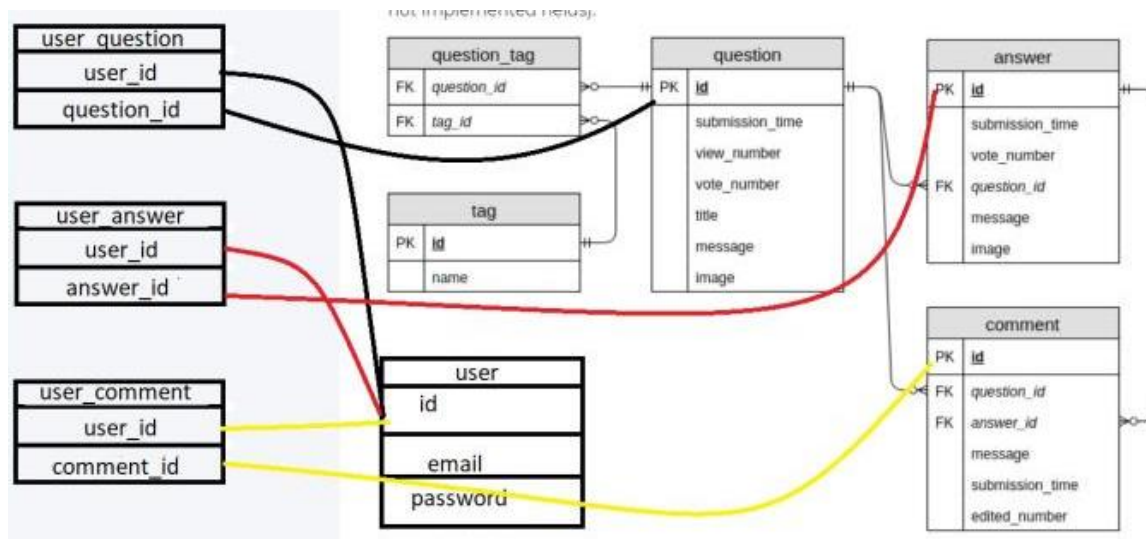

#####

```

CREATE TABLE users (
  id serial NOT null,
  login text,
  password text,
  registered timestamp NOT null );
  
```

```

CREATE TABLE user_question (
  user_id integer,
  question_id integer
);
  
```

```

CREATE TABLE user_answer (
  user_id integer,
  answer_id integer
);
  
```

```

CREATE TABLE user_comment (
  user_id integer,
  comment_id integer
);
  
```

Add column into user_answer [added 02.01.2021]:

```
ALTER TABLE user_answer
```

```
ADD answer_status text;
```

Result:

1





SELECT * FROM user_answer

Data Output

Explain

Messages

Notifications

	 user_id integer	 answer_id integer	 answer_status text	
1	1	3	[null]	
2	1	4	[null]	
3	2	5	[null]	

```
ALTER TABLE user_answer
```

```
ADD question_id integer
```

```
ALTER TABLE user_comment
```

```
ADD question_id integer
```