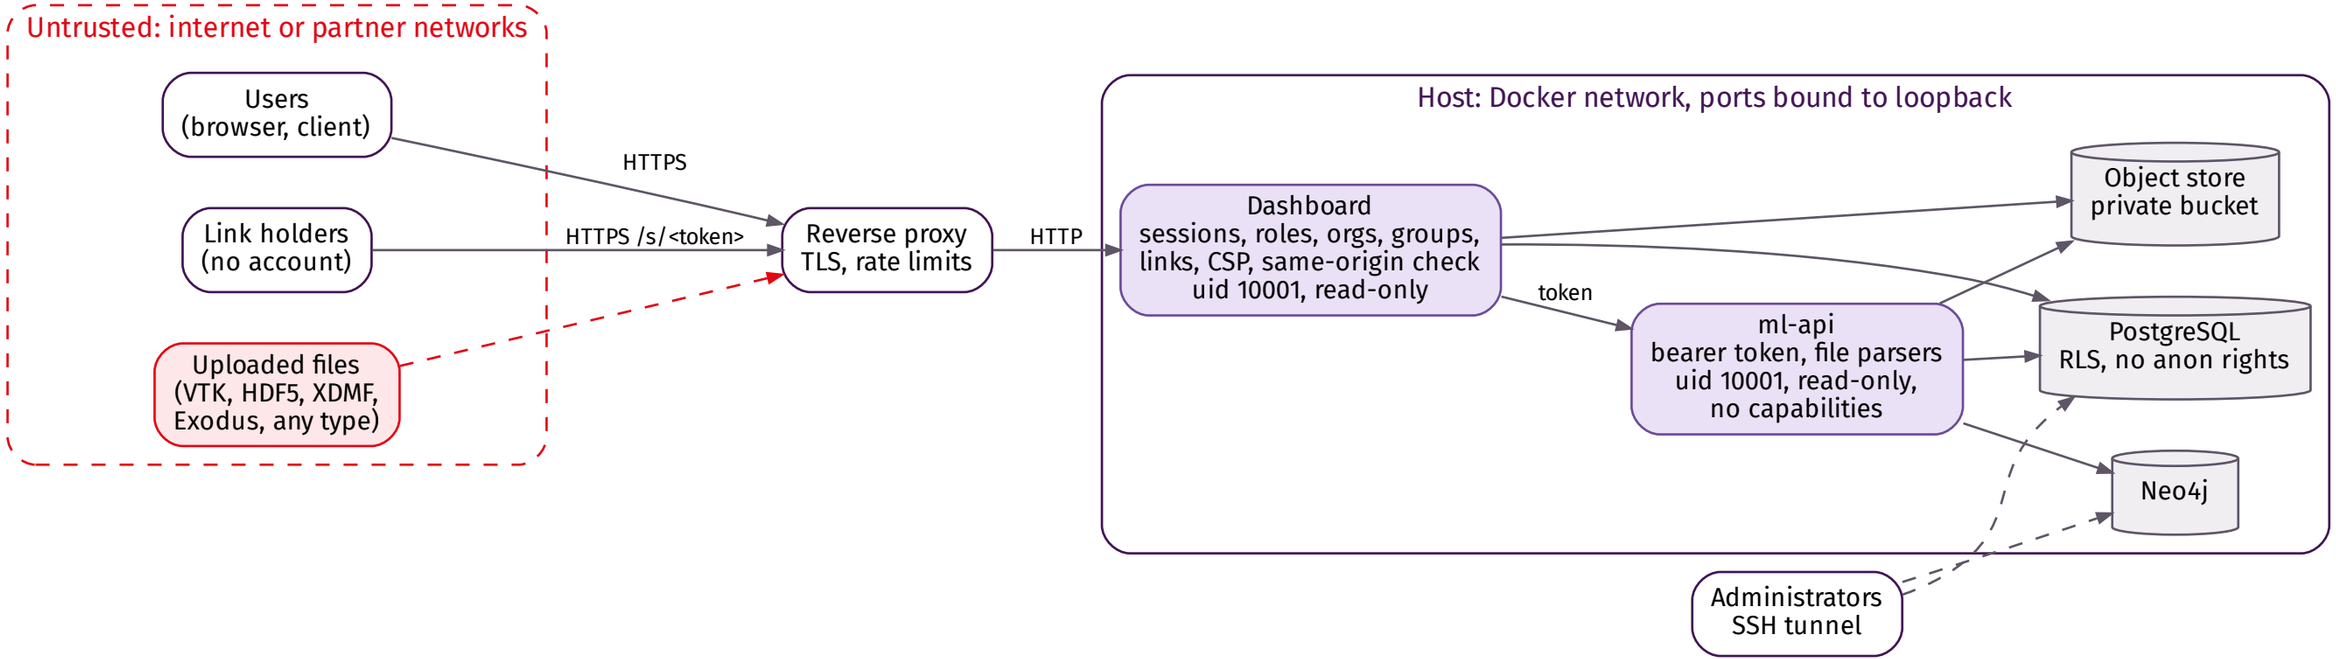
Untrusted: internet or partner networks
Users
(browser, client)
Link holders
(no account)
Uploaded files
(VTK, HDF5, XDMF,
Exodus, any type)
HTTPS
HTTPS /s/<token>
Reverse proxy
TLS, rate limits
HTTP
Host: Docker network, ports bound to loopback
Dashboard
sessions, roles, orgs, groups,
links, CSP, same-origin check
uid 10001, read-only
token
ml-api
bearer token, file parsers
uid 10001, read-only,
no capabilities
Object store
private bucket
PostgreSQL
RLS, no anon rights
Neo4j
Administrators
SSH tunnel