

## Chapter 10. Object-Oriented Programming: Polymorphism

One Ring to rule them all,  
One Ring to find them,  
One Ring to bring them all  
and in the darkness bind  
them.

John Ronald Reuel Tolkien

General propositions do not decide concrete cases.

Oliver Wendell Holmes

A philosopher of imposing stature doesn't think in a vacuum. Even his most abstract ideas are, to some extent, conditioned by what is or is not known in the time when he lives.

Alfred North Whitehead

Why art thou cast down,  
O my soul?

Psalms 42:5

### OBJECTIVES

In this chapter you will learn:

- The concept of polymorphism.
- To use overridden methods to effect polymorphism.
- To distinguish between abstract and concrete classes.
- To declare abstract methods to create abstract classes.
- How polymorphism makes systems extensible and maintainable.
- To determine an object's type at execution time.
- To declare and implement interfaces.

### Outline

[10.1](#) Introduction

[10.2](#) Polymorphism Examples

[10.3](#) Demonstrating Polymorphic Behavior

[10.4](#) Abstract Classes and Methods

[10.5](#) Case Study: Payroll System Using Polymorphism

[10.5.1](#) Creating Abstract Superclass `Employee`

[10.5.2](#) Creating Concrete Subclass `SalariedEmployee`

[10.5.3](#) Creating Concrete Subclass `HourlyEmployee`

[10.5.4](#) Creating Concrete Subclass `CommissionEmployee`

[10.5.5](#) Creating Indirect Concrete Subclass `BasePlusCommissionEmployee`

[10.5.6](#) Demonstrating Polymorphic Processing, Operator `instanceof` and Downcasting

[10.5.7](#) Summary of the Allowed Assignments Between Superclass and Subclass Variables

[10.6](#) `final` Methods and Classes

[10.7](#) Case Study: Creating and Using Interfaces

[10.7.1](#) Developing a Payable Hierarchy

[10.7.2](#) Declaring Interface `Payable`

[10.7.3](#) Creating Class `Invoice`

[10.7.4](#) Modifying Class `Employee` to Implement Interface `Payable`

[10.7.5](#) Modifying Class `SalariedEmployee` for Use in the `Payable` Hierarchy

[10.7.6](#) Using Interface `Payable` to Process Invoices and Employees Polymorphically

[10.7.7](#) Declaring Constants with Interfaces

[10.7.8](#) Common Interfaces of the Java API

[10.8](#) (Optional) GUI and Graphics Case Study: Drawing with Polymorphism

[10.9](#) (Optional) Software Engineering Case Study: Incorporating Inheritance into the ATM System

[10.10](#) Wrap-Up

[Summary](#)

[Terminology](#)

[Self-Review Exercises](#)

[Answers to Self-Review Exercises](#)

[Exercises](#)

◀ PREV

◀ PREV

NEXT ▶

NEXT ▶

[Page 460 (continued)]

## 10.1. Introduction

We now continue our study of object-oriented programming by explaining and demonstrating **polymorphism** with inheritance hierarchies. Polymorphism enables us to "program in the general" rather than "program in the specific." In particular, polymorphism enables us to write programs that process objects that share the same superclass in a class hierarchy as if they are all objects of the

superclass.

Consider the following example of polymorphism. Suppose we create a program that simulates the movement of several types of animals for a biological study. Classes `Fish`, `Frog` and `Bird` represent the three types of animals under investigation. Imagine that each of these classes extends superclass `Animal`, which contains a method `move` and maintains an animal's current location as x-y coordinates. Each subclass implements method `move`. Our program maintains an array of references to objects of the various `Animal` subclasses. To simulate the animals' movements, the program sends each object the same message once per secondnamely, `move`. However, each specific type of `Animal` responds to a `move` message in a unique waya `Fish` might swim three feet, a `Frog` might jump five feet and a `Bird` might fly ten feet. The program issues the same message (i.e., `move`) to each animal object generically, but each object knows how to modify its x-y coordinates appropriately for its specific type of movement. Relying on each object to know how to "do the right thing" (i.e., do what is appropriate for that type of object) in response to the same method call is the key concept of polymorphism. The same message (in this case, `move`) sent to a variety of objects has "many forms" of resultshence the term polymorphism.

---

[Page 461]

With polymorphism, we can design and implement systems that are easily extensiblenew classes can be added with little or no modification to the general portions of the program, as long as the new classes are part of the inheritance hierarchy that the program processes generically. The only parts of a program that must be altered to accommodate new classes are those that require direct knowledge of the new classes that the programmer adds to the hierarchy. For example, if we extend class `Animal` to create class `Tortoise` (which might respond to a `move` message by crawling one inch), we need to write only the `Tortoise` class and the part of the simulation that instantiates a `Tortoise` object. The portions of the simulation that process each `Animal` generically can remain the same.

This chapter has several key parts. First, we discuss common examples of polymorphism. We then provide a live-code example demonstrating polymorphic behavior. As you will soon see, you will use superclass references to manipulate both superclass objects and subclass objects polymorphically.

We then present a case study that revisits the employee hierarchy of [Section 9.4.5](#). We develop a simple payroll application that polymorphically calculates the weekly pay of several different types of employees using each employee's `earnings` method. Though the earnings of each type of employee are calculated in a specific way, polymorphism allows us to process the employees "in the general." In the case study, we enlarge the hierarchy to include two new classes `SalariedEmployee` (for people paid a fixed weekly salary) and `HourlyEmployee` (for people paid an hourly salary and so-called time-and-a-half for overtime). We declare a common set of functionality for all the classes in the updated hierarchy in a so-called abstract class, `Employee`, from which classes `SalariedEmployee`, `HourlyEmployee` and `CommissionEmployee` inherit directly and class `BasePlusCommissionEmployee4` inherits indirectly. As you will soon see, when we invoke each employee's `earnings` method off a superclass `Employee` reference, the correct earnings calculation is performed due to Java's polymorphic capabilities.

Occasionally, when performing polymorphic processing, we need to program "in the specific." Our `Employee` case study demonstrates that a program can determine the type of an object at execution time and act on that object accordingly. In the case study, we use these capabilities to determine whether a particular employee object is a `BasePlusCommissionEmployee`. If so, we increase that employee's base salary by 10%.

The chapter continues with an introduction to Java interfaces. An interface describes a set of methods that can be called on an object, but does not provide concrete implementations for the methods. Programmers can declare classes that **implement** (i.e., provide concrete implementations for the methods of) one or more interfaces. Each interface method must be declared in all the classes that implement the interface. Once a class implements an interface, all objects of that class have an is-a

relationship with the interface type, and all objects of the class are guaranteed to provide the functionality described by the interface. This is true of all subclasses of that class as well.

---

[Page 462]

Interfaces are particularly useful for assigning common functionality to possibly unrelated classes. This allows objects of unrelated classes to be processed polymorphically. Objects of classes that implement the same interface can respond to the same method calls. To demonstrate creating and using interfaces, we modify our payroll application to create a general accounts payable application that can calculate payments due for company employees and invoice amounts to be billed for purchased goods. As you will see, interfaces enable polymorphic capabilities similar to those possible with inheritance.



[Page 462 (continued)]

## 10.2. Polymorphism Examples

We now consider several additional examples of polymorphism. If class `Rectangle` is derived from class `Quadrilateral`, then a `Rectangle` object is a more specific version of a `Quadrilateral` object. Any operation (e.g., calculating the perimeter or the area) that can be performed on a `Quadrilateral` object can also be performed on a `Rectangle` object. These operations can also be performed on other `Quadrilaterals`, such as `Squares`, `Parallelograms` and `trapezoids`. The polymorphism occurs when a program invokes a method through a superclass variable. At execution time, the correct subclass version of the method is called, based on the type of the reference stored in the superclass variable. You will see a simple code example that illustrates this process in [Section 10.3](#).

As another example, suppose we design a video game that manipulates objects of many different types, including objects of classes `Martian`, `Venusian`, `Plutonian`, `SpaceShip` and `LaserBeam`. Imagine that each class inherits from the common superclass called `SpaceObject`, which contains method `draw`. Each subclass implements this method. A screen-manager program maintains a collection (e.g., a `SpaceObject` array) of references to objects of the various classes. To refresh the screen, the screen manager periodically sends each object the same message, namely, `draw`. However, each object responds in a unique way. For example, a `Martian` object might draw itself in red with the appropriate number of antennae. A `SpaceShip` object might draw itself as a bright silver flying saucer. A `LaserBeam` object might draw itself as a bright red beam across the screen. Again, the same message (in this case, `draw`) sent to a variety of objects has "many forms" of results.

A polymorphic screen manager might use polymorphism to facilitate adding new classes to a system with minimal modifications to the system's code. Suppose that we want to add `Mercurian` objects to our video game. To do so, we must build a class `Mercurian` that extends `SpaceObject` and provides its own `draw` method implementation. When objects of class `Mercurian` appear in the `SpaceObject` collection, the screen manager code invokes method `draw`, exactly as it does for every other object in the collection, regardless of its type. So the new `Mercurian` objects simply "plug right in" without any modification of the screen manager code by the programmer. Thus, without modifying the system (other than to build new classes and modify the code that creates new objects), programmers can use polymorphism to include additional types that were not envisioned when the system was created.

With polymorphism, the same method name and signature can be used to cause different actions to occur, depending on the type of object on which the method is invoked. This gives the programmer tremendous expressive capability.

---

[Page 463]



Polymorphism enables programmers to deal in generalities and let the execution-time environment handle the specifics. Programmers can command objects to behave in manners appropriate to those objects, without knowing the types of the objects (as long as the objects belong to the same inheritance hierarchy).

## Software Engineering Observation 10.2



Polymorphism promotes extensibility: Software that invokes polymorphic behavior is independent of the object types to which messages are sent. New object types that can respond to existing method calls can be incorporated into a system without requiring modification of the base system. Only client code that instantiates new objects must be modified to accommodate new types.

◀ PREVIOUS

◀ PREVIOUS

NEXT ▶

NEXT ▶

[Page 463 (continued)]

### 10.3. Demonstrating Polymorphic Behavior

[Section 9.4](#) created a commission employee class hierarchy, in which class `BasePlusCommissionEmployee` inherited from class `CommissionEmployee`. The examples in that section manipulated `CommissionEmployee` and `BasePlusCommissionEmployee` objects by using references to them to invoke their methods. We aimed superclass references at superclass objects and subclass references at subclass objects. These assignments are natural and straightforward: superclass references are intended to refer to superclass objects, and subclass references are intended to refer to subclass objects. However, as you will soon see, other assignments are possible.

In the next example, we aim a superclass reference at a subclass object. We then show how invoking a method on a subclass object via a superclass reference invokes the subclass functionality: the type of the actual referenced object, not the type of the reference, determines which method is called. This example demonstrates the key concept that an object of a subclass can be treated as an object of its superclass. This enables various interesting manipulations. A program can create an array of superclass references that refer to objects of many subclass types. This is allowed because each subclass object is an object of its superclass. For instance, we can assign the reference of a `BasePlusCommissionEmployee` object to a superclass `CommissionEmployee` variable because a `BasePlusCommissionEmployee` is a `CommissionEmployee`; we can treat a `BasePlusCommissionEmployee` as a `CommissionEmployee`.

As you will learn later in the chapter, we cannot treat a superclass object as a subclass object because a superclass object is not an object of any of its subclasses. For example, we cannot assign the reference of a `CommissionEmployee` object to a subclass `BasePlusCommissionEmployee` variable because a `CommissionEmployee` is not a `BasePlusCommissionEmployee`; a `CommissionEmployee` does not have a `baseSalary` instance variable and does not have methods `setBaseSalary` and `getBaseSalary`. The is-a relationship applies only from a subclass to its direct (and indirect) superclasses, and not vice versa.

It turns out that the Java compiler does allow the assignment of a superclass reference to a subclass variable if we explicitly cast the superclass reference to the subclass type: a technique we discuss in greater detail in [Section 10.5](#). Why would we ever want to perform such an assignment? A superclass reference can be used to invoke only the methods declared in the superclass; attempting to invoke subclass-only methods through a superclass reference results in compilation errors. If a program needs to perform a subclass-specific operation on a subclass object referenced by a superclass variable, the program must first cast the superclass reference to a subclass reference through a technique known as

**downcasting.** This enables the program to invoke subclass methods that are not in the superclass. We will show you a concrete example of downcasting in [Section 10.5](#).

---

[Page 464]

The example in [Fig. 10.1](#) demonstrates three ways to use superclass and subclass variables to store references to superclass and subclass objects. The first two are straightforward as in [Section 9.4](#), we assign a superclass reference to a superclass variable, and we assign a subclass reference to a subclass variable. Then we demonstrate the relationship between subclasses and superclasses (i.e., the is-a relationship) by assigning a subclass reference to a superclass variable. [Note: This program uses classes `CommissionEmployee3` and `BasePlusCommissionEmployee4` from [Fig. 9.12](#) and [Fig. 9.13](#), respectively.]

**Figure 10.1. Assigning superclass and subclass references to superclass and subclass variables.**  
(This item is displayed on pages 464 - 465 in the print version)

```
1  // Fig. 10.1: PolymorphismTest.java
2  // Assigning superclass and subclass references to superclass and
3  // subclass variables.
4
5  public class PolymorphismTest
6  {
7      public static void main( String args[] )
8      {
9          // assign superclass reference to superclass variable
10         CommissionEmployee3 commissionEmployee = new CommissionEmployee3(
11             "Sue", "Jones", "222-22-2222", 10000, .06 );
12
13         // assign subclass reference to subclass variable
14         BasePlusCommissionEmployee4 basePlusCommissionEmployee =
15             new BasePlusCommissionEmployee4(
16                 "Bob", "Lewis", "333-33-3333", 5000, .04, 300 );
17
18         // invoke toString on superclass object using superclass variable
19         System.out.printf( "%s %s:\n\n%s\n\n",
20             "Call CommissionEmployee3's toString with superclass reference ",
21             "to superclass object", commissionEmployee.toString() );
22
23         // invoke toString on subclass object using subclass variable
24         System.out.printf( "%s %s:\n\n%s\n\n",
25             "Call BasePlusCommissionEmployee4's toString with subclass",
26             "reference to subclass object",
27             basePlusCommissionEmployee.toString() );
28
29         // invoke toString on subclass object using superclass variable
30         CommissionEmployee3 commissionEmployee2 =
31             basePlusCommissionEmployee;
32         System.out.printf( "%s %s:\n\n%s\n",
33             "Call BasePlusCommissionEmployee4's toString with superclass",
34             "reference to subclass object", commissionEmployee2.toString() );
35     } // end main
36 } // end class PolymorphismTest
```

Call CommissionEmployee3's toString with superclass reference to superclass object:

commission employee: Sue Jones  
social security number: 222-22-2222

```
gross sales: 10000.00
commission rate: 0.06
```

Call BasePlusCommissionEmployee4's toString with subclass reference to subclass object:

```
base-salaried commission employee: Bob Lewis
social security number: 333-33-3333
gross sales: 5000.00
commission rate: 0.04
base salary: 300.00
```

Call BasePlusCommissionEmployee4's toString with superclass reference to subclass object:

```
base-salaried commission employee: Bob Lewis
social security number: 333-33-3333
gross sales: 5000.00
commission rate: 0.04
base salary: 300.00
```

[Page 465]

In [Fig. 10.1](#), lines 1011 create a `CommissionEmployee3` object and assign its reference to a `CommissionEmployee3` variable. Lines 1416 create a `BasePlusCommissionEmployee4` object and assign its reference to a `BasePlusCommissionEmployee4` variable. These assignments are natural for example, a `CommissionEmployee3` variable's primary purpose is to hold a reference to a `CommissionEmployee3` object. Lines 1921 use reference `commissionEmployee` to invoke `toString` explicitly. Because `commissionEmployee` refers to a `CommissionEmployee3` object, superclass `CommissionEmployee3`'s version of `toString` is called. Similarly, lines 2427 use `basePlusCommissionEmployee` to invoke `toString` explicitly on the `BasePlusCommissionEmployee4` object. This invokes subclass `BasePlusCommissionEmployee4`'s version of `toString`.

Lines 3031 then assign the reference to subclass object `basePlusCommissionEmployee` to a superclass `CommissionEmployee3` variable, which lines 3234 use to invoke method `toString`. A superclass variable that contains a reference to a subclass object and is used to call a method actually calls the subclass version of the method. Hence, `commissionEmployee2.toString()` in line 34 actually calls class `BasePlusCommissionEmployee4`'s `toString` method. The Java compiler allows this "crossover" because an object of a subclass is an object of its superclass (but not vice versa). When the compiler encounters a method call made through a variable, the compiler determines if the method can be called by checking the variable's class type. If that class contains the proper method declaration (or inherits one), the compiler allows the call to be compiled. At execution time, the type of the object to which the variable refers determines the actual method to use.

◀ PREVIOUS

◀ PREVIOUS

NEXT ▶

NEXT ▶

[Page 466]

## 10.4. Abstract Classes and Methods



When we think of a class type, we assume that programs will create objects of that type. In some cases, however, it is useful to declare classes for which the programmer never intends to instantiate objects. Such classes are called abstract classes. Because they are used only as superclasses in inheritance hierarchies, we refer to them as **abstract superclasses**. These classes cannot be used to instantiate objects, because, as we will soon see, abstract classes are incomplete. Subclasses must declare the "missing pieces." We demonstrate abstract classes in [Section 10.5](#).

The purpose of an abstract class is primarily to provide an appropriate superclass from which other classes can inherit and thus share a common design. In the Shape hierarchy of [Fig. 9.3](#), for example, subclasses inherit the notion of what it means to be a Shape common attributes such as location, color and borderThickness, and behaviors such as draw, move, resize and changeColor. Classes that can be used to instantiate objects are called **concrete classes**. Such classes provide implementations of every method they declare (some of the implementations can be inherited). For example, we could derive concrete classes Circle, Square and triangle from abstract superclass TwoDimensionalShape. Similarly, we could derive concrete classes Sphere, Cube and Tetrahedron from abstract superclass THreeDimensionalShape. Abstract superclasses are too general to create real objects they specify only what is common among subclasses. We need to be more specific before we can create objects. For example, if you send the draw message to abstract class TwoDimensionalShape, it knows that two-dimensional shapes should be drawable, but it does not know what specific shape to draw, so it cannot implement a real draw method. Concrete classes provide the specifics that make it reasonable to instantiate objects.

Not all inheritance hierarchies contain abstract classes. However, programmers often write client code that uses only abstract superclass types to reduce client code's dependencies on a range of specific subclass types. For example, a programmer can write a method with a parameter of an abstract superclass type. When called, such a method can be passed an object of any concrete class that directly or indirectly extends the superclass specified as the parameter's type.

Abstract classes sometimes constitute several levels of the hierarchy. For example, the Shape hierarchy of [Fig. 9.3](#) begins with abstract class Shape. On the next level of the hierarchy are two more abstract classes, TwoDimensionalShape and ThreeDimensionalShape. The next level of the hierarchy declares concrete classes for TwoDimensionalShapes (Circle, Square and TRiangle) and for ThreeDimensionalShapes (Sphere, Cube and TeTRahedron).

You make a class abstract by declaring it with keyword **abstract**. An abstract class normally contains one or more **abstract methods**. An abstract method is one with keyword `abstract` in its declaration, as in

```
public abstract void draw(); // abstract method
```

Abstract methods do not provide implementations. A class that contains any abstract methods must be declared as an abstract class even if that class contains concrete (non-abstract) methods. Each concrete subclass of an abstract superclass also must provide concrete implementations of the superclass's abstract methods. Constructors and static methods cannot be declared `abstract`. Constructors are not inherited, so an `abstract` constructor could never be implemented. Similarly, subclasses cannot override static methods, so an `abstract static` method could never be implemented.



An abstract class declares common attributes and behaviors of the various classes in a class hierarchy. An abstract class typically contains one or more abstract methods that subclasses must override if the subclasses are to be concrete. The instance variables and concrete methods of an abstract class are subject to the normal rules of inheritance.



## Common Programming Error 10.1



Attempting to instantiate an object of an abstract class is a compilation error.

## Common Programming Error 10.2



Failure to implement a superclass's abstract methods in a subclass is a compilation error unless the subclass is also declared `abstract`.

Although we cannot instantiate objects of abstract superclasses, you will soon see that we can use abstract superclasses to declare variables that can hold references to objects of any concrete class derived from those abstract classes. Programs typically use such variables to manipulate subclass objects polymorphically. We also can use abstract superclass names to invoke `static` methods declared in those abstract superclasses.

Consider another application of polymorphism. A drawing program needs to display many shapes, including new shape types that the programmer will add to the system after writing the drawing program. The drawing program might need to display shapes, such as `Circles`, `TRiangles`, `Rectangles` or others, that derive from abstract superclass `Shape`. The drawing program uses `Shape` variables to manage the objects that are displayed. To draw any object in this inheritance hierarchy, the drawing program uses a superclass `Shape` variable containing a reference to the subclass object to invoke the object's `draw` method. This method is declared `abstract` in superclass `Shape`, so each concrete subclass must implement method `draw` in a manner specific to that shape. Each object in the `Shape` inheritance hierarchy knows how to draw itself. The drawing program does not have to worry about the type of each object or whether the drawing program has ever encountered objects of that type.

Polymorphism is particularly effective for implementing so-called layered software systems. In operating systems, for example, each type of physical device could operate quite differently from the others. Even so, commands to read or write data from and to devices may have a certain uniformity. For each device, the operating system uses a piece of software called a device driver to control all communication between the system and the device. The write message sent to a device-driver object needs to be interpreted specifically in the context of that driver and how it manipulates devices of a specific type. However, the write call itself really is no different from the write to any other device in the system: Place some number of bytes from memory onto that device. An object-oriented operating system might use an abstract superclass to provide an "interface" appropriate for all device drivers. Then, through inheritance from that abstract superclass, subclasses are formed that all behave similarly. The device driver methods are declared as abstract methods in the abstract superclass. The implementations of these abstract methods are provided in the subclasses that correspond to the specific types of device drivers. New devices are always being developed, and often long after the operating system has been released. When you buy a new device, it comes with a device driver provided by the device vendor. The device is immediately operational after you connect it to your computer and install the driver. This is another elegant example of how polymorphism makes systems extensible.

It is common in object-oriented programming to declare an **iterator class** that can traverse all the objects in a collection, such as an array ([Chapter 7](#)) or an `ArrayList` ([Chapter 19](#), [Collections](#)). For example, a program can print an `ArrayList` of objects by creating an iterator object and using it to obtain the next list element each time the iterator is called. Iterators often are used in polymorphic programming to traverse a collection that contains references to objects from various levels of a hierarchy. ([Chapter 19](#), presents a thorough treatment of `ArrayList`, iterators and J2SE 5.0's new

"generics" capabilities.) An `ArrayList` of objects of class `TwoDimensionalShape`, for example, could contain objects from subclasses `Square`, `Circle`, `triangle` and so on. Calling method `draw` for each `TwoDimensionalShape` object off a `TwoDimensionalShape` variable would polymorphically draw each object correctly on the screen.

[< PREY](#)[< PREY](#)[NEXT >](#)[NEXT >](#)

[Page 468 (continued)]

## 10.5. Case Study: Payroll System Using Polymorphism

This section reexamines the `CommissionEmployee-BasePlusCommissionEmployee` hierarchy that we explored throughout [Section 9.4](#). Now we use an abstract method and polymorphism to perform payroll calculations based on the type of employee. We create an enhanced employee hierarchy to solve the following problem:

A company pays its employees on a weekly basis. The employees are of four types: Salaried employees are paid a fixed weekly salary regardless of the number of hours worked, hourly employees are paid by the hour and receive overtime pay for all hours worked in excess of 40 hours, commission employees are paid a percentage of their sales and salaried-commission employees receive a base salary plus a percentage of their sales. For the current pay period, the company has decided to reward salaried-commission employees by adding 10% to their base salaries. The company wants to implement a Java application that performs its payroll calculations polymorphically.

We use abstract class `Employee` to represent the general concept of an employee. The classes that extend `Employee` are `SalariedEmployee`, `CommissionEmployee` and `HourlyEmployee`. Class `BasePlusCommissionEmployee` which extends `CommissionEmployee` represents the last employee type. The UML class diagram in [Fig. 10.2](#) shows the inheritance hierarchy for our polymorphic employee-payroll application. Note that abstract class `Employee` is italicized, as per the convention of the UML.

Figure 10.2. `Employee` hierarchy UML class diagram.

[\[View full size image\]](#)



[Page 469]

Abstract superclass `Employee` declares the "interface" to the hierarchy that is, the set of methods that a program can invoke on all `Employee` objects. We use the term "interface" here in a general sense to refer to the various ways programs can communicate with objects of any `Employee` subclass. Be careful not to confuse the general notion of an "interface" to something with the formal notion of a Java interface, the subject of [Section 10.7](#). Each employee, regardless of the way his or her earnings are calculated, has a first name, a last name and a social security number, so `private` instance variables `firstName`, `lastName` and `socialSecurityNumber` appear in abstract superclass `Employee`.



A subclass can inherit "interface" or "implementation" from a superclass. Hierarchies designed for **implementation inheritance** tend to have their functionality high in the hierarchy each new subclass inherits one or more methods that were implemented in a superclass, and the subclass uses the superclass implementations. Hierarchies designed for **interface inheritance** tend to have their functionality lower in the hierarchy a superclass specifies one or more abstract methods that must be declared for each concrete class in the hierarchy, and the individual subclasses override these methods to provide subclass-specific implementations.

The following sections implement the `Employee` class hierarchy. The first four sections each implement one of the concrete classes. The last section implements a test program that builds objects of all these classes and processes those objects polymorphically.

### 10.5.1. Creating Abstract Superclass `Employee`

Class `Employee` ([Fig. 10.4](#)) provides methods `earnings` and `toString`, in addition to the `get` and `set` methods that manipulate `Employee`'s instance variables. An `earnings` method certainly applies generically to all employees. But each earnings calculation depends on the employee's class. So we declare `earnings` as abstract in superclass `Employee` because a default implementation does not make sense for that method there is not enough information to determine what amount `earnings` should return. Each subclass overrides `earnings` with an appropriate implementation. To calculate an employee's earnings, the program assigns a reference to the employee's object to a superclass `Employee` variable, then invokes the `earnings` method on that variable. We maintain an array of `Employee` variables, each of which holds a reference to an `Employee` object (of course, there cannot be `Employee` objects because `Employee` is an abstract class because of inheritance, however, all objects of all subclasses of `Employee` may nevertheless be thought of as `Employee` objects). The program iterates through the array and calls method `earnings` for each `Employee` object. Java processes these method calls polymorphically. Including `earnings` as an abstract method in `Employee` forces every direct subclass of `Employee` to override `earnings` in order to become a concrete class. This enables the designer of the class hierarchy to demand that each subclass provide an appropriate pay calculation.

Method `toString` in class `Employee` returns a `String` containing the first name, last name and social security number of the employee. As we will see, each subclass of `Employee` overrides method `toString` to create a string representation of an object of that class that contains the employee's type (e.g., "salaried employee:") followed by the rest of the employee's information.

The diagram in [Fig. 10.3](#) shows each of the five classes in the hierarchy down the left side and methods `earnings` and `toString` across the top. For each class, the diagram shows the desired results of each method. [Note: We do not list superclass `Employee`'s `get` and `set` methods because they are not overridden in any of the subclasses each of these methods is inherited and used "as is" by each of the subclasses.]

Figure 10.3. Polymorphic interface for the `Employee` hierarchy classes.

[\[View full size image\]](#)

	earnings	toString
Employee	abstract	<i>firstName</i> <i>lastName</i> social security number: <i>SSN</i>
Salaried- Employee	weeklySalary	salaried employee: <i>firstName</i> <i>lastName</i> social security number: <i>SSN</i> weekly salary: <i>weeklySalary</i>
Hourly- Employee	if <i>hours</i> <= 40 <i>wage</i> * <i>hours</i> if <i>hours</i> > 40 40 * <i>wage</i> + ( <i>hours</i> - 40 ) * <i>wage</i> * 1.5	hourly employee: <i>firstName</i> <i>lastName</i> social security number: <i>SSN</i> hourly wage: <i>wage</i> ; hours worked: <i>hours</i>
Commission- Employee	<i>commissionRate</i> * <i>grossSales</i>	commission employee: <i>firstName</i> <i>lastName</i> social security number: <i>SSN</i> gross sales: <i>grossSales</i> ; commission rate: <i>commissionRate</i>
BasePlus- Commission- Employee	( <i>commissionRate</i> * <i>grossSales</i> ) + <i>baseSalary</i>	base salaried commission employee: <i>firstName</i> <i>lastName</i> social security number: <i>SSN</i> gross sales: <i>grossSales</i> ; commission rate: <i>commissionRate</i> ; base salary: <i>baseSalary</i>

Let us consider class `Employee`'s declaration (Fig. 10.4). The class includes a constructor that takes the first name, last name and social security number as arguments (lines 1116); get methods that return the first name, last name and social security number (lines 2528, 3740 and 4952, respectively); set methods that set the first name, last name and social security number (lines 1922, 3134 and 4346, respectively); method `toString` (lines 5559), which returns the string representation of `Employee`; and abstract method `earnings` (line 62), which will be implemented by subclasses. Note that the `Employee` constructor does not validate the social security number in this example. Normally, such validation should be provided.

**Figure 10.4. `Employee` abstract superclass.**

(This item is displayed on pages 471 - 472 in the print version)

```

1  // Fig. 10.4: Employee.java
2  // Employee abstract superclass.
3
4  public abstract class Employee
5  {
6      private String firstName;
7      private String lastName;
8      private String socialSecurityNumber;
9
10     // three-argument constructor
11     public Employee( String first, String last, String ssn )
12     {
13         firstName = first;
14         lastName = last;
15         socialSecurityNumber = ssn;
16     } // end three-argument Employee constructor
17
18     // set first name
19     public void setFirstName( String first )
20     {
21         firstName = first;
22     } // end method setFirstName
23
24     // return first name
25     public String getFirstName()
26     {
27         return firstName;
28     } // end method getFirstName

```

```

29
30 // set last name
31 public void setLastName( String last )
32 {
33     lastName = last;
34 } // end method setLastName
35
36 // return last name
37 public String getLastName()
38 {
39     return lastName;
40 } // end method getLastName
41
42 // set social security number
43 public void setSocialSecurityNumber( String ssn )
44 {
45     socialSecurityNumber = ssn; // should validate
46 } // end method setSocialSecurityNumber
47
48 // return social security number
49 public String getSocialSecurityNumber()
50 {
51     return socialSecurityNumber;
52 } // end method getSocialSecurityNumber
53
54 // return String representation of Employee object
55 public String toString()
56 {
57     return String.format( "%s %s\nsocial security number: %s",
58         getFirstName(), getLastName(), getSocialSecurityNumber() );
59 } // end method toString
60
61 // abstract method overridden by subclasses
62 public abstract double earnings(); // no implementation here
63 } // end abstract class Employee

```

Why did we decide to declare `earnings` as an abstract method? It simply does not make sense to provide an implementation of this method in class `Employee`. We cannot calculate the earnings for a general `Employee` we first must know the specific `Employee` type to determine the appropriate earnings calculation. By declaring this method abstract, we indicate that each concrete subclass must provide an appropriate `earnings` implementation and that a program will be able to use superclass `Employee` variables to invoke method `earnings` polymorphically for any type of `Employee`.

### 10.5.2. Creating Concrete Subclass `SalariedEmployee`

Class `SalariedEmployee` ([Fig. 10.5](#)) extends class `Employee` (line 4) and overrides `earnings` (lines 2932), which makes `SalariedEmployee` a concrete class. The class includes a constructor (lines 914) that takes a first name, a last name, a social security number and a weekly salary as arguments; a set method to assign a new non-negative value to instance variable `weeklySalary` (lines 1720); a get method to return `weeklySalary`'s value (lines 2326); a method `earnings` (lines 2932) to calculate a `SalariedEmployee`'s earnings; and a method `toString` (lines 3539), which returns a `String` including the employee's type, namely, "salaried employee:" followed by employee-specific information produced by superclass `Employee`'s `toString` method and `SalariedEmployee`'s `getWeeklySalary` method. Class `SalariedEmployee`'s constructor passes the first name, last name and social security number to the `Employee` constructor (line 12) to initialize the private instance

variables not inherited from the superclass. Method `earnings` overrides abstract method `earnings` in `Employee` to provide a concrete implementation that returns the `SalariedEmployee`'s weekly salary. If we do not implement `earnings`, class `SalariedEmployee` must be declared `abstract` otherwise, a compilation error occurs (and, of course, we want `SalariedEmployee` here to be a concrete class).

---

[Page 473]

**Figure 10.5. `SalariedEmployee` class derived from `Employee`.**

(This item is displayed on pages 472 - 473 in the print version)

```
1  // Fig. 10.5: SalariedEmployee.java
2  // SalariedEmployee class extends Employee.
3
4  public class SalariedEmployee extends Employee
5  {
6      private double weeklySalary;
7
8      // four-argument constructor
9      public SalariedEmployee( String first, String last, String ssn,
10         double salary )
11      {
12          super( first, last, ssn ); // pass to Employee constructor
13          setWeeklySalary( salary ); // validate and store salary
14      } // end four-argument SalariedEmployee constructor
15
16      // set salary
17      public void setWeeklySalary( double salary )
18      {
19          weeklySalary = salary < 0.0 ? 0.0 : salary;
20      } // end method setWeeklySalary
21
22      // return salary
23      public double getWeeklySalary()
24      {
25          return weeklySalary;
26      } // end method getWeeklySalary
27
28      // calculate earnings; override abstract method earnings in Employee
29      public double earnings()
30      {
31          return getWeeklySalary();
32      } // end method earnings
33
34      // return String representation of SalariedEmployee object
35      public String toString()
36      {
37          return String.format( "salaried employee: %s\n%s: $%,.2f",
38              super.toString(), "weekly salary", getWeeklySalary() );
39      } // end method toString
40  } // end class SalariedEmployee
```

Method `toString` (lines 3539) of class `SalariedEmployee` overrides `Employee` method `toString`. If class `SalariedEmployee` did not override `toString`, `SalariedEmployee` would have inherited the `Employee` version of `toString`. In that case, `SalariedEmployee`'s `toString` method would simply return the employee's full name and social security number, which does not adequately represent a `SalariedEmployee`. To produce a complete string representation of a `SalariedEmployee`, the subclass's `toString` method returns "salaried employee:" followed by the superclass `Employee`-specific information (i.e., first name, last name and social security number) obtained by invoking the



superclass's `toString` (line 38) this is a nice example of code reuse. The string representation of a `SalariedEmployee` also contains the employee's weekly salary obtained by invoking the class's `getWeeklySalary` method.

### 10.5.3. Creating Concrete Subclass `HourlyEmployee`

Class `HourlyEmployee` (Fig. 10.6) also extends class `Employee` (line 4). The class includes a constructor (lines 1016) that takes as arguments a first name, a last name, a social security number, an hourly wage and the number of hours worked. Lines 1922 and 3135 declare set methods that assign new values to instance variables `wage` and `hours`, respectively. Method `setWage` (lines 1922) ensures that `wage` is non-negative, and method `setHours` (lines 3135) ensures that `hours` is between 0 and 168 (the total number of hours in a week). Class `HourlyEmployee` also includes get methods (lines 2528 and 3841) to return the values of `wage` and `hours`, respectively; a method `earnings` (lines 4450) to calculate an `HourlyEmployee`'s earnings; and a method `toString` (lines 5358), which returns the employee's type, namely, "hourly employee:" and employee-specific information. Note that the `HourlyEmployee` constructor, like the `SalariedEmployee` constructor, passes the first name, last name and social security number to the superclass `Employee` constructor (line 13) to initialize the private instance variables. In addition, method `toString` calls superclass method `toString` (line 56) to obtain the `Employee`-specific information (i.e., first name, last name and social security number) this is another nice example of code reuse.

---

[Page 474]

---

[Page 475]

---

**Figure 10.6.** `HourlyEmployee` class derived from `Employee`.

(This item is displayed on pages 474 - 475 in the print version)

```
1  // Fig. 10.6: HourlyEmployee.java
2  // HourlyEmployee class extends Employee.
3
4  public class HourlyEmployee extends Employee
5  {
6      private double wage; // wage per hour
7      private double hours; // hours worked for week
8
9      // five-argument constructor
10     public HourlyEmployee( String first, String last, String ssn,
11         double hourlyWage, double hoursWorked )
12     {
13         super( first, last, ssn );
14         setWage( hourlyWage ); // validate hourly wage
15         setHours( hoursWorked ); // validate hours worked
16     } // end five-argument HourlyEmployee constructor
17
18     // set wage
19     public void setWage( double hourlyWage )
20     {
21         wage = ( hourlyWage < 0.0 ) ? 0.0 : hourlyWage;
22     } // end method setWage
23
24     // return wage
25     public double getWage()
26     {
27         return wage;
28     } // end method getWage
29
30     // set hours worked
31     public void setHours( double hoursWorked )
```

```

32     {
33         hours = ( ( hoursWorked >= 0.0 ) && ( hoursWorked <= 168.0 ) ) ?
34             hoursWorked : 0.0;
35     } // end method setHours
36
37     // return hours worked
38     public double getHours()
39     {
40         return hours;
41     } // end method getHours
42
43     // calculate earnings; override abstract method earnings in Employee
44     public double earnings()
45     {
46         if ( getHours() <= 40 ) // no overtime
47             return getWage() * getHours();
48         else
49             return 40 * getWage() + ( getHours() - 40 ) * getWage() * 1.5;
50     } // end method earnings
51
52     // return String representation of HourlyEmployee object
53     public String toString()
54     {
55         return String.format( "hourly employee: %s\n%s: $%,.2f; %s: $%,.2f",
56             super.toString(), "hourly wage", getWage(),
57             "hours worked", getHours() );
58     } // end method toString
59 } // end class HourlyEmployee

```

#### 10.5.4. Creating Concrete Subclass `CommissionEmployee`

Class `CommissionEmployee` ([Fig. 10.7](#)) extends class `Employee` (line 4). The class includes a constructor (lines 1016) that takes a first name, a last name, a social security number, a sales amount and a commission rate; set methods (lines 1922 and 3134) to assign new values to instance variables `commissionRate` and `grossSales`, respectively; get methods (lines 2528 and 3740) that retrieve the values of these instance variables; method `earnings` (lines 4346) to calculate a `CommissionEmployee`'s earnings; and method `toString` (lines 4955), which returns the employee's type, namely, "commission employee:" and employee-specific information. The `CommissionEmployee`'s constructor also passes the first name, last name and social security number to the `Employee` constructor (line 13) to initialize `Employee`'s private instance variables. Method `toString` calls superclass method `toString` (line 52) to obtain the `Employee`-specific information (i.e., first name, last name and social security number).

[Page 476]

**Figure 10.7.** `CommissionEmployee` class derived from `Employee`.  
(This item is displayed on pages 475 - 476 in the print version)

```

1  // Fig. 10.7: CommissionEmployee.java
2  // CommissionEmployee class extends Employee.
3
4  public class CommissionEmployee extends Employee
5  {
6      private double grossSales; // gross weekly sales
7      private double commissionRate; // commission percentage
8
9      // five-argument constructor

```

```

10 public CommissionEmployee( String first, String last, String ssn,
11     double sales, double rate )
12 {
13     super( first, last, ssn );
14     setGrossSales( sales );
15     setCommissionRate( rate );
16 } // end five-argument CommissionEmployee constructor
17
18 // set commission rate
19 public void setCommissionRate( double rate )
20 {
21     commissionRate = ( rate > 0.0 && rate < 1.0 ) ? rate : 0.0;
22 } // end method setCommissionRate
23
24 // return commission rate
25 public double getCommissionRate()
26 {
27     return commissionRate;
28 } // end method getCommissionRate
29
30 // set gross sales amount
31 public void setGrossSales( double sales )
32 {
33     grossSales = ( sales < 0.0 ) ? 0.0 : sales;
34 } // end method setGrossSales
35
36 // return gross sales amount
37 public double getGrossSales()
38 {
39     return grossSales;
40 } // end method getGrossSales
41
42 // calculate earnings; override abstract method earnings in Employee
43 public double earnings()
44 {
45     return getCommissionRate() * getGrossSales();
46 } // end method earnings
47
48 // return String representation of CommissionEmployee object
49 public String toString()
50 {
51     return String.format( "%s: %s\n%s: $%,.2f; %s: %.2f",
52         "commission employee", super.toString(),
53         "gross sales", getGrossSales(),
54         "commission rate", getCommissionRate() );
55 } // end method toString
56 } // end class CommissionEmployee

```

### 10.5.5. Creating Indirect Concrete Subclass BasePlusCommissionEmployee

Class `BasePlusCommissionEmployee` (Fig. 10.8) extends class `CommissionEmployee` (line 4) and therefore is an indirect subclass of class `Employee`. Class `BasePlusCommissionEmployee` has a constructor (lines 914) that takes as arguments a first name, a last name, a social security number, a sales amount, a commission rate and a base salary. It then passes the first name, last name, social security number, sales amount and commission rate to the `CommissionEmployee` constructor (line 12) to initialize the inherited members. `BasePlusCommissionEmployee` also contains a set method (lines 1720) to assign a new value to instance variable `baseSalary` and a get method (lines 2326) to return `baseSalary`'s value. Method `earnings` (lines 2932) calculates a `BasePlusCommissionEmployee`'s earnings. Note that line 31 in method `earnings` calls superclass `CommissionEmployee`'s `earnings`

method to calculate the commission-based portion of the employee's earnings. This is a nice example of code reuse. `BasePlusCommissionEmployee`'s `toString` method (lines 3540) creates a string representation of a `BasePlusCommissionEmployee` that contains "base-salaried", followed by the String obtained by invoking superclass `CommissionEmployee`'s `toString` method (another example of code reuse), then the base salary. The result is a String beginning with "base-salaried commission employee" followed by the rest of the `BasePlusCommissionEmployee`'s information. Recall that `CommissionEmployee`'s `toString` obtains the employee's first name, last name and social security number by invoking the `toString` method of its superclass (i.e., `Employee`) yet another example of code reuse. Note that `BasePlusCommissionEmployee`'s `toString` initiates a chain of method calls that span all three levels of the `Employee` hierarchy.

---

[Page 477]

---

[Page 478]

**Figure 10.8. `BasePlusCommissionEmployee` class derived from `CommissionEmployee`.**  
(This item is displayed on page 477 in the print version)

```
1  // Fig. 10.8: BasePlusCommissionEmployee.java
2  // BasePlusCommissionEmployee class extends CommissionEmployee.
3
4  public class BasePlusCommissionEmployee extends CommissionEmployee
5  {
6      private double baseSalary; // base salary per week
7
8      // six-argument constructor
9      public BasePlusCommissionEmployee( String first, String last,
10         String ssn, double sales, double rate, double salary )
11      {
12          super( first, last, ssn, sales, rate );
13          setBaseSalary( salary ); // validate and store base salary
14      } // end six-argument BasePlusCommissionEmployee constructor
15
16      // set base salary
17      public void setBaseSalary( double salary )
18      {
19          baseSalary = ( salary < 0.0 ) ? 0.0 : salary; // non-negative
20      } // end method setBaseSalary
21
22      // return base salary
23      public double getBaseSalary()
24      {
25          return baseSalary;
26      } // end method getBaseSalary
27
28      // calculate earnings; override method earnings in CommissionEmployee
29      public double earnings()
30      {
31          return getBaseSalary() + super.earnings();
32      } // end method earnings
33
34      // return String representation of BasePlusCommissionEmployee object
35      public String toString()
36      {
37          return String.format( "%s %s; %s: $%,.2f",
38             "base-salaried", super.toString(),
39             "base salary", getBaseSalary() );
40      } // end method toString
41  } // end class BasePlusCommissionEmployee
```

### 10.5.6. Demonstrating Polymorphic Processing, Operator instanceof and Downcasting

To test our `Employee` hierarchy, the application in [Fig. 10.9](#) creates an object of each of the four concrete classes `SalariedEmployee`, `HourlyEmployee`, `CommissionEmployee` and `BasePlusCommissionEmployee`. The program manipulates these objects, first via variables of each object's own type, then polymorphically, using an array of `Employee` variables. While processing the objects polymorphically, the program increases the base salary of each `BasePlusCommissionEmployee` by 10% (this, of course, requires determining the object's type at execution time). Finally, the program polymorphically determines and outputs the type of each object in the `Employee` array. Lines 918 create objects of each of the four concrete `Employee` subclasses. Lines 2230 output the string representation and earnings of each of these objects. Note that each object's `toString` method is called implicitly by `printf` when the object is output as a `String` with the `%s` format specifier.

**Figure 10.9. `Employee` class hierarchy test program.**

(This item is displayed on pages 478 - 480 in the print version)

```
1  // Fig. 10.9: PayrollSystemTest.java
2  // Employee hierarchy test program.
3
4  public class PayrollSystemTest
5  {
6      public static void main( String args[] )
7      {
8          // create subclass objects
9          SalariedEmployee salariedEmployee =
10             new SalariedEmployee( "John", "Smith", "111-11-1111", 800.00 );
11          HourlyEmployee hourlyEmployee =
12             new HourlyEmployee( "Karen", "Price", "222-22-2222", 16.75, 40 );
13          CommissionEmployee commissionEmployee =
14             new CommissionEmployee(
15                 "Sue", "Jones", "333-33-3333", 10000, .06 );
16          BasePlusCommissionEmployee basePlusCommissionEmployee =
17             new BasePlusCommissionEmployee(
18                 "Bob", "Lewis", "444-44-4444", 5000, .04, 300 );
19
20          System.out.println( "Employees processed individually:\n" );
21
22          System.out.printf( "%s\n%s: $%,.2f\n\n",
23              salariedEmployee, "earned", salariedEmployee.earnings() );
24          System.out.printf( "%s\n%s: $%,.2f\n\n",
25              hourlyEmployee, "earned", hourlyEmployee.earnings() );
26          System.out.printf( "%s\n%s: $%,.2f\n\n",
27              commissionEmployee, "earned", commissionEmployee.earnings() );
28          System.out.printf( "%s\n%s: $%,.2f\n\n",
29              basePlusCommissionEmployee,
30              "earned", basePlusCommissionEmployee.earnings() );
31
32          // create four-element Employee array
33          Employee employees[] = new Employee[ 4 ];
34
35          // initialize array with Employees
36          employees[ 0 ] = salariedEmployee;
37          employees[ 1 ] = hourlyEmployee;
38          employees[ 2 ] = commissionEmployee;
39          employees[ 3 ] = basePlusCommissionEmployee;
40
41          System.out.println( "Employees processed polymorphically:\n" );
```

```

42
43     // generically process each element in array employees
44     for ( Employee currentEmployee : employees )
45     {
46         System.out.println( currentEmployee ); // invokes toString
47
48         // determine whether element is a BasePlusCommissionEmployee
49         if ( currentEmployee instanceof BasePlusCommissionEmployee )
50         {
51             // downcast Employee reference to
52             // BasePlusCommissionEmployee reference
53             BasePlusCommissionEmployee employee =
54                 ( BasePlusCommissionEmployee ) currentEmployee;
55
56             double oldBaseSalary = employee.getBaseSalary();
57             employee.setBaseSalary( 1.10 * oldBaseSalary );
58             System.out.printf(
59                 "new base salary with 10% increase is: $%,.2f\n",
60                 employee.getBaseSalary() );
61         } // end if
62
63         System.out.printf(
64             "earned $%,.2f\n\n", currentEmployee.earnings() );
65     } // end for
66
67     // get type name of each object in employees array
68     for ( int j = 0; j < employees.length; j++ )
69         System.out.printf( "Employee %d is a %s\n", j,
70             employees[ j ].getClass().getName() );
71     } // end main
72 } // end class PayrollSystemTest

```

Employees processed individually:

salaried employee: John Smith  
social security number: 111-11-1111  
weekly salary: \$800.00  
earned: \$800.00

hourly employee: Karen Price  
social security number: 222-22-2222  
hourly wage: \$16.75; hours worked: 40.00  
earned: \$670.00

commission employee: Sue Jones  
social security number: 333-33-3333  
gross sales: \$10,000.00; commission rate: 0.06  
earned: \$600.00

base-salaried commission employee: Bob Lewis  
social security number: 444-44-4444  
gross sales: \$5,000.00; commission rate: 0.04; base salary: \$300.00  
earned: \$500.00

Employees processed polymorphically:

salaried employee: John Smith  
social security number: 111-11-1111  
weekly salary: \$800.00  
earned \$800.00



```

hourly employee: Karen Price
social security number: 222-22-2222
hourly wage: $16.75; hours worked: 40.00
earned $670.00

commission employee: Sue Jones
social security number: 333-33-3333
gross sales: $10,000.00; commission rate: 0.06
earned $600.00

base-salaried commission employee: Bob Lewis
social security number: 444-44-4444
gross sales: $5,000.00; commission rate: 0.04; base salary: $300.00
new base salary with 10% increase is: $330.00
earned $530.00

Employee 0 is a SalariedEmployee
Employee 1 is a HourlyEmployee
Employee 2 is a CommissionEmployee
Employee 3 is a BasePlusCommissionEmployee

```

Line 33 declares `employees` and assigns it an array of four `Employee` variables. Line 36 assigns to element `employees[ 0 ]` the reference to a `SalariedEmployee` object. Line 37 assigns to element `employees[ 1 ]` the reference to an `HourlyEmployee` object. Line 38 assigns to element `employees[ 2 ]` the reference to a `CommissionEmployee` object. Line 39 assigns to element `employees[ 3 ]` the reference to a `BasePlusCommissionEmployee` object. Each assignment is allowed, because a `SalariedEmployee` is an `Employee`, an `HourlyEmployee` is an `Employee`, a `CommissionEmployee` is an `Employee` and a `BasePlusCommissionEmployee` is an `Employee`. Therefore, we can assign the references of `SalariedEmployee`, `HourlyEmployee`, `CommissionEmployee` and `BasePlusCommissionEmployee` objects to superclass `Employee` variables, even though `Employee` is an abstract class.

---

[Page 480]

---

[Page 481]

---

Lines 4465 iterate through array `employees` and invoke methods `toString` and `earnings` with `Employee` variable `currentEmployee`, which is assigned the reference to a different `Employee` in the array during each iteration. The output illustrates that the appropriate methods for each class are indeed invoked. All calls to method `toString` and `earnings` are resolved at execution time, based on the type of the object to which `currentEmployee` refers. This process is known as **dynamic binding** or **late binding**. For example, line 46 implicitly invokes method `toString` of the object to which `currentEmployee` refers. As a result of dynamic binding, Java decides which class's `toString` method to call at execution time rather than at compile time. Please note that only the methods of class `Employee` can be called via an `Employee` variable (and `Employee`, of course, includes the methods of class `Object`). ([Section 9.7](#) discusses the set of methods that all classes inherit from class `Object`.) A superclass reference can be used to invoke only methods of the superclass.

We perform special processing on `BasePlusCommissionEmployee` objects as we encounter these objects, we increase their base salary by 10%. When processing objects polymorphically, we typically do not need to worry about the "specifics," but to adjust the base salary, we do have to determine the specific type of `Employee` object at execution time. Line 49 uses the **instanceof operator** to determine

whether a particular `Employee` object's type is `BasePlusCommissionEmployee`. The condition in line 49 is true if the object referenced by `currentEmployee` is a `BasePlusCommissionEmployee`. This would also be true for any object of a `BasePlusCommissionEmployee` subclass because of the is-a relationship a subclass has with its superclass. Lines 53-54 downcast `currentEmployee` from type `Employee` to type `BasePlusCommissionEmployee`; this cast is allowed only if the object has an is-a relationship with `BasePlusCommissionEmployee`. The condition at line 49 ensures that this is the case. This cast is required if we are to invoke subclass `BasePlusCommissionEmployee` methods `getBaseSalary` and `setBaseSalary` on the current `Employee` object as you will see momentarily, attempting to invoke a subclass-only method directly on a superclass reference is a compilation error.

### Common Programming Error 10.3



Assigning a superclass variable to a subclass variable (without an explicit cast) is a compilation error.

### Software Engineering Observation 10.5



If at execution time the reference of a subclass object has been assigned to a variable of one of its direct or indirect superclasses, it is acceptable to cast the reference stored in that superclass variable back to a reference of the subclass type. Before performing such a cast, use the `instanceof` operator to ensure that the object is indeed an object of an appropriate subclass type.

### Common Programming Error 10.4



When downcasting an object, a `ClassCastException` occurs, if at execution time the object does not have an is-a relationship with the type specified in the cast operator. An object can be cast only to its own type or to the type of one of its superclasses.

If the `instanceof` expression in line 49 is `True`, the `if` statement (lines 49-61) performs the special processing required for the `BasePlusCommissionEmployee` object. Using `BasePlusCommissionEmployee` variable `employee`, lines 56 and 57 invoke subclass-only methods `getBaseSalary` and `setBaseSalary` to retrieve and update the employee's base salary with the 10% raise.

---

[Page 482]

Lines 63-64 invoke method `earnings` on `currentEmployee`, which calls the appropriate subclass object's `earnings` method polymorphically. Note that obtaining the earnings of the `SalariedEmployee`, `HourlyEmployee` and `CommissionEmployee` polymorphically in lines 63-64 produces the same result as obtaining these employees' earnings individually in lines 22-27. However, the earnings amount obtained for the `BasePlusCommissionEmployee` in lines 63-64 is higher than that obtained in lines 28-30, due to the 10% increase in its base salary.

Lines 68-70 display each employee's type as a string. Every object in Java knows its own class and can access this information through method `getClass`, which all classes inherit from class `Object`. Method `getClass` returns an object of type `Class` (package `java.lang`), which contains information about the object's type, including its class name. Line 70 invokes method `getClass` on the object to get its runtime class (i.e., a `Class` object that represents the object's type). Then method `getName` is invoked on the object returned by `getClass` to get the class's name.

In the previous example, we avoid several compilation errors by downcasting an `Employee` variable to

a `BasePlusCommissionEmployee` variable in lines 5354. If we remove the cast operator `( BasePlusCommissionEmployee )` from line 54 and attempt to assign `Employee` variable `currentEmployee` directly to `BasePlusCommissionEmployee` variable `employee`, we would receive an "incompatible types" compilation error. This error indicates that the attempt to assign the reference of superclass object `commissionEmployee` to subclass variable `basePlusCommissionEmployee` is not allowed. The compiler prevents this assignment because a `CommissionEmployee` is not a `BasePlusCommissionEmployee` the is-a relationship applies only between the subclass and its superclasses, not vice versa.

Similarly, if lines 56, 57 and 60 used superclass variable `currentEmployee`, rather than subclass variable `employee`, to invoke subclass-only methods `getBaseSalary` and `setBaseSalary`, we would receive a "cannot find symbol" compilation error on each of these lines. Attempting to invoke subclass-only methods on a superclass reference is not allowed. While lines 56, 57 and 60 execute only if `instanceof` in line 49 returns true to indicate that `currentEmployee` has been assigned a reference to a `BasePlusCommissionEmployee` object, we cannot attempt to invoke subclass `BasePlusCommissionEmployee` methods `getBaseSalary` and `setBaseSalary` on superclass `Employee` reference `currentEmployee`. The compiler would generate errors on lines 56, 57 and 60, because `getBaseSalary` and `setBaseSalary` are not superclass methods and cannot be invoked on a superclass variable. Although the actual method that is called depends on the object's type at execution time, a variable can be used to invoke only those methods that are members of that variable's type, which the compiler verifies. Using a superclass `Employee` variable, we can invoke only methods found in class `Employee` `earnings`, `toString` and `Employee`'s `get` and `set` methods.

### 10.5.7. Summary of the Allowed Assignments Between Superclass and Subclass Variables

Now that you have seen a complete application that processes diverse subclass objects polymorphically, we summarize what you can and cannot do with superclass and subclass objects and variables. Although a subclass object also is a superclass object, the two objects are nevertheless different. As discussed previously, subclass objects can be treated as if they are superclass objects. However, the subclass can have additional subclass-only members. For this reason, assigning a superclass reference to a subclass variable is not allowed without an explicit cast such an assignment would leave the subclass members undefined for the superclass object.

---

[Page 483]

In the current section, in [Section 10.3](#) and in [Chapter 9](#), we have discussed four ways to assign superclass and subclass references to variables of superclass and subclass types:

1. Assigning a superclass reference to a superclass variable is straightforward.
2. Assigning a subclass reference to a subclass variable is straightforward.
3. Assigning a subclass reference to a superclass variable is safe, because the subclass object is an object of its superclass. However, this reference can be used to refer only to superclass members. If this code refers to subclass-only members through the superclass variable, the compiler reports errors.
4. Attempting to assign a superclass reference to a subclass variable is a compilation error. To avoid this error, the superclass reference must be cast to a subclass type explicitly. At execution time, if the object to which the reference refers is not a subclass object, an exception will occur. (For more on exception handling, see [Chapter 13, Exception Handling](#).) The `instanceof` operator can be used to ensure that such a cast is performed only if the object is a subclass object.

## 10.6. `final` Methods and Classes

We saw in [Section 6.10](#) that variables can be declared `final` to indicate that they cannot be modified after they are declared and that they must be initialized when they are declared. Such variables represent constant values. It is also possible to declare methods and classes with the `final` modifier.

A method that is declared `final` in a superclass cannot be overridden in a subclass. Methods that are declared `private` are implicitly `final`, because it is impossible to override them in a subclass (though the subclass can declare a new method with the same signature as the `private` method in the superclass). Methods that are declared `static` are also implicitly `final`, because `static` methods cannot be overridden either. A `final` method's declaration can never change, so all subclasses use the same method implementation and calls to `final` methods are resolved at compile time. This is known as **static binding**. Since the compiler knows that `final` methods cannot be overridden, it can optimize programs by removing calls to `final` methods and replacing them with the expanded code of their declarations at each method call location, a technique known as **inlining the code**.

### Performance Tip 10.1



The compiler can decide to inline a `final` method call and will do so for small, simple `final` methods. Inlining does not violate encapsulation or information hiding, but does improve performance because it eliminates the overhead of making a method call.

A class that is declared `final` cannot be a superclass (i.e., a class cannot extend a `final` class). All methods in a `final` class are implicitly `final`. Class `String` is an example of a `final` class. This class cannot be extended, so programs that use `Strings` can rely on the functionality of `String` objects as specified in the Java API. Making the class `final` also prevents programmers from creating subclasses that might bypass security restrictions. For more information on `final` classes and methods, visit [java.sun.com/docs/books/tutorial/java/javaOO/final.html](http://java.sun.com/docs/books/tutorial/java/javaOO/final.html). This site contains additional insights into using `final` classes to improve the security of a system.

---

[Page 484]

### Common Programming Error 10.5



Attempting to declare a subclass of a `final` class is a compilation error.

### Software Engineering Observation 10.6



In the Java API, the vast majority of classes are not declared `final`. This enables inheritance and polymorphism, the fundamental capabilities of object-oriented programming. However, in some cases, it is important to declare classes `final` typically for security reasons.

◀ PREY

◀ PREY

NEXT ▶

NEXT ▶

[Page 484 (continued)]

## 10.7. Case Study: Creating and Using Interfaces

Our next example ([Fig. 10.11](#)[Fig. 10.13](#)) reexamines the payroll system of [Section 10.5](#). Suppose that the company involved wishes to perform several accounting operations in a single accounts payable application in addition to calculating the earnings that must be paid to each employee, the company must also calculate the payment due on each of several invoices (i.e., bills for goods purchased). Though applied to unrelated things (i.e., employees and invoices), both operations have to do with obtaining some kind of payment amount. For an employee, the payment refers to the employee's earnings. For an invoice, the payment refers to the total cost of the goods listed on the invoice. Can we calculate such different things as the payments due for employees and invoices in a single application polymorphically? Does Java offer a capability that requires that unrelated classes implement a set of common methods (e.g., a method that calculates a payment amount)? Java interfaces offer exactly this capability.

Interfaces define and standardize the ways in which things such as people and systems can interact with one another. For example, the controls on a radio serve as an interface between radio users and a radio's internal components. The controls allow users to perform only a limited set of operations (e.g., changing the station, adjusting the volume, choosing between AM and FM), and different radios may implement the controls in different ways (e.g., using push buttons, dials, voice commands). The interface specifies what operations a radio must permit users to perform but does not specify how the operations are performed. Similarly, the interface between a driver and a car with a manual transmission includes the steering wheel, the gear shift, the clutch pedal, the gas pedal and the brake pedal. This same interface is found in nearly all manual transmission cars, enabling someone who knows how to drive one particular manual transmission car to drive just about any manual transmission car. The components of each individual car may look different, but the components' general purpose is the same to allow people to drive the car.

Software objects also communicate via interfaces. A Java interface describes a set of methods that can be called on an object, to tell the object to perform some task or return some piece of information, for example. The next example introduces an interface named `Payable` to describe the functionality of any object that must be capable of being paid and thus must offer a method to determine the proper payment amount due. An **interface declaration** begins with the keyword `interface` and contains only constants and `abstract` methods. Unlike classes, all interface members must be `public`, and interfaces may not specify any implementation details, such as concrete method declarations and instance variables. So all methods declared in an interface are implicitly `public abstract` methods and all fields are implicitly `public, static` and `final`.

---

[Page 485]

### Good Programming Practice 10.1



According to [Chapter 9](#) of the Java Language Specification, it is proper style to declare an interface's methods without keywords `public` and `abstract` because they are redundant in interface method declarations. Similarly, constants should be declared without keywords `public`, `static` and `final` because they, too, are redundant.

To use an interface, a concrete class must specify that it **implements** the interface and must declare each method in the interface with the signature specified in the interface declaration. A class that does not implement all the methods of the interface is an abstract class and must be declared `abstract`. Implementing an interface is like signing a contract with the compiler that states, "I will declare all the methods specified by the interface or I will declare my class `abstract`."

### Common Programming Error 10.6



Failing to implement any method of an interface in a concrete class that `implements` the interface results in a syntax error indicating that the class must be declared



`abstract.`

An interface is typically used when disparate (i.e., unrelated) classes need to share common methods and constants. This allows objects of unrelated classes to be processed polymorphically; objects of classes that implement the same interface can respond to the same method calls. Programmers can create an interface that describes the desired functionality, then implement this interface in any classes that require that functionality. For example, in the accounts payable application developed in this section, we implement interface `Payable` in any class that must be able to calculate a payment amount (e.g., `Employee`, `Invoice`).

An interface is often used in place of an `abstract` class when there is no default implementation to inherit—that is, no fields and no default method implementations. Like `public abstract` classes, interfaces are typically `public` types, so they are normally declared in files by themselves with the same name as the interface and the `.java` file-name extension.

### 10.7.1. Developing a Payable Hierarchy

To build an application that can determine payments for employees and invoices alike, we first create interface `Payable` (Fig. 10.11). Interface `Payable` contains method `getPaymentAmount` that returns a `double` amount that must be paid for an object of any class that implements the interface. Method `getPaymentAmount` is a general purpose version of method `earnings` of the `Employee` hierarchy; method `earnings` calculates a payment amount specifically for an `Employee`, while `getPaymentAmount` can be applied to a broad range of unrelated objects. After declaring interface `Payable`, we introduce class `Invoice` (Fig. 10.12), which implements interface `Payable`. We then modify class `Employee` such that it also implements interface `Payable`. Finally, we update `Employee` subclass `SalariedEmployee` to "fit" into the `Payable` hierarchy (i.e., rename `SalariedEmployee` method `earnings` as `getPaymentAmount`).

---

[Page 486]

#### Good Programming Practice 10.2



When declaring a method in an interface, choose a method name that describes the method's purpose in a general manner, because the method may be implemented by a broad range of unrelated classes.


Classes `Invoice` and `Employee` both represent things for which the company must be able to calculate a payment amount. Both classes implement `Payable`, so a program can invoke method `getPaymentAmount` on `Invoice` objects and `Employee` objects alike. As we will soon see, this enables the polymorphic processing of `Invoices` and `Employees` required for our company's accounts payable application.

The UML class diagram in Fig. 10.10 shows the hierarchy used in our accounts payable application. The hierarchy begins with interface `Payable`. The UML distinguishes an interface from other classes by placing the word "interface" in guillemets (« and ») above the interface name. The UML expresses the relationship between a class and an interface through a relationship known as a **realization**. A class is said to "realize," or implement, the methods of an interface. A class diagram models a realization as a dashed arrow with a hollow arrowhead pointing from the implementing class to the interface. The diagram in Fig. 10.10 indicates that classes `Invoice` and `Employee` each realize (i.e., implement) interface `Payable`. Note that, as in the class diagram of Fig. 10.2, class `Employee` appears in italics, indicating that it is an abstract class. Concrete class `SalariedEmployee` extends `Employee` and inherits its superclass's realization relationship with interface `Payable`.

**Figure 10.10.** `Payable` interface hierarchy UML class diagram.



[\[View full size image\]](#)

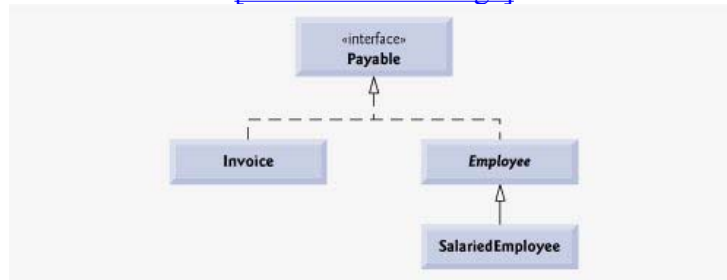

### 10.7.2. Declaring Interface Payable

The declaration of interface Payable begins in [Fig. 10.11](#) at line 4. Interface Payable contains public abstract method `getPaymentAmount` (line 6). Note that the method is not explicitly declared public or abstract. Interface methods must be public and abstract, so they do not need to be declared as such. Interface Payable has only one method interfaces can have any number of methods. (We will see later in the book the notion of "tagging interfaces" these actually have no methods. In fact, a tagging interface contains no constant values either it simply contains an empty interface declaration.) In addition, method `getPaymentAmount` has no parameters, but interface methods can have parameters.

---

[Page 487]

**Figure 10.11. Payable interface declaration.**

```
1 // Fig. 10.11: Payable.java
2 // Payable interface declaration.
3
4 public interface Payable
5 {
6     double getPaymentAmount(); // calculate payment; no implementation
7 } // end interface Payable
```

### 10.7.3. Creating Class Invoice

We now create class Invoice ([Fig. 10.12](#)) to represent a simple invoice that contains billing information for only one kind of part. The class declares private instance variables `partNumber`, `partDescription`, `quantity` and `pricePerItem` (in lines 69) that indicate the part number, a description of the part, the quantity of the part ordered and the price per item. Class Invoice also contains a constructor (lines 1219), get and set methods (lines 2267) that manipulate the class's instance variables and a `toString` method (lines 7075) that returns a string representation of an Invoice object. Note that methods `setQuantity` (lines 4649) and `setPricePerItem` (lines 5861) ensure that quantity and pricePerItem obtain only non-negative values.

---

[Page 489]

**Figure 10.12. Invoice class that implements Payable.**

(This item is displayed on pages 487 - 488 in the print version)

```
1 // Fig. 10.12: Invoice.java
2 // Invoice class implements Payable.
3
4 public class Invoice implements Payable
5 {
```

```
6     private String partNumber;
7     private String partDescription;
8     private int quantity;
9     private double pricePerItem;
10
11     // four-argument constructor
12     public Invoice( String part, String description, int count,
13         double price )
14     {
15         partNumber = part;
16         partDescription = description;
17         setQuantity( count ); // validate and store quantity
18         setPricePerItem( price ); // validate and store price per item
19     } // end four-argument Invoice constructor
20
21     // set part number
22     public void setPartNumber( String part )
23     {
24         partNumber = part;
25     } // end method setPartNumber
26
27     // get part number
28     public String getPartNumber()
29     {
30         return partNumber;
31     } // end method getPartNumber
32
33     // set description
34     public void setPartDescription( String description )
35     {
36         partDescription = description;
37     } // end method setPartDescription
38
39     // get description
40     public String getPartDescription()
41     {
42         return partDescription;
43     } // end method getPartDescription
44
45     // set quantity
46     public void setQuantity( int count )
47     {
48         quantity = ( count < 0 ) ? 0 : count; // quantity cannot be negative
49     } // end method setQuantity
50
51     // get quantity
52     public int getQuantity()
53     {
54         return quantity;
55     } // end method getQuantity
56
57     // set price per item
58     public void setPricePerItem( double price )
59     {
60         pricePerItem = ( price < 0.0 ) ? 0.0 : price; // validate price
61     } // end method setPricePerItem
62
63     // get price per item
64     public double getPricePerItem()
65     {
66         return pricePerItem;
67     } // end method getPricePerItem
```

```

68
69 // return String representation of Invoice object
70 public String toString()
71 {
72     return String.format( "%s: \n%s: %s (%s) \n%s: %d \n%s: $%,.2f",
73         "invoice", "part number", getPartNumber(), getPartDescription(),
74         "quantity", getQuantity(), "price per item", getPricePerItem() );
75 } // end method toString
76
77 // method required to carry out contract with interface Payable
78 public double getPaymentAmount()
79 {
80     return getQuantity() * getPricePerItem(); // calculate total cost
81 } // end method getPaymentAmount
82 } // end class Invoice

```

Line 4 of [Fig. 10.12](#) indicates that class `Invoice` implements interface `Payable`. Like all classes, class `Invoice` also implicitly extends `Object`. Java does not allow subclasses to inherit from more than one superclass, but it does allow a class to inherit from a superclass and implement more than one interface. In fact, a class can implement as many interfaces as it needs, in addition to extending another class. To implement more than one interface, use a comma-separated list of interface names after keyword **implements** in the class declaration, as in:

```

public class ClassName extends SuperclassName implements FirstInterface,
    SecondInterface, ...

```

All objects of a class that implement multiple interfaces have the is-a relationship with each implemented interface type.

Class `Invoice` implements the one method in interface `Payable`. Method `getPaymentAmount` is declared in lines 78-81. The method calculates the total payment required to pay the invoice. The method multiplies the values of `quantity` and `pricePerItem` (obtained through the appropriate `get` methods) and returns the result (line 80). This method satisfies the implementation requirement for this method in interface `Payable` we have fulfilled the interface contract with the compiler.

#### 10.7.4. Modifying Class `Employee` to Implement Interface `Payable`

We now modify class `Employee` such that it implements interface `Payable`. [Figure 10.13](#) contains the modified `Employee` class. This class declaration is identical to that of [Fig. 10.4](#) with only two exceptions. First, line 4 of [Fig. 10.13](#) indicates that class `Employee` now implements interface `Payable`. Second, since `Employee` now implements interface `Payable`, we must rename `earnings` to `getPaymentAmount` throughout the `Employee` hierarchy. As with method `earnings` in the version of class `Employee` in [Fig. 10.4](#), however, it does not make sense to implement method `getPaymentAmount` in class `Employee` because we cannot calculate the earnings payment owed to a general `Employee` first we must know the specific type of `Employee`. In [Fig. 10.4](#), we declared method `earnings` as abstract for this reason, and as a result class `Employee` had to be declared abstract. This forced each `Employee` subclass to override `earnings` with a concrete implementation.

**Figure 10.13.** `Employee` class that implements `Payable`.  
(This item is displayed on pages 489 - 490 in the print version)

```

1 // Fig. 10.13: Employee.java
2 // Employee abstract superclass implements Payable.

```

```

3
4 public abstract class Employee implements Payable
5 {
6     private String firstName;
7     private String lastName;
8     private String socialSecurityNumber;
9
10    // three-argument constructor
11    public Employee( String first, String last, String ssn )
12    {
13        firstName = first;
14        lastName = last;
15        socialSecurityNumber = ssn;
16    } // end three-argument Employee constructor
17
18    // set first name
19    public void setFirstName( String first )
20    {
21        firstName = first;
22    } // end method setFirstName
23
24    // return first name
25    public String getFirstName()
26    {
27        return firstName;
28    } // end method getFirstName
29
30    // set last name
31    public void setLastName( String last )
32    {
33        lastName = last;
34    } // end method setLastName
35
36    // return last name
37    public String getLastName()
38    {
39        return lastName;
40    } // end method getLastName
41
42    // set social security number
43    public void setSocialSecurityNumber( String ssn )
44    {
45        socialSecurityNumber = ssn; // should validate
46    } // end method setSocialSecurityNumber
47
48    // return social security number
49    public String getSocialSecurityNumber()
50    {
51        return socialSecurityNumber;
52    } // end method getSocialSecurityNumber
53
54    // return String representation of Employee object
55    public String toString()
56    {
57        return String.format( "%s %s\nsocial security number: %s",
58            getFirstName(), getLastName(), getSocialSecurityNumber() );
59    } // end method toString
60
61    // Note: We do not implement Payable method getPaymentAmount here so
62    // this class must be declared abstract to avoid a compilation error.
63 } // end abstract class Employee

```

In [Fig. 10.13](#), we handle this situation differently. Recall that when a class implements an interface, the class makes a contract with the compiler stating either that the class will implement each of the methods in the interface or that the class will be declared `abstract`. If the latter option is chosen, we do not need to declare the interface methods as `abstract` in the abstract class—they are already implicitly declared as such in the interface. Any concrete subclass of the abstract class must implement the interface methods to fulfill the superclass's contract with the compiler. If the subclass does not do so, it too must be declared `abstract`. As indicated by the comments in lines 6162, class `Employee` of [Fig. 10.13](#) does not implement method `getPaymentAmount`, so the class is declared `abstract`. Each direct `Employee` subclass inherits the superclass's contract to implement method `getPaymentAmount` and thus must implement this method to become a concrete class for which objects can be instantiated. A class that extends one of `Employee`'s concrete subclasses will inherit an implementation of `getPaymentAmount` and thus will also be a concrete class.

### 10.7.5. Modifying Class `SalariedEmployee` for Use in the `Payable` Hierarchy

[Figure 10.14](#) contains a modified version of class `SalariedEmployee` that extends `Employee` and fulfills superclass `Employee`'s contract to implement method `getPaymentAmount` of interface `Payable`. This version of `SalariedEmployee` is identical to that of [Fig. 10.5](#) with the exception that the version here implements method `getPaymentAmount` (lines 3033) instead of method `earnings`. The two methods contain the same functionality but have different names. Recall that the `Payable` version of the method has a more general name to be applicable to possibly disparate classes. The remaining `Employee` subclasses (e.g., `HourlyEmployee`, `CommissionEmployee` and `BasePlusCommissionEmployee`) also must be modified to contain method `getPaymentAmount` in place of `earnings` to reflect the fact that `Employee` now implements `Payable`. We leave these modifications as an exercise and use only `SalariedEmployee` in our test program in this section.

**Figure 10.14.** `SalariedEmployee` class that implements interface `Payable` method `getPaymentAmount`.  
(This item is displayed on page 492 in the print version)

```

1  // Fig. 10.14: SalariedEmployee.java
2  // SalariedEmployee class extends Employee, which implements Payable.
3
4  public class SalariedEmployee extends Employee
5  {
6      private double weeklySalary;
7
8      // four-argument constructor
9      public SalariedEmployee( String first, String last, String ssn,
10         double salary )
11      {
12          super( first, last, ssn ); // pass to Employee constructor
13          setWeeklySalary( salary ); // validate and store salary
14      } // end four-argument SalariedEmployee constructor
15
16      // set salary
17      public void setWeeklySalary( double salary )
18      {
19          weeklySalary = salary < 0.0 ? 0.0 : salary;
20      } // end method setWeeklySalary
21
22      // return salary
23      public double getWeeklySalary()
24      {
25          return weeklySalary;

```

```

26     } // end method getWeeklySalary
27
28     // calculate earnings; implement interface Payable method that was
29     // abstract in superclass Employee
30     public double getPaymentAmount()
31     {
32         return getWeeklySalary();
33     } // end method getPaymentAmount
34
35     // return String representation of SalariedEmployee object
36     public String toString()
37     {
38         return String.format( "salaried employee: %s\n%s: $%,.2f",
39                               super.toString(), "weekly salary", getWeeklySalary() );
40     } // end method toString
41 } // end class SalariedEmployee

```

When a class implements an interface, the same is-a relationship provided by inheritance applies. For example, class `Employee` implements `Payable`, so we can say that an `Employee` is a `Payable`. In fact, objects of any classes that extend `Employee` are also `Payable` objects. `SalariedEmployee` objects, for instance, are `Payable` objects. As with inheritance relationships, an object of a class that implements an interface may be thought of as an object of the interface class. Objects of any subclasses of the class that implements the interface can also be thought of as objects of the interface class. Thus, just as we can assign the reference of a `SalariedEmployee` object to a superclass `Employee` variable, we can assign the reference of a `SalariedEmployee` object to an interface `Payable` variable. `Invoice` implements `Payable`, so an `Invoice` object also is a `Payable` object, and we can assign the reference of an `Invoice` object to a `Payable` variable.

#### Software Engineering Observation 10.7



Inheritance and interfaces are similar in their implementation of the "is-a" relationship. An object of a class that implements an interface may be thought of as an object of that interface type. An object of any subclasses of a class that implements an interface also can be thought of as an object of the interface type.

---

[Page 492]

#### Software Engineering Observation 10.8



The "is-a" relationship that exists between superclasses and subclasses, and between interfaces and the classes that implement them, holds when passing an object to a method. When a method parameter receives a variable of a superclass or interface type, the method processes the object received as an argument polymorphically.

---

[Page 493]

#### Software Engineering Observation 10.9



Using a superclass reference, we can polymorphically invoke any method specified in the superclass declaration (and in class `Object`). Using an interface reference, we can polymorphically invoke any method specified in the interface declaration (and in class `Object`).



### 10.7.6. Using Interface Payable to Process Invoices and Employees Polymorphically

PayableInterfaceTest (Fig. 10.15) illustrates that interface Payable can be used to process a set of Invoices and Employees polymorphically in a single application. Line 9 declares payableObjects and assigns it an array of four Payable variables. Lines 12-13 assign the references of Invoice objects to the first two elements of payableObjects. Lines 14-17 then assign the references of SalariedEmployee objects to the remaining two elements of payableObjects. These assignments are allowed because an Invoice is a Payable, a SalariedEmployee is an Employee and an Employee is a Payable. Lines 23-29 use the enhanced for statement to polymorphically process each Payable object in payableObjects, printing the object as a String, along with the payment amount due. Note that line 27 invokes method toString off a Payable interface reference, even though toString is not declared in interface Payable; all references (including those of interface types) refer to objects that extend Object and therefore have a toString method. Line 28 invokes Payable method getPaymentAmount to obtain the payment amount for each object in payableObjects, regardless of the actual type of the object. The output reveals that the method calls in lines 27-28 invoke the appropriate class's implementation of methods toString and getPaymentAmount. For instance, when currentEmployee refers to an Invoice during the first iteration of the for loop, class Invoice's toString and getPaymentAmount execute.

---

[Page 494]

**Figure 10.15. Payable interface test program processing Invoices and Employees polymorphically.**  
(This item is displayed on pages 493 - 494 in the print version)

```
1  // Fig. 10.15: PayableInterfaceTest.java
2  // Tests interface Payable.
3
4  public class PayableInterfaceTest
5  {
6      public static void main( String args[] )
7      {
8          // create four-element Payable array
9          Payable payableObjects[] = new Payable[ 4 ];
10
11         // populate array with objects that implement Payable
12         payableObjects[ 0 ] = new Invoice( "01234", "seat", 2, 375.00 );
13         payableObjects[ 1 ] = new Invoice( "56789", "tire", 4, 79.95 );
14         payableObjects[ 2 ] =
15             new SalariedEmployee( "John", "Smith", "111-11-1111", 800.00 );
16         payableObjects[ 3 ] =
17             new SalariedEmployee( "Lisa", "Barnes", "888-88-8888", 1200.00 );
18
19         System.out.println(
20             "Invoices and Employees processed polymorphically:\n" );
21
22         // generically process each element in array payableObjects
23         for ( Payable currentPayable : payableObjects )
24         {
25             // output currentPayable and its appropriate payment amount
26             System.out.printf( "%s \n%s: $%,.2f\n\n",
27                 currentPayable.toString(),
28                 "payment due", currentPayable.getPaymentAmount() );
29         } // end for
30     } // end main
31 } // end class PayableInterfaceTest
```

Invoices and Employees processed polymorphically:

```
invoice:
part number: 01234 (seat)
quantity: 2
price per item: $375.00
payment due: $750.00

invoice:
part number: 56789 (tire)
quantity: 4
price per item: $79.95
payment due: $319.80

salaried employee: John Smith
social security number: 111-11-1111
weekly salary: $800.00
payment due: $800.00

salaried employee: Lisa Barnes
social security number: 888-88-8888
weekly salary: $1,200.00
payment due: $1,200.00
```

## Software Engineering Observation 10.10



All methods of class `Object` can be called by using a reference of an interface type. A reference refers to an object, and all objects inherit the methods of class `Object`.

### 10.7.7. Declaring Constants with Interfaces

As we mentioned in [Section 10.7](#), an interface can declare constants. The constants are implicitly `public`, `static` and `final` again, these keywords are not required in the interface declaration. One popular use of an interface is to declare a set of constants that can be used in many class declarations. Consider interface `Constants`:

```
public interface Constants
{
    int ONE = 1;
    int TWO = 2;
    int THREE = 3;
}
```

---

[Page 495]

A class can use these constants by importing the interface, then referring to each constant as `Constants.ONE`, `Constants.TWO` and `Constants.THREE`. Note that a class can refer to the imported constants with just their names (i.e., `ONE`, `TWO` and `THREE`) if it uses a `static import` declaration (presented in [Section 8.12](#)) to import the interface.

## Software Engineering Observation 10.11



As of J2SE 5.0, it is considered a better programming practice to create sets of

constants as enumerations with keyword `enum`. See [Section 6.10](#) for an introduction to `enum` and [Section 8.9](#) for additional `enum` details.

### 10.7.8. Common Interfaces of the Java API

In this section, we overview several common interfaces found in the Java API. The power and flexibility of interfaces is used frequently throughout the Java API. These interfaces are implemented and used in the same manner as the interfaces you create (e.g., interface `Payable` in [Section 10.7.2](#)). As you will see throughout this book, the Java API's interfaces enable you to extend many important aspects of Java with your own classes. [Figure 10.16](#) presents a brief overview of a few of the more popular interfaces of the Java API that we use in Java How to Program, Sixth Edition.

**Figure 10.16. Common interfaces of the Java API.**

[Page 496]

Interface	Description
<code>Comparable</code>	As you learned in <a href="#">Chapter 2</a> , Java contains several comparison operators (e.g., <code>&lt;</code> , <code>&lt;=</code> , <code>&gt;</code> , <code>&gt;=</code> , <code>==</code> , <code>!=</code> ) that allow you to compare primitive values. However, these operators cannot be used to compare the contents of objects. Interface <code>Comparable</code> is used to allow objects of a class that implements the interface to be compared to one another. The interface contains one method, <code>compareTo</code> , that compares the object that calls the method to the object passed as an argument to the method. Classes must implement <code>compareTo</code> such that it returns a value indicating whether the object on which it is invoked is less than (negative integer return value), equal to (0 return value) or greater than (positive integer return value) the object passed as an argument, using any criteria specified by the programmer. For example, if class <code>Employee</code> implements <code>Comparable</code> , its <code>compareTo</code> method could compare <code>Employee</code> objects by their earnings amounts. Interface <code>Comparable</code> is commonly used for ordering objects in a collection such as an array. We use <code>Comparable</code> in <a href="#">Chapter 18</a> , <a href="#">Generics</a> , and <a href="#">Chapter 19</a> , <a href="#">Collections</a> .
<code>Serializable</code>	A tagging interface used only to identify classes whose objects can be written to (i.e., serialized) or read from (i.e., deserialized) some type of storage (e.g., file on disk, database field) or transmitted across a network. We use <code>Serializable</code> in <a href="#">Chapter 14</a> , <a href="#">Files and</a>

Runnable	Implemented by any class for which objects of that class should be able to execute in parallel using a technique called multithreading (discussed in <a href="#">Chapter 23, Multithreading</a> ). The interface contains one method, <code>run</code> , which describes the behavior of an object when executed.
GUI event-listener interfaces	You work with Graphical User Interfaces (GUIs) every day. For example, in your Web browser, you might type in a text field the address of a Web site to visit, or you might click a button to return to the previous site you visited. When you type a Web site address or click a button in the Web browser, the browser must respond to your interaction and perform the desired task for you. Your interaction is known as an event, and the code that the browser uses to respond to an event is known as an event handler. In <a href="#">Chapter 11, GUI Components: Part 1</a> , and <a href="#">Chapter 22, GUI Components: Part 2</a> , you will learn how to build Java GUIs and how to build event handlers to respond to user interactions. The event handlers are declared in classes that implement an appropriate event-listener interface. Each event listener interface specifies one or more methods that must be implemented to respond to user interactions.
SwingConstants	Contains a set of constants used in GUI programming to position GUI elements on the screen. We explore GUI programming in <a href="#">Chapters 11</a> and <a href="#">22</a> .

## 10.8. (Optional) GUI and Graphics Case Study: Drawing with Polymorphism


You may have noticed in the drawing program created in [Exercise 8.1](#) (and modified in [Exercise 9.1](#)) that there are many similarities between the shape classes. Using inheritance, we can "factor out" the common features from all three classes and place them in a single shape superclass. We can then manipulate objects of all three shape types polymorphically using variables of the superclass type. Removing the redundancy in the code will result in a smaller, more flexible program that is easier to maintain.

## GUI and Graphics Case Study Exercises

- 10.1** Modify the `MyLine`, `MyOval` and `MyRectangle` classes of [Exercise 8.1](#) and [Exercise 9.1](#) to create the class hierarchy in [Fig. 10.17](#). Classes of the `MyShape` hierarchy should be "smart" shape classes that know how to draw themselves (if provided with a `Graphics` object that tells them where to draw). Once the program creates an object from this hierarchy, it can manipulate it polymorphically for the rest of its lifetime as a `MyShape`.

**Figure 10.17. `MyShape` hierarchy.**  
(This item is displayed on page 497 in the print version)

[\[View full size image\]](#)

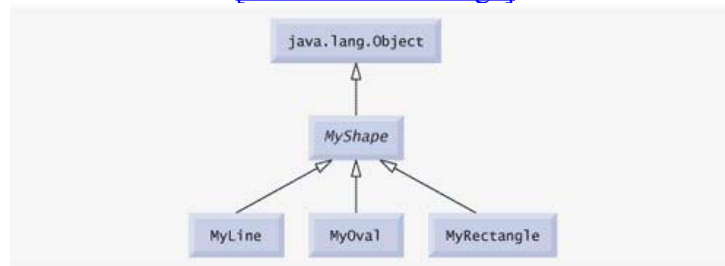

In your solution, class `MyShape` in [Fig. 10.17](#) must be `abstract`. Since `MyShape` represents any shape in general, you cannot implement a `draw` method without knowing exactly what shape it is. The data representing the coordinates and color of the shapes in the hierarchy should be declared as `private` members of class `MyShape`. In addition to the common data, class `MyShape` should declare the following methods:

---

[Page 497]

- A no-argument constructor that sets all the coordinates of the shape to 0 and the color to `Color.BLACK`.
- A constructor that initializes the coordinates and color to the values of the arguments supplied.
- Set methods for the individual coordinates and color that allow the programmer to set any piece of data independently for a shape in the hierarchy.
- Get methods for the individual coordinates and color that allow the programmer to retrieve any piece of data independently for a shape in the hierarchy.
- The `abstract` method

```
public abstract void draw( Graphics g );
```

which will be called from the program's `paintComponent` method to draw a shape on the screen.

To ensure proper encapsulation, all data in class `MyShape` must be `private`. This requires declaring proper set and get methods to manipulate the data. Class `MyLine` should provide a no-argument constructor and a constructor with arguments for the coordinates and color. Classes `MyOval` and `MyRect` should provide a no-argument constructor and a constructor with arguments for the coordinates, color and determining whether the shape is filled. The no-argument constructor should, in addition to setting the default values, set the shape to be an unfilled shape.

You can draw lines, rectangles and ovals if you know two points in space. Lines require `x1`, `y1`, `x2` and `y2` coordinates. The `drawLine` method of the `Graphics` class will connect the two points supplied with a line. If you have the same four coordinate values (`x1`, `y1`, `x2` and `y2`) for ovals and rectangles, you can calculate the four arguments needed to draw them. Each requires an upper-left x-coordinate value (the smaller of the two x-coordinate values), an upper-left y-coordinate value (the smaller of the two y coordinate values), a width (the absolute value of the difference between the two x-coordinate values) and a height (the absolute value of the difference between the two y-coordinate values). Rectangles and ovals should also have a `filled` flag that determines whether to draw the shape as a filled shape.

There should be no `MyLine`, `MyOval` or `MyRectangle` variables in the program only `MyShape` variables that contain references to `MyLine`, `MyOval` and `MyRectangle` objects. The program should generate random shapes and store them in an array of type `MyShape`. Method `paintComponent` should walk through the `MyShape` array and draw every shape (i.e., polymorphically calling every shape's `draw` method).


---

[Page 498]

Allow the user to specify (via an input dialog) the number of shapes to generate. The program will then generate and display the shapes along with a status bar that informs the user how many of each shape were created.

- 10.2** (Drawing Application Modification) In [Exercise 10.1](#), you created a `MyShape` hierarchy in which classes `MyLine`, `MyOval` and `MyRectangle` extend `MyShape` directly. If your hierarchy was properly designed, you should be able to see the similarities between the `MyOval` and `MyRectangle` classes. Redesign and reimplement the code for the `MyOval` and `MyRectangle` classes to "factor out" the common features into the abstract class `MyBoundedShape` to produce the hierarchy in [Fig. 10.18](#).

**Figure 10.18.** `MyShape` hierarchy with `MyBoundedShape`.

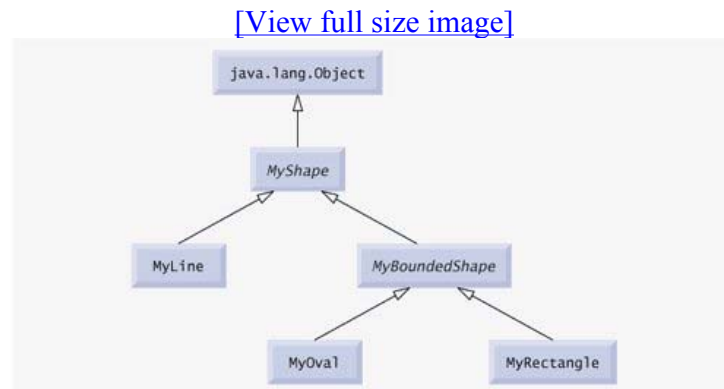

Class `MyBoundedShape` should declare two constructors that mimic the constructors of class `MyShape`, only with an added parameter to set whether the shape is filled. Class `MyBoundedShape` should also declare `get` and `set` methods for manipulating the filled flag and methods that calculate the upper-left x- coordinate, upper-left y-coordinate, width and height. Remember, the values needed to draw an oval or a rectangle can be calculated from two (x, y) coordinates. If designed properly, the new `MyOval` and `MyRectangle` classes should each have two constructors and a `draw` method.




## 10.9. (Optional) Software Engineering Case Study: Incorporating Inheritance into the ATM System

We now revisit our ATM system design to see how it might benefit from inheritance. To apply inheritance, we first look for commonality among classes in the system. We create an inheritance hierarchy to model similar (yet not identical) classes in a more elegant and efficient manner. We then modify our class diagram to incorporate the new inheritance relationships. Finally, we demonstrate how our updated design is translated into Java code.

In [Section 3.10](#), we encountered the problem of representing a financial transaction in the system. Rather than create one class to represent all transaction types, we decided to create three individual transaction classes `BalanceInquiry`, `Withdrawal` and `Deposit` to represent the transactions that the ATM system can perform. [Figure 10.19](#) shows the attributes and operations of classes `BalanceInquiry`, `Withdrawal` and `Deposit`. Note that these classes have one attribute (`accountNumber`) and one operation (`execute`) in common. Each class requires attribute `accountNumber` to specify the account to which the transaction applies. Each class contains operation `execute`, which the ATM invokes to perform a transaction. Clearly, `BalanceInquiry`, `Withdrawal` and `Deposit` represent types of transactions. [Figure 10.19](#) reveals commonality among the transaction classes, so using inheritance to factor out the common features seems appropriate for designing classes `BalanceInquiry`, `Withdrawal` and `Deposit`. We place the common functionality in a superclass, `transaction`, that classes `BalanceInquiry`, `Withdrawal` and `Deposit` extend.

**Figure 10.19. Attributes and operations of classes `BalanceInquiry`, `Withdrawal` and `Deposit`.**


[\[View full size image\]](#)

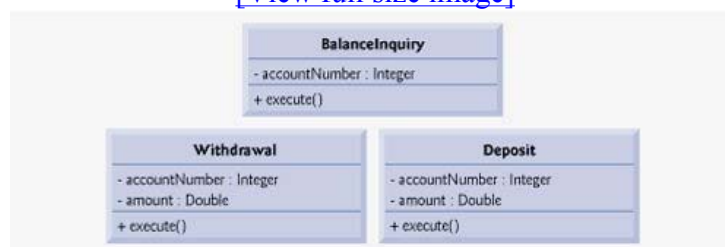

The UML specifies a relationship called a [generalization](#) to model inheritance. [Figure 10.20](#) is the class diagram that models the generalization of superclass `transaction` and subclasses `BalanceInquiry`, `Withdrawal` and `Deposit`. The arrows with triangular hollow arrowheads indicate that classes `BalanceInquiry`, `Withdrawal` and `Deposit` extend class `transaction`. Class `transaction` is said to be a generalization of classes `BalanceInquiry`, `Withdrawal` and `Deposit`. Class `BalanceInquiry`, `Withdrawal` and `Deposit` are said to be [specializations](#) of class `transaction`.

**Figure 10.20. Class diagram modeling generalization of superclass `transaction` and subclasses `BalanceInquiry`, `Withdrawal` and `Deposit`. Note that abstract class names (e.g., `transaction`) and method names (e.g., `execute` in class `transaction`) appear in italics.**

[\[View full size image\]](#)

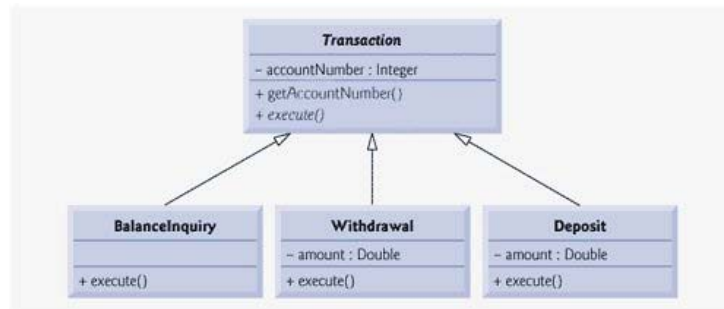

Classes `BalanceInquiry`, `Withdrawal` and `Deposit` share integer attribute `accountNumber`, so we factor out this common attribute and place it in superclass `Transaction`. We no longer list `accountNumber` in the second compartment of each subclass, because the three subclasses inherit this attribute from `transaction`. Recall, however, that subclasses cannot access private attributes of a superclass. We therefore include public method `getAccountNumber` in class `transaction`. Each subclass will inherit this method, enabling the subclass to access its `accountNumber` as needed to execute a transaction.

---

[Page 500]

According to [Fig. 10.19](#), classes `BalanceInquiry`, `Withdrawal` and `Deposit` also share operation `execute`, so we decided that superclass `transaction` should contain public method `execute`. However, it does not make sense to implement `execute` in class `transaction`, because the functionality that this method provides depends on the type of the actual transaction. We therefore declare method `execute` as abstract in superclass `transaction`. Any class that contains at least one abstract method must also be declared abstract. This forces any subclass of `transaction` that must be a concrete class (i.e., `BalanceInquiry`, `Withdrawal` and `Deposit`) to implement method `execute`. The UML requires that we place abstract class names (and abstract methods) in italics, so `transaction` and its method `execute` appear in italics in [Fig. 10.20](#). Note that method `execute` is not italicized in subclasses `BalanceInquiry`, `Withdrawal` and `Deposit`. Each subclass overrides superclass `transaction`'s `execute` method with a concrete implementation that performs the steps appropriate for completing that type of transaction. Note that [Fig. 10.20](#) includes operation `execute` in the third compartment of classes `BalanceInquiry`, `Withdrawal` and `Deposit`, because each class has a different concrete implementation of the overridden method.

Incorporating inheritance provides the ATM with an elegant way to execute all transactions "in the general." For example, suppose a user chooses to perform a balance inquiry. The ATM sets a `transaction` reference to a new object of class `BalanceInquiry`. When the ATM uses its `transaction` reference to invoke method `execute`, `BalanceInquiry`'s version of `execute` is called.

This polymorphic approach also makes the system easily extensible. Should we wish to create a new transaction type (e.g., funds transfer or bill payment), we would just create an additional `transaction` subclass that overrides the `execute` method with a version of the method appropriate for executing the new transaction type. We would need to make only minimal changes to the system code to allow users to choose the new transaction type from the main menu and for the ATM to instantiate and execute objects of the new subclass. The ATM could execute transactions of the new type using the current code, because it executes all transactions polymorphically using a general `transaction` reference.

As you learned earlier in the chapter, an abstract class like `Transaction` is one for which the programmer never intends to instantiate objects. An abstract class simply declares common attributes and behaviors of its subclasses in an inheritance hierarchy. Class `Transaction` defines the concept of what it means to be a transaction that has an account number and executes. You may wonder why we bother to include abstract method `execute` in class `Transaction` if it lacks a concrete implementation. Conceptually, we include this method because it corresponds to the defining behavior

of all transactions executing. Technically, we must include method `execute` in superclass `Transaction` so that the `ATM` (or any other class) can polymorphically invoke each subclass's overridden version of this method through a `Transaction` reference. Also, from a software engineering perspective, including an abstract method in a superclass forces the implementor of the subclasses to override that method with concrete implementations in the subclasses, or else the subclasses, too, will be abstract, preventing objects of those subclasses from being instantiated.

---

[Page 501]

Subclasses `BalanceInquiry`, `Withdrawal` and `Deposit` inherit attribute `accountNumber` from superclass `Transaction`, but classes `Withdrawal` and `Deposit` contain the additional attribute `amount` that distinguishes them from class `BalanceInquiry`. Classes `Withdrawal` and `Deposit` require this additional attribute to store the amount of money that the user wishes to withdraw or deposit. Class `BalanceInquiry` has no need for such an attribute and requires only an account number to execute. Even though two of the three `Transaction` subclasses share this attribute, we do not place it in superclass `Transaction`; we place only features common to all the subclasses in the superclass, otherwise subclasses could inherit attributes (and methods) that they do not need and should not have.


[Figure 10.21](#) presents an updated class diagram of our model that incorporates inheritance and introduces class `Transaction`. We model an association between class `ATM` and class `Transaction` to show that the `ATM`, at any given moment, is either executing a transaction or it is not (i.e., zero or one objects of type `Transaction` exist in the system at a time). Because a `Withdrawal` is a type of transaction, we no longer draw an association line directly between class `ATM` and class `Withdrawal`. Subclass `Withdrawal` inherits superclass `Transaction`'s association with class `ATM`. Subclasses `BalanceInquiry` and `Deposit` inherit this association, too, so the previously omitted associations between `ATM` and classes `BalanceInquiry` and `Deposit` no longer exist either.

---

[Page 502]

**Figure 10.21. Class diagram of the ATM system (incorporating inheritance). Note that abstract class names (e.g., `Transaction`) appear in italics.**  
(This item is displayed on page 501 in the print version)

[\[View full size image\]](#)

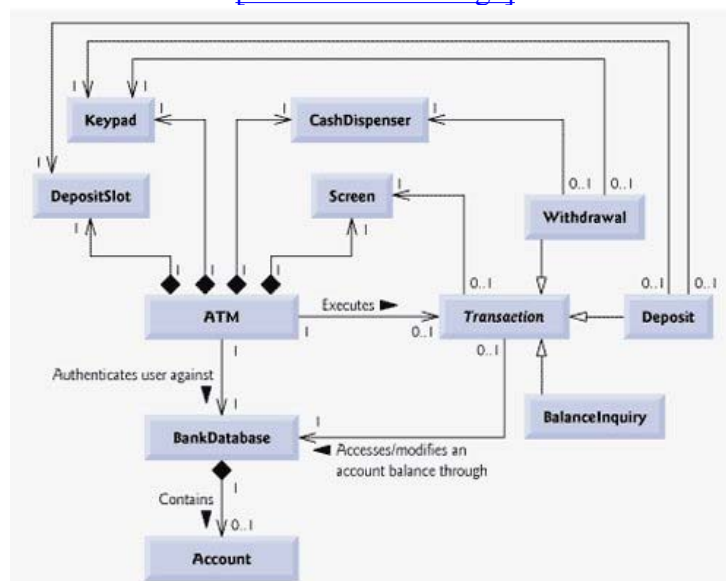

We also add an association between class `Transaction` and the `BankDatabase` ([Fig. 10.21](#)). All `Transactions` require a reference to the `BankDatabase` so they can access and modify account information. Because each `Transaction` subclass inherits this reference, we no longer model the


association between class `Withdrawal` and the `BankDatabase`. Similarly, the previously omitted associations between the `BankDatabase` and classes `BalanceInquiry` and `Deposit` no longer exist.

We show an association between class `Transaction` and the `Screen`. All `Transactions` display output to the user via the `Screen`. Thus, we no longer include the association previously modeled between `Withdrawal` and the `Screen`, although `Withdrawal` still participates in associations with the `CashDispenser` and the `Keypad`. Our class diagram incorporating inheritance also models `Deposit` and `BalanceInquiry`. We show associations between `Deposit` and both the `DepositSlot` and the `Keypad`. Note that class `BalanceInquiry` takes part in no associations other than those inherited from class `transaction`. `BalanceInquiry` needs to interact only with the `BankDatabase` and with the `Screen`.

The class diagram of [Fig. 8.24](#) showed attributes and operations with visibility markers. Now we present a modified class diagram that incorporates inheritance in [Fig. 10.22](#). This abbreviated diagram does not show inheritance relationships, but instead shows the attributes and methods after we have employed inheritance in our system. To save space, as we did in [Fig. 4.24](#), we do not include those attributes shown by associations in [Fig. 10.21](#) we do, however, include them in the Java implementation in [Appendix J](#). We also omit all operation parameters, as we did in [Fig. 8.24](#) incorporating inheritance does not affect the parameters already modeled in [Fig. 6.22](#) [Fig. 6.25](#).

**Figure 10.22. Class diagram with attributes and operations (incorporating inheritance).** Note that abstract class names (e.g., `transaction`) and method names (e.g., `execute` in class `transaction`) appear in italics.  
(This item is displayed on page 503 in the print version)

[\[View full size image\]](#)

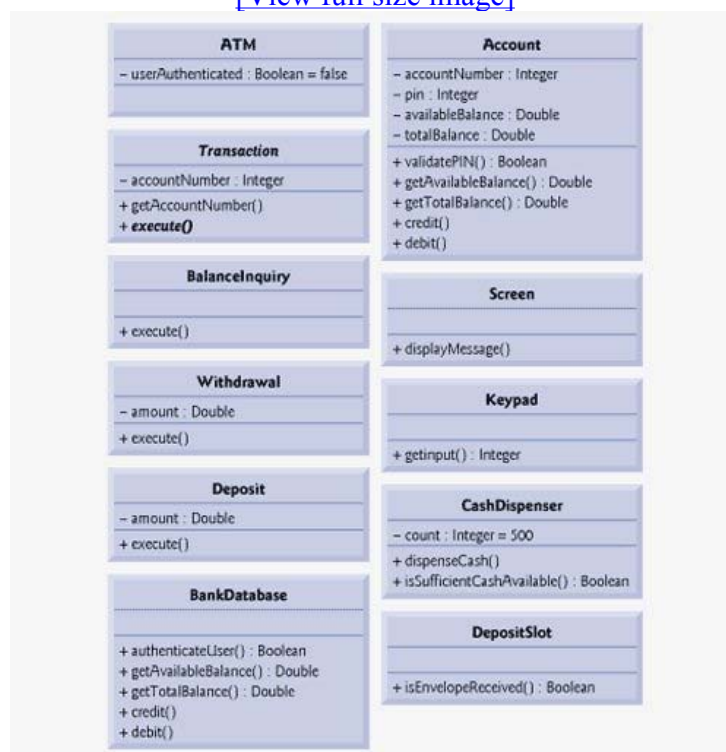

## Software Engineering Observation 10.12



A complete class diagram shows all the associations among classes and all the attributes and operations for each class. When the number of class attributes, methods and associations is substantial (as in [Fig. 10.21](#) and [Fig. 10.22](#)), a good practice that promotes readability is to divide this information between two class diagramsone focusing on associations and the other on attributes and methods.

## Implementing the ATM System Design (Incorporating Inheritance)

In [Section 8.19](#), we began implementing the ATM system design in Java code. We now modify our implementation to incorporate inheritance, using class `Withdrawal` as an example.

1. If a class A is a generalization of class B, then class B extends class A in the class declaration. For example, abstract superclass `transaction` is a generalization of class `Withdrawal`. [Figure 10.23](#) contains the shell of class `Withdrawal` containing the appropriate class declaration.
2. If class A is an abstract class and class B is a subclass of class A, then class B must implement the abstract methods of class A if class B is to be a concrete class. For example, class `TRansaction` contains abstract method `execute`, so class `Withdrawal` must implement this method if we want to instantiate a `Withdrawal` object. [Figure 10.24](#) is the Java code for class `Withdrawal` from [Fig. 10.21](#) and [Fig. 10.22](#). Class `Withdrawal` inherits field `accountNumber` from superclass `transaction`, so `Withdrawal` does not need to declare this field. Class `Withdrawal` also inherits references to the `Screen` and the `BankDatabase` from its superclass `TRansaction`, so we do not include these references in our code. [Figure 10.22](#) specifies attribute `amount` and operation `execute` for class `Withdrawal`. Line 6 of [Fig. 10.24](#) declares a field for attribute `amount`. Lines 1618 declare the shell of a method for operation `execute`. Recall that subclass `Withdrawal` must provide a concrete implementation of the abstract method `execute` in superclass `transaction`. The `keypad` and `cashDispenser` references (lines 78) are fields derived from `Withdrawal`'s associations in [Fig. 10.21](#). [Note: The constructor in the complete working version of this class will initialize these references to actual objects.]

---

[Page 503]

---

[Page 504]

**Figure 10.23.** Java code for shell of class `Withdrawal`.

```
1  // Class Withdrawal represents an ATM withdrawal transaction
2  public class Withdrawal extends Transaction
3  {
4  } // end class Withdrawal
```

**Figure 10.24.** Java code for class `Withdrawal` based on [Fig. 10.21](#) and [Fig. 10.22](#).

```
1  // Withdrawal.java
2  // Generated using the class diagrams in Fig. 10.21 and Fig. 10.22
3  public class Withdrawal extends Transaction
4  {
5      // attributes
6      private double amount; // amount to withdraw
7      private Keypad keypad; // reference to keypad
8      private CashDispenser cashDispenser; // reference to cash dispenser
9
10     // no-argument constructor
11     public Withdrawal()
12     {
13     } // end no-argument Withdrawal constructor
14
15     // method overriding execute
16     public void execute()
17     {
18     } // end method execute
19 } // end class Withdrawal
```

## Software Engineering Observation 10.13



Several UML modeling tools convert UML-based designs into Java code and can speed the implementation process considerably. For more information on these tools, refer to the Internet and Web Resources listed at the end of [Section 2.9](#).

Congratulations on completing the design portion of the case study! This concludes our object-oriented design of the ATM system. We completely implement the ATM system in 670 lines of Java code in [Appendix J](#). We recommend that you carefully read the code and its description. The code is abundantly commented and precisely follows the design with which you are now familiar. The accompanying description is carefully written to guide your understanding of the implementation based on the UML design. Mastering this code is a wonderful culminating accomplishment after studying [Chapters 18](#).

### Software Engineering Case Study Self-Review Exercises

- 10.1** The UML uses an arrow with a \_\_\_\_\_ to indicate a generalization relationship.
- a. solid filled arrowhead
  - b. triangular hollow arrowhead
  - c. diamond-shaped hollow arrowhead
  - d. stick arrowhead

---

[Page 505]

- 10.2** State whether the following statement is true or false, and if false, explain why: The UML requires that we underline abstract class names and method names.
- 10.3** Write Java code to begin implementing the design for class `transaction` specified in [Fig. 10.21](#) and [Fig. 10.22](#). Be sure to include `private` reference-type attributes based on class `TTransaction`'s associations. Also be sure to include `public` `get` methods that provide access to any of these `private` attributes that the subclasses require to perform their tasks.

### Answers to Software Engineering Case Study Self-Review Exercises

- 10.1** b.
- 10.2** False. The UML requires that we italicize abstract class names and method names.
- 10.3** The design for class `TTransaction` yields the code in [Fig. 10.25](#). The bodies of the class constructor and methods will be completed in [Appendix J](#). When fully implemented, methods `getScreen` and `getBankDatabase` will return superclass `transaction`'s `private` reference attributes `screen` and `bankDatabase`, respectively. These methods allow the `transaction` subclasses to access the ATM's screen and interact with the bank's database.

**Figure 10.25.** Java code for class `transaction` based on [Fig. 10.21](#) and [Fig. 10.22](#).

```
1 // Abstract class Transaction represents an ATM transaction
2 public abstract class Transaction
```



```

3  {
4      // attributes
5      private int accountNumber; // indicates account involved
6      private Screen screen; // ATM's screen
7      private BankDatabase bankDatabase; // account info database
8
9      // no-argument constructor invoked by subclasses using super()
10     public Transaction()
11     {
12     } // end no-argument Transaction constructor
13
14     // return account number
15     public int getAccountNumber()
16     {
17     } // end method getAccountNumber
18
19     // return reference to screen
20     public Screen getScreen()
21     {
22     } // end method getScreen
23
24     // return reference to bank database
25     public BankDatabase getBankDatabase()
26     {
27     } // end method getBankDatabase
28
29     // abstract method overridden by subclasses
30     public abstract void execute();
31 } // end class Transaction

```

[< PREVIOUS](#)
[< PREVIOUS](#)
[NEXT >](#)
[NEXT >](#)

[Page 506]

## 10.10. Wrap-Up

This chapter introduced polymorphismthe ability to process objects that share the same superclass in a class hierarchy as if they are all objects of the superclass. The chapter discussed how polymorphism makes systems extensible and maintainable, then demonstrated how to use overridden methods to effect polymorphic behavior. We introduced abstract classes, which allow programmers to provide an appropriate superclass from which other classes can inherit. You learned that an abstract class can declare abstract methods that each subclass must implement to become a concrete class and that a program can use variables of an abstract class to invoke subclasses' implementations of abstract methods polymorphically. You also learned how to determine an object's type at execution time. Finally, the chapter discussed declaring and implementing an interface as another way to achieve polymorphic behavior.

You should now be familiar with classes, objects, encapsulation, inheritance, interfaces and polymorphismthe most essential aspects of object-oriented programming. In the next chapter, we take a deeper look at Graphical User Interfaces (GUIs).

[< PREVIOUS](#)
[< PREVIOUS](#)
[NEXT >](#)
[NEXT >](#)

## Summary

- With polymorphism, it is possible to design and implement systems that are more easily extensible. Programs can be written to process even objects of types that do not exist when the program is under development.
- There are many situations in which it is useful to declare abstract classes for which the programmer never intends to create objects. These are used only as superclasses, so we sometimes refer to them as abstract superclasses. You cannot instantiate objects of an abstract class.
- Classes from which objects can be created are called concrete classes.
- A class must be declared `abstract` if one or more of its methods are `abstract`. An abstract method is one with keyword `abstract` to the left of the return type in its declaration.
- If a class extends a class with an abstract method and does not provide a concrete implementation of that method, then that method remains abstract in the subclass. Consequently, the subclass is also an abstract class and must be declared `abstract`.
- Java enables polymorphism the ability for objects of different classes related by inheritance or interface implementation to respond differently to the same method call.
- When a request is made through a superclass reference to a subclass object to use an `abstract` method, Java executes the implemented version of the method found in the subclass.
- Although we cannot instantiate objects of `abstract` classes, we can declare variables of abstract class types. Such variables can be used to reference subclass objects.
- Due to dynamic binding (also called late binding), the specific type of a subclass object need not be known at compile time for a method call off a superclass variable to be compiled. At execution time, the correct subclass version of the method is called, based on the type of the reference stored in the superclass variable.
- Operator `instanceof` checks the type of the object to which its left operand refers and determines whether this type has an is-a relationship with the type specified as its right operand. If the two have an is-a relationship, the `instanceof` expression is `true`. If not, the `instanceof` expression is `false`.
- Every object in Java knows its own class and can access this information through method `getClass`, which all classes inherit from class `Object`. Method `getClass` returns an object of type `Class` (package `java.lang`), which contains information about the object's type that can be accessed using `Class`'s public methods. `Class` method `getName`, for example, returns the name of the class.

- An interface declaration begins with the keyword `interface` and contains a set of `public abstract` methods. Interfaces may also contain `public static final` fields.
- To use an interface, a class must specify that it `implements` the interface and must either declare every method in the interface with the signatures specified in the interface declaration or be declared `abstract`.
- An interface is typically used when disparate (i.e., unrelated) classes need to provide common functionality (i.e., methods) or use common constants.
- An interface is often used in place of an `abstract` class when there is no default implementation

to inherit.

- When a class implements an interface, it establishes an is-a relationship with the interface type, as do all its subclasses.
- To implement more than one interface, simply provide a comma-separated list of interface names after keyword `implements` in the class declaration.

◀ PREVIOUS

◀ PREVIOUS

NEXT ▶

NEXT ▶

[Page 507 (continued)]

## Terminology

[abstract class](#)

[abstract keyword](#)

[abstract method](#)

[abstract superclass](#)

[Class class](#)

[concrete class](#)

[constants declared in an interface](#)

[downcasting](#)

[dynamic binding](#)

[final class](#)

[final method](#)

[getClass method of Object](#)

[getName method of Class](#)

[implement an interface](#)

[implementation inheritance](#)

[implements keyword](#)

[inlining code](#)

[instanceof operator](#)

[interface declaration](#)

[interface inheritance](#)

[interface keyword](#)

[iterator class](#)

[late binding](#)

[polymorphism](#)

[static binding](#)

[subclass reference](#)

[superclass reference](#)

◀ PREY

◀ PREY

NEXT ▶

NEXT ▶

[Page 507 (continued)]

## Self-Review Exercises

**10.1** Fill in the blanks in each of the following statements:

- a. Polymorphism helps eliminate \_\_\_\_\_ logic.
- b. If a class contains at least one abstract method, it is a(n) \_\_\_\_\_ class.
- c. Classes from which objects can be instantiated are called \_\_\_\_\_ classes.
- d. \_\_\_\_\_ involves using a superclass variable to invoke methods on superclass and subclass objects, enabling you to "program in the general."
- e. Methods that are not interface methods and that do not provide implementations must be declared using keyword \_\_\_\_\_.
- f. Casting a reference stored in a superclass variable to a subclass type is called \_\_\_\_\_.

**10.2** State whether each of the statements that follows is true or false. If false, explain why.

- a. It is possible to treat superclass objects and subclass objects similarly.
- b. All methods in an `abstract` class must be declared as `abstract` methods.

---

[Page 508]

- c. It is dangerous to try to invoke a subclass-only method through a subclass variable.
- d. If a superclass declares an `abstract` method, a subclass must implement that method.
- e. An object of a class that implements an interface may be thought of as an object of that interface type.

◀ PREY

◀ PREY

NEXT ▶

NEXT ▶

[Page 508 (continued)]

## Answers to Self-Review Exercises

**10.1** a) `switch`. b) `abstract`. c) `concrete`. d) Polymorphism. e) `abstract`. f) downcasting.

**10.2** a) True. b) False. An `abstract` class can include methods with implementations and

abstract methods. c) False. Trying to invoke a subclass-only method with a superclass variable is dangerous. d) False. Only a concrete subclass must implement the method. e) True.



[Page 508 (continued)]

## Exercises

- 10.3 How does polymorphism enable you to program "in the general" rather than "in the specific"? Discuss the key advantages of programming "in the general."
- 10.4 A subclass can inherit "interface" or "implementation" from a superclass. How do inheritance hierarchies designed for inheriting interface differ from those designed for inheriting implementation?
- 10.5 What are abstract methods? Describe the circumstances in which an abstract method would be appropriate.
- 10.6 How does polymorphism promote extensibility?
- 10.7 Discuss four ways in which you can assign superclass and subclass references to variables of superclass and subclass types.
- 10.8 Compare and contrast abstract classes and interfaces. Why would you use an abstract class? Why would you use an interface?
- 10.9 (Payroll System Modification) Modify the payroll system of [Fig. 10.4](#)[Fig. 10.9](#) to include private instance variable `birthDate` in class `Employee`. Use class `Date` of [Fig. 8.7](#) to represent an employee's birthday. Add get methods to class `Date` and replace method `toDateString` with method `toString`. Assume that payroll is processed once per month. Create an array of `Employee` variables to store references to the various employee objects. In a loop, calculate the payroll for each `Employee` (polymorphically), and add a \$100.00 bonus to the person's payroll amount if the current month is the month in which the `Employee`'s birthday occurs.
- 10.10 (Shape Hierarchy) Implement the `Shape` hierarchy shown in [Fig. 9.3](#). Each `TwoDimensionalShape` should contain method `getArea` to calculate the area of the two-dimensional shape. Each `ThreeDimensionalShape` should have methods `getArea` and `getVolume` to calculate the surface area and volume, respectively, of the three-dimensional shape. Create a program that uses an array of `Shape` references to objects of each concrete class in the hierarchy. The program should print a text description of the object to which each array element refers. Also, in the loop that processes all the shapes in the array, determine whether each shape is a `TwoDimensionalShape` or a `ThreeDimensionalShape`. If a shape is a `TwoDimensionalShape`, display its area. If a shape is a `ThreeDimensionalShape`, display its area and volume.
- 10.11 (Payroll System Modification) Modify the payroll system of [Fig. 10.4](#)[Fig. 10.9](#) to include an additional `Employee` subclass `PieceWorker` that represents an employee whose pay is based on the number of pieces of merchandise produced. Class `PieceWorker` should contain private instance variables `wage` (to store the employee's wage per piece) and `pieces` (to store the number of pieces produced). Provide a concrete implementation of method `earnings` in class `PieceWorker` that calculates the employee's earnings by

multiplying the number of pieces produced by the wage per piece. Create an array of `Employee` variables to store references to objects of each concrete class in the new `Employee` hierarchy. For each `Employee`, display its string representation and earnings.

---

[Page 509]

- 10.12** (Accounts Payable System Modification) In this exercise, we modify the accounts payable application of [Fig. 10.11](#)[Fig. 10.15](#) to include the complete functionality of the payroll application of [Fig. 10.4](#)[Fig. 10.9](#). The application should still process two `Invoice` objects, but now should process one object of each of the four `Employee` subclasses. If the object currently being processed is a `BasePlusCommissionEmployee`, the application should increase the `BasePlusCommissionEmployee`'s base salary by 10%. Finally, the application should output the payment amount for each object. Complete the following steps to create the new application:
- Modify classes `HourlyEmployee` ([Fig. 10.6](#)) and `CommissionEmployee` ([Fig. 10.7](#)) to place them in the `Payable` hierarchy as subclasses of the version of `Employee` ([Fig. 10.13](#)) that implements `Payable`. [Hint: Change the name of method `earnings` to `getPaymentAmount` in each subclass so that the class satisfies its inherited contract with interface `Payable`.]
  - Modify class `BasePlusCommissionEmployee` ([Fig. 10.8](#)) such that it extends the version of class `CommissionEmployee` created in Part a.
  - Modify `PayableInterfaceTest` ([Fig. 10.15](#)) to polymorphically process two `Invoices`, one `SalariedEmployee`, one `HourlyEmployee`, one `CommissionEmployee` and one `BasePlusCommissionEmployee`. First output a string representation of each `Payable` object. Next, if an object is a `BasePlusCommissionEmployee`, increase its base salary by 10%. Finally, output the payment amount for each `Payable` object.